


Linear Position Sensors (for reference only)

Japan
Malaysia

Type: **EVAJ**
EVAWA, EVAWM (Slim Type)
EVAW7 (Headlight Sensor)

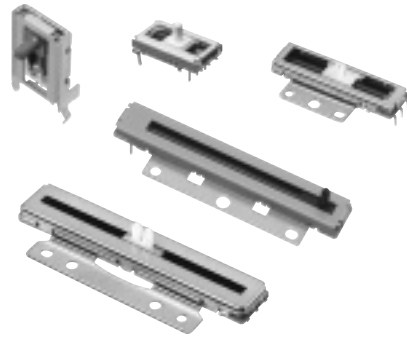


■ Features

- High performance that guarantees a terminal-based linearity within $\pm 0.5\%$
- A wide variety of operation strokes
- Long life and high resolution

■ Recommended Applications

- Detection of still camera/camcorder lens positions
- Detection of car seat positions
- Steering wheel tilt and telescopic controller
- Car headlight angle detection sensor

■ Explanation Part Numbers

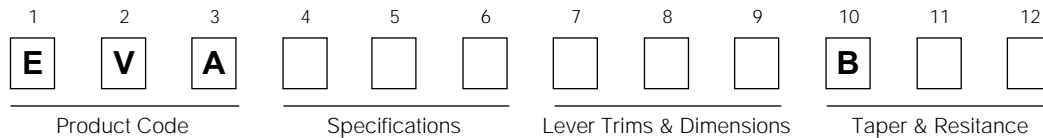

■ Specifications

		EVAJ, EVAWA, EVAWM	EVAW7	
Mechanical	Stroke	13.0 mm \pm 0.5 mm 18.0 mm \pm 0.5 mm 32.0 mm \pm 0.5 mm	9.0 mm \pm 0.5 mm	8.0 mm \pm 0.5 mm
	Operating Force	0.25 N max. (Measurement speed: 5 mm/s to 25 mm/s)	2 N max.	1 N max.
Electrical	Linearity	$\pm 1\%$ ($\pm 0.5\%$)	$\pm 2\%$	$\pm 1\%$
	Total Resistance	10 k Ω \pm 30 %	10 k Ω \pm 30 %	4.7 k Ω \pm 30 %
	Voltage Rating	5 Vdc max.	5 Vdc max.	12 Vdc max.
	Taper	B	B	
Endurance	Operating Life	100000 cycles min. (Type capable of 200000 or more operaton is also available)	10000 cycles min.	10000 cycles min.
Minimum Quantity/Packing Unit		100 pcs. (Tray Pack)	300 pcs. (Tray Pack)	200 pcs. (Tray Pack)
Quantity/Carton		500 pcs.	3000 pcs.	2000 pcs.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Dimensions in mm (not to scale)

<p>No. 1</p> <p>Japan</p> <p>EVAJ 32.0 mm Stroke Type</p>		<p>Potentiometer circuit diagram</p>								
<p>No. 2</p> <p>Malaysia</p> <p>EVAJG 32.0 mm Stroke Type</p>		<p>Potentiometer circuit diagram</p>								
<p>No. 3</p> <p>Japan</p> <p>EVAW</p>		<p>Potentiometer circuit diagram</p>								
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 15%;">Stroke type</th> <th style="width: 15%;">L</th> <th style="width: 70%;">Notes</th> </tr> </thead> <tbody> <tr> <td>EVAWA 13.0 mm</td> <td>22.0 mm</td> <td rowspan="2">1. The above figure (EVAW series) shows the 13.0 mm type. 2. The shape of the Lever and fittings can be customized.</td> </tr> <tr> <td>EVAWM 18.0 mm</td> <td>26.1 mm</td> </tr> </tbody> </table>			Stroke type	L	Notes	EVAWA 13.0 mm	22.0 mm	1. The above figure (EVAW series) shows the 13.0 mm type. 2. The shape of the Lever and fittings can be customized.	EVAWM 18.0 mm	26.1 mm
Stroke type	L	Notes								
EVAWA 13.0 mm	22.0 mm	1. The above figure (EVAW series) shows the 13.0 mm type. 2. The shape of the Lever and fittings can be customized.								
EVAWM 18.0 mm	26.1 mm									

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Dimensions in mm (not to scale)

No. 4

Malaysia

EVAW7
9.0 mm Stroke Type

Potentiometer circuit diagram

No. 5

Malaysia

EVAW7
8.0 mm Stroke Type

MECHANICAL STROKE

Potentiometer circuit diagram



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.