



STM961-15B


RF POWER MODULE DIGITAL CELLULAR APPLICATIONS

- LINEAR POWER AMPLIFIER
- 915-960 MHz
- 26 VOLTS
- INPUT/OUTPUT 50 OHMS
- P_{OUT} = 42 dBm CW or PEP
- GAIN = 30 dB

DESCRIPTION

The STM961-15B module is designed for digital cellular radio base station applications in the 915-960 MHz frequency range operating at 26V.

The STM961-15B is designed to meet the low distortion, high linearity requirements of modern digital cellular base station equipment.




CASE STYLE H110

ORDER CODE
STM961-15B

BRANDING
STM961-15B

PIN CONNECTION



1. RF Input
2. V_{S1}, 26V

3. V_B, 26V
4. RF Output

ABSOLUTE MAXIMUM RATINGS (T_{case} = 85 °C)

Symbol	Parameter	Value	Unit
V _{S1} , V _{S2}	DC Supply Voltage	28	Vdc
V _B	DC Bias Voltage	28	Vdc
P _{IN}	RF Input Power	14	dBm CW
P _{OUT}	RF Output Power (V = 26V)	43	dBm CW
T _{STG}	Storage Temperature	- 30 to + 100	°C

STM961-15B


ELECTRICAL SPECIFICATION (T_{case} = -10 °C to +85°C, V_{S1} = 26 V, V_B = 26 V to 27 V)

DYNAMIC

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
BW	Frequency Range		915		960	MHz
G _P	Power Gain	P _{OUT} = +42 dBm CW	28	30		dB
h	Efficiency	P _{OUT} = +42 dBm CW	32	35		%
	VSWR	P _{OUT} = +42 dBm CW Z _S , Z _L = 50 Ω			2:1	VSWR
I _Q	Quiescent Current	P _{IN} = 0 dBm		580		mA
2F _O	Harmonics	P _{OUT} = +42 dBm CW			-30	dBc
3F _O	Harmonics	P _{OUT} = +42 dBm CW			-50	dBc
F	Gain Flatness	P _{OUT} = +42 dBm CW		1		dB
P _{1dB}	Output Power @ 1 dB Compression		41			dBm
	Load Mismatch	VSWR = 3:1 P _{OUT} = +42 dBm CW	No Degradation in Output Power			
	Stability	P _{OUT} = +10 dBm to +42 dBm Load VSWR = 3:1 All phase angles	All Spurious Outputs more than 60db Below Carrier			

REF. 1017332I


MODULE DC AND TEST FIXTURE CONFIGURATION

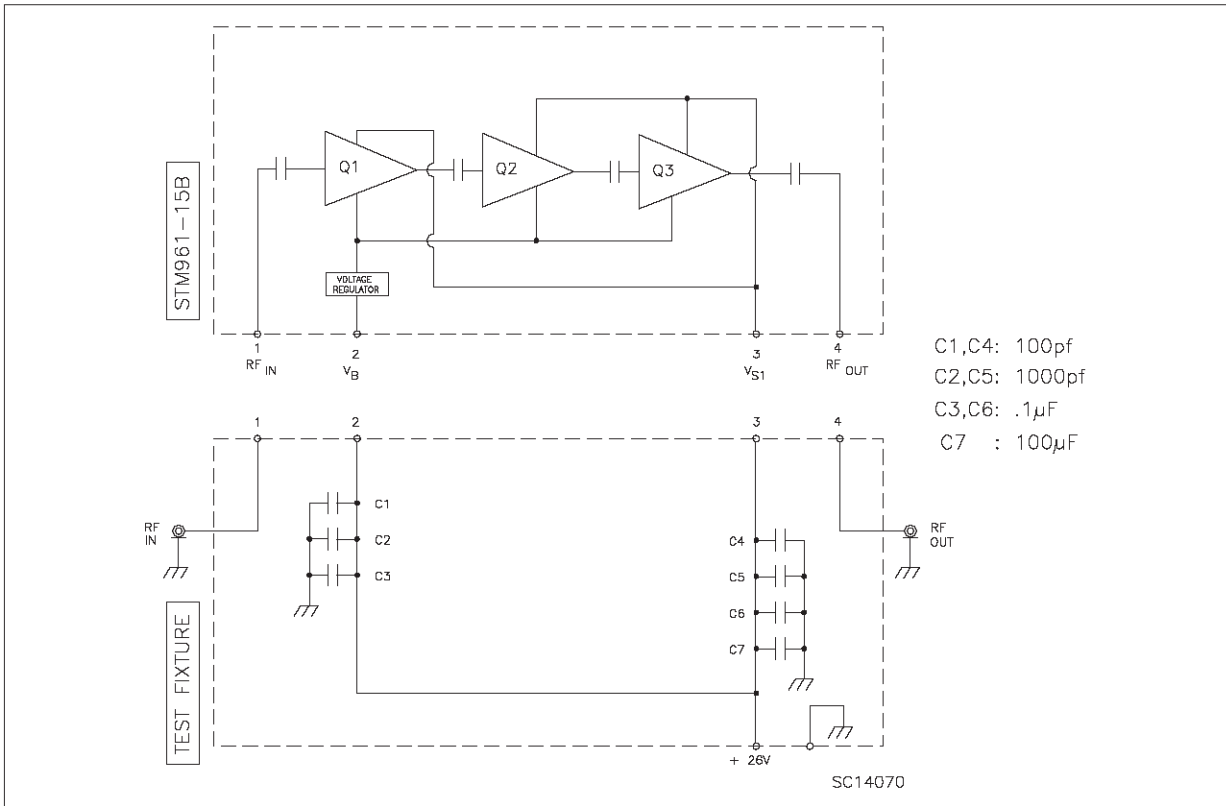


REF. 1014532D

TYPICAL PERFORMANCE


Power Gain vs Output Power

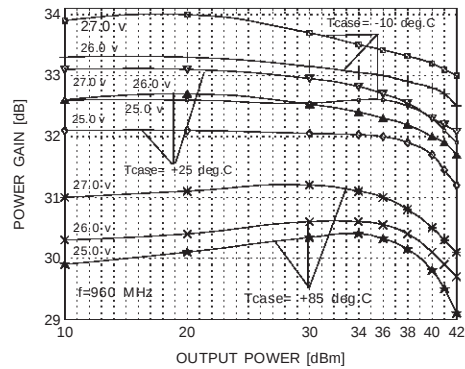


Power Gain vs Output Power

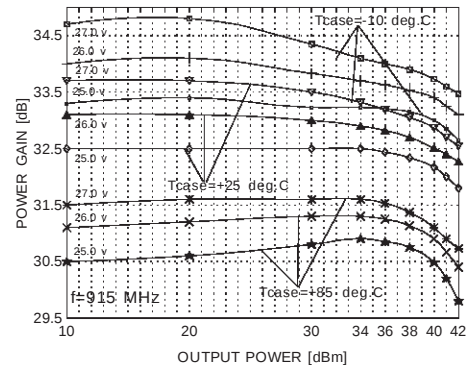

Power Gain vs Frequency & Temperature

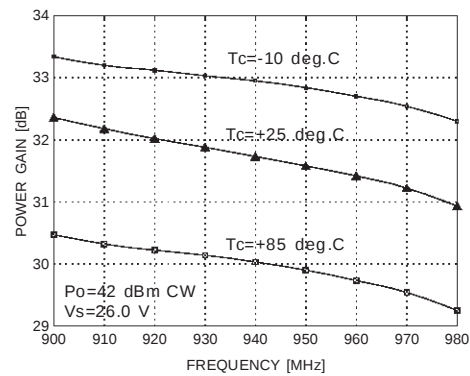


3rd Order IMD vs Output Power & Temperature

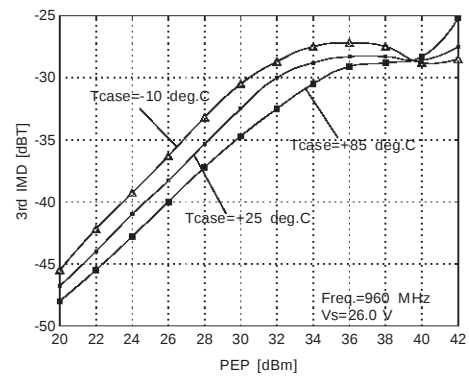


see note 1

3rd Order IMD vs Output Power & Temperature

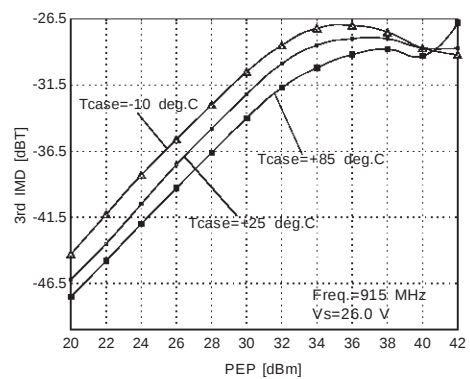

see note 1


5th Order IMD vs Output Power & Temperature

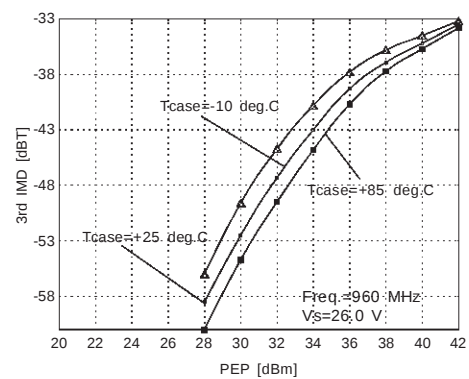

see note 1


TYPICAL PERFORMANCE

5th Order IMD vs Output Power & Temperature

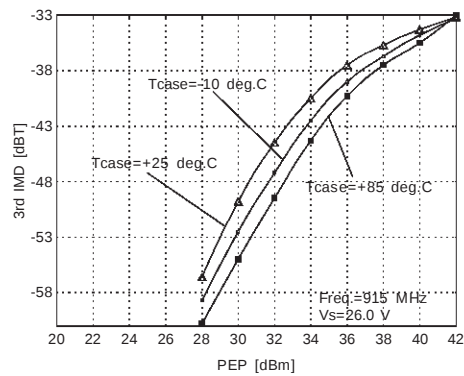


see note 1


Efficiency vs Frequency

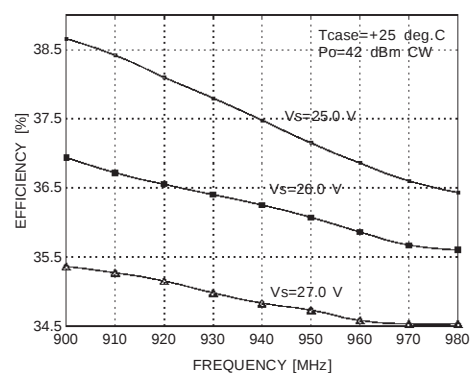


CW Efficiency vs Output Power & Temperature

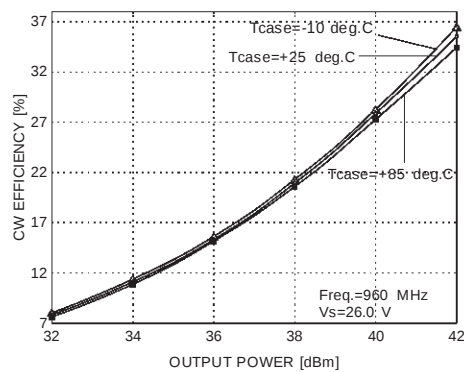

CW Efficiency vs Output Power & Temperature

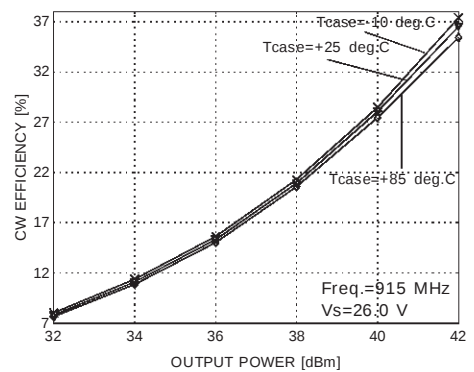

VSWR vs Frequency & Temperature

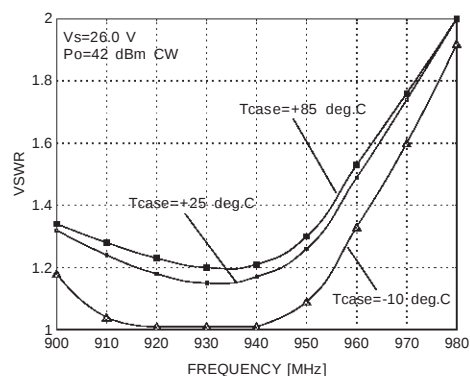

Note (1) :
Two-tone test; 20KHz separation;
IMD (in dB) is referenced to the individual tone level.

APPLICATIONS RECOMMENDATIONS

OPERATION LIMITS

The STM961-15B power module should never be operated under any condition which exceeds the Absolute Maximum Ratings presented on this data sheet. Nor should the module be operated continuously at any of the specified maximum ratings. If the module is to be subjected to one or more of the maximum rating conditions, care must be taken to monitor other parameters which may be affected.

DECOUPLING

Failure to properly decouple any of the voltage supply pins will result in oscillations at certain operating frequencies. Therefore, it is recommended that these pins be bypassed as indicated in the Module DC and Test Fixture Configuration drawing of this data sheet.

MODULE MOUNTING

To insure adequate thermal transfer from the module to the heatsink, it is recommended that a satisfactory thermal compound such as Dow Corning 340, Wakefield 120-2 or equivalent be applied between the module flange and the heatsink.

The heatsink mounting surface under the module should be flat to within $\pm 0.05\text{mm}$ (± 0.002 inch). The module should be mounted to the heatsink using 3.5 mm (or 6-32) or equivalent screws torqued to 5-6 kg-cm (4-6 in-lb).

The module leads should be attached to equipment PC board using 180°C solder applied to the leads with a properly grounded soldering iron tip, not to exceed 195°C, applied a minimum of 2 mm (0.080 inch) from the body of the module for a duration not to exceed 15 seconds per lead. It is imperative that no other portion of the module, other than the leads, be subjected to temperatures in excess of 100°C (maximum storage temperature), for any period of time, as the plastic moulded cover, internal components and sealing adhesives may be adversely affected by such conditions.

Due to the construction techniques and materials used within the module, reflow soldering of the flange heatsink or leads, is not recommended.

THERMAL CONSIDERATIONS


It will be necessary to provide a suitable heatsink in order to maintain the module flange temperature at or below to maximum case operating temperature. In a case where the module output power limited to +42 dBm CW and designing for the worst case efficiency of 32%, the power dissipated by the module will be 33.6 Watts. The heatsink must be designed such that the thermal rise will be less than the difference between the maximum operating case temperature of the module while dissipating 33.6 W.

At $T_{\text{case}} = +85^{\circ}\text{C}$, $V = 26\text{V}$, $Z_L = 50\ \Omega$ and $P_{\text{OUT}} = 42\ \text{dBm}$, maximum junction temperatures for the individual transistors should be below the following values:

$Q1 = 140^{\circ}\text{C}$, $Q2 = 145^{\circ}\text{C}$, $Q3 = 130^{\circ}\text{C}$.

H110 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	48.01		48.51	1.890		1.910
B	29.72		30.22	1.170		1.190
C	15.12		15.49	0.595		0.610
D	8.89		9.55	0.350		0.376
E	3.05		3.42	0.120		0.135
F		4.06			0.160	
G	0.13		0.38	0.005		0.015
H		40.64			1.600	
J		35.94			1.415	
K		33.40			1.315	
M		15.62			0.615	
N		13.08			0.515	
P	0.38		0.63	0.015		0.025
Q	3.81		4.06	0.150		0.160
R	17.40		19.55	0.685		0.770
S	8.77		9.77	0.345		0.385
T	4.52		5.72	0.178		0.225

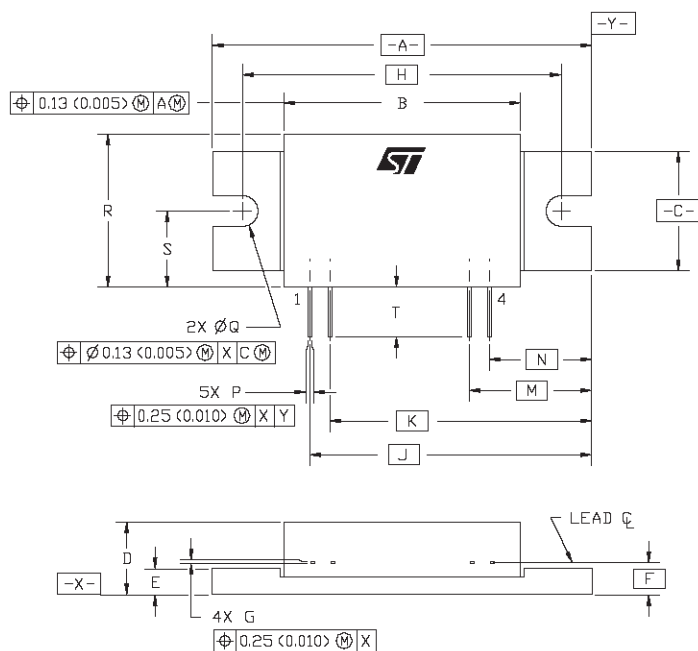

NOTES:
 1) UNLESS OTHERWISE SPECIFIED TOLERANCES ARE $\pm 0.25\text{mm}$ (0.010in)
 2) CONTROLLING DIMENSION - INCHES

1014273H

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 1999 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Mexico - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.

<http://www.st.com>





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.