


# PTVA101K02EV


## Thermally-Enhanced High Power RF LDMOS FET 1000 W, 50 V, 1030 / 1090 MHz

### Description

The PTVA101K02EV LDMOS FET is designed for use in power amplifier applications in the 1030 MHz / 1090 MHz frequency band. Features include high gain and thermally-enhanced package with bolt-down flange. Manufactured with Wolfspeed's advanced LDMOS process, this device provides excellent thermal performance and superior reliability.

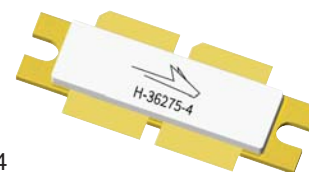

PTVA101K02EV  
Package H-36275-4

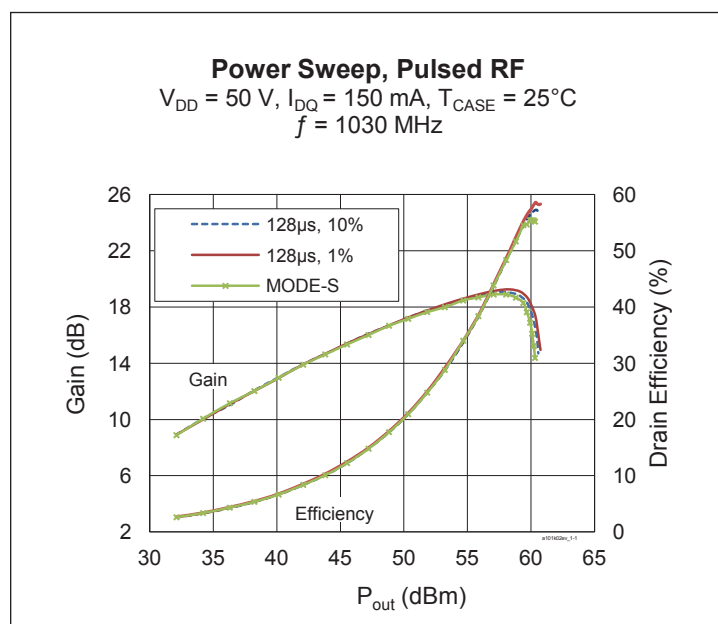

### Features

- Broadband input matching
- High gain and efficiency
- Integrated ESD protection
- Human Body Model Class 2 (per ANSI/ESDA/ JEDEC JS-001)
- Low thermal resistance
- Pb-free and RoHS compliant
- Capable of withstanding a 10:1 load mismatch (all phase angles) at 1000 W under MODE-S pulse condition, (32µS ON / 18µS OFF) X 80, LTDF = 6.4%.

### RF Characteristics

#### Pulsed RF Performance (tested in Wolfspeed test fixture)

$V_{DD} = 50\text{ V}$ ,  $I_{DQ} = 0.15\text{ A}$ ,  $P_{OUT} = 900\text{ W}$ ,  $f = 1030\text{ MHz}$ , 128 µs pulse width, 10% duty cycle

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	$G_{ps}$	17	18	21	dB
Drain Efficiency	$\eta_D$	62	65	—	%

All published data at  $T_{CASE} = 25^\circ\text{C}$  unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

## RF Characteristics

**Typical RF Performance** (not subject to production test, verified by design/characterization in Wolfspeed test fixture)  
 $V_{DD} = 50\text{ V}$ ,  $I_{DQ} = 75\text{ mA}$  per side, Input signal ( $t_r = 5\text{ ns}$ ,  $t_f = 6.5\text{ ns}$ ),  $T_{CASE} = 25^\circ\text{C}$ , class AB test

Mode of operation	f (MHz)	IRL (dB)	P <sub>1dB</sub>			P <sub>3dB</sub>			P <sub>droop(pulse)</sub> dB @ 1000 W	t <sub>r</sub> (ns)	t <sub>f</sub> (ns)
			Gain (dB)	Eff (%)	P <sub>OUT</sub> (W)	Gain (dB)	Eff (%)	P <sub>OUT</sub> (W)			
128 $\mu\text{s}$ , 10%	1030	20	18	56	980	16	57	1090	0.18	7	8
128 $\mu\text{s}$ , 1%	1030	20	18.1	57	1010	16.1	58	1130	0.16	7	8
MODE-S (32 $\mu\text{s}$ ON / 18 $\mu\text{s}$ OFF)X80, LTDF=6.4%	1030	20	17.9	54	930	14.9	55	1060	0.45	7	8
128 $\mu\text{s}$ , 10%	1090	13	18.3	59	920	16.2	60	1050	0.16	7	8
128 $\mu\text{s}$ , 1%	1090	14	18.4	60	950	16.4	61	1080	0.17	7	8

## DC Characteristics (each side)

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}$ , $I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	105	—	—	V
Drain Leakage Current	$V_{DS} = 50\text{ V}$ , $V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	1	$\mu\text{A}$
	$V_{DS} = 105\text{ V}$ , $V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	10	$\mu\text{A}$
On-State Resistance	$V_{GS} = 10\text{ V}$ , $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.1	—	$\Omega$
Operating Gate Voltage	$V_{DS} = 50\text{ V}$ , $I_{DQ} = 150\text{ mA}$	$V_{GS}$	3	3.35	4	V
Gate Leakage Current	$V_{GS} = 10\text{ V}$ , $V_{DS} = 0\text{ V}$	$I_{GSS}$	—	—	1.0	$\mu\text{A}$

## Maximum Ratings



Parameter	Symbol	Value	Unit
Drain-Source Voltage	$V_{DSS}$	105	V
Gate-Source Voltage	$V_{GS}$	-6 to +12	V
Operating Voltage	$V_{DD}$	0 to +55	V
Junction Temperature	$T_J$	225	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +150	$^\circ\text{C}$
Thermal Resistance ( $T_{CASE} = 70^\circ\text{C}$ , 1000 W, MODE-S)	$R_{\theta JC}$	0.16	$^\circ\text{C/W}$




### Ordering Information

Type and Version	Order Code	Package and Description	Shipping
PTVA101K02EV V1 R0	PTVA101K02EV-V1-R0	H-36275-4, bolt-down	Tape & Reel, 50pcs
PTVA101K02EV V1 R250	PTVA101K02EV-V1-R250	H-36275-4, bolt-down	Tape & Reel, 250pcs



### Typical RF Performance (tested with LTN/PTVA101K02EV V1 test fixture, 1030 MHz)

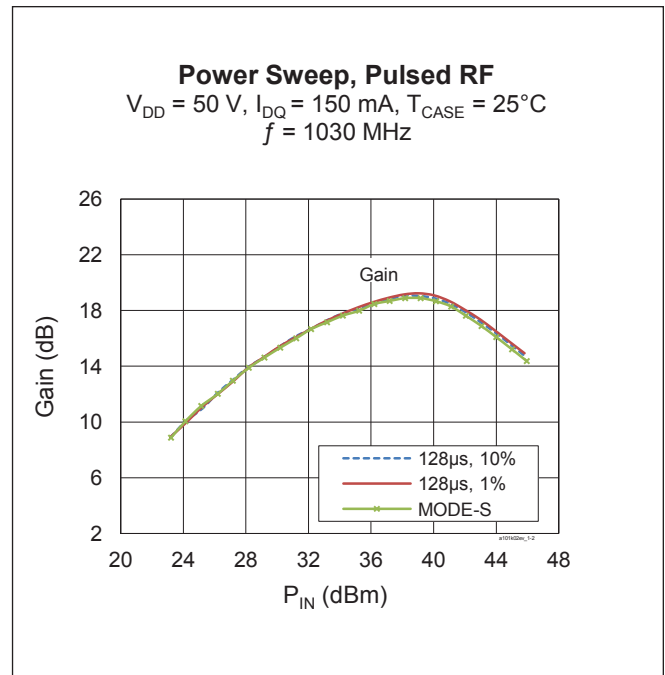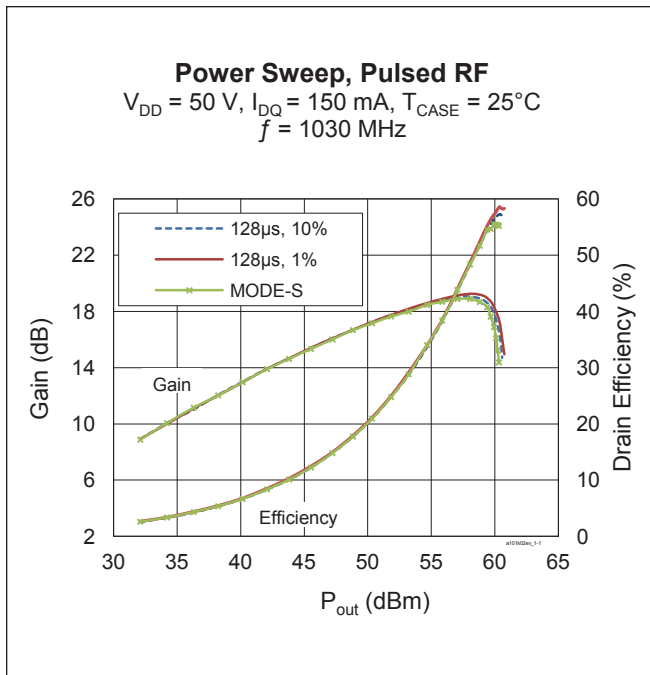


**Typical RF Performance** (cont.) (tested with LTN/PTVA101K02EV V1 test fixture, 1030 MHz)

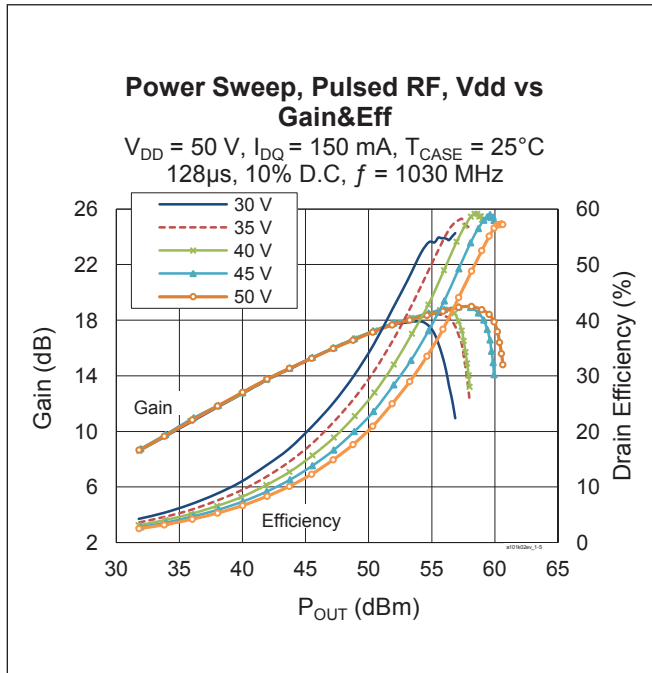

**Typical RF Performance** (tested with LTN/PTVA101K02EV E6 test fixture, 1090 MHz)

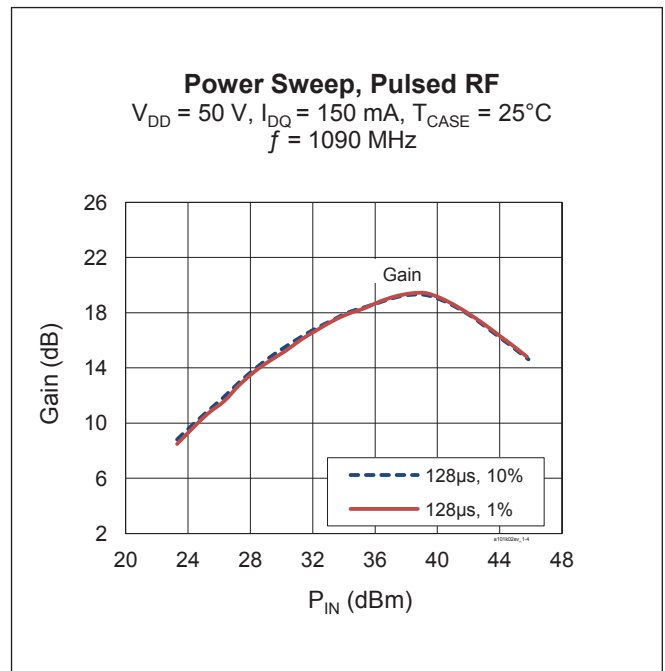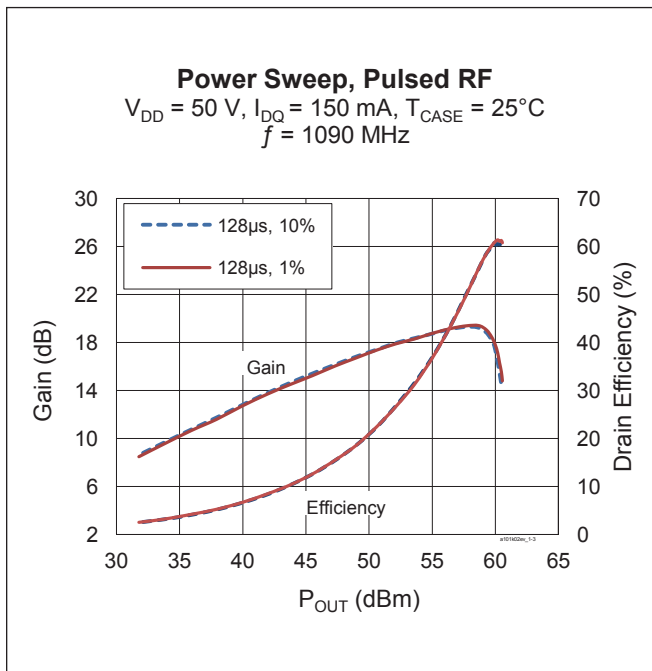

## Broadband Circuit Impedance

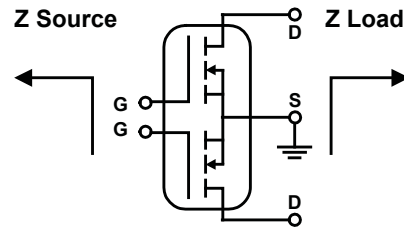

Freq [MHz]	Z Source $\Omega$		Z Load $\Omega$	
	R	jX	R	jX
1030	2.00	1.51	1.48	0.07
1090	2.35	0.64	1.12	-0.28

Note: Measurement on single side.


## Load Pull Performance

Each Side Load Pull Performance –16  $\mu$ s pulse width, 10% duty cycle, class AB,  $V_{DD} = 50$  V, 100 mA

Freq [MHz]	Max Output Power					Max Efficiency					Z Optimum					
	P <sub>OUT</sub> [dBm]	P <sub>OUT</sub> [W]	Eff [%]	Gain [dB]	Z <sub>Load</sub> [ $\Omega$ ]	P <sub>OUT</sub> [dBm]	P <sub>OUT</sub> [W]	Eff [%]	Gain [dB]	Z <sub>Load</sub> [ $\Omega$ ]	P <sub>OUT</sub> [dBm]	P <sub>OUT</sub> [W]	Eff [%]	Gain [dB]	Z <sub>Load</sub> [ $\Omega$ ]	Z <sub>Source</sub> [ $\Omega$ ]
960	58.10	645.65	61.90	16.46	1.14 - j0.08	56.00	398.11	72.20	18.68	0.79 + j0.69	57.50	562.34	68.00	17.50	0.91 + j0.33	1.41 - j1.62
1030	57.80	602.56	55.60	16.00	0.91 - j0.08	56.00	398.11	71.00	18.80	0.71 + j0.66	57.10	512.86	65.00	17.50	0.78 + j0.34	1.76 - j2.12
1090	57.90	616.60	61.80	16.95	0.95 + j0.27	56.20	416.87	69.80	18.68	0.83 + j0.90	57.40	549.54	65.70	17.73	0.87 + j0.62	2.34 - j2.39
1150	57.36	544.50	50.52	15.80	1.11 + j0.12	56.90	489.78	65.00	17.63	0.94 + j0.76	57.20	524.81	61.20	17.00	1.01 + j0.48	3.21 - j1.47
1215	57.26	532.11	53.90	15.60	1.20 + j0.01	55.40	346.74	62.30	17.46	0.59 + j0.81	56.70	467.74	58.45	16.60	0.88 + j0.49	2.37 - j0.84



**Reference Circuit** (LTN/PTVA101K02EV V1 test fixture, 1030 MHz)

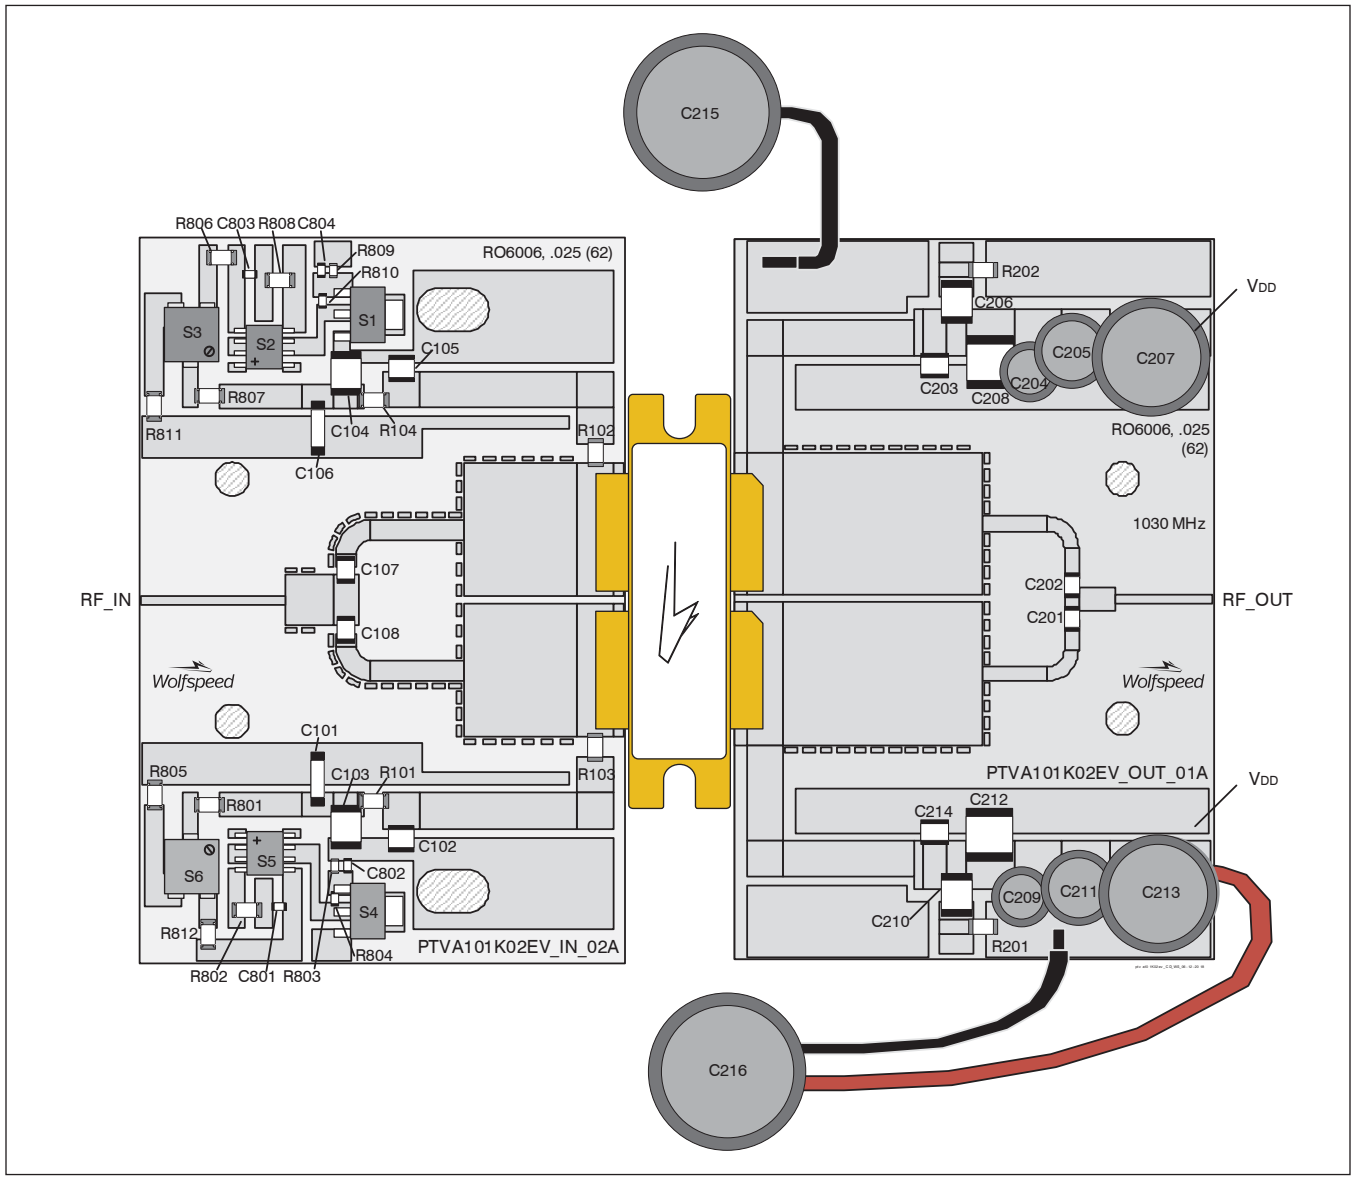

Reference circuit assembly diagram (not to scale)\*


**Reference Circuit** (cont.)**Reference Circuit Assembly**

DUT	Test Fixture Part No.	PCB	Frequency (MHz)
PTVA101K02EV	LTN/PTVA101K02EV V1	Rogers 6006, 0.635 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 6.15$	1030 MHz
PTVA101K02EV	LTN/PTVA101K02EV E4	Rogers 6006, 0.635 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 6.15$	1090 MHz
PTVA101K02EV	LTN/PTVA101K02EV E6	Rogers 3010, 0.635 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 10.2$	1090 MHz
PTVA101K02EV	LTN/PTVA101K02EV E8	Rogers 3010, 0.635 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 10.2$	1030 MHz

**Components Information**

Component	Description	Suggested Manufacturer	P/N
<b>Input</b>			
C101, C106	Capacitor, 10 $\mu$ F	TDK Corporation	C5750X5R1H106K230KA
C102, C105, C107, C108	Capacitor, 39 pF	ATC	ATC100B390KW500XB
C103, C104	Capacitor, 1 $\mu$ F	TDK Corporation	C4532X7R2A105M230KA
C801, C802, C803, C804	Capacitor, 1000 pF	Panasonic Electronic Components	ECJ-1VB1H102K
R101, R104, R801, R807	Resistor, 10 Ohm	Panasonic Electronic Components	ERJ-8GEYJ100V
R102, R103	Resistor, 100 Ohm	Panasonic Electronic Components	ERJ-8GEYJ101V
R802, R808	Resistor, 6200 Ohm	Panasonic Electronic Components	ERJ-8GEYJ623V
R803, R809	Resistor, 1300 Ohm	Panasonic Electronic Components	ERJ-3GEYJ132V
R804, R810	Resistor, 1200 Ohm	Panasonic Electronic Components	ERJ-3GEYJ122V
R805, R806, R811, R812	Resistor, 2000 Ohm	Panasonic Electronic Components	ERJ-8GEYJ202V
S1, S4	Transistor	Infineon Technologies	BCP56
S2, S5	Voltage regulator	National Semiconductor	LM7805
S3, S6	Potentiometer, 2k ohm	Bourns Inc.	3224W-202ECT-ND
<b>Output</b>			
C201, C202, C203, C214	Capacitor, 39 pF	ATC	ATC100B390KW500XB
C204, C209	Capacitor, 100 $\mu$ F	Panasonic Electronic Components	EEV-HD1V101P
C205, C211	Capacitor, 22 $\mu$ F	Cornell Dubilier Electronics (CDE)	SEK220M100ST
C206, C210	Capacitor, 1 $\mu$ F	TDK Corporation	C4532X7R2A105M230KA
C207, C213	Capacitor, 100 $\mu$ F	Cornell Dubilier Electronics (CDE)	SK101M100ST
C208, C212	Capacitor, 10 $\mu$ F	TDK Corporation	C5750X5R1H106K230KA
C215, C216	Capacitor, 6800 $\mu$ F	Panasonic Electronic Components	ECO-S2AP682EA
R201, R202	Resistor, 5600 Ohm	Panasonic Electronic Components	ERJ-8GEYJ562V

Package Outline Specifications

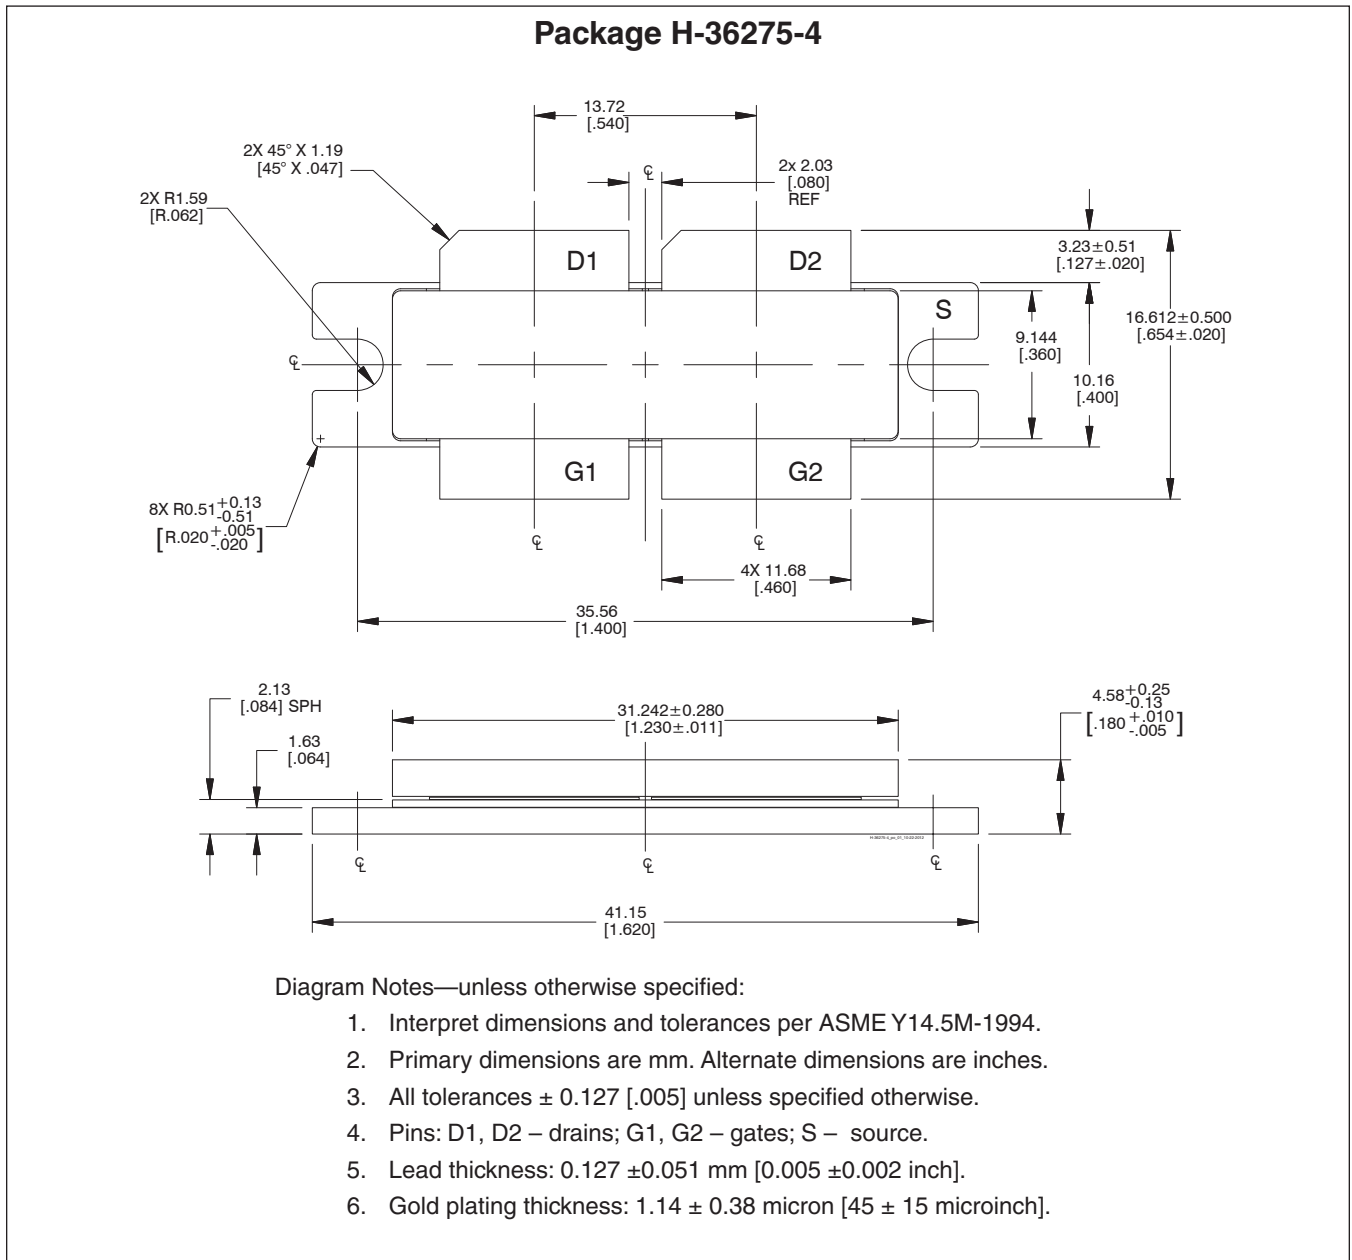



## Revision History

Revision	Date	Data Sheet Type	Page	Subjects (major changes since last revision)
01	2012-06-07	Preliminary	All	Data Sheet reflects preliminary specification
02	2013-04-15	Production	1	Data Sheet reflects released product specification
02.1	2016-04-19	Production	1, 2	Added ESD rating, updated ordering information
02.2	2017-02-09	Production	2	Updated operating voltage and junction temperature
03	2018-06-12	Production	All	Converted to Wolfspeed Data Sheet

For more information, please contact:

4600 Silicon Drive  
 Durham, North Carolina, USA 27703  
[www.wolfspeed.com/RF](http://www.wolfspeed.com/RF)

Sales Contact  
[RFSales@wolfspeed.com](mailto:RFSales@wolfspeed.com)

RF Product Marketing Contact  
[RFMarketing@wolfspeed.com](mailto:RFMarketing@wolfspeed.com)  
 919.407.7816

## Notes

---

### Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.