

**K-No.:** 26333

**1000 A Current Sensor for  $\pm 15V$ - Supply Voltage**
**Date:** 10.04.2014

 for electric current measurement:  
 DC, AC, pulsed, mixed ..., with a galvanic isolation between  
 primary circuit (high power) and secondary circuit (electronic circuit)

**Customer:** Standard Type

**Customer part no.:**
**Page** 1 **of** 6

**Electrical Data – Ratings**

|          |                                  |           |          |
|----------|----------------------------------|-----------|----------|
| $I_{PN}$ | Primary nominal r.m.s. current   | 1000      | A        |
| $R_M^*$  | Measuring resistance             | 0 ... 100 | $\Omega$ |
| $I_{SN}$ | Secondary nominal r.m.s. current | 200       | mA       |
| $K_N$    | Turns ratio                      | (1): 5000 |          |

 \* for  $I_{P,max}$  see fig. 1 on page 2

**Accuracy – Dynamic performance data**

|                        |   | min.     | typ. | max. | Einheit |
|------------------------|---|----------|------|------|---------|
| $I_{P,max}^*$          | Max. measuring range @ $R_M = 10 \Omega$ ; $T_A = 25^\circ C$ | 1580     |      |      | A       |
|                        | @ $R_M = 10 \Omega$ ; $T_A = 85^\circ C$                      | 1340     |      |      | A       |
| X                      | Accuracy @ $I_{PN}$ , $T_A = -40 \dots +85^\circ C$           |          |      | 0.4  | %       |
| $\epsilon_L$           | Linearity   |          |      | 0.1  | %       |
| $I_0$                  | Offset current @ $I_P = 0$ , $T_A = 25^\circ C$               |          |      | 0.1  | mA      |
| $I_{0H}$               | Hysteresis current  |          |      | 0.1  | mA      |
| $t_r$                  | Response time @ 80% of $I_{PN}$                               |          | < 1  |      | $\mu s$ |
| $\Delta t (I_{P,max})$ | Delay time at $di/dt = 1200 A/\mu s$                          |          |      | 1    | $\mu s$ |
| f                      | Frequency bandwidth   | DC...100 |      |      | kHz     |

 \*currents with high slew rates can be measured above  $I_{P,max}$ 
**General data**

|               |  | min.        | typ.     | max.        | Einheit    |
|---------------|--|-------------|----------|-------------|------------|
| $T_A$         | Ambient operating temperature            | -40         |          | +85         | $^\circ C$ |
| $T_S$         | Ambient storage temperature              | -40         |          | +85         | $^\circ C$ |
| m             | Mass                                     |             | 550      |             | g          |
| $V_C$         | Supply voltage                           | $\pm 13.50$ | $\pm 15$ | $\pm 15.75$ | V          |
| $I_{C0}$      | Current consumption for $I_P = 0A$       |             | 25       |             | mA         |
| $I_{CN}$      | Current consumption for $I_{PN} = 1000A$ |             | 190      |             | mA         |
| * $S_{clear}$ | Clearance                                | 20          |          |             | mm         |
| * $S_{creep}$ | Creepage                                 | 20          |          |             | mm         |

 \* Constructed and manufactured and tested in accordance with EN 61800-5-1 (Pin 1 - 4 to primary opening)  
 Reinforced insulation, Insulation material group 1, Pollution degree 2

|              |                         |                               |            |      |   |
|--------------|-------------------------|-------------------------------|------------|------|---|
| * $V_{sys}$  | System voltage          | overvoltage category 3        | RMS        | 1000 | V |
| * $V_{work}$ | Working voltage         | (tabel 7 acc. to EN61800-5-1) | RMS        | 1500 | V |
| * $U_{PD}$   | Rated discharge voltage |                               | peak value | 1500 | V |

 Max. potential difference acc. to UL 508 RMS 1000  $V_{AC}$ 

| Datum    | Name | Index | Änderung  |
|----------|------|-------|---|
| 10.04.14 | KRe. | 83    | Completion of data sheet: X, $V_C$ , „max. Potential...“ (page1), Values for supply voltage (page2), maximum continuous currents at defined Temperatures (page2), Applicable documents added and $V_d$ from 4.4 $\rightarrow$ 6kV (page 5) CN-985 |

|                       |                             |                      |                        |
|-----------------------|-----------------------------|----------------------|------------------------|
| Hrsg.: KB-E<br>editor | Bearb.: Ockajak<br>designer | KB-PM: KRe.<br>check | freig.: HS<br>released |
|-----------------------|-----------------------------|----------------------|------------------------|

K-No.: 26333

1000 A Current Sensor for  $\pm 15V$ - Supply Voltage

Date: 10.04.2014

for electric current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic isolation between  
primary circuit (high power) and secondary circuit (electronic circuit)

Customer: Standard Type

Customer part no.:

Page 2 of 6

**Maximum peak currents at defined temperatures Values for supply voltage  $\pm 14.25 V (\pm 15 V -5 \%)$**

|             |            |            |             |             |
|-------------|------------|------------|-------------|-------------|
| $T_A$       | 55 °C      | 55 °C      | 55 °C       | 55 °C       |
| $R_M$       | 1 $\Omega$ | 5 $\Omega$ | 20 $\Omega$ | 50 $\Omega$ |
| $I_{P,max}$ | 1780A      | 1620A      | 1200A       | 790A        |

|             |            |            |             |             |
|-------------|------------|------------|-------------|-------------|
| $T_A$       | 85 °C      | 85 °C      | 85 °C       | 85 °C       |
| $R_M$       | 1 $\Omega$ | 5 $\Omega$ | 20 $\Omega$ | 50 $\Omega$ |
| $I_{P,max}$ | 1620A      | 1480A      | 1120A       | 750A        |

**Maximum continuous currents at defined temperatures**

|                         |                       |  |
|-------------------------|-----------------------|--|
| $T_A$                   | $\leq 70\text{ °C}$   | $70\text{ °C} < T_a \leq 85\text{ °C}$ |
| $I_P = I_{P,max}$ up to | 1800 A <sub>rms</sub> | 1200 A <sub>rms</sub>                  |

**Limit curve of measurable current  $\hat{I}_P=f(R_M)$  Values for supply voltage  $\pm 14.25 V (\pm 15 V -5 \%)$**

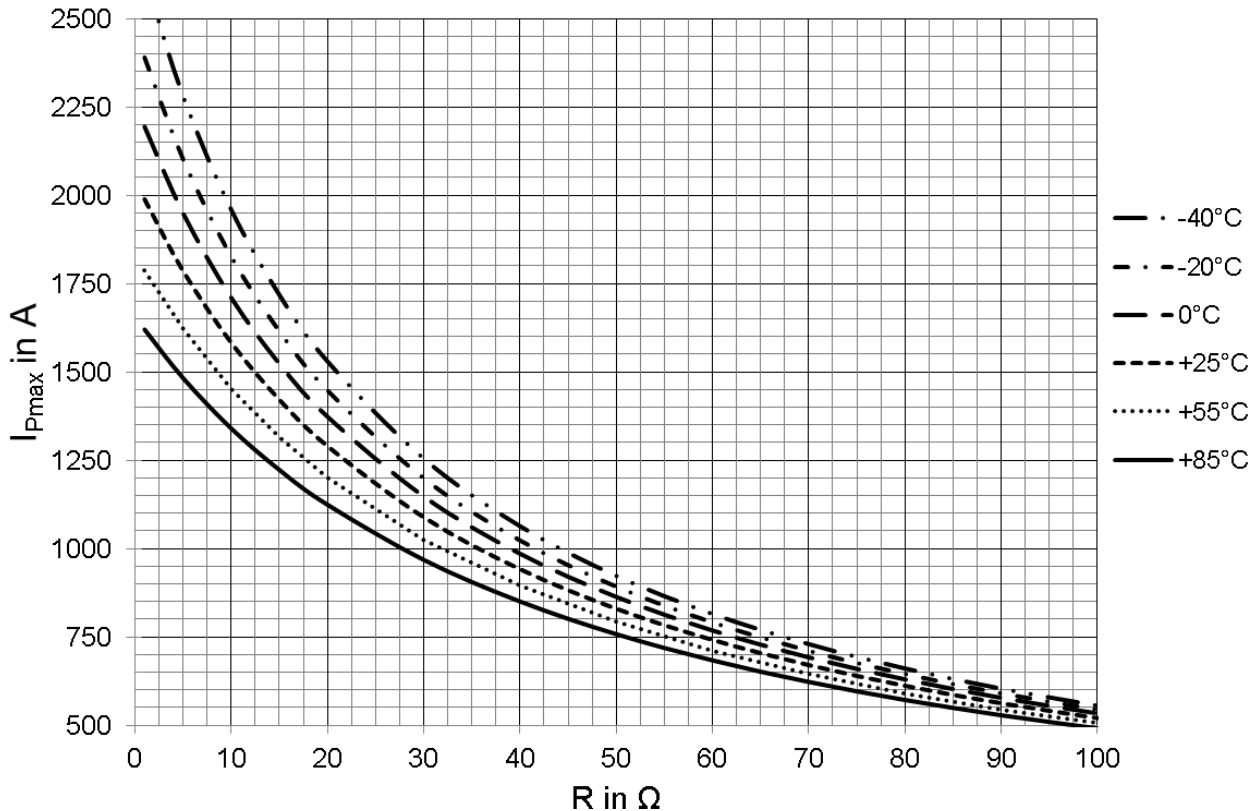


Fig. 1:  $I_{P,max} = f(R_m) @T_A$

Hrsg.: KB-E  
editor

Bearb: Ockajak  
designer

KB-PM: KRe.  
check

freig.: HS  
released

K-No.: 26333

1000 A Current Sensor for  $\pm 15V$ - Supply Voltage

Date: 10.04.2014

for electric current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic isolation between  
primary circuit (high power) and secondary circuit (electronic circuit)

Customer: Standard Type

Customer part no.:

Page 3 of 6

**Overload puls ( $\mu s$ -range)**


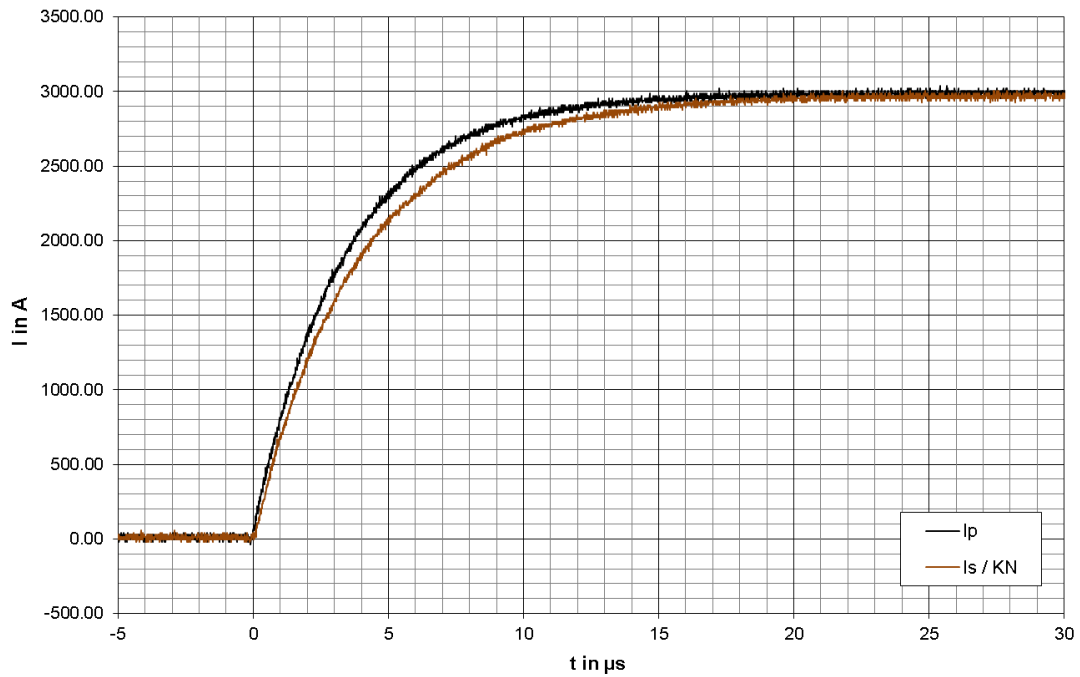


Fig. 2: Output current reaction of a 3kA current pulse with  $R_M = 10\Omega$

**Schematic diagram:**

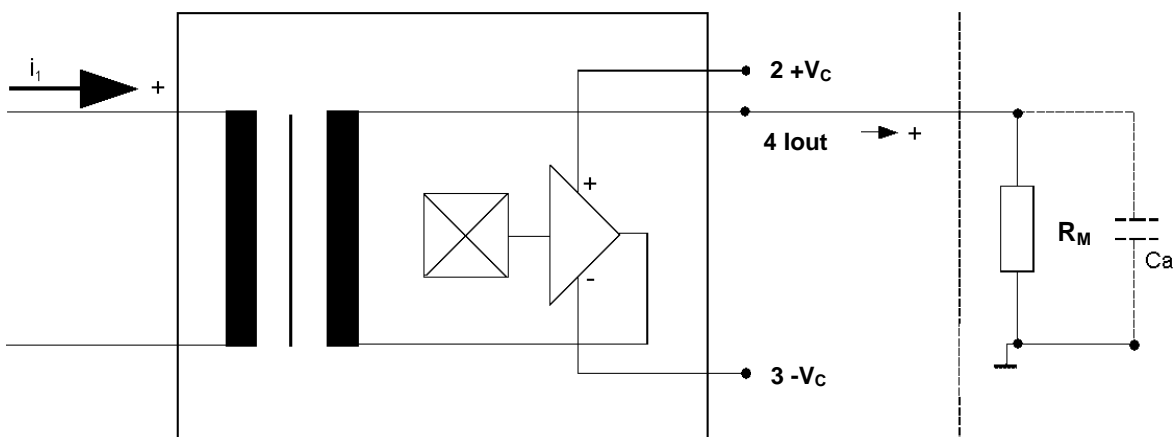

Hrsg.: KB-E  
editor

Bearb: Ockajak  
designer

KB-PM: KRe.  
check

freig.: HS  
released

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder GM-Eintragung vorbehalten

Copying of this document, disclosing it to third parties or using the contents there for any purposes without express written authorization by use illegally forbidden. Any offenders are liable to pay all relevant damages.

K-No.: 26333

1000 A Current Sensor for ±15V- Supply Voltage

Date: 10.04.2014

for electric current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic isolation between  
primary circuit (high power) and secondary circuit (electronic circuit)

Customer: Standard Type

Customer part no.:


Page 4 of 6

Maßbild (mm): Freimaßtoleranz DIN ISO 2768-c  
Mechanical outline General tolerance


Anschlüsse:  
Connections:  
**Connector:**  
Molex Minifit(4Pin)

Pin 1: n.c.  
Pin 2: +V<sub>C</sub>  
Pin 3: -V<sub>C</sub>  
Pin 4: I<sub>out</sub>

Beschriftung  
(marking):



<sup>1</sup> I<sub>p</sub>: positive current direction

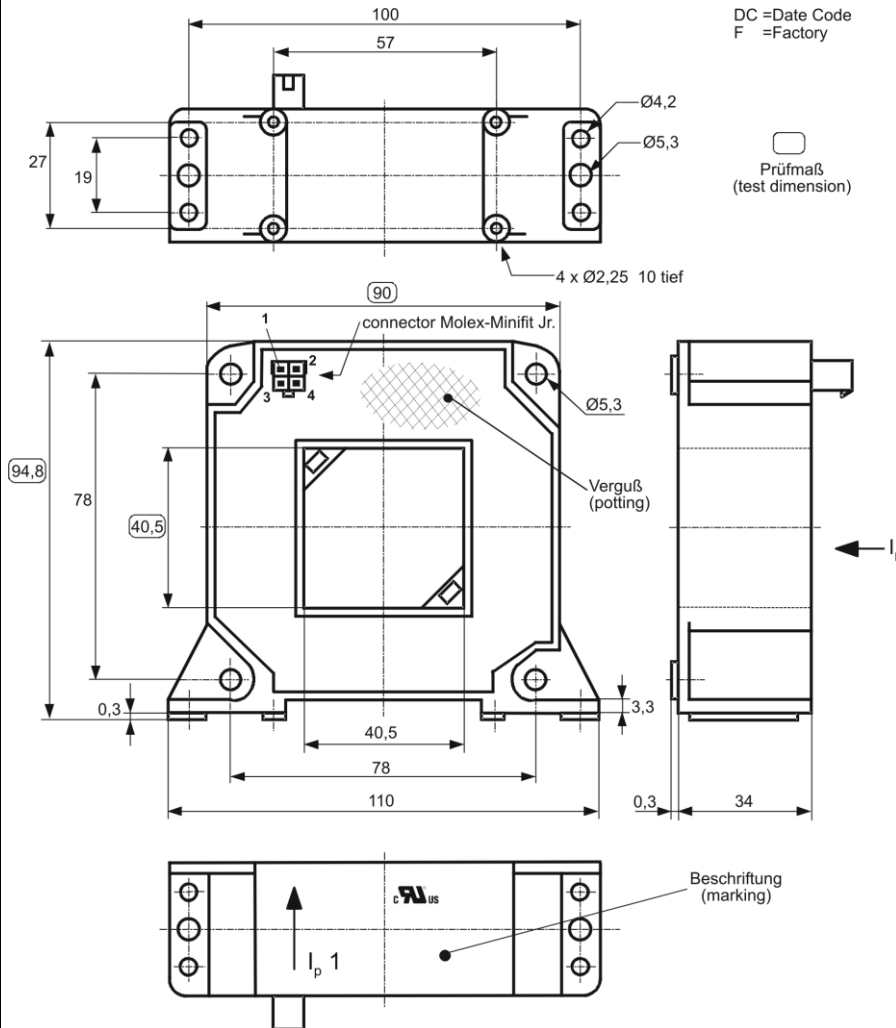

**Offset ripple reduction**

The offset ripple can be reduced by an external low pass. Simplest solution is a passive low pass filter of 1st order with

$$f_g = \frac{1}{2\pi \cdot R_M \cdot C_a}$$

In this case the response time is enlarged.

It is calculated from:

$$t'_r \leq t_r + 2,5R_M C_a$$

Hrsg.: KB-E  
editor

Bearb: Ockajak  
designer

KB-PM: KRe.  
check

freig.: HS  
released

**K-No.:** 26333

**1000 A Current Sensor for  $\pm 15V$ - Supply Voltage**
**Date:** 10.04.2014

 for electric current measurement:  
 DC, AC, pulsed, mixed ..., with a galvanic isolation between  
 primary circuit (high power) and secondary circuit (electronic circuit)

**Customer:** Standard Type

**Customer part no.:**
**Page** 5 **of** 6

**Inspection<sup>1)</sup>** (Measurement after temperature balance of the samples at room temperature; SC = significant characteristic)

|                |            |         |  |                    |         |
|----------------|------------|---------|--|--------------------|---------|
| $K_N(N_1/N_2)$ | (V)        | M3011/6 | Transformation ratio ( $I_p=3*1000A$ , 40-80 Hz)                   | 1 : 5000 $\pm$ 0.4 | %       |
| $I_0$          | (V)        | M3226   | Offset current   | < 0.1              | mA      |
| $V_{P,eff}$    | (V)        | M3014   | Test voltage, rms, 1s<br>Pin 1 - 4 to Primary                      | 2.2                | kV (SC) |
| $V_e$          | (AQL 1/S4) |         | Partial discharge voltage acc. M3024 (RMS)<br>with $V_{vor}$ (RMS) | 1500<br>1875       | V<br>V  |

**Type Testing** (Pin 1 - 4 to primary)

Designed according standard EN 61800 with insulation material group 1

|       |  |   |       |              |        |
|-------|--|---|-------|--------------|--------|
| $V_W$ |  | HV transient test according (to M3064)<br>(1,2 $\mu s$ / 50 $\mu s$ -wave form) |       | 12           | kV     |
| $V_d$ |  | Testing voltage acc. M3014 (RMS)  | (5 s) | 6            | kV     |
| $V_e$ |  | Partial discharge voltage acc. M3024 (RMS)<br>with $V_{vor}$ (RMS)              |       | 1500<br>1875 | V<br>V |

**Applicable documents**

Constructed and manufactured and tested in accordance with EN 61800.

Further standards: UL 508 ; file E317483, category NMTR2 / NMTR8

**Hrsg.:** KB-E  
editor
**Bearb.:** Ockajak  
designer
**KB-PM:** KRe.  
check
**freig.:** HS  
released

K-No.: 26333

1000 A Current Sensor for ±15V- Supply Voltage

Date: 10.04.2014

for electric current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic isolation between  
primary circuit (high power) and secondary circuit (electronic circuit)

Customer: Standard Type

Customer part no.:

Page 6 of 6

**Explanation of several of the terms used in the tablets (in alphabetical order)**

$I_{0H}$ : Zero variation after overloading with a DC of tenfold the rated value ( $R_M = R_{MN}$ )

$I_{0t}$ : Long term drift of  $I_o$  after 100 temperature cycles in the range -40 bis 85 °C.

$t_r$ : Response time, measured as delay time at  $I_P = 0,8 \cdot I_{Pmax}$  between a rectangular current and the output current.

$\Delta t (I_{Pmax})$ : Delay time between  $I_{Pmax}$  and the output current  $i_a$  with a primary current rise of  $di_1/dt = 1200 A/\mu s$ .

$U_{PD}$  Rated discharge voltage (recurring peak voltage separated by the insulation) proved with a sinusoidal voltage  $V_e$   
 $U_{PD} = \sqrt{2} \cdot V_e / 1,5$

$V_{vor}$  Defined voltage is the RMS value of a sinusoidal voltage with peak value of  $1,875 \cdot U_{PD}$  required for partial discharge test in IEC 61800-5-1

$$V_{vor} = 1,875 \cdot U_{PD} / \sqrt{2}$$

$V_{sys}$  System voltage RMS value of rated voltage according to IEC 61800-5-1

$V_{work}$  Working voltage voltage according to IEC 61800-5-1 which occurs by design in a circuit or across insulation

$X_{ges}(I_{PN})$ : The sum of all possible errors over the temperature range by measuring a current  $I_{PN}$ :

$$X_{ges} = 100 \cdot \left| \frac{I_S(I_{PN})}{K_N \cdot I_{PN}} - 1 \right|$$

X: Permissible measurement error in the final inspection at RT, defined by

$$X = 100 \cdot \left| \frac{I_{SB}}{I_{SN}} - 1 \right|$$

where  $I_{SB}$  is the output DC value of an input DC current of the same magnitude as the (positive) rated current ( $I_o = 0$ )

$X_{Ti}$ : Temperature drift of the rated value orientated output term.  $I_{SN}$  (cf. Notes on  $F_i$ ) in a specified temperature range, obtained by:

$$X_{Ti} = 100 \cdot \left| \frac{I_{SB}(T_{A2}) - I_{SB}(T_{A1})}{I_{SN}} \right|$$

$\varepsilon_L$ : Linearity fault defined by  $\varepsilon_L = 100 \cdot \left| \frac{I_P}{I_{PN}} - \frac{I_{Sx}}{I_{SN}} \right|$

Where  $I_P$  is any input DC and  $I_{Sx}$  the corresponding output term.  $I_{SN}$ : see notes of  $F_i$  ( $I_o = 0$ ).

Hrsg.: KB-E  
editor

Bearb.: Ockajak  
designer

KB-PM: KRe.  
check

freig.: HS  
released



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.