


5/5.8kW Single-Phase Monitored PDU with LX Platform Interface, 208/240V Outlets (20 C13 & 4 C19), L6-30P, 0U, TAA

MODEL NUMBER: PDUMNV30HVLX

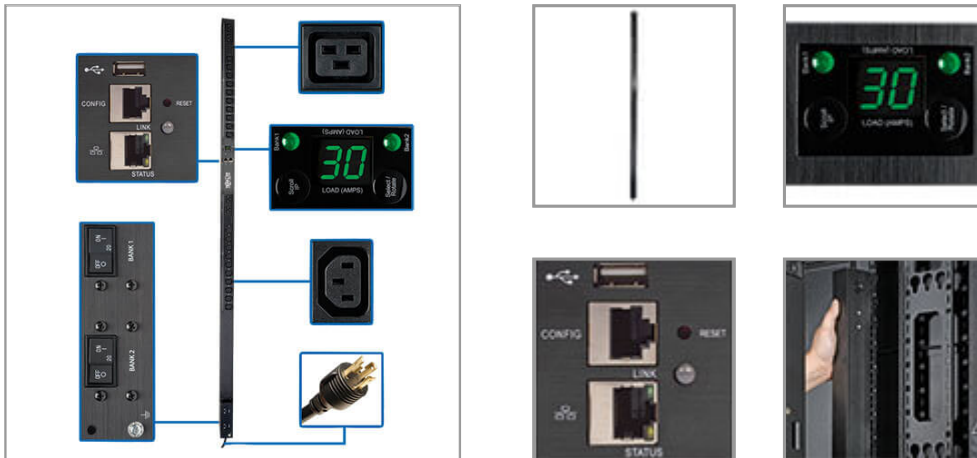

Cost-effective 5/5.8kW PDU distributes and monitors single-phase power in an IT or industrial environment. Built-in network interface helps monitor load levels to prevent overloads that cause downtime.

Description

The PDUMNV30HVLX 5.8kW Single-Phase Monitored PDU provides real-time remote monitoring of voltage, frequency and load levels via built-in network connection. Recommended for any IT or industrial application, it features 24 outlets (20 C13 and 4 C19) with included cord retention brackets to prevent cables from becoming accidentally disconnected. A 10-foot cord with NEMA L6-30P plug connects the PDU to a compatible AC power source, generator or protected UPS.

The built-in Java-free HTML5-based LX Platform network interface enables full remote access for PDU status monitoring and email notifications via secure web browser, SNMP, telnet or SSH. It supports 10/100 Mbps auto-sensing for optimum communication with an Ethernet network. Optional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilities. Protocols supported include HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTP.

A digital ammeter allows you to monitor each bank's load in real time to ensure it remains well below maximum capacity with no danger of overload. The PDU mounts in 0U of space in EIA-standard 19-inch racks using the included toolless mounting buttons or the included rack-mounting brackets. Use the included PDUMVROTATEBRKT kit to install the unit with outlets facing the rear for better airflow or equipment access.

Features

Distributes Network-Grade Single-Phase Power

- 5/5.8kW 208/240V 30A monitored PDU with single-phase input/output

Highlights

- 5/5.8kW 208/240V 30A monitored PDU
- 24 outlets—20 C13, 4 C19—with cord retention brackets
- NEMA L6-30P input with 10 ft. AC power cord
- Digital ammeter for on-site load monitoring in real time
- Built-in LX Platform interface for remote access

Package Includes

- PDUMNV30HVLX 5/5.8kW Single-Phase Monitored PDU
- Configuration cable
- (24) Cable ties
- (2) Cord retention brackets
- Rack-mounting hardware
- PDUMVROTATEBRKT mounting bracket accessory
- Owner's manual



- NEMA L6-30P with 10 ft. cord connects to compatible AC power source
- Firmware upgrades support future product enhancements

24 Outlets Distribute AC Power

- 20 C13 and 4 C19 outlets split into 2 separate load banks
- Cord retention bracket prevents cables from becoming accidentally disconnected

Digital Ammeter

- Reports total connected equipment load
- Supports IP-address self-ID
- Rotates 180° for easy reading at either angle

Built-In LX Platform Interface

- Allows full remote access for power monitoring with email notifications via secure web browser, SNMP, telnet or SSH
- Optional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilities
- No Java required

Broad Communications Compatibility

- Supports HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTP
- Supports automatic and manual assignment of IP address

Easy 0U Installation in EIA-Standard 19 in. Racks

- Mounts vertically using included toolless buttons or rack-mounting brackets
- Included PDUMVROTATEBRKT allows mounting with rear-facing outlets

TAA-Compliant

- Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

Specifications

| OVERVIEW | |
|--------------------------------|---------------|
| UPC Code | 037332204479 |
| PDU Type | Monitored |
| INPUT | |
| PDU Input Voltage | 200; 208; 240 |
| Recommended Electrical Service | 30A 208/240V |



| | |
|--|--|
| Maximum Input Amps | 30 |
| Maximum Input Amps Details | Agency de-rated to 24A continuous |
| PDU Plug Type | NEMA L6-30P |
| Input Phase | Single-Phase |
| Input Cord Length (ft.) | 10 |
| Input Cord Length (m) | 3.05 |
| OUTPUT | |
| Output Capacity Details | 5.8kW (240V), 5kW (208V), 4.8kW (200V) total capacity / 30A max (Agency de-rated to 24A), 20A max per breakered outlet bank; 16A max per C19 outlet; 12A max per C13 outlet |
| Frequency Compatibility | 50 / 60 Hz |
| Output Receptacles | (20) C13; (4) C19 |
| Output Nominal Voltage | 200; 208; 240 |
| Overload Protection | Two 20A breakers protect 12 outlets each |
| Customized Load Management Receptacles | n/a |
| USER INTERFACE, ALERTS & CONTROLS | |
| Front Panel LCD Display | Digital meter reports PDU output current in amps, Scroll IP-address information; Display can be rotated 180 degrees for installation with the input cable at the top |
| Front Panel LEDs | Front panel LEDs indicate which loading segment the digital LCD current display is reporting; Bank 1 LED indicates the meter is reporting load level for outlets 1-12; Bank 2 LED indicates the meter is reporting load level for outlets 13-24; Both LEDs lighted indicates the meter is reporting load level for all outlets combined |
| Switches | Press the SCROLL IP button and release to display the configured IP address in 2 digit intervals; Press the SELECT / ROTATE button and release after one second to advance the local display power power consumption for the 3 reported segments: Bank 1, Bank 2 and Banks 1+2; Press the SELECT / ROTATE button and release after two seconds to rotate the display 180 degrees |
| Current Measurement Accuracy (Amps) | +/-2% |
| PHYSICAL | |
| Form Factors Supported | 0U vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks |
| Material of Construction | Metal |
| PDU Form Factor | Vertical (0U) |
| Shipping Dimensions (hwd / cm) | 12.70 x 16.00 x 185.93 |
| Shipping Dimensions (hwd / in.) | 5.00 x 6.30 x 73.20 |
| Shipping Weight (kg) | 6.62 |
| Shipping Weight (lbs.) | 14.60 |
| Unit Dimensions (hwd / cm) | 177.8 x 5.6 x 6.7 |
| Unit Dimensions (hwd / in.) | 70 x 2.2 x 2.65 |
| Unit Weight (kg) | 5.22 |



| | |
|-------------------------------------|---|
| Unit Weight (lbs.) | 11.5 |
| ENVIRONMENTAL | |
| Storage Temperature Range | -30°C to +60°C (-22°F to +140°F) |
| Relative Humidity | 5-95% non-condensing |
| COMMUNICATIONS | |
| SNMP Compatibility | Pre-installed LX platform interface provides remote monitoring via Java-free HTML5 web interface, telnet, SSH and SNMP management systems |
| SPECIAL FEATURES | |
| High Availability PDU Features | Auto Probe Monitoring (included) |
| STANDARDS & COMPLIANCE | |
| Certifications | Tested to UL/CAN 60950-1 (USA, Canada), Class A (Emissions), NOM (Mexico), RoHS Compliant, TAA Compliant |
| WARRANTY | |
| Product Warranty Period (Worldwide) | 2-year limited warranty |

© 2020 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.