





- AEC-Q200 Qualified
- IATF-16949 QMS

| STANDARD SPECIFICATIONS | |
|--|--------------------------------|
| PARAMETERS | MAX (unless otherwise noted) |
| Frequency | 32.768 kHz |
| Frequency Tolerance @ 25°C | ±20 PPM |
| Frequency Stability (Temperature Coefficient) | -0.04 PPM / (Δ°C) ² |
| Temperature Range | |
| Turnover (T _o) | +20°C ~ +30°C |
| Operating (T _{OPR}) | -40°C ~ +125°C |
| Storage (T _{STG}) | -40°C ~ +125°C |
| Equivalent Series Resistance (R _s) | 90 kΩ |
| Load Capacitance (C _L) | (See options on page 2) |
| Insulation Resistance @ 100VDC | 500MΩ Min |
| Drive Level | 1.0μW 0.1μW Typ |
| Aging per year @ 25°C (first year) | ±3 PPM |
| Maximum Soldering Temp / Time | 260°C / 10 Seconds |
| Moisture Sensitivity Level (MSL) | 1 |
| Termination Finish | Au over Ni |
| Seal Method | Seam |
| Lead (Pb) Free | Yes |
| RoHS/Reach Compliant | Yes |

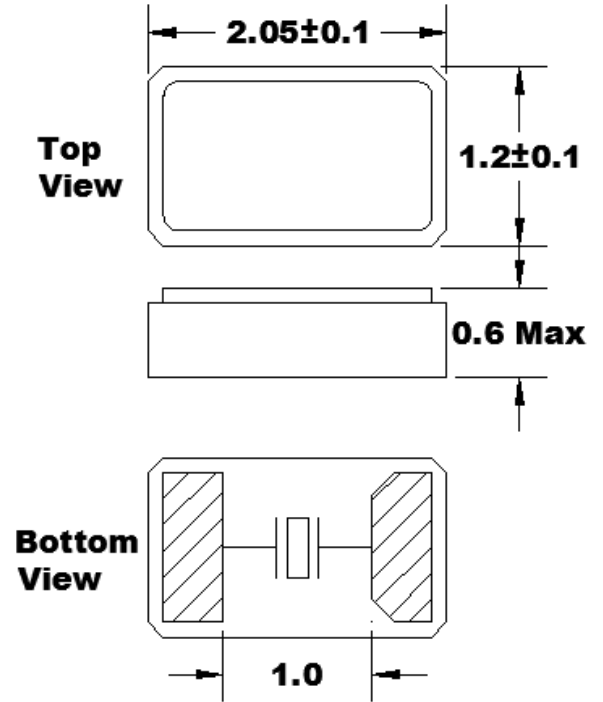


Recommended Solder Pad Layout

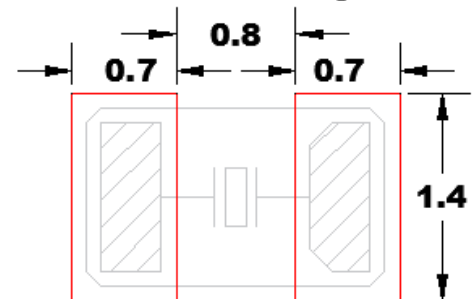

All dimensions are in millimeters.

Note: Dimensional drawing is for reference to critical specifications defined by size measurements. Certain non-critical visual attributes, such as side castellations, etc. may vary.

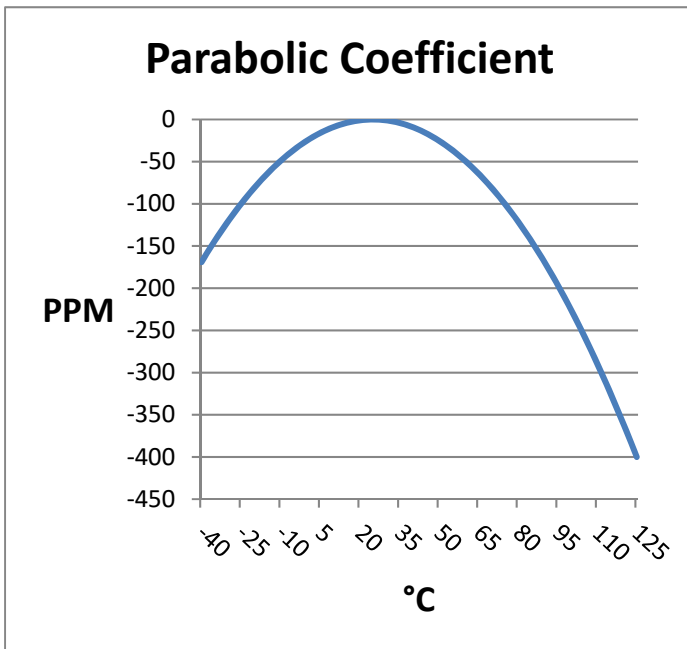

| | |
|--|----------------------|
| Title / Description: K12A STANDARD SPECIFICATIONS | |
| Drawing Number: K12A-DOC-1 | Size: A |
| Part Number: | Cage: 61429 |
| Draftsperson: MAJ | Approved: BEC |
| Revision Date: 10/17/2019 | |




2 x 1.2mm Auto Grade Tuning Fork

K12A DATASHEET

| • TAPE SPECIFICATIONS (millimeters) | | | | | | |
|-------------------------------------|-----|-----|-----|-----|------|-------------|
| A | B | C | D | E | F | Reel QTY |
| Ø1.5 | 4.0 | 4.0 | 3.5 | 8.0 | 0.75 | -T3 = 3,000 |

| • REEL SPECIFICATIONS (millimeters) | | | | | | |
|-------------------------------------|-----|-----|-----|------|-----|-----|
| G | H | I | J | K | L | M |
| 2.0 | Ø13 | Ø21 | Ø60 | Ø180 | 9.0 | 1.2 |

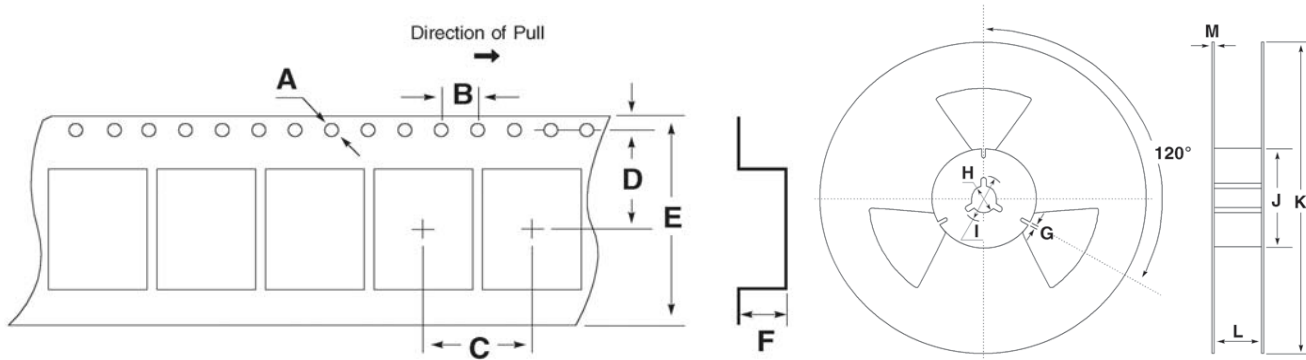

Available Options & Part Identification for SMD Tuning Fork Crystal K12A F K12A E I H I 0.032768

| F | K12A | E | I | H | I | 0.032768 |
|------------|---------------------|--------------------------------|--|--|---|------------------------|
| <u>FOX</u> | <u>Model Number</u> | <u>Tolerance</u> E = ±20ppm | <u>Stability</u> I = -0.04 PPM / (Δ°C) ² | <u>Load Capacitance</u> B=6pF V=7pF W=9pF H=12.5pF | <u>Operating Temperature</u> I = -40 ~ +125 °C | <u>Frequency (MHz)</u> |



Corporate
Headquarters
5570 Enterprise Parkway
Fort Myers, FL 33905
<http://www.FOXONLINE.com>

Sales
1-888-GET-2-FOX (1-888-438-2369) or
1-239-693-0099
<http://www.FOXONLINE.com/repdisty>

Tech Support
<http://www.FOXONLINE.com/email>

PRODUCT USE: Fox Electronics reserves the right to modify the products and/or specifications described herein at any time and at Fox Electronics' sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of Fox Electronics' products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of Fox Electronics or any third parties. Fox Electronics' products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of a Fox Electronics product can be reasonably expected to significantly affect the health or safety of users. Anyone using a Fox Electronics product in such a manner does so at their own risk, absent an express, written agreement by Fox Electronics. Fox Electronics and the Fox logo are registered trademarks of Fox Electronics. Product specification is subject to change without notice. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of Fox Electronics or their respective third party owners. For datasheet type definitions and a glossary of common terms, visit <http://www.foxonline.com/tgcrystals.html>

| | | | |
|--|--|----------------------|----------------------------------|
| <p>© Copyright 2019 Fox Electronics. All rights reserved</p> | Title / Description: K12A STANDARD SPECIFICATIONS | | |
| | Drawing Number: K12A-DOC-1 | | Size: A |
| | Part Number: | | Cage: 61429 |
| | Draftsperson: MAJ | Approved: BEC | Revision Date: 10/17/2019 |




Crystal Unit Handling Precautions

1) Mounting Precautions

- If the board is deformed, such as bending after mounting, peeling of the soldered joint between the crystal resonator and board may occur producing a crack in the ceramic package, leading to loss of vacuum, destruction of the internal element, etc. Especially when depaneling the board on which it is mounted, there is a possibility that a large stress may be applied, please consider board layout and cutting method to minimize stress on products.
- When the product is automatically mounted on the board, if a large impact is applied to the crystal resonator, there is a possibility that characteristics may change / deteriorate, or the product may be broken. When mounting automatically, please set conditions considering the shock to the crystal unit. Also, please conduct the mounting test beforehand and confirm that there is no influence on the characteristics to the crystal resonator.
- Cracks may occur in the soldered part by repeated harsh temperature changes for a long time when mounting due to the board having a expansion coefficient different from that of the ceramics used in the crystal package. When using under such circumstances, please conduct test beforehand and confirm that there is no influence on the crystal unit.
- Ceramic packages are small and thin products. So, if/when you rework after mounting, please give consideration to the selection and handling of the tools to be used.

2) Soldering


Following is typical SMD Pb-free reflow profile for soldering:

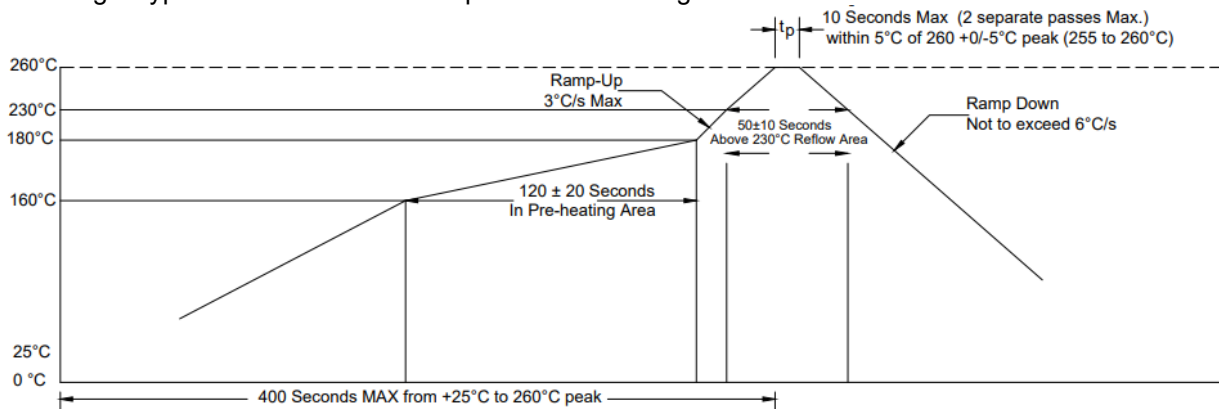

Excessive heating time at high temperature may result in deterioration of the characteristics and may break the crystal unit. For manual rework, heat the lead part at 300°C or lower for 5 seconds or less.

3) Cleaning

Since a small, thin crystal chip is used for tuning fork crystal units and the frequency approximates that of an ultrasonic cleaner, the crystal chip may break easily. Therefore, DO NOT perform ultrasonic cleaning.

| | | | |
|--|--|----------------------|----------------------------------|
|  © Copyright 2019 Fox Electronics. All rights reserved | Title / Description: K12A STANDARD SPECIFICATIONS | | |
| | Drawing Number: K12A-DOC-1 | | Size: A |
| | Part Number: | | Cage: 61429 |
| | Draftsperson: MAJ | Approved: BEC | Revision Date: 10/17/2019 |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.