

**1A LOW DROPOUT ADJUSTABLE AND FIXED-MODE
REGULATOR WITH ENABLE**

Description

The AP7361 is a 1A, adjustable and fixed output voltage, ultra-low dropout linear regulator with enable. The device includes pass element, error amplifier, band-gap reference, current limit and thermal shutdown circuitry. The device is turned on when EN pin is set to logic high level.


The characteristics of the low dropout voltage and low quiescent current make it suitable for low to medium power applications, for example, laptop computers, audio and video applications, and battery powered devices. The typical quiescent current is approximately 70 μ A. Built-in current-limit and thermal-shutdown functions prevent IC from damage in fault conditions.

The AP7361 is available in U-DFN3030-8 Type E, SOT89-5L, SOT223-3L and TO252-3L package.

Features

- Wide input voltage range: 2.2V – 6V
- 150mV very low dropout at 300mA load
- 500mV very low dropout at 1A load
- Low quiescent current (I_Q): 70 μ A typical
- Adjustable output voltage range: 1V to 5.0V
- Fixed output options: 1V to 3.3V
- Very fast transient response
- High PSRR
- Accurate voltage regulation
- Current limiting and short circuit protection
- Thermal shutdown protection
- Stable with ceramic output capacitor $\geq 2.2\mu$ F
- Ambient temperature range -40°C to 85°C
- DFN3030E-8, SOT89-5L, SOT223-3L and TO252-3L: Available in "Green" Molding Compound (No Br, Sb)
- Lead Free Finish/ RoHS Compliant (Note 1)

Pin Assignments



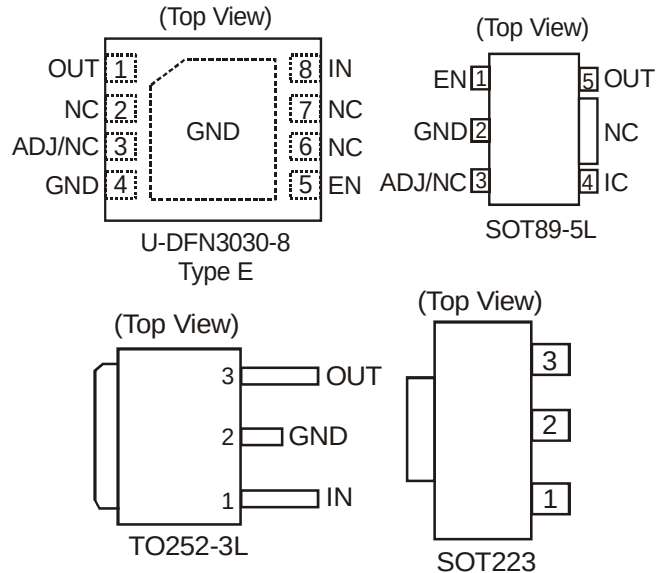


Applications

- Servers and laptops
- FPGA and DSP core or I/O power
- TV, and home electrical appliances
- Battery-powered devices

Note: 1. EU Directive 2002/95/EC (RoHS). All applicable RoHS exemptions applied. Please visit our website at http://www.diodes.com/products/lead_free.html


Typical Application Circuit

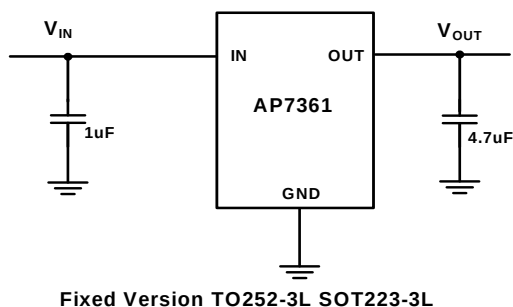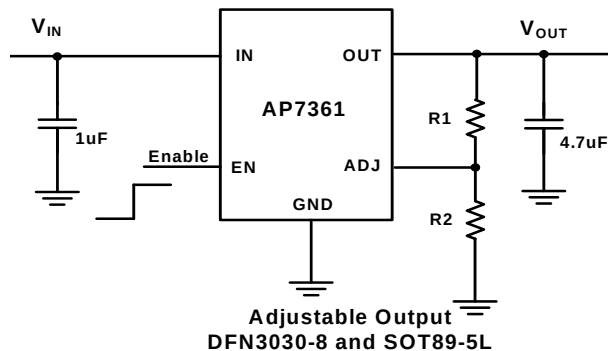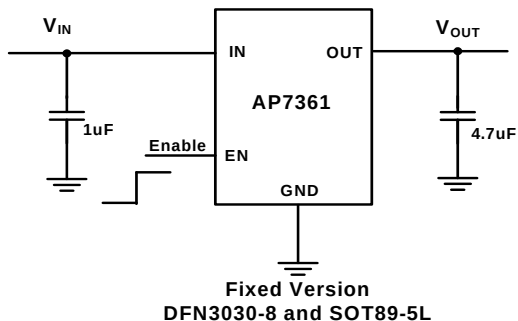


Pin Descriptions

Pin Name	Pin Number					Description
	U-DFN3030-8 Type E	SOT89-3L	TO252-3L	SOT223-3L	SOT223R-3L	
IN	8	4	1	1	3	The input of the regulator. Bypass to ground through at least 1μF ceramic capacitor.
OUT	1	5	3	3	2	The output of the regulator. Bypass to ground through at least 2.2μF ceramic capacitor. For improved ac load response a larger capacitor is recommended.
GND	4	2	2	2	1	Ground.
ADJ	3	3	NA	NA	NA	Adjustable voltage version only – a resistor divider from this pin to the OUT pin and ground sets the output voltage.
EN	5	1	NA	NA	NA	Enable input, active high.
NC	2, 6, 7	NA	NA	NA	NA	No connection.


Functional Block Diagram

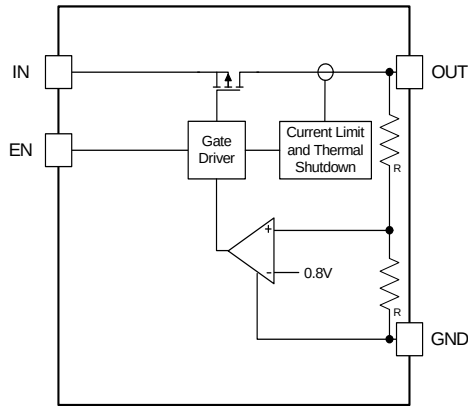

Fixed Version DFN3030-8 and SOT89-5L

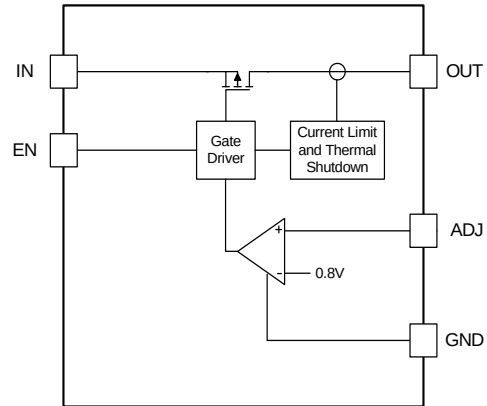

Adjustable Version DFN3030-8 and SOT89-5L

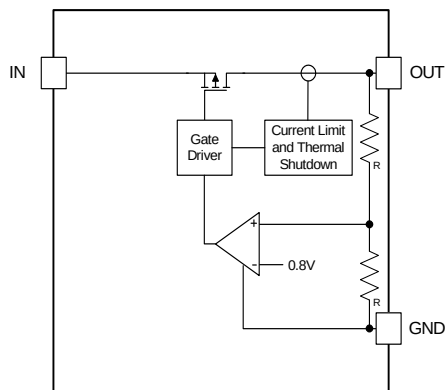

Fixed Version TO252-3L SOT223-3L

Absolute Maximum Ratings

Symbol	Parameter	Ratings	Unit
ESD HBM	Human Body Model ESD Protection	> 2	KV
ESD MM	Machine Model ESD Protection	> 200	V
V_{IN}	Input Voltage	6.5	V
	OUT, ADJ, EN Voltage	$V_{IN} + 0.3$	V
T_J	Operating Junction Temperature Range	-40 ~ 150	°C
T_{ST}	Storage Temperature Range	-65 ~ 150	°C
P_D	Power Dissipation (Note 2)	Internally limited by maximum junction temperature of 150°C	
P_D	Power Dissipation (Note 2)	U-DFN3030-8 Type E	1700
		TO252	1250
		SOT223-3L	1100
		SOT89-5L	800

Note: 2. Ratings apply to ambient temperature at 25°C

Stresses greater than the 'Absolute Maximum Ratings' specified above, may cause permanent damage to the device. These are stress ratings only; functional operation of the device at these or any other conditions exceeding those indicated in this specification is not implied. Device reliability may be affected by exposure to absolute maximum rating conditions for extended periods of time.

Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V_{IN}	Input voltage	2.2	6.0	V
I_{OUT}	Output Current (Note 3)	0	1.0	A
T_A	Operating Ambient Temperature	-40	85	°C

Note: 3. The device maintains a stable, regulated output voltage without a load current. When the output current is large, attention should be given to the limitation of the package power dissipation.

**1A LOW DROPOUT ADJUSTABLE AND FIXED-MODE
REGULATOR WITH ENABLE**
Electrical Characteristics


 (T_A = 25°C, V_{IN} = V_{OUT} + 1V, C_{IN} = 1μF, C_{OUT} = 4.7μF, V_{EN} = V_{IN}, unless otherwise stated)

Symbol	Parameter	Test Conditions	Min	Typ.	Max	Unit
V _{REF}	FB reference voltage	I _{OUT} = 10mA, T _A = 25°C		0.8		V
I _{ADJ}	ADJ pin leakage			0.1	0.5	μA
I _Q	Input Quiescent Current	Enabled, I _{OUT} = 0A		70	90	μA
I _{SHDN}	Input Shutdown Current	V _{EN} = 0V, I _{OUT} = 0A	-1	0.05	1	μA
V _{OUT}	Output Voltage Accuracy	I _{OUT} = 100mA, T _A = 25°C	-1		1	%
		I _{OUT} = 100mA, -40°C ≤ T _A ≤ 85°C	-2		2	
		Over V _{IN} , I _{OUT} , and T _A	-3	±0.5	3	
$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	Line Regulation	V _{IN} = V _{OUT} + 1V to 6V, I _{OUT} = 100mA		0.01	0.1	% / V
		T _A = 25°C				
		-40°C ≤ T _A ≤ 85°C			0.2	
$\Delta V_{OUT} / V_{OUT}$	Load Regulation	I _{OUT} from 1mA to 300mA	-1.0	0.5	1.0	%
		I _{OUT} from 1mA to 1A	-1.0	0.5	1.0	%
V _{DROPOUT}	Dropout Voltage (Note 4)	I _{OUT} = 300mA		150	200	mV
		I _{OUT} = 500mA		250	350	
		I _{OUT} = 1A		500	700	
V _{IL}	EN Input Logic Low Voltage		0		0.3	V
V _{IH}	EN Input Logic High Voltage		1.0		V _{IN}	V
I _{EN}	EN Input leakage	V _{IN} = 6V, V _{EN} = 0V or 6V	-0.1	0.01	0.1	μA
I _{LIMIT}	Current limit	V _{IN} = V _{OUT} + 1V	1.1	1.5		A
I _{SHORT}	Short-circuit Current	V _{IN} = V _{OUT} + 1V, Output Voltage < 25% V _{out}		200		mA
PSRR	Power Supply Rejection Ratio (Note 5)	f = 1KHz, I _{OUT} = 100mA	60	65		dB
		f = 10KHz, I _{OUT} = 100mA		45		
t _{ST}	Start-up Time	V _{OUT} = 3V, C _{OUT} = 1μF, R _L = 30Ω		200		μs
$\frac{\Delta V_{OUT}}{\Delta T_A \times V_{OUT}}$	Output voltage temperature coefficient	I _{OUT} = 100mA, -40°C ≤ T _A ≤ 85°C		±130		ppm/°C
T _{SHDN}	Thermal shutdown threshold			150		°C
T _{HYS}	Thermal shutdown hysteresis			20		°C
θ _{JA}	Thermal Resistance Junction-to-Ambient	U-DFN3030-8 Type E (Note 6)		70		°C/W
		TO252 (Note 6)		95		
		SOT223-3L (Note 6)		110		
		SOT89-5L (Note 6)		150		


- Notes:
- Dropout voltage is the voltage difference between the input and the output at which the output voltage drops 2% below its nominal value. This parameter only applies to output voltages above 1.5V since minimum V_{IN} = 2.2V.
 - For V_{IN} ≥ 2.5V and V_{IN} = V_{OUT} + 1V. For V_{IN} < 2.5V, the PSRR performance may be reduced.
 - Test condition : U-DFN3030-8 Type E device mounted on 2"x2" FR-4 substrate PCB, with minimum recommended pad on top layer and thermal vias to bottom layer ground plane. TO252 device mounted on 2"x2" FR-4 substrate PC board, 2oz copper, with minimum recommended pad layout. SOT223-3L the device is mounted on FR-4 substrate PC board, with minimum recommended pad layout. SOT89-5L device mounted on 1"x1" FR-4 substrate PC board, with minimum recommended pad layout

Typical Performance Characteristics


Start-up Time

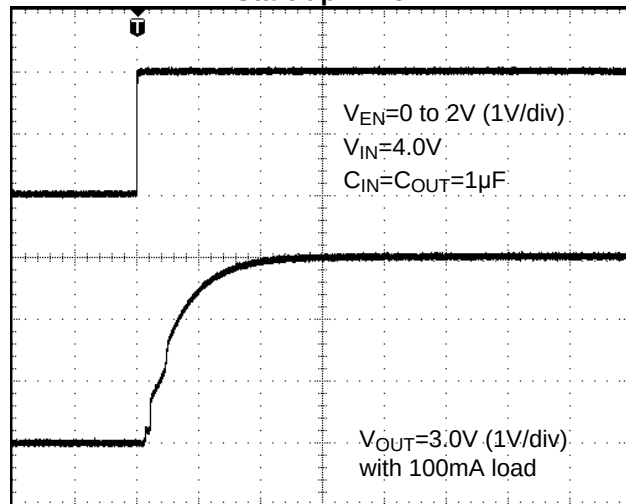


Start-up Time

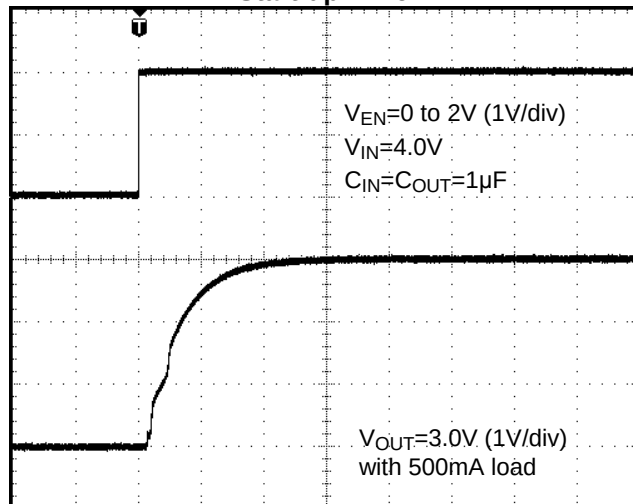

Line Transient Response

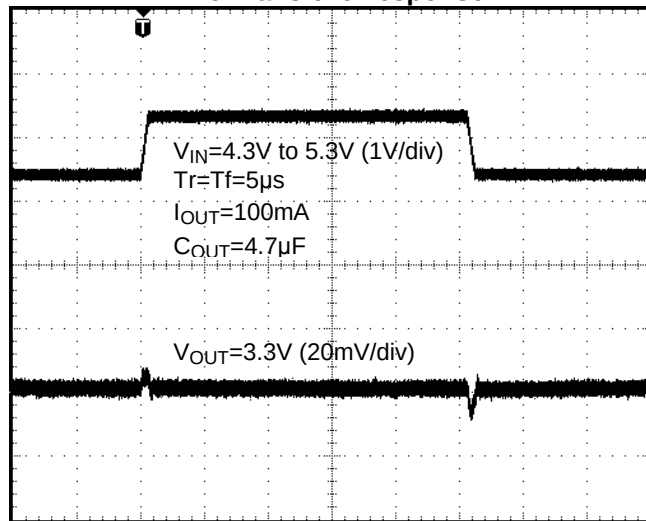


Line Transient Response

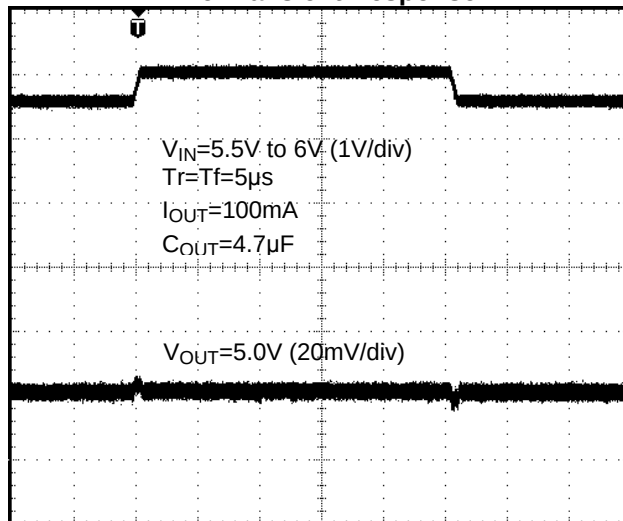


Typical Performance Characteristics (cont.)


Load Transient Response

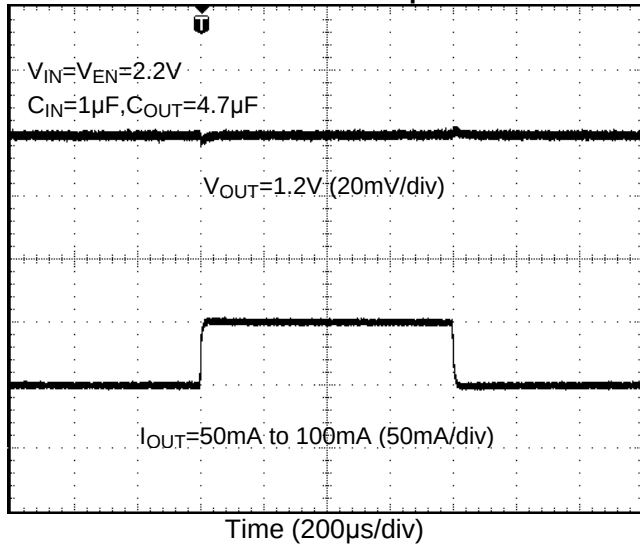


Load Transient Response

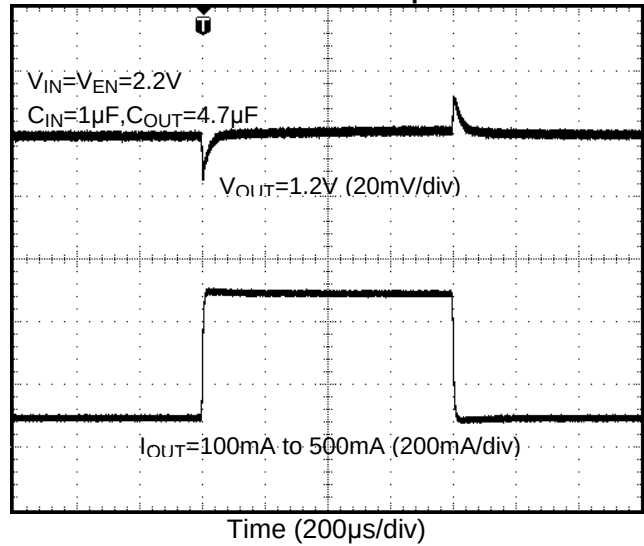





Load Transient Response

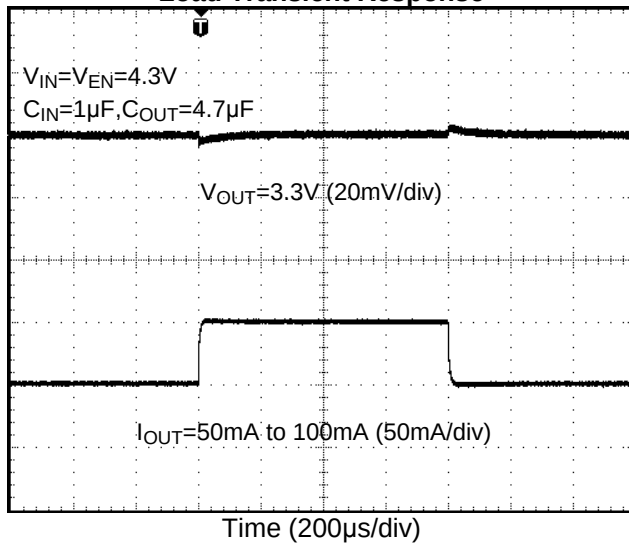





Load Transient Response

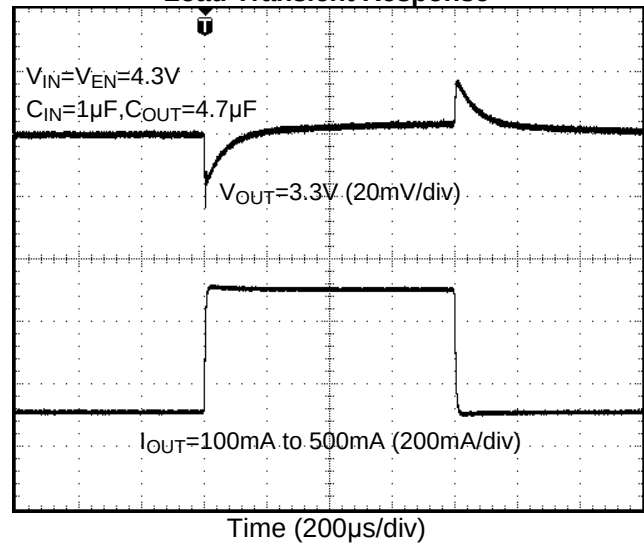





Typical Performance Characteristics (cont.)

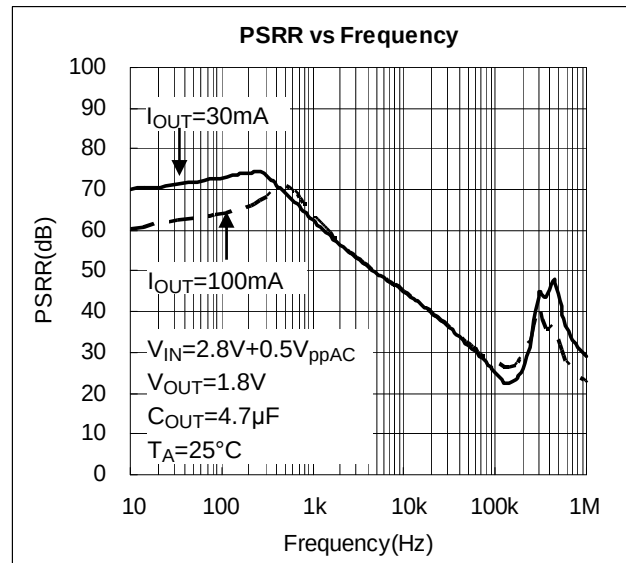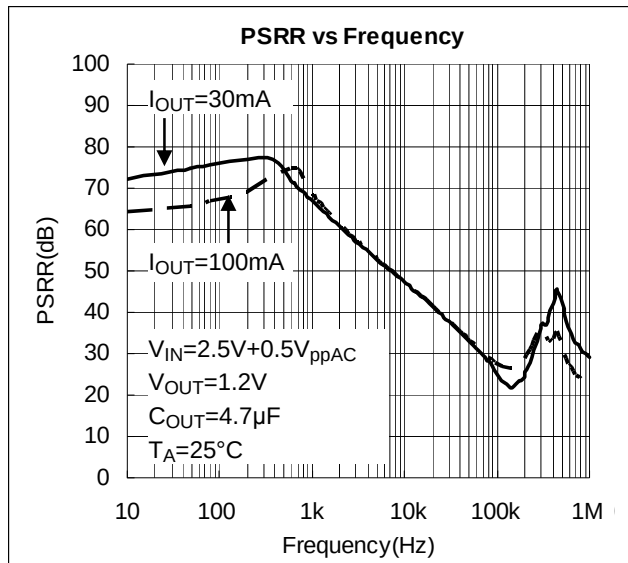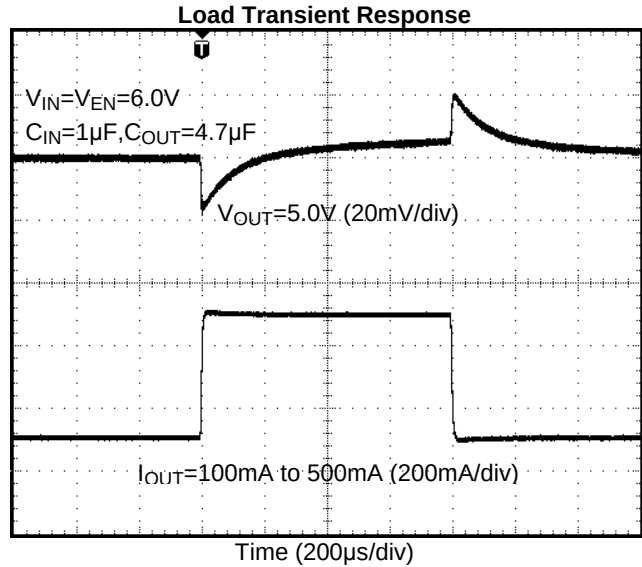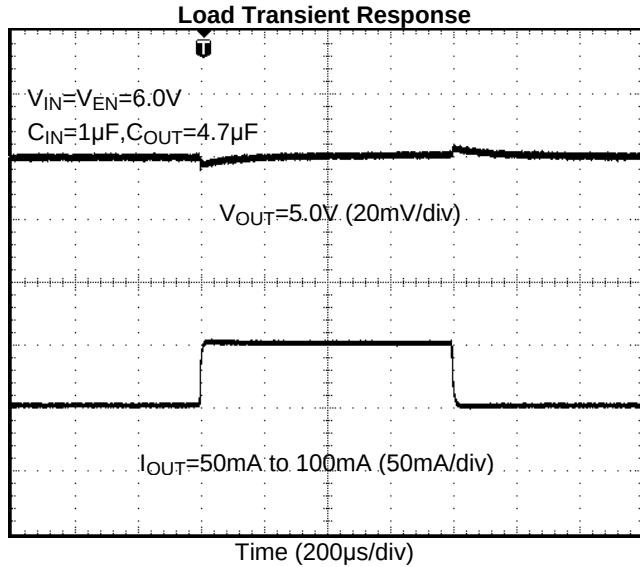

Typical Performance Characteristics (cont.)

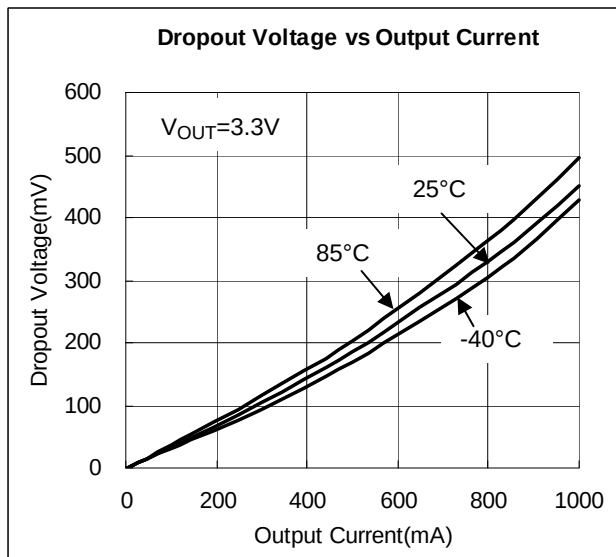
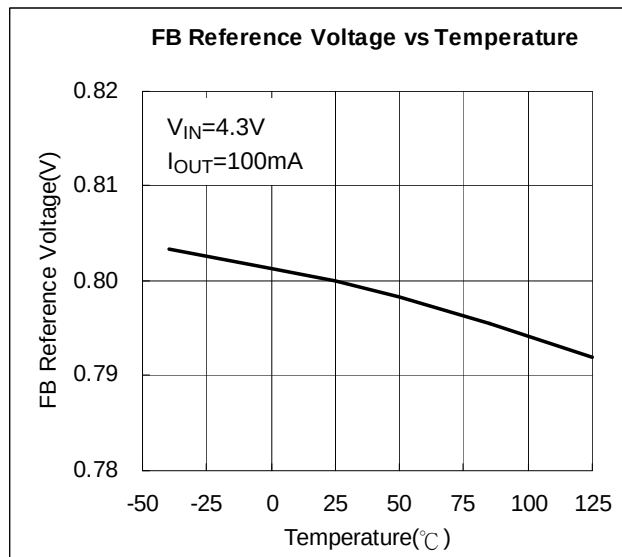
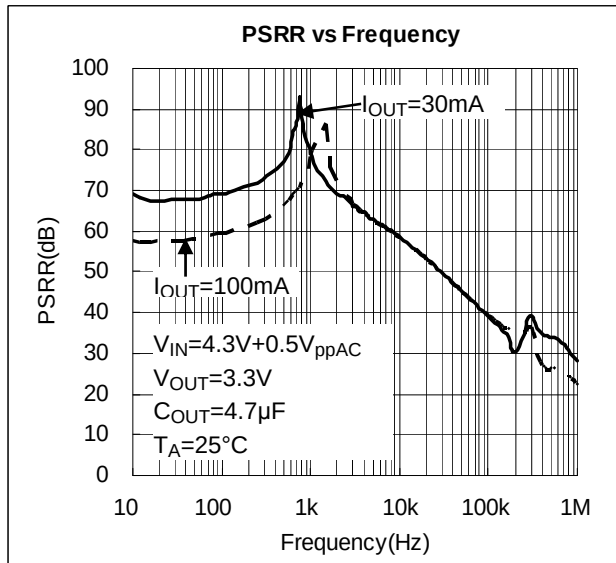
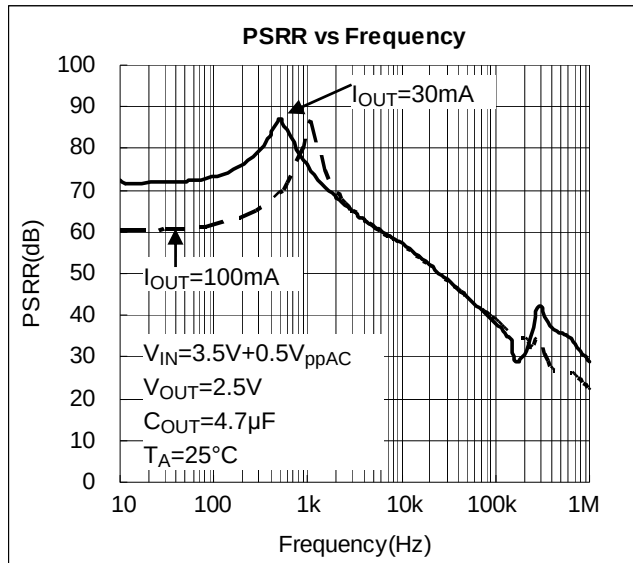


Typical Performance Characteristics (cont.)

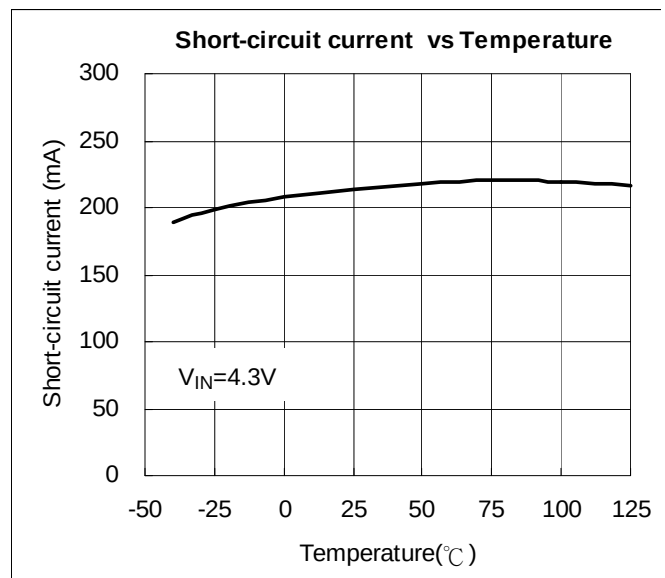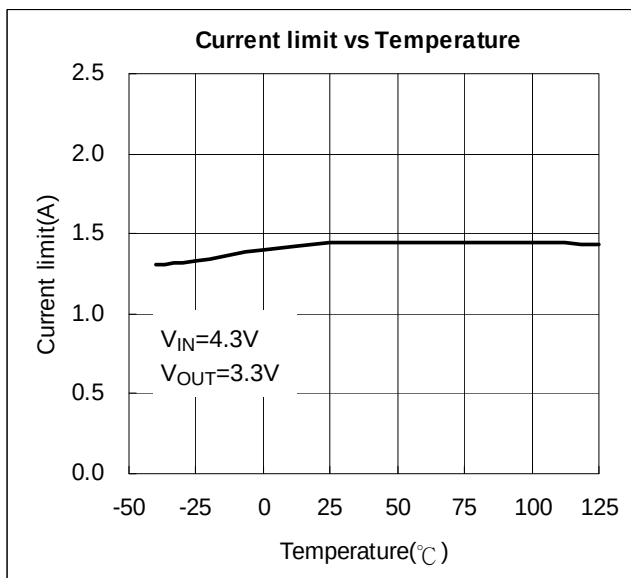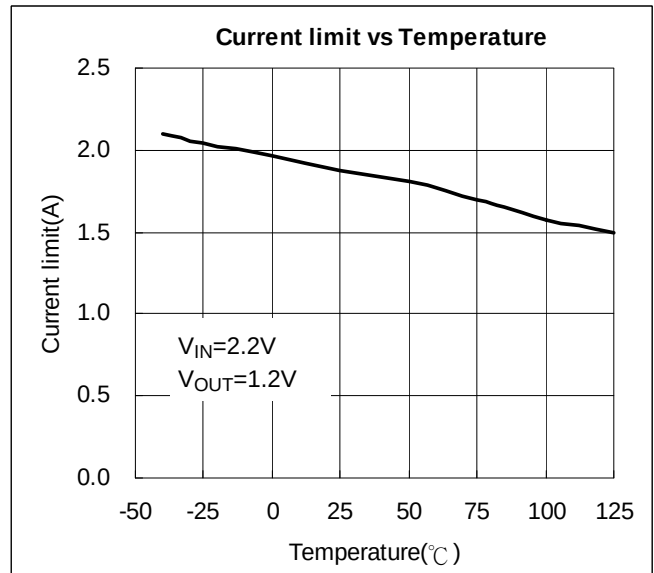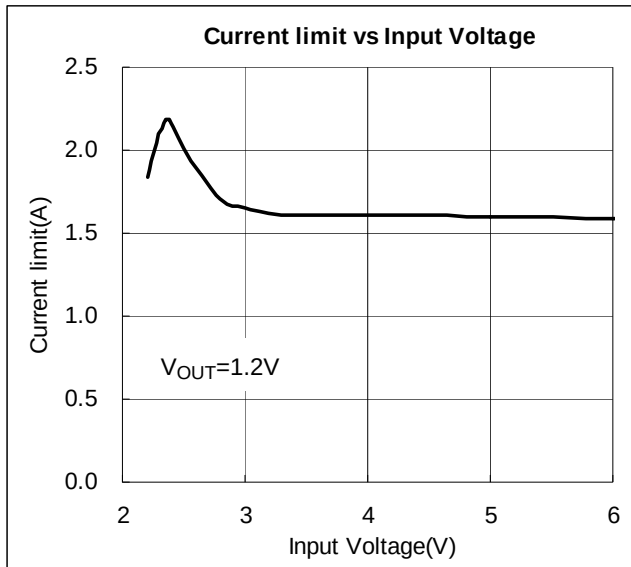

Typical Performance Characteristics (cont.)

NEW PRODUCT

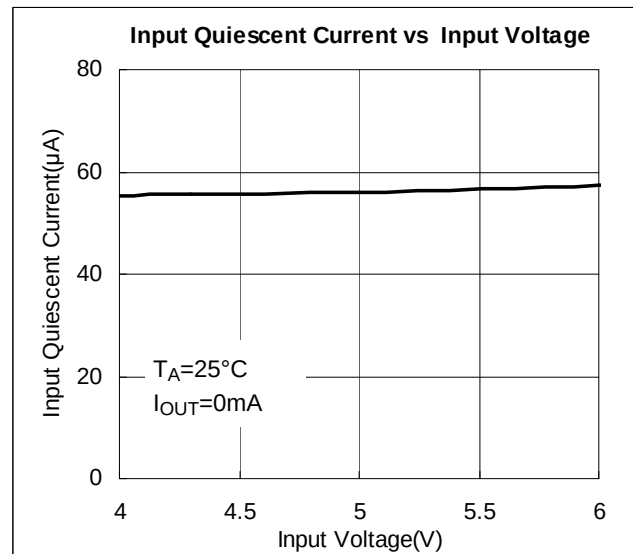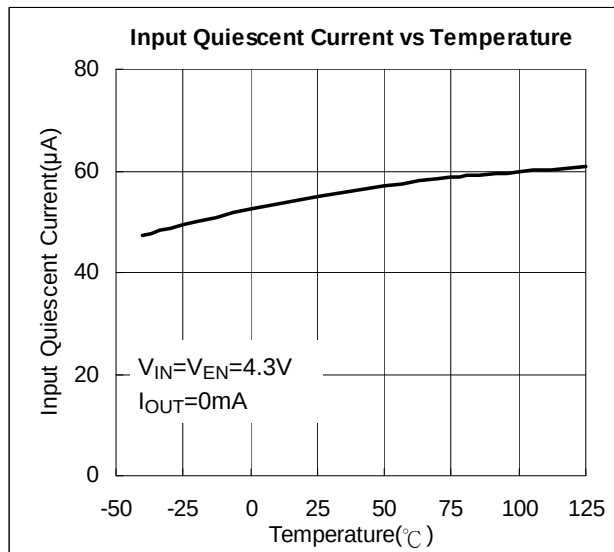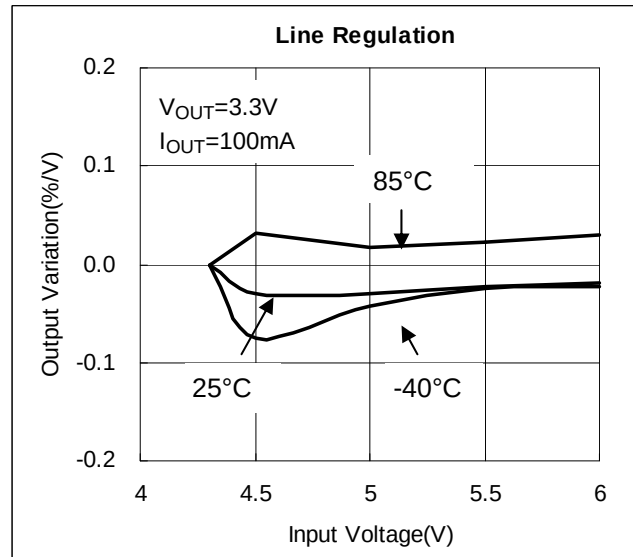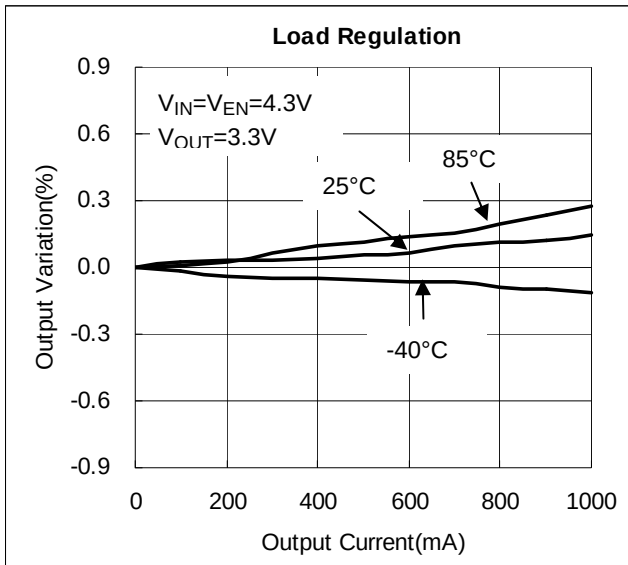

Application Information

Input Capacitor

A 1μF ceramic capacitor is recommended between IN and GND pins to decouple input power supply glitch and noise. The amount of the capacitance may be increased without limit. This input capacitor must be located as close as possible to the device to assure input stability and reduce noise. For PCB layout, a wide copper trace is required for both IN and GND pins. A lower ESR capacitor type allows the use of less capacitance, while higher ESR type requires more capacitance.


Output Capacitor

The output capacitor is required to stabilize and improve the transient response of the LDO. The AP7361 is stable with very small ceramic output capacitors. Using a ceramic capacitor value that is at least 2.2μF with 10mΩ ≤ ESR ≤ 300mΩ on the output ensures stability. Higher capacitance values help to improve line and load transient response. The output capacitance may be increased to keep low undershoot and overshoot. Output capacitor must be placed as close as possible to OUT and GND pins.

Adjustable Operation

Adjustable operation is not available in the SOT223-3L and TO252-3L package.

The AP7361 provides output voltage from 0.8V to 5.0V through external resistor divider as shown below.

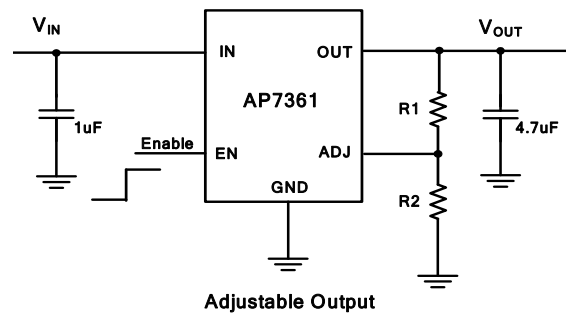

The output voltage is calculated by:

$$V_{OUT} = V_{REF} \left(1 + \frac{R_1}{R_2} \right)$$

Where $V_{REF}=0.8V$ (the internal reference voltage)

Rearranging the equation will give the following that is used for adjusting the output to a particular voltage:

$$R_1 = R_2 \left(\frac{V_{OUT}}{V_{REF}} - 1 \right)$$

To maintain the stability of the internal reference voltage, R_2 need to be kept smaller than 80kΩ.


No Load Stability

Other than external resistor divider, no minimum load is required to keep the device stable. The device will remain stable and regulated in no load condition.

ON/OFF Input Operation

The ON/OFF feature is not available in the SOT223-3L and TO252-3L package.

The AP7361 is turned on by setting the EN pin high, and is turned off by pulling it low. If this feature is not used, the EN pin should be tied to IN pin to keep the regulator output on at all time. To ensure proper operation, the signal source used to drive the EN pin must be able to swing above and below the specified turn-on/off voltage thresholds listed in the Electrical Characteristics section under V_{IL} and V_{IH} .

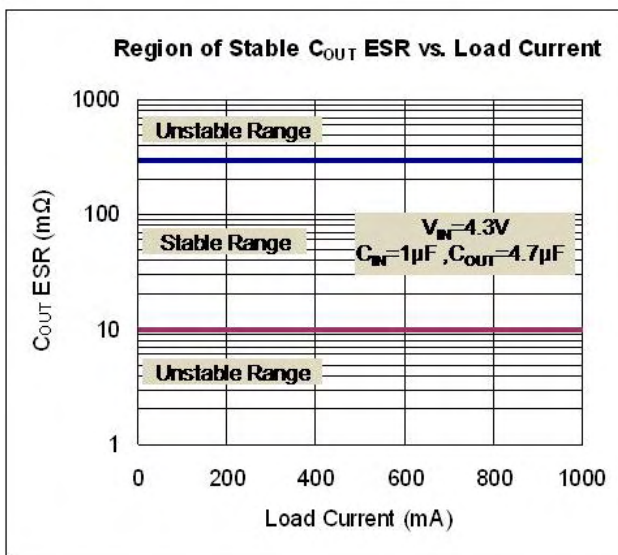

Application Information (cont.)

Current Limit Protection

When output current at OUT pin is higher than current limit threshold, the current limit protection will be triggered and clamp the output current to prevent over-current and to protect the regulator from damage due to overheating.

Short Circuit Protection

When OUT pin is short-circuit to GND, short circuit protection will be triggered and clamp the output current to approximately 200mA. Full current is restored when the output voltage exceeds 25% of V_{OUT}. This feature protects the regulator from over-current and damage due to overheating.

Thermal Shutdown Protection

Thermal protection disables the output when the junction temperature rises to approximately +150°C, allowing the device to cool down. When the junction temperature reduces to approximately +130°C the output circuitry is enabled again. Depending on power dissipation, thermal resistance, and ambient temperature, the thermal protection circuit may cycle on and off. This cycling limits the heat dissipation of the regulator, protecting it from damage due to overheating.

Ultra Fast Start-up

After enabled, the AP7361 is able to provide full power in as little as tens of microseconds, typically 200μs, without sacrificing low ground current. This feature will help load circuitry move in and out of standby mode in real time, eventually extend battery life for mobile phones and other portable devices.

Low Quiescent Current

The AP7361, consuming only around 70μA for all input range, provides great power saving in portable and low power applications.




Power Dissipation

The device power dissipation and proper sizing of the thermal plane that is connected to the thermal pad is critical to avoid thermal shutdown and ensure reliable operation. Power dissipation of the device depends on input voltage and load conditions and can be calculated by:

$$P_D = (V_{IN} - V_{OUT}) \times I_{OUT}$$

The maximum power dissipation, handled by the device, depends on the maximum junction to ambient thermal resistance, maximum ambient temperature, and maximum device junction temperature, which can be calculated by the equation in the following:

$$P_D(\text{max@ } T_A) = \frac{(+150^\circ\text{C} - T_A)}{R_{\theta JA}}$$

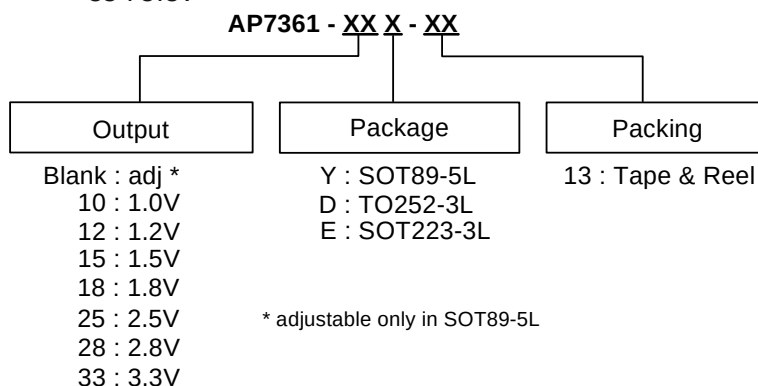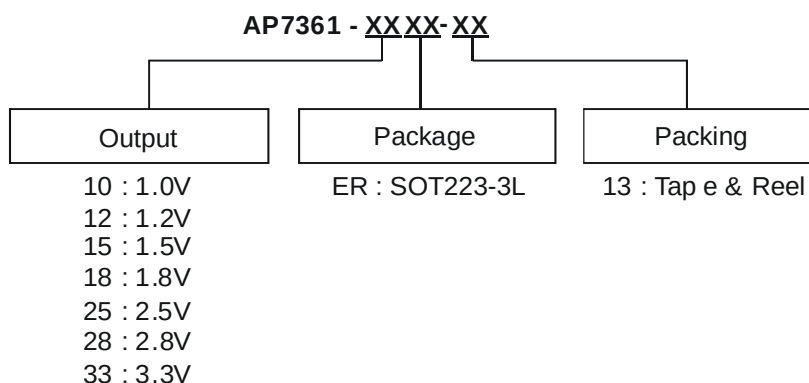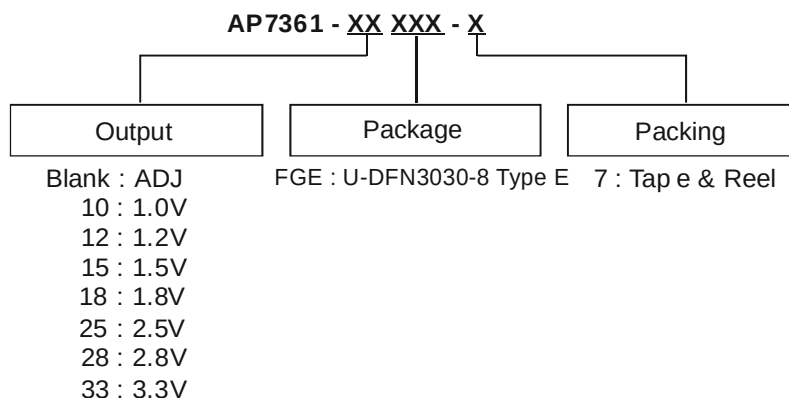**1A LOW DROPOUT ADJUSTABLE AND FIXED-MODE
 REGULATOR WITH ENABLE**
Ordering Information



Device	Package Code	Packaging (Note 8)	7"/13" Tape and Reel	
			Quantity	Part Number Suffix
AP7361-XXFGE-7	FGE	U-DFN3030-8 Type E	3000/Tape & Reel	-7
AP7361-XXY-13	Y	SOT89-5L	2500/Tape & Reel	-13
AP7361-XXD-13	D	TO252-3L	2500/Tape & Reel	-13
AP7361-XXE-13	E	SOT223-3L	2500/Tape & Reel	-13
AP7361-XXER-13	ER	SOT223R-3L	2500/Tape & Reel	-13

Note: 7. Pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.

Marking Information

(1) U-DFN3030-8 Type E

(Top View)




XX : Identification Code
Y : Year : 0~9
W : Week : A~Z : 1~26 week;
a~z : 27~52 week; z represents
52 and 53 week
X : A~Z : Internal code

Device	Package	Identification Code
AP7361ADJ	U-DFN3030-8 Type E	PA
AP7361-10	U-DFN3030-8 Type E	PB
AP7361-12	U-DFN3030-8 Type E	PC
AP7361-15	U-DFN3030-8 Type E	PD
AP7361-18	U-DFN3030-8 Type E	PE
AP7361-25	U-DFN3030-8 Type E	PF
AP7361-28	U-DFN3030-8 Type E	PG
AP7361-33	U-DFN3030-8 Type E	PH

(2) SOT89-5L

(Top View)




XX : Identification code
Y : Year : 0~9
W : Week : A~Z : 1~26 week;
a~z : 27~52 week;
z represents 52 and 53 week
X : A~Z : Internal code

Device	Package	Identification Code
AP7361ADJ	SOT89-5L	PA
AP7361-10	SOT89-5L	PB
AP7361-12	SOT89-5L	PC
AP7361-15	SOT89-5L	PD
AP7361-18	SOT89-5L	PE
AP7361-25	SOT89-5L	PF
AP7361-28	SOT89-5L	PG
AP7361-33	SOT89-5L	PH

Marking Information (cont.)


(3) TO252-3L

Pin 1: V_{IN} , Pin 2: GND, Pin 3: V_{OUT}

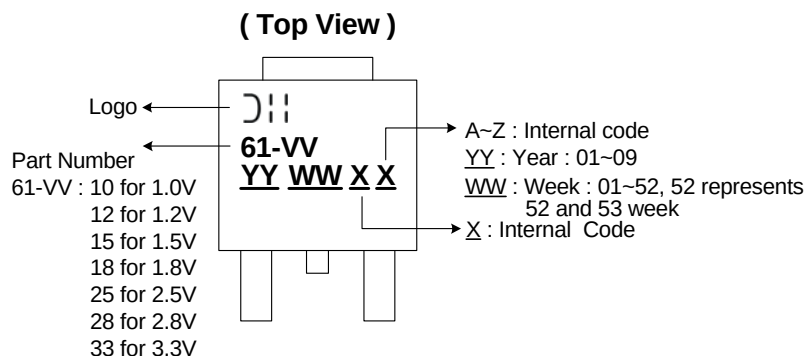


(4) SOT223-3L


Pin 1: V_{IN} , Pin 2: GND, Pin 3: V_{OUT}

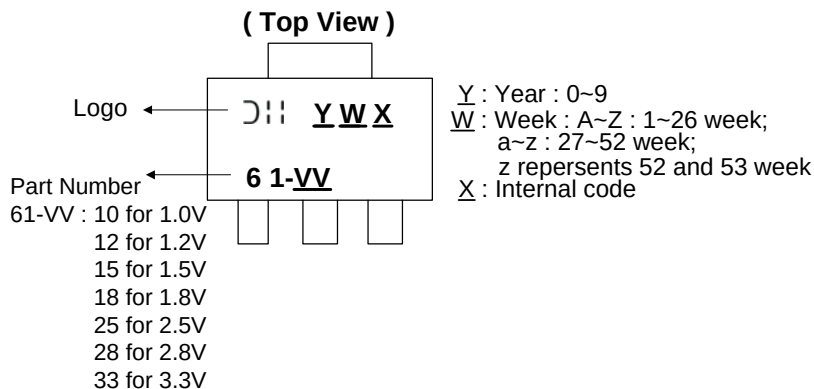


(5) SOT223R-3L

Pin 1: GND, Pin 2: V_{OUT} , Pin 3: V_{IN}

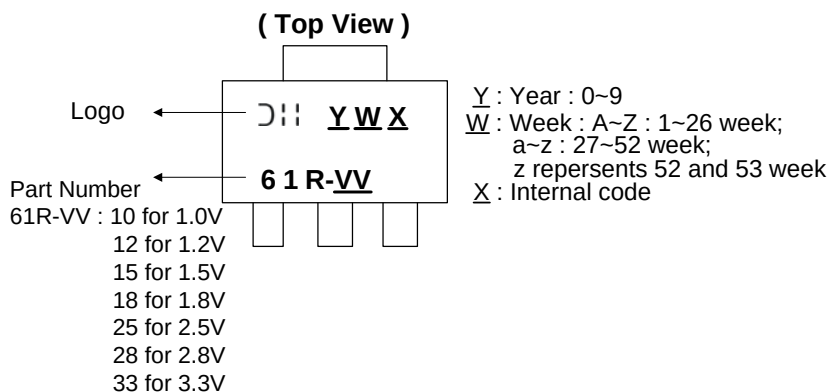

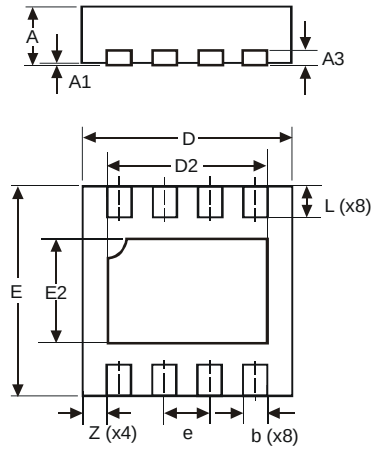Package Outline Dimensions
(1) Package Type: U-DFN3030-8 Type E


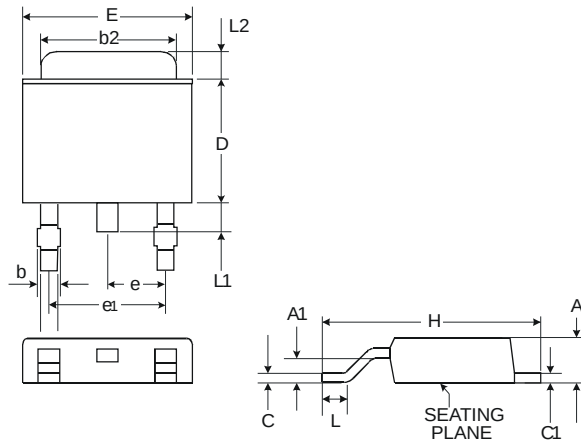
U-DFN3030-8 Type E			
Dim	Min	Max	Typ
A	0.57	0.63	0.60
A1	0	0.05	0.02
A3	—	—	0.15
b	0.20	0.30	0.25
D	2.95	3.05	3.00
D2	2.15	2.35	2.25
E	2.95	3.05	3.00
e	—	—	0.65
E2	1.40	1.60	1.50
L	0.30	0.60	0.45
Z	—	—	0.40
All Dimensions in mm			

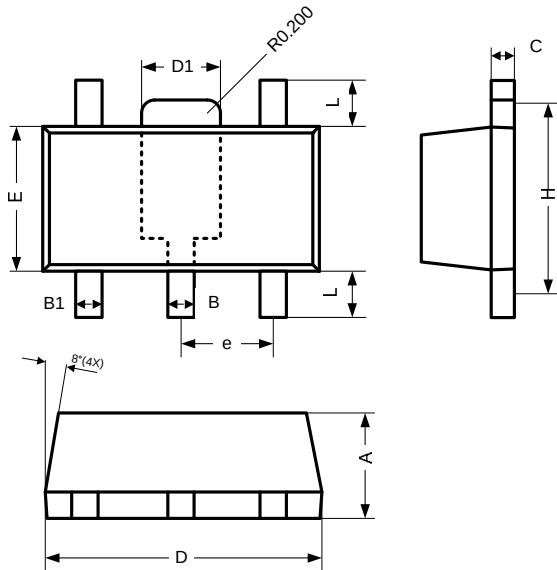(2) Package type: SOT89-5L


SOT89-5L			
DIM	Min	Max	Typ
A	1.40	1.60	1.50
C	0.35	0.43	0.38
D	4.40	4.60	4.50
E	2.40	2.60	2.50
D1	1.62	1.83	1.733
B1	0.44	0.54	0.48
B	0.50	0.62	0.56
E	—	—	1.50
H	3.95	4.25	4.10
L	0.65	0.95	0.80
All dimensions in mm			


Package Outline Dimensions (cont.)

(3) Package type: TO252-3L



TO252-3L		
Dim	Min	Max
A	2.18	2.40
A1	0.89	1.14
b	0.61 Typ	
b2	5.20	5.50
C	0.45	0.58
C1	0.45	0.58
D	5.40	6.20
E	6.35	6.80
e	2.28 Typ	
e1	4.57 Typ	
H	9.00	10.40
L	0.51	—
L1	0.64	1.02
L2	0.88	1.27
All Dimensions in mm		



(4) Package Type: SOT223-3L and SOT223R-3L

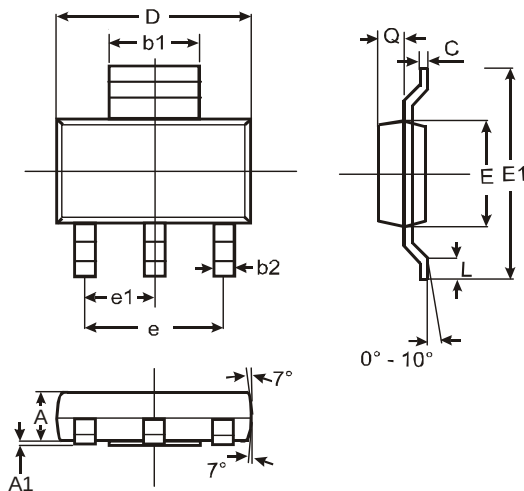

SOT223-3L			
Dim	Min	Max	Typ
A	1.55	1.65	1.60
A1	0.010	0.15	0.05
b1	2.90	3.10	3.00
b2	0.60	0.80	0.70
C	0.20	0.30	0.25
D	6.45	6.55	6.50
E	3.45	3.55	3.50
E1	6.90	7.10	7.00
e	—	—	4.60
e1	—	—	2.30
L	0.85	1.05	0.95
Q	0.84	0.94	0.89
All Dimensions in mm			

Taping Orientation (Note 9)

For U-DFN3030-8 Type E

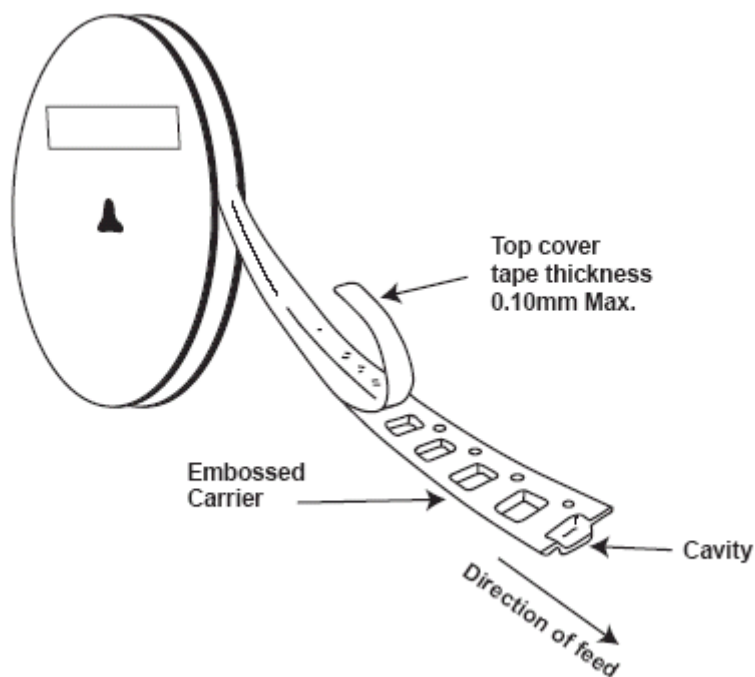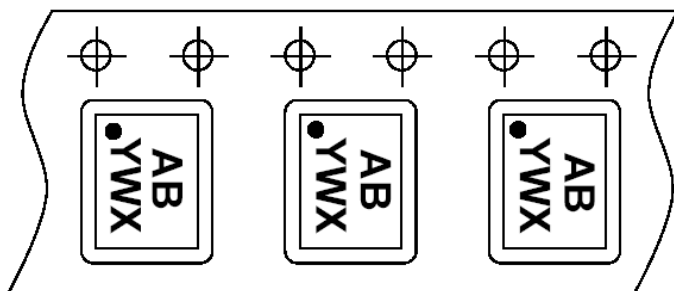

Note: 9. The taping orientation of the other package type can be found on our website at <http://www.diodes.com/datasheets/ap02007.pdf>

**1A LOW DROPOUT ADJUSTABLE AND FIXED-MODE
REGULATOR WITH ENABLE****IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2011, Diodes Incorporated

www.diodes.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.