

# NCS8353

## Stereo 20W/Ch Class D Audio Power Amplifier with Programmable Power Limit and Selectable Gain

The NCS8353 is a stereo Class D audio power amplifier capable of delivering a continuous power of up to 20 W/ch into an 8  $\Omega$  bridge tied load (BTL). It can be powered from the existing 24 V rail in Flat Panel Television (FPTV) systems. The high efficiency of the NCS8353, 86%, reduces the requirement of an external heat sink when driving high power.

The digital power limit feature can program the output power limit at 10 W, 12 W, 15 W, or 20 W/ch, allowing the NCS8353 to be a single system solution in FPTV audio applications.

The NCS8353 includes a digital power limit feature. The digital power limiter quickly reduces the internal gain of the amplifier when high amplitude signals would cause excessive clipping on the output.

The NCS8353 minimizes pop and click artifacts in the audio system by reducing voltage and current transients during power supply cycling, entering or recovering from shutdown, and mute. The shutdown feature reduces the quiescent current draw of the amplifier to 100  $\mu$ A typical. The mute feature ensures that audio is not present at the output during audio source switching.

The gain of the NCS8353 is programmed via two gain pins, G0 and G1, allowing four selectable ranges: 20 dB, 26 dB, 32 dB, and 36 dB.

Auto recovery short circuit and over temperature protection circuitry are incorporated to ensure device functionality after short circuit and high temperature events occur.


### Features

- Powered from 8 V to 26 V to include FPTV Backlight Supply (24 V  $\pm$ 5%)
- Digital Power Limiter Controlled by Two External bits: 10 W, 12 W, 15 W, or 20 W per Channel
  - ♦ Allows for Maximum System Flexibility
  - ♦ Reduces Distortion with Excessive Inputs
- Pop and Click Suppression
- Selectable Gain: 20 dB, 26 dB, 32 dB, 36 dB
- High Efficiency Eliminates the Need for External Heat Sink
- Low Supply Current:  $I_Q$  = 100  $\mu$ A Typical During Shutdown at 12 V
- Mute Function
- Auto-recovery Short-Circuit Protection
- Over Temperature Protection




ON Semiconductor®

<http://onsemi.com>



QFN32  
MN SUFFIX  
CASE 488AM

### MARKING DIAGRAMS



A = Assembly Location  
WL = Wafer Lot  
YY = Year  
WW = Work Week  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

### ORDERING INFORMATION

| Device       | Package            | Shipping†          |
|--------------|--------------------|--------------------|
| NCS8353MNTXG | QFN32<br>(Pb-Free) | 2500 / Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

- Fully Differential Architecture
- This is a Pb-Free Device

### Typical Applications

- Flat Panel Television (FPTV)
- Powered Speakers

# NCS8353

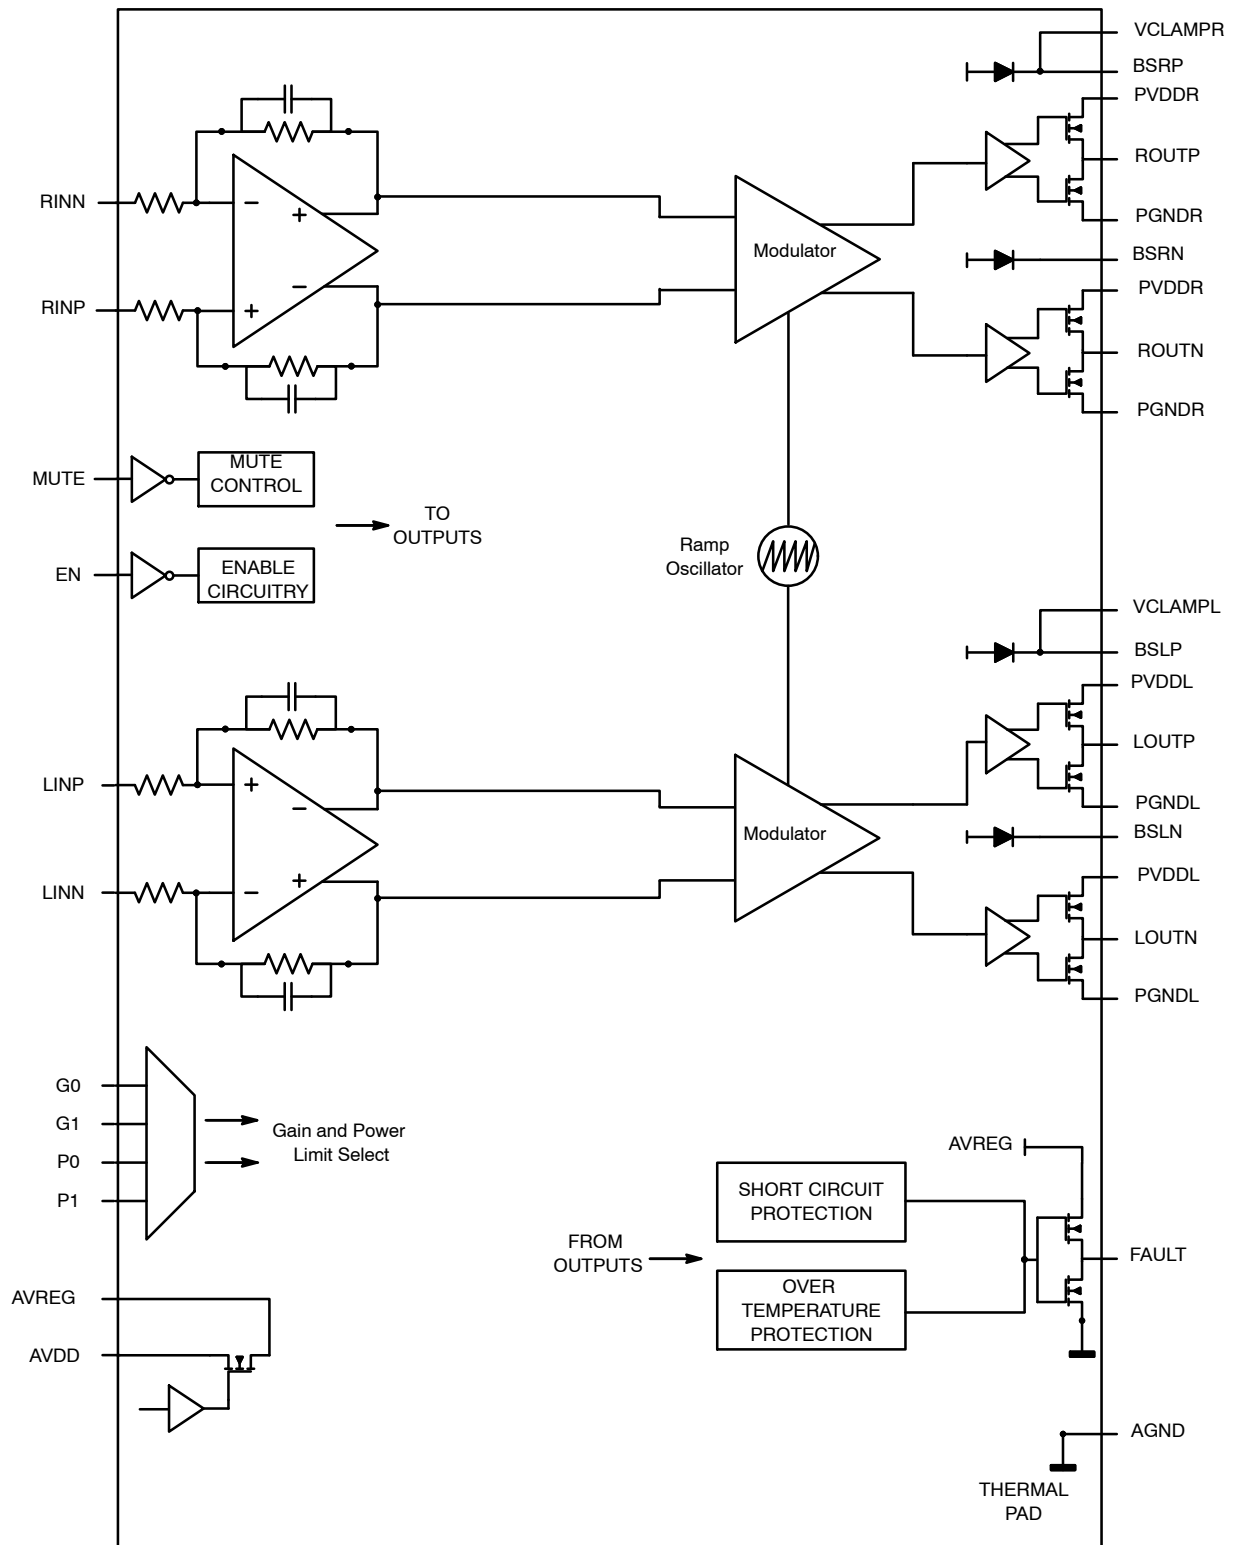


Figure 1. NCS8353 Basic Connections

NCS8353

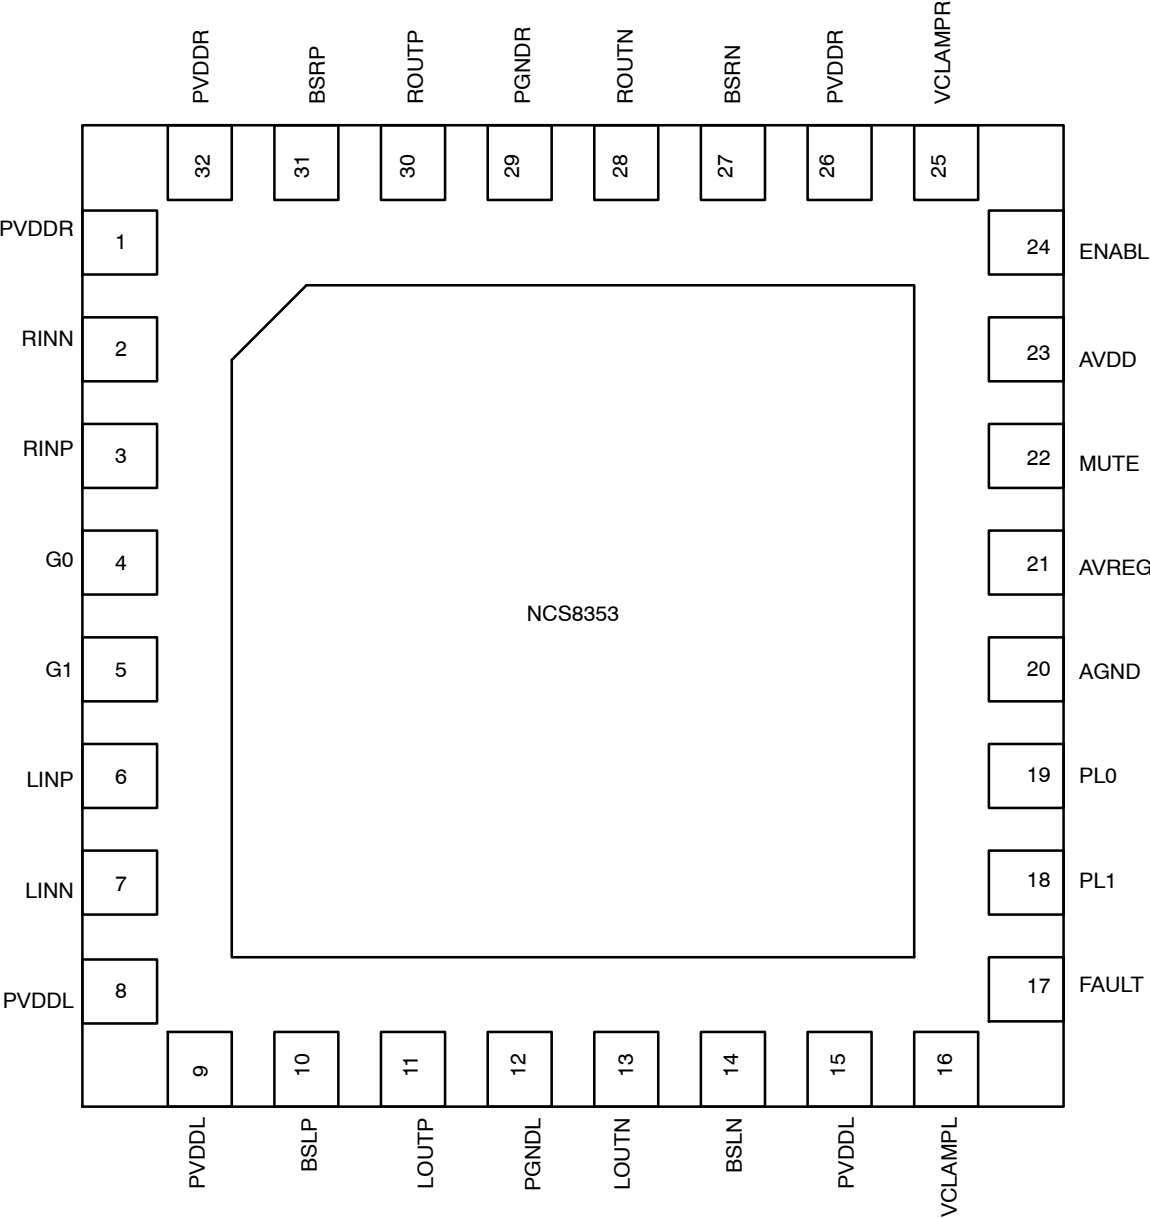


Figure 2. Package Options

# NCS8353

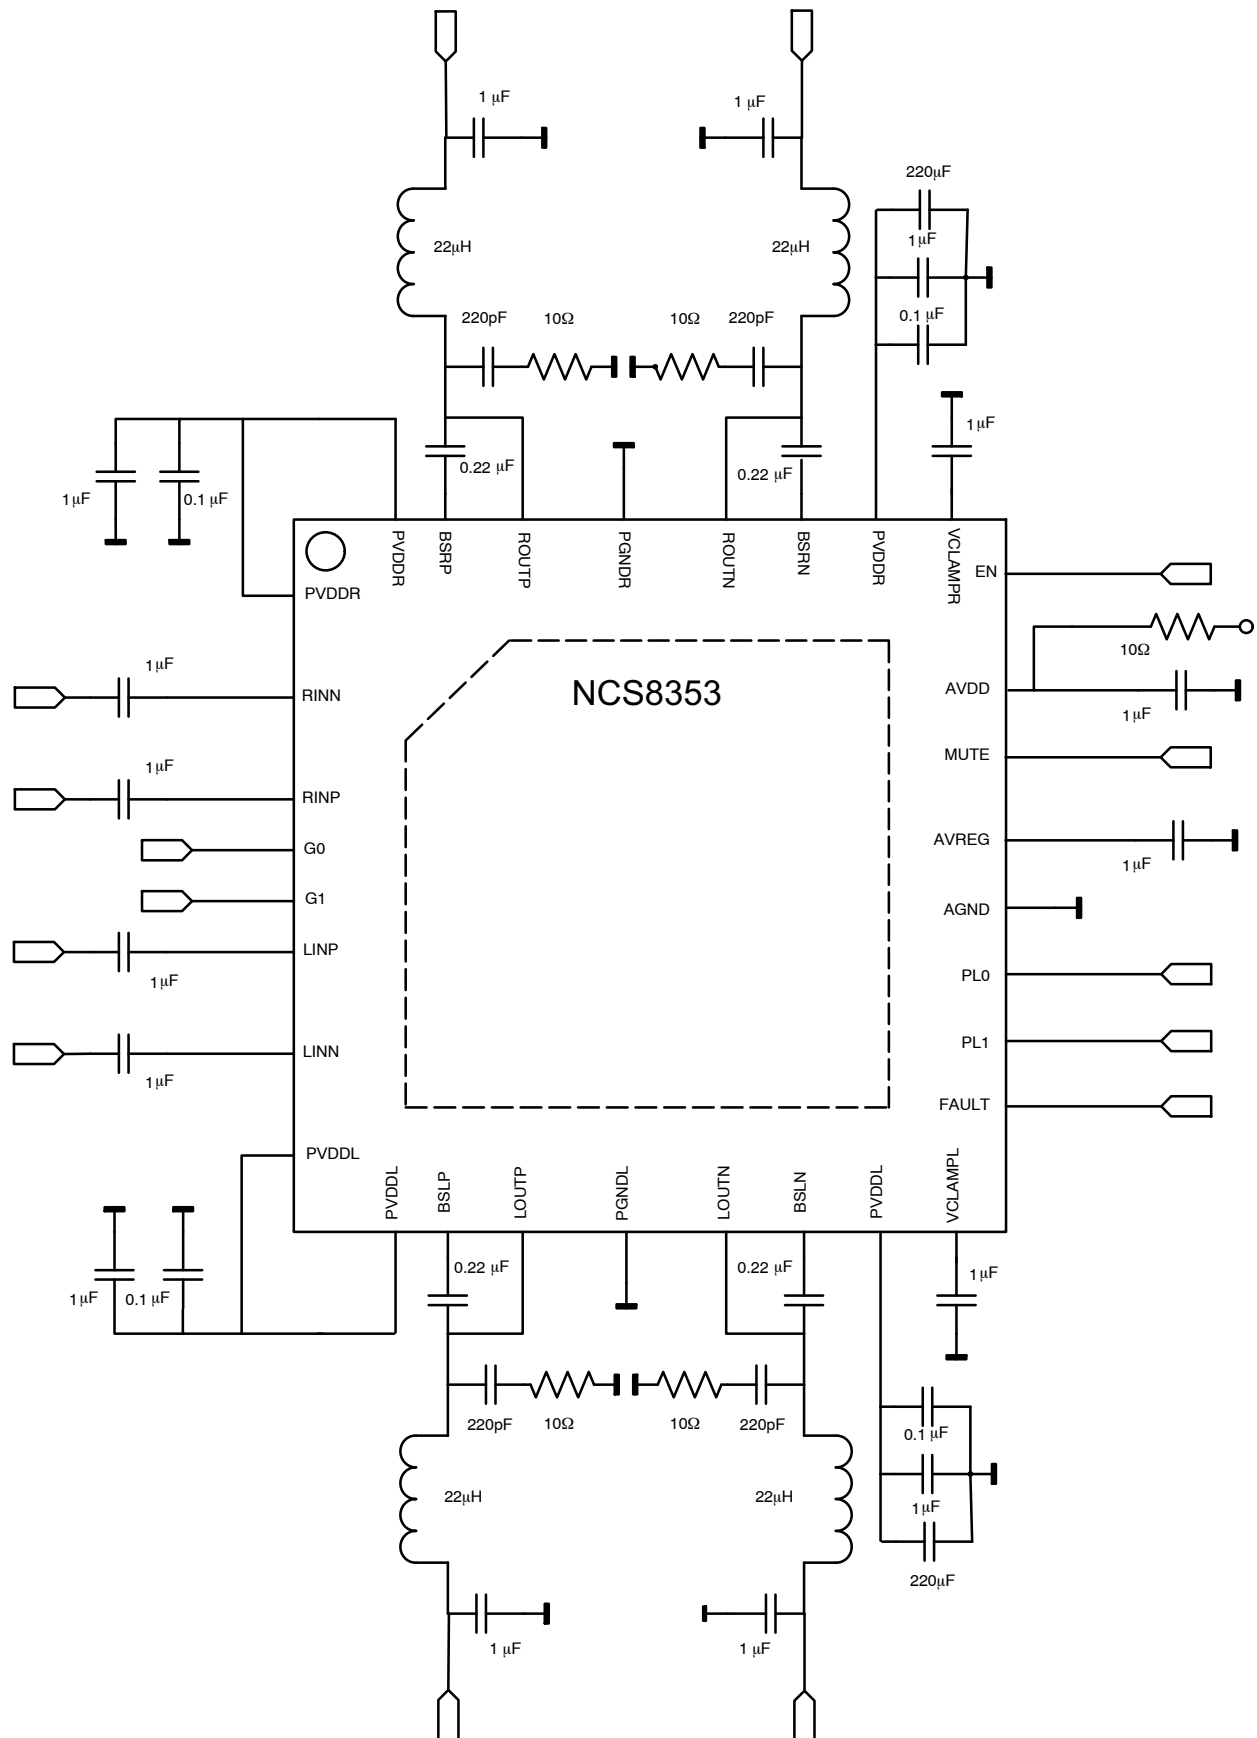


Figure 3. Typical Application Connection for 8 Ω Speaker

## PIN FUNCTION AND DESCRIPTION

| Pin# | Name    | Input/output | Description                                                                              |
|------|---------|--------------|------------------------------------------------------------------------------------------|
| 1    | PVDDR   | Power        | Power supply for right channel.                                                          |
| 2    | RINN    | Input        | Right Input – Negative.                                                                  |
| 3    | RINP    | Input        | Right Input – Positive.                                                                  |
| 4    | G0      | Input        | LSB Gain Setting.                                                                        |
| 5    | G1      | Input        | MSB Gain Setting.                                                                        |
| 6    | LINP    | Input        | Left Input Positive.                                                                     |
| 7    | LINN    | Input        | Left Input Negative.                                                                     |
| 8    | PVDDL   | Power        | Power supply for left channel.                                                           |
| 9    | PVDDL   | Power        | Power supply for left channel.                                                           |
| 10   | BSLP    | –            | Bootstrap for positive left speaker output.                                              |
| 11   | LOUTP   | Output       | Positive Left Speaker Output.                                                            |
| 12   | PGNDL   | Ground       | Power ground for left channel.                                                           |
| 13   | LOUTN   | Output       | Negative Left Speaker Output.                                                            |
| 14   | BSLN    | –            | Bootstrap for negative left speaker output.                                              |
| 15   | PVDDL   | Power        | Power supply for left channel.                                                           |
| 16   | VCLAMPL | –            | Internal voltage supply for left channel bootstrap capacitor.                            |
| 17   | FAULT   | Output       | TTL compatible output. Asserts HIGH during thermal shutdown or short circuit conditions. |
| 18   | PL1     | Input        | MSB – Power Limit.                                                                       |
| 19   | PL0     | Input        | LSB – Power Limit.                                                                       |
| 20   | AGND    | Ground       | Analog ground reference.                                                                 |
| 21   | AVREG   | Output       | Regulator output voltage.                                                                |
| 22   | MUTE    | Input        | TTL compatible input. Mutes the device when a logic HIGH is present.                     |
| 23   | AVDD    | Power        | Analog high voltage supply.                                                              |
| 24   | ENABLE  | Input        | TTL compatible input. Enable for right and left channels when logic HIGH is present.     |
| 25   | VCLAMPR | –            | Internal voltage supply for right channel bootstrap capacitor.                           |
| 26   | PVDDR   | Power        | Power supply for right channel.                                                          |
| 27   | BSRN    | –            | Bootstrap for right negative output.                                                     |
| 28   | ROUTN   | Output       | Negative right speaker output.                                                           |
| 29   | PGNDR   | Ground       | Power ground for right channel.                                                          |
| 30   | ROUTP   | Output       | Positive right speaker output.                                                           |
| 31   | BSRP    | –            | Bootstrap for right positive output.                                                     |
| 32   | PVDDR   | Power        | Power supply for right channel.                                                          |

**MAXIMUM RATINGS TABLE**

| Parameter                                              | Symbol           | Rating                      | Unit |
|--------------------------------------------------------|------------------|-----------------------------|------|
| Power Supply Voltage (PVDDR, PVDDL)                    | P <sub>VDD</sub> | 30                          | V    |
| Analog Supply Voltage (AVDD)                           | A <sub>VDD</sub> | 30                          | V    |
| Input voltage (ENABLE, G0, G1, RINN, RINP, LINN, LINP) | V <sub>in</sub>  | -0.3 V to A <sub>Vreg</sub> | V    |
| Input voltage Mute function (MUTE)                     | V <sub>in</sub>  | -0.3 V to 3.6 V             | V    |
| Output Current (ROUTP, ROUTN, LOUPT, LOUTN)            | I <sub>O</sub>   | 4.7                         | A    |
| Maximum Junction Temperature                           | T <sub>J</sub>   | 150                         | °C   |
| Operating Ambient Temperature                          | T <sub>A</sub>   | -40 to +85                  | °C   |
| Storage Temperature                                    | T <sub>STG</sub> | 160                         | °C   |
| Junction-to-Air Thermal Resistance QFN-32 (Note 1)     | R <sub>θJA</sub> | 31.4                        | °C/W |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Board size: 5" x 4", 4-layer, 2 oz copper.

**RECOMMENDED OPERATING CONDITIONS**, T<sub>A</sub> = 25°C unless otherwise noted

| Specification Name             | Conditions                     | Symbol           | Min                     | Typ | Max                    | Unit |
|--------------------------------|--------------------------------|------------------|-------------------------|-----|------------------------|------|
| Operating Supply Voltage Range |                                | P <sub>VDD</sub> | 8                       |     | 26                     | V    |
| Analog Supply Voltage range    |                                | A <sub>VDD</sub> | 8                       |     | 26                     | V    |
| High-level input voltage       | G0, G1, PL0, PL1, ENABLE, MUTE | V <sub>IH</sub>  | 2                       | 3.3 | 3.6                    | V    |
| Low-level input voltage        | G0, G1, PL0, PL1, ENABLE, MUTE | V <sub>IL</sub>  |                         |     | 0.8                    | V    |
| High Level Output Voltage      | Fault, I <sub>OH</sub> = +1 mA | V <sub>OH</sub>  | A <sub>VREG</sub> - 0.4 |     |                        | V    |
| Low Level Output Voltage       | Fault, I <sub>OL</sub> = -1 mA | V <sub>OL</sub>  |                         |     | A <sub>GND</sub> + 0.4 | V    |
| Internal Oscillator Frequency  |                                | f <sub>OSC</sub> |                         | 315 |                        | kHz  |

# NCS8353

**DC ELECTRICAL CHARACTERISTICS**, AVDD = PVDDR = PVDDL = 12 V, R<sub>L</sub> = 8 Ω, T<sub>A</sub> = 25°C unless otherwise noted

| Specification Name                 | Conditions                                                                             | Symbol              | Min                     | Typ | Max                      | Unit |
|------------------------------------|----------------------------------------------------------------------------------------|---------------------|-------------------------|-----|--------------------------|------|
| Differential Output Offset Voltage | Inputs AC GND, C <sub>IN</sub> = 1 μF, A <sub>V</sub> = 20 dB, Measured differentially | V <sub>OSDIFF</sub> |                         | 15  | 50                       | mV   |
| 5.0 V Internal Regulator           | No load, C <sub>reg</sub> = 1 μF                                                       | A <sub>VREG</sub>   | 4.5                     | 5   | 5.5                      | V    |
| Voltage input common mode range    | Inputs AC coupled, C <sub>IN</sub> = 1 μF, V <sub>bias</sub> = 2.15 V                  | V <sub>ICR</sub>    | A <sub>GND</sub> + 0.35 |     | A <sub>VREG</sub> - 1.35 | V    |
| Quiescent Current                  | No load, No filter                                                                     | I <sub>Q</sub>      |                         | 28  | 42                       | mA   |
| Shutdown Quiescent Current         | No load, No filter, ENABLE ≤ 0.8 V                                                     | I <sub>QSHDN</sub>  |                         | 100 | 200                      | μA   |
| On Resistance Drain to Source      | I <sub>O</sub> = 500 mA                                                                | R <sub>DSon</sub>   |                         | 360 |                          | mΩ   |
| Gain                               | G <sub>0</sub> = G <sub>1</sub> ≤ 0.8 V                                                | A <sub>V</sub>      | 19                      | 20  | 21                       | dB   |
|                                    | G <sub>0</sub> ≤ 0.8 V, G <sub>1</sub> ≥ 2 V                                           |                     | 25                      | 26  | 27                       |      |
|                                    | G <sub>0</sub> ≥ 2 V, G <sub>1</sub> ≤ 0.8 V                                           |                     | 31                      | 32  | 33                       |      |
|                                    | G <sub>0</sub> = G <sub>1</sub> ≥ 2 V                                                  |                     | 35                      | 36  | 37                       |      |
| Gain Matching                      | R <sub>OUTN</sub> / R <sub>OUTP</sub> , L <sub>OUTN</sub> / L <sub>OUTP</sub>          |                     |                         | 0.5 |                          | dB   |
| Turn on time                       | ENABLE ≥ 2 V                                                                           | t <sub>ON</sub>     |                         | 250 |                          | ms   |
| Turn off time                      | ENABLE ≤ 0.8 V                                                                         | t <sub>OFF</sub>    |                         | 60  |                          | ms   |

**DC ELECTRICAL CHARACTERISTICS**, AVDD = PVDDR = PVDDL = 24 V, R<sub>L</sub> = 8 Ω, T<sub>A</sub> = 25°C unless otherwise noted

| Specification Name                 | Conditions                                                                             | Symbol              | Min                     | Typ | Max                      | Unit |
|------------------------------------|----------------------------------------------------------------------------------------|---------------------|-------------------------|-----|--------------------------|------|
| Differential Output Offset Voltage | Inputs AC GND, C <sub>IN</sub> = 1 μF, A <sub>V</sub> = 20 dB, Measured differentially | V <sub>OSDIFF</sub> |                         | 15  | 50                       | mV   |
| 5.0V Internal Regulator            | No load, C <sub>reg</sub> = 1 μF                                                       | A <sub>VREG</sub>   | 4.5                     | 5   | 5.5                      | V    |
| Voltage input common mode range    | Inputs AC coupled, C <sub>IN</sub> = 1 μF, V <sub>bias</sub> = 2.15 V                  | V <sub>ICR</sub>    | A <sub>GND</sub> + 0.35 |     | A <sub>VREG</sub> - 1.35 | V    |
| Quiescent Current                  | P <sub>VDD</sub> = 24 V, No load, No filter                                            | I <sub>Q</sub>      |                         | 33  | 45                       | mA   |
| Shutdown Quiescent Current         | P <sub>VDD</sub> = 24 V, No load, No filter, ENABLE ≤ 0.8 V                            | I <sub>QSHDN</sub>  |                         | 100 | 200                      | μA   |
| On Resistance Drain to Source      | I <sub>O</sub> = 500 mA                                                                | r <sub>DS(on)</sub> |                         | 360 |                          | mΩ   |
| Gain                               | G <sub>0</sub> = G <sub>1</sub> ≤ 0.8 V                                                | A <sub>V</sub>      | 19                      | 20  | 21                       | dB   |
|                                    | G <sub>0</sub> ≤ 0.8 V, G <sub>1</sub> ≥ 2 V                                           |                     | 25                      | 26  | 27                       |      |
|                                    | G <sub>0</sub> ≥ 2 V, G <sub>1</sub> ≤ 0.8 V                                           |                     | 31                      | 32  | 33                       |      |
|                                    | G <sub>0</sub> = G <sub>1</sub> ≥ 2 V                                                  |                     | 35                      | 36  | 37                       |      |
| Gain Matching                      | R <sub>OUTN</sub> / R <sub>OUTP</sub> , L <sub>OUTN</sub> / L <sub>OUTP</sub>          |                     |                         | 0.5 |                          | dB   |
| Turn on time                       | ENABLE ≥ 2 V                                                                           | t <sub>ON</sub>     |                         | 250 |                          | ms   |
| Turn off time                      | ENABLE ≤ 0.8 V                                                                         | t <sub>OFF</sub>    |                         | 60  |                          | ms   |

# NCS8353

## AC ELECTRICAL CHARACTERISTICS, AVDD = PVDDR = PVDDL = 12 V, R<sub>L</sub> = 8 Ω, T<sub>A</sub> = 25°C unless otherwise noted

| Specification Name                | Conditions                                                                                          | Symbol              | Min | Typ  | Max | Unit  |
|-----------------------------------|-----------------------------------------------------------------------------------------------------|---------------------|-----|------|-----|-------|
| AC Power Supply Rejection Ratio   | No supply bypass, 200 mVpp ripple, f <sub>in</sub> = 1 kHz, A <sub>V</sub> = 36 dB                  | PSRR <sub>AC</sub>  |     | -69  |     | dB    |
| Common Mode Rejection Ratio IEC   | Inputs shorted together, V <sub>IN</sub> = 32 mVpp, f <sub>in</sub> = 1 kHz, A <sub>V</sub> = 36 dB | CMRR <sub>IEC</sub> |     | -55  |     | dB    |
| Output Power                      | A <sub>V</sub> = 36 dB, THD+N = 1%                                                                  | P <sub>out</sub>    |     | 7.5  |     | W     |
| Total Harmonic Distortion + Noise | A <sub>V</sub> = 36 dB, P <sub>OUT</sub> = 1 W, f <sub>in</sub> = 1 kHz                             | THD+N               |     | 0.05 |     | %     |
| Efficiency                        | THD+N = 0.03%, P <sub>OUT</sub> = 5 W                                                               | n                   |     | 85   |     | %     |
| Voltage noise (RTI)               | Inputs AC GND thru 100 nF, A <sub>V</sub> = 20 dB, A-weighting                                      | V <sub>en</sub>     |     | 100  |     | μVrms |
| Crosstalk                         | P <sub>O</sub> = 1 W, f <sub>in</sub> = 1 kHz, A <sub>V</sub> = 36 dB                               | X <sub>TALK</sub>   |     | -85  |     | dB    |
| Signal to Noise Ratio             | V <sub>IN</sub> = 100 mVpp, A <sub>V</sub> = 20 dB                                                  | SNR                 |     | 90   |     | dB    |
| Thermal trip point                | Thermal Shutdown                                                                                    | TSD                 |     | 160  |     | °C    |
| Thermal hysteresis                |                                                                                                     | THS                 |     | 30   |     | °C    |

## AC ELECTRICAL CHARACTERISTICS, AVDD = PVDDR = PVDDL = 24 V, R<sub>L</sub> = 8 Ω, T<sub>A</sub> = 25 °C unless otherwise noted

| Specification Name                | Conditions                                                                         | Symbol              | Min | Typ  | Max | Unit  |
|-----------------------------------|------------------------------------------------------------------------------------|---------------------|-----|------|-----|-------|
| AC Power Supply Rejection Ratio   | No supply bypass, 200 mVpp ripple, f <sub>in</sub> = 1 kHz, A <sub>V</sub> = 36 dB | PSRR <sub>AC</sub>  |     | -69  |     | dB    |
| Common Mode Rejection Ratio (IEC) | V <sub>IN</sub> = 32 mVpp, f <sub>in</sub> = 1 kHz, A <sub>V</sub> = 36 dB         | CMRR <sub>IEC</sub> |     | -55  |     | dB    |
| Output Power                      | A <sub>V</sub> = 36 dB, THD+N = 1%                                                 | P <sub>out</sub>    |     | 20   |     | W     |
| Total Harmonic Distortion + Noise | A <sub>V</sub> = 20 dB, P <sub>OUT</sub> = 10 W (Max value from 20 Hz to 20 kHz)   | THD+N               |     | 0.03 |     | %     |
| Efficiency                        | THD+N = 1%, P <sub>OUT</sub> = 20 W                                                |                     |     | 83   |     | %     |
| Voltage noise (RTI)               | Inputs AC GND thru 100 nF, A <sub>V</sub> = 32 dB, A-Weighting                     | V <sub>en</sub>     |     | 100  |     | μVrms |
| Crosstalk                         | P <sub>O</sub> = 1 W, f <sub>in</sub> = 1 kHz, A <sub>V</sub> = 36 dB              | X <sub>TALK</sub>   |     | -85  |     | dB    |
| Signal to Noise Ratio             | V <sub>IN</sub> = 100 mVpp, f <sub>in</sub> = 1 kHz, A <sub>V</sub> = 36 dB        | SNR                 |     | 90   |     | dB    |
| Thermal trip point                | Thermal Shutdown                                                                   | TSD                 |     | 160  |     | °C    |
| Thermal hysteresis                |                                                                                    | THS                 |     | 30   |     | °C    |

TYPICAL CHARACTERISTICS

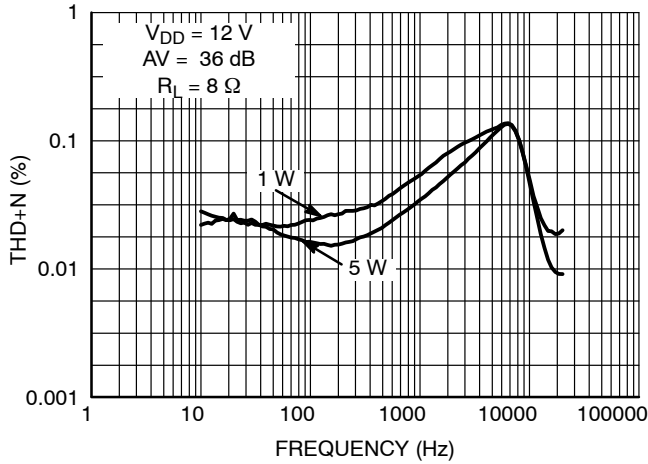


Figure 4. THD+N vs. Frequency (BTL)

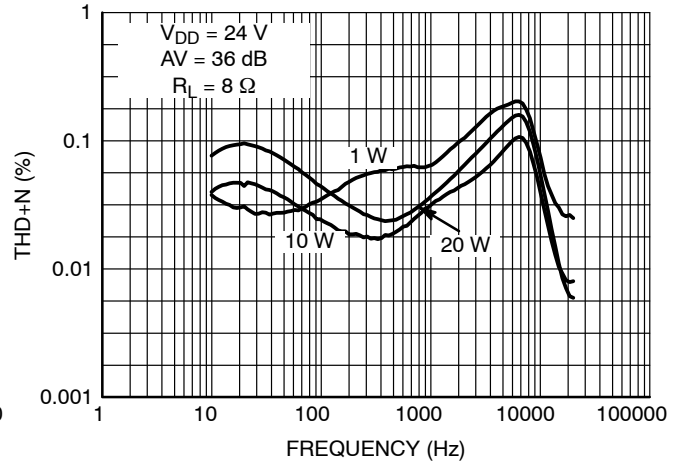


Figure 5. THD+N vs. Frequency (BTL)

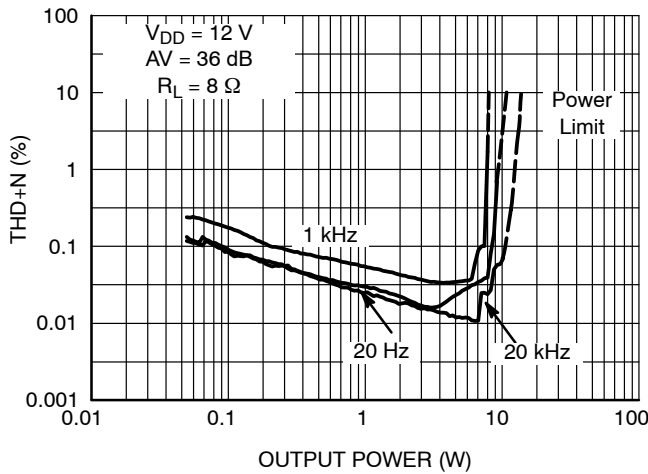


Figure 6. THD+N vs.  $P_{OUT}$

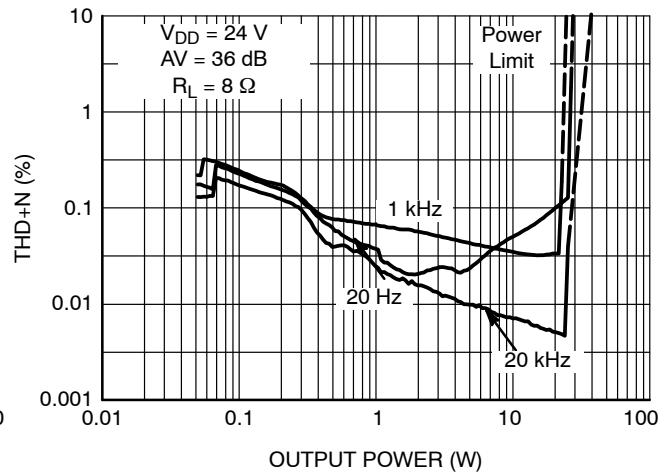


Figure 7. THD+N vs.  $P_{OUT}$

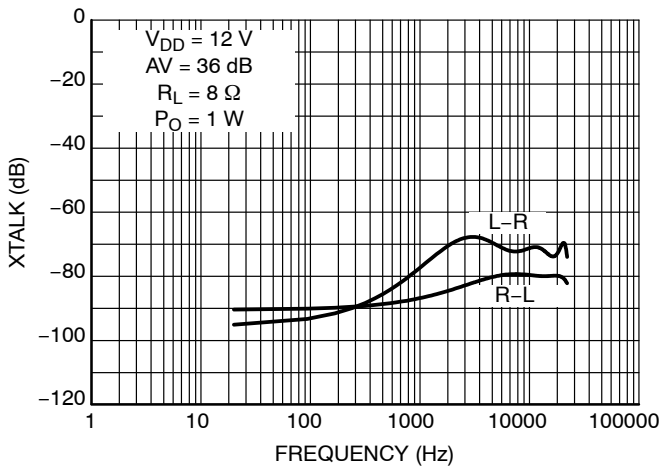


Figure 8. Crosstalk L to R and R to L (20 Hz to 20 kHz)

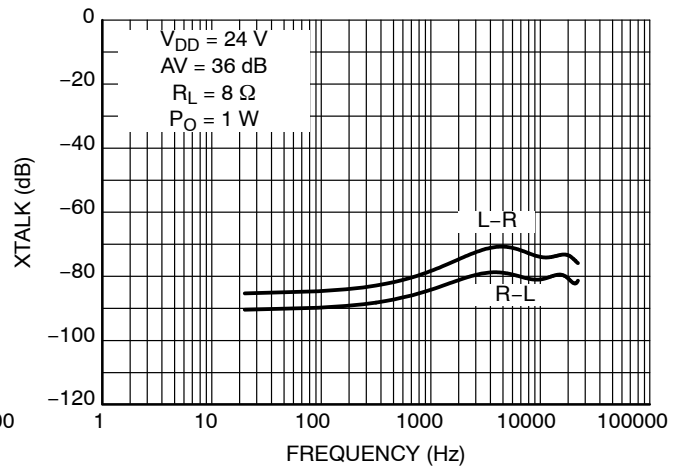


Figure 9. Crosstalk L to R and R to L (20 Hz to 20 kHz)

TYPICAL CHARACTERISTICS

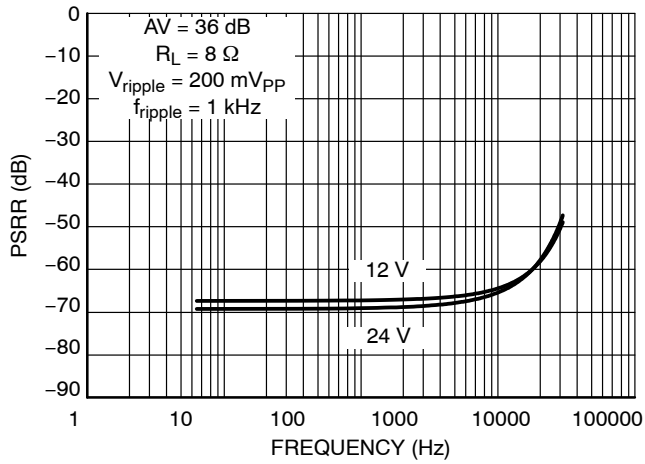


Figure 10. PSRR vs. Frequency

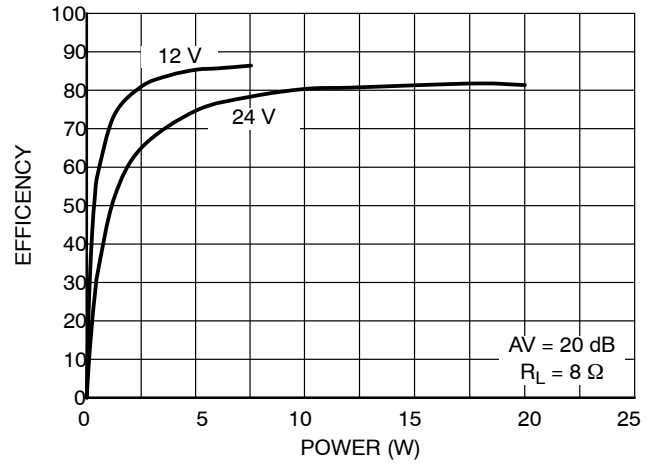


Figure 11. Efficiency vs.  $P_{\text{out}}$

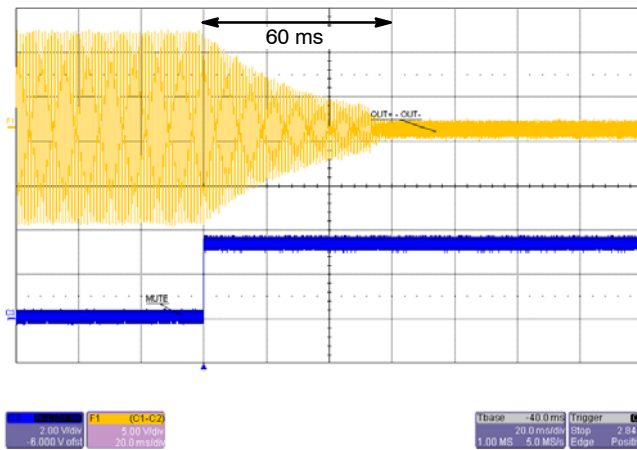


Figure 12. Turn-off Time - Mute

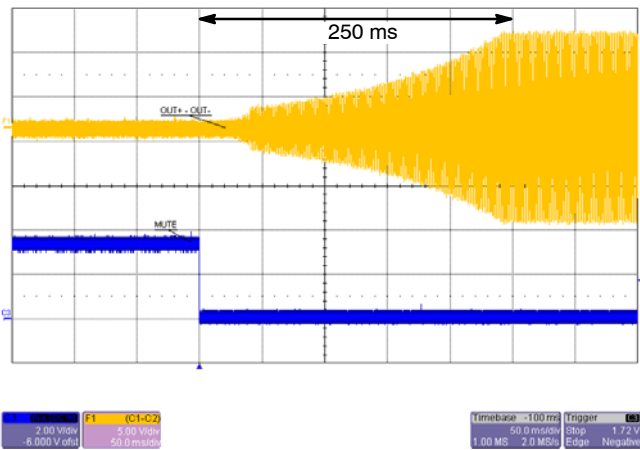


Figure 13. Turn-on Time - Unmute

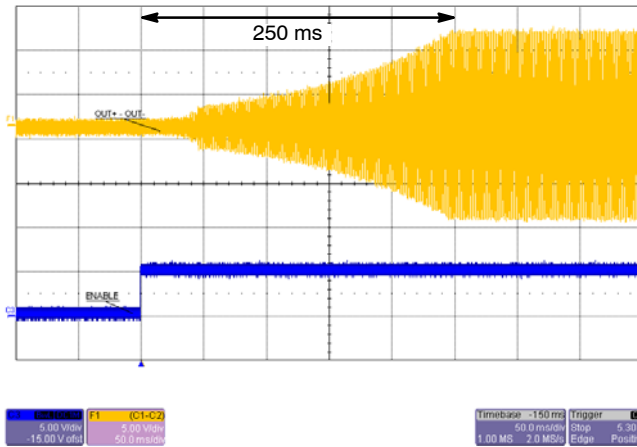


Figure 14. Turn-on Time - Enable

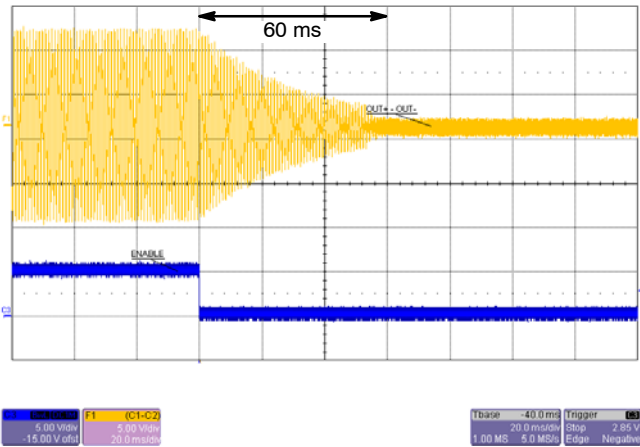


Figure 15. Turn-off Time - Disable

## APPLICATIONS INFORMATION

**Digital Power Limiter**

The NCS8353 utilizes a Digital Power Limiter (DPL) feature that limits the output power to 10 W, 12 W, 15 W, or 20 W per channel. This is achieved by the two external power limit pins, PL0 and PL1, which are TTL level compatible.

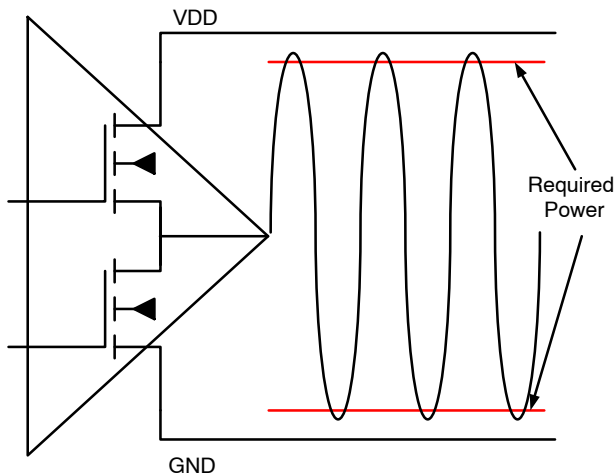
If a change in power limit is desired, the NCS8353 must first be disabled followed by setting a new power limit. Finally, when the NCS8353 is re-enabled, the new power limit will be active.

Table 1 illustrates the power limit per channel of the NCS8353 depending on the logic level of the power limit pins and is based on an 8  $\Omega$  speaker load.


**Table 1.**

| PL1 | PL0 | Power Limit |
|-----|-----|-------------|
| 0   | 0   | 10 W        |
| 0   | 1   | 12 W        |
| 1   | 0   | 15 W        |
| 1   | 1   | 20 W        |

Figure 16 shows a typical output waveform and a desired output power for an application. If the output waveform produces a higher output power than required; e.g., due to high input amplitudes, the DPL feature of the NCS8353 activates.


**Figure 16. Before DPL Operation**

The DPL reduces the internal gain of the NCS8353 thus reduces the output voltage to ensure the programmed power limit is not exceeded. Figure 17 illustrates the output voltage waveform after the DPL is activated.

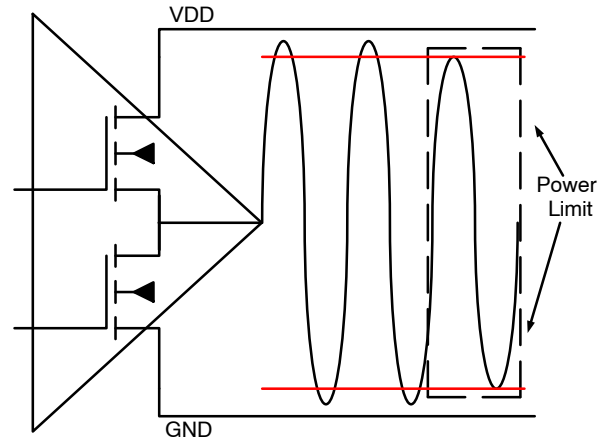**Figure 17. DPL Activated**

The DPL monitors the input referred voltage level and is dependent on the programmed gain of the NCS8353. Table 2, page 12, is a quick reference for the system designer to verify when the DPL will activate assuming an 8  $\Omega$  load. If the input voltage exceeds the input reference levels illustrated in Table 2, the DPL will activate.

Figure 18 highlights the output power vs. input voltage for programmed power limits.

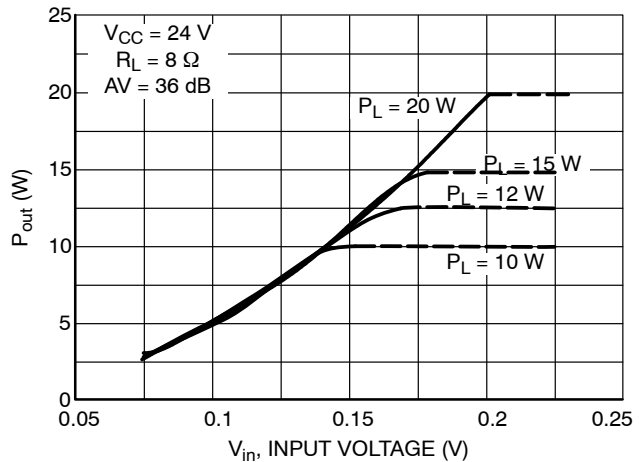**Figure 18. Power Limiter vs. V<sub>in</sub>**

**Table 2. ALL POWER LIMITS AND VOLTAGES REFERENCED TO 8  $\Omega$  LOAD**

| $P_{limit}$ |              |              |              |              |
|-------------|--------------|--------------|--------------|--------------|
| $A_v$       | 20 W         | 15 W         | 12 W         | 10 W         |
| 20 dB       | 1.789 Vin(p) | 1.549 Vin(p) | 1.386 Vin(p) | 1.265 Vin(p) |
| 26 dB       | 894 mVin(p)  | 775 mVin(p)  | 693 mVin(p)  | 632 mVin(p)  |
| 32 dB       | 447 mVin(p)  | 387 mVin(p)  | 346 mVin(p)  | 316 mVin(p)  |
| 36 dB       | 284 mVin(p)  | 246 mVin(p)  | 220 mVin(p)  | 201 mVin(p)  |

**Programmable Gain Control**

The NCS8353's 2-bit gain control can be programmed either by digital control or by bootstrapping the gain control pins, G0, G1, to logic HIGH or LOW and are TTL compatible inputs for soft programming needs. Reference the electrical characteristics table for minimum and maximum levels. The logic table shown in Table 3 highlights the amplifier gain settings in dB based on gain setting.

**Table 3.**

| G1 | G0 | AMPLIFIER GAIN (dB)<br>(Typ) |
|----|----|------------------------------|
| 0  | 0  | 20                           |
| 0  | 1  | 26                           |
| 1  | 0  | 32                           |
| 1  | 1  | 36                           |

Similar to the DPL, if a change in gain is desired the NCS8353 must be disabled. The gain may then be programmed to the new desired level and then re-enabled for the new gain setting to latch.

**Fault Detection**

The NCS8353 incorporates fault detection circuitry. If a short circuit occurs the FAULT pin asserts logic HIGH providing the system designer an error flag for monitoring.

The FAULT flag also asserts HIGH when the NCS8353 enters thermal shutdown. When the NCS8353 cools to 130°C or once the short circuit condition is removed the FAULT flag returns LOW.

**Short-Circuit Protection**

A short can occur to  $V_{DD}$ ,  $V_{SS}$ , or across the load. The short circuit protection circuitry will disable the output stage from delivering current to the load when a short is present. With the short circuit protection circuitry active the internal power dissipation will be minimized.

The NCS8353's short circuit protection is analogous to a power supply's hiccup mode current limiting operation. When a short is detected the NCS8353 will disable the output stage and will attempt to re-enable the output stage after 180 ms. If the short has been removed then the output

stage re-enables and operates normally; however, if the short is still present the cycle begins again. Internal heat dissipation is kept to a minimum as current will only flow during the reset time of the protection circuitry. The hiccup mode is continuous until the short is removed.

**Over Temperature Protection**

The thermal protection circuitry of the NCS8353 monitors the maximum junction temperature of the die. When the temperature increases to 150°C, the specified maximum junction temperature, the internal gain of the device is reduced until the junction temperature is approximately 130°C. If the gain reduction is unable to limit the temperature rise of the junction then the thermal protection circuitry will completely disable the output stage once the junction temperature rises above 160°C. The NCS8353 will re-enable the output stage when the junction temperature falls to 130°C. This provides 30° of thermal hysteresis.

**Enable**

The NCS8353 incorporates a single ENABLE control for right and left audio channels. When ENABLE is asserted logic LOW, the internal circuitry completely disables each channel to reduce quiescent current draw from the power supply. Typical shutdown current for the NCS8353 will be 100  $\mu$ A typical per channel and start-up time from shutdown is typically  $\leq 250$  ms. See the electrical specification table for conditions.

The ENABLE function also serves to latch new values for gain and the DPL. When new levels are desired the NCS8353 must be disabled, the new values must be programmed, and then re-enabled for the new values to latch. See Tables 1 and 3 for power limit and gain values.

**Mute Function**

The MUTE function will ensure any audio signal present at the input is inaudible at the speaker load. The right and left channels are not in shutdown during this time. During the MUTE state, the outputs will continue to switch at 50% duty cycle; however, a modulated audio signal will not be present. The MUTE function is activated with a logic HIGH signal and deactivated with a logic LOW signal.

**Pop and Click Suppression**

Pop and click is often a function of charge difference from input coupling and bypass capacitors, momentary differential offset voltages across the speaker, or state changes of the input source (codec) that cause an abrupt change in current to flow through the loudspeaker. In all cases these pop and click phenomena occur during the following power sequences:


- Power supply power-up or power down (codec or amp).
- Entering or releasing from shutdown/mute (codec or amp).
- State changes in the audio codec; e.g., switching between audio sources.

Due to the voltage changes in the audio signal chain a momentary current will flow through the loudspeaker. When current flows through the voice coil of a loudspeaker

it causes the diaphragm to move thus causing a popping and clicking sound.

The NCS8353 includes pop and click suppression circuitry that creates a slow ramp to bias the amplifier during the previously mentioned power sequences. In order to eliminate “pop and click” noises during transition, the output power in the load must not be established or cutoff suddenly. When logic high is applied to the shutdown pin, the internal biasing voltage rises quickly and once the output DC level is around the common mode voltage, the gain is established slowly. This method to turn on the device is optimized in terms of rejection of “pop and click” noises. The device has the same behavior when it is turned-off by a logic low on the enable pin. No power is delivered to the load 60 ms after a falling edge on the enable pin. Due to the fast turn on and off times, the shutdown signal can be used as a mute signal as well.

## PACKAGE DIMENSIONS

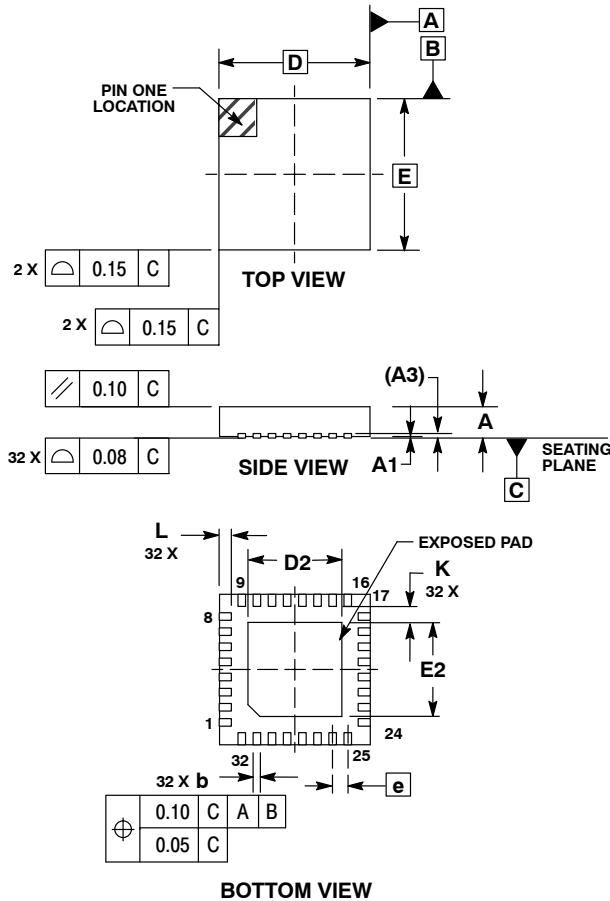
QFN32, 5x5x1, 0.5P  
CASE 488AM-01  
ISSUE O

## NOTES:

1. DIMENSIONS AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.25 AND 0.30 MM TERMINAL
4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

| MILLIMETERS |           |       |       |
|-------------|-----------|-------|-------|
| DIM         | MIN       | NOM   | MAX   |
| A           | 0.800     | 0.900 | 1.000 |
| A1          | 0.000     | 0.025 | 0.050 |
| A3          | 0.200 REF |       |       |
| b           | 0.180     | 0.250 | 0.300 |
| D           | 5.00 BSC  |       |       |
| D2          | 2.950     | 3.100 | 3.250 |
| E           | 5.00 BSC  |       |       |
| E2          | 2.950     | 3.100 | 3.250 |
| e           | 0.500 BSC |       |       |
| K           | 0.200     | ---   | ---   |
| L           | 0.300     | 0.400 | 0.500 |

## SOLDERING FOOTPRINT\*

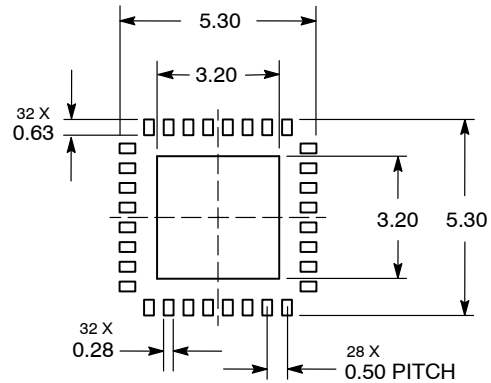

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

## LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada  
Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910  
Japan Customer Focus Center  
Phone: 81-3-5773-3850

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.