

POWER RELAY

2 POLES—5 A LOW PROFILE TYPE FTR-F1 SERIES

RoHS compliant

FEATURES

- Low profile power relay (height 16.5 mm) employing unique construction
- DPST/DPDT 5 A, TV-3 rating available
- Higher isolation by employing reinforced insulation construction
 - Insulation distance: 8 mm (between coil and contact)
 - Dielectric strength: 5 kV (between coil and contact)
 - Surge strength: 10 kV (between coil and contact)
- Pin configuration compatible to VB/FBR620
- UL, CSA, VDE, SEMKO, SEV, CQC, FIMKO, IMQ, DEMKO, NEMKO recognized
- RoHS compliant since date code: 0434R
Please see page 8 for more information



ORDERING INFORMATION - 5A Rating Type

FTR-F1 A A 005 V - **
 [Example] (a) (b) (c) (d) (e) (f)

| | | | | | |
|-----|--------------------------|-----------------------|---|------|---------|
| (a) | Series Name | FTR-F1: FTR-F1 Series | | | |
| (b) | Contact Arrangement | A | : 2 form A (DPST-NO) | | |
| | | C | : 2 form C (DPDT) | | |
| (c) | Coil Type | A | : Standard type (530 mW) | | |
| | | D | : High sensitive type (400 mW) | | |
| (d) | Nominal Voltage | 003 | : 3 VDC (high sensitive type 'D' only) | | |
| | | 005 | : 5 VDC | 012: | 12 VDC |
| | | 006 | : 6 VDC | 018: | 18 VDC |
| | | 009 | : 9 VDC | 024: | 24 VDC |
| | | | | 048: | 48 VDC |
| | | | | 060: | 60 VDC |
| | | | | 110: | 110 VDC |
| (e) | Contact Material/TV Type | V | : Gold plate silver tin oxide (standard type) | | |
| | | T | : Gold plate silver tin oxide (TV-3 rating type, only standard make type) | | |
| (f) | Custom Designation | RG | : Transparency cover | | |

Ordering Code: FTR-F1AA005V Actual Marking: F1AA005V

FTR-F1 SERIES

■ PART NUMBERS

530mW type

| Ordering Part Number | Series | Contact | Coil Power | Coil Voltage | Contact Material | Special Designation |
|----------------------|-----------|-------------|------------|--------------|--------------------------------|------------------------|
| FTR-F1AA005V(-RG) | FTR-F1 | A: 2 form A | A: 530 mW | 5 | V: Gold plate silver tin oxide | RG: Transparency cover |
| FTR-F1AA006V(-RG) | | | | 6 | | |
| FTR-F1AA009V(-RG) | | | | 9 | | |
| FTR-F1AA012V(-RG) | | | | 12 | | |
| FTR-F1AA018V(-RG) | | | | 18 | | |
| FTR-F1AA024V(-RG) | | | | 24 | | |
| FTR-F1AA048V(-RG) | | | | 48 | | |
| FTR-F1AA060V(-RG) | | | | 60 | | |
| FTR-F1AA110V(-RG) | | A: 550 mW | 110 | | | |
| FTR-F1CA005V(-RG) | | C: 2 form C | A: 530 mW | 5 | | |
| FTR-F1CA006V(-RG) | | | | 6 | | |
| FTR-F1CA009V(-RG) | | | | 9 | | |
| FTR-F1CA012V(-RG) | | | | 12 | | |
| FTR-F1CA018V(-RG) | | | | 18 | | |
| FTR-F1CA024V(-RG) | | | | 24 | | |
| FTR-F1CA048V(-RG) | | | | 48 | | |
| FTR-F1CA060V(-RG) | 60 | | | | | |
| FTR-F1CA110V(-RG) | A: 550 mW | 110 | | | | |

TV-3 type

| Ordering Part Number | Series | Contact | Coil Power | Coil Voltage | Contact Material | Special Designation |
|----------------------|--------|-------------|------------|--------------|--|------------------------|
| FTR-F1AA005T(-RG) | FTR-F1 | A: 2 form A | A: 530 mW | 5 | T: Gold plate silver tin oxide (TV-3 type) | RG: Transparency cover |
| FTR-F1AA006T(-RG) | | | | 6 | | |
| FTR-F1AA009T(-RG) | | | | 9 | | |
| FTR-F1AA012T(-RG) | | | | 12 | | |
| FTR-F1AA018T(-RG) | | | | 18 | | |
| FTR-F1AA024T(-RG) | | | | 24 | | |
| FTR-F1AA048T(-RG) | | | | 48 | | |
| FTR-F1AA060T(-RG) | | | | 60 | | |
| FTR-F1AA110T(-RG) | | | A: 550 mW | 110 | | |

FTR-F1 SERIES

■ PART NUMBERS

400mW type

| Ordering Part Number | Series | Contact | Coil Power | Coil Voltage | Contact Material | Special Designation |
|----------------------|--------|-------------|------------|--------------|--------------------------------|------------------------|
| FTR-F1AD003V(-RG) | FTR-F1 | A: 2 form A | D: 400 mW | 3 | V: Gold plate silver tin oxide | RG: Transparency cover |
| FTR-F1AD005V(-RG) | | | | 5 | | |
| FTR-F1AD006V(-RG) | | | | 6 | | |
| FTR-F1AD009V(-RG) | | | | 9 | | |
| FTR-F1AD012V(-RG) | | | | 12 | | |
| FTR-F1AD024V(-RG) | | | | 24 | | |
| FTR-F1AD048V(-RG) | | | | 48 | | |
| FTR-F1CD003V(-RG) | | C: 2 form C | | 3 | | |
| FTR-F1CD005V(-RG) | | | | 5 | | |
| FTR-F1CD006V(-RG) | | | | 6 | | |
| FTR-F1CD009V(-RG) | | | | 9 | | |
| FTR-F1CD012V(-RG) | | | | 12 | | |
| FTR-F1CD024V(-RG) | | | | 24 | | |
| FTR-F1CD048V(-RG) | | | | 48 | | |

■ COIL DATA CHART

530mW type

| Coil Voltage | Nominal Voltage (VDC) | Max. Coil Voltage* ¹ | Coil Resistance (±10%) | Must Operate Voltage* ² | Must Release Voltage* ² | Nominal Power (mW) |
|--------------|-----------------------|---------------------------------|------------------------|------------------------------------|------------------------------------|--------------------|
| 005 | 5 | 8.5 VDC | 47 Ω | 3.5 VDC | 0.5 VDC | 530 |
| 006 | 6 | 10.2 VDC | 68 Ω | 4.2 VDC | 0.6 VDC | |
| 009 | 9 | 15.3 VDC | 155 Ω | 6.3 VDC | 0.9 VDC | |
| 012 | 12 | 20.4 VDC | 270 Ω | 8.4 VDC | 1.2 VDC | |
| 018 | 18 | 30.6 VDC | 610 Ω | 12.6 VDC | 1.8 VDC | |
| 024 | 24 | 40.8 VDC | 1,100 Ω | 16.8 VDC | 2.4 VDC | |
| 048 | 48 | 81.6 VDC | 4,400 Ω | 33.6 VDC | 4.8 VDC | |
| 060 | 60 | 102.0 VDC | 6,800 Ω | 42.0 VDC | 6.0 VDC | 550 |
| 110 | 110 | 187.0 VDC | 22,000 Ω | 77.0 VDC | 11.0 VDC | |

Note: All values in the table are measured at 20°C.

*1: No contact current at 20°C

*2: Specified values are subject to pulse wave voltage

FTR-F1 SERIES

■ COIL DATA CHART

400mW type

| Coil Voltage | Nominal Voltage (VDC) | Max. Coil Voltage* ¹ | Coil Resistance (±10%) | Must Operate Voltage* ² | Must Release Voltage* ² | Nominal Power (mW) |
|--------------|-----------------------|---------------------------------|------------------------|------------------------------------|------------------------------------|--------------------|
| 003 | 3 | 6.0VDC | 22.5 Ω | 2.25 VDC | 0.3 VDC | 400 |
| 005 | 5 | 10.0 VDC | 62 Ω | 3.75 VDC | 0.5 VDC | |
| 006 | 6 | 12.0 VDC | 90 Ω | 4.5 VDC | 0.6 VDC | |
| 009 | 9 | 18.0 VDC | 202 Ω | 6.75 VDC | 0.9 VDC | |
| 012 | 12 | 24.0 VDC | 360 Ω | 9 VDC | 1.2 VDC | |
| 024 | 24 | 48.0 VDC | 1,440 Ω | 18 VDC | 2.4 VDC | |
| 048 | 48 | 96.0 VDC | 5,760 Ω | 36 VDC | 4.8 VDC | |

Note: All values in the table are measured at 20°C.

*1: No contact current at 20°C

*2: Specified values are subject to pulse wave voltage

■ SPECIFICATIONS

| Item | | Standard Type F1(A, C)A ()V | TV-3 rating F1AA ()T | Sensitive Type F1(A, C)D ()V |
|------------|--|--|--|---------------------------------------|
| Contact | Arrangement | 2 form A (DPST-NO), 2 form C (DPDT) | 2 form A (DSDT-NO) | 2 form A (DPST-NO) 2 form C (DPDT) |
| | Material | Gold plate silver tin oxide | | |
| | Configuration | Single | | |
| | Resistance (initial) | Maximum 100 mΩ at 1 A, 6 VDC | | |
| | Rating (resistive) | 5A, 250VAC / 24VDC | | |
| | Maximum Carrying Current* ¹ | 7A | | |
| | Maximum Switching Rating | 1,250 VA / 120W | | |
| | Maximum Switching Voltage | 400 VAC / 300VDC | | |
| | Maximum Switching Load* ² | 10mA 5 VDC | | |
| Coil | Nominal Power (at 20°C) | 530mW, 110V type: 550mW | | 400mW |
| | Operate Power (at 20°C) | 260mW, 110V type: 270mW | | 225mW |
| | Operating Temperature | -40°C to +75°C (no frost) -40°C to +70°C (-RG type) | | |
| Time Value | Operate (without diode) | Maximum 15ms (at nominal voltage, no bounce) | | |
| | Release (without diode) | Maximum 5ms (at nominal voltage, no bounce) | | |
| Life | Mechanical | 2 x 10 ⁷ ops minimum | | |
| | Electrical | AC load | 1 x 10 ⁵ ops min. | |
| | | DC load | 1 x 10 ⁵ ops min. | |
| | Lamp load (TV-3) | - | 2.5 x 10 ⁴ ops min. | - |
| Other | Vibration Resistance | Misoperation | 10 to 55 Hz, at double amplitude of 1.65mm | |
| | | Endurance | 10 to 55Hz, at double amplitude of 3.3mm | |
| | Shock Resistance | Misoperation | 100m/s ² (11±1ms) | |
| | | Endurance | 1,000m/s ² (6±1ms) | |
| | Weight | Approximately 12g | | |

*¹ Minimum switching loads mentioned above are reference values. Please perform the confirmation test with the actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

FTR-F1 SERIES

■ INSULATION

| Item | FTR-F1 | Note |
|--|--------------------|-----------------------------|
| Resistance (initial) | Minimum 1,000 MΩ | at 500 VDC |
| Dielectric Strength | open contacts | 1,000 VAC (50/60 Hz) 1 min. |
| | coil and contacts | 5,000 VAC (50/60 Hz) 1 min. |
| | adjacent contacts | 3,000 VAC (50/60 Hz) 1 min. |
| Surge Voltage (coil and contact) | 10,000 V | 1.2 x 50µs standard wave |
| Clearance/Creepage | 8 mm / 8 mm | |
| Insulation (DIN EN61810-1 VDE0435) Voltage Pollution Isolation material group | 250 V 3 IIIa | |
| Isolation category / Reference voltage (VDE0110b) | C / 250 V | |


■ SAFETY STANDARDS

| Type | Compliance | Contact rating |
|------------|--|---|
| UL | UL 508 | Flammability: UL 94-V0 (plastics) 5A, 24VDC (resistive) 5A, 250 VAC (resistive) 1/6 HP, 125VAC 1/4 HP, 250VAC Pilot duty: C300 Pilot duty: R300 (F1AA()T, F1AA()V) TV-3 (F1AA()T) |
| | E63614 | |
| CSA | C22.2 No. 14 LR 40304 | |
| VDE | 0435, 0631, 0700, 0860 | 5A, 250 VAC (cosØ=1) 2A, 250 VAC (cosØ=0.4) 5 A 24VDC (0ms), 85°C |
| SEMKO | EN 61058-1:1992 and A1 EN 61095:1993 and A1+A11 | 250VAC, 5 (1)A |
| IEC60335-1 | GWFI IEC 60695-2-12 | >850°C (except for -RG) |
| | GWFI IEC 60695-2-13 | >775°C(except for -RG) |

Complies with BSI, IMC, CQC, NEMKO, DEMKO, FIMKO

■ REFERENCE DATA

5A Rating Type

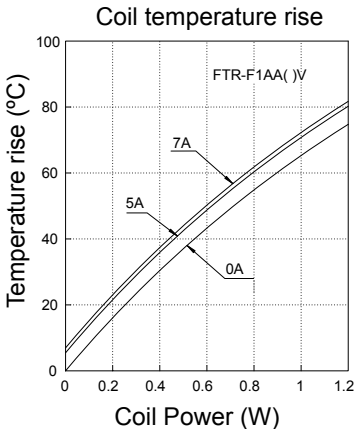

FTR-F1 SERIES

REFERENCE DATA


Distribution of operate and release voltage



Distribution of contact resistance



Mechanical life test

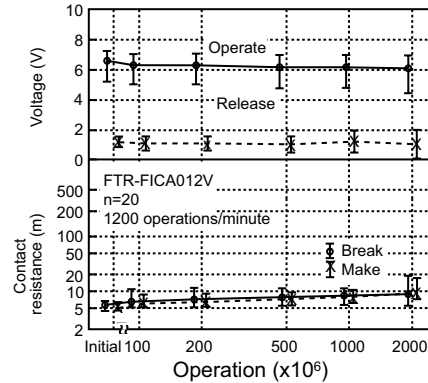

Electrical life test



DIMENSIONS

Dimensions



FTR-F1A type




FTR-F1C type



Schematics (BOTTOM VIEW)



PC board mounting hole layout (BOTTOM VIEW)



Unit: mm

RoHS Compliance and Lead Free Relay Information

1. General Information

- Relays produced after the specific date code that is indicated on each data sheet are lead-free now. All our signal and power relays are lead-free. Please refer to Lead-Free Status Info. (<http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>)
- Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu.
- All signal and power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 5 hazardous materials that are restricted by RoHS directive (lead, mercury, chromium IV, PBB, PBDE).
- It has been verified that using lead-free relays in leaded assembly process will not cause any problems (compatible).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).
- To avoid leaded relays (for lead-free sample, etc.) please consult with area sales office.
- We will ship leaded relays as long as the leaded relay inventory exists.

Note: Cadmium was exempted from RoHS on October 21, 2005. (Amendment to Directive 2002/95/EC)

2. Recommended Lead Free Solder Profile

- Recommended solder paste Sn-3.0Ag-0.5Cu.

Reflow Solder condition

Flow Solder condition:

Pre-heating: maximum 120°C
Soldering: dip within 5 sec. at
260°C solder bath

Solder by Soldering Iron:

Soldering Iron
Temperature: maximum 360°C
Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays.

4. Tin Whisker

- Dipped SnAgCu solder is known as low risk tin whisker. No considerable length whisker was found by our in house test.

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: <http://www.fujitsu.com/us/services/edevices/components/>

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: emea.fujitsu.com/components/

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#01-01 CitiLink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@fcal.fujitsu.com
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2007 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.
Rev. November 29, 2007



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.