

**CONSTANT VOLTAGE AND CONSTANT CURRENT CONTROLLER****AP4306****General Description**

The AP4306 is a highly integrated solution for a constant voltage/constant current mode SMPS application.

The AP4306 contains one 1.21V voltage reference, one low voltage reference used in current sensing circuit and two operational amplifiers. The 1.21V voltage reference, combined with one operational amplifier, makes of an ideal voltage controller for use in adapters and battery chargers. The low voltage reference, combined with another operational amplifier, makes of an ideal current limiter for output low side current sensing.

The AP4306 is fully compatible with AP4305 in functionality and electrical characteristics except its lower reference voltage for current control loop, thus higher power efficiency in SMPS applications such as low power charger can be realized with AP4306 compared to AP4305.

The AP4306 is available in SOT-23-6 package.

Features

- Constant Voltage and Constant Current Control
- Precision Internal Voltage Reference
- Low External Component Count
- Easy Compensation
- Low Supply Current: 0.5mA
- Current Control Loop Reference
 - A Version: 70mV
 - B Version: 100mV
 - C Version: 150mV
- Operating Temperature Range: -40 to 105°C
- Operating Supply Voltage: 2.5V to 18V

Applications

- Adapters
- Battery Chargers

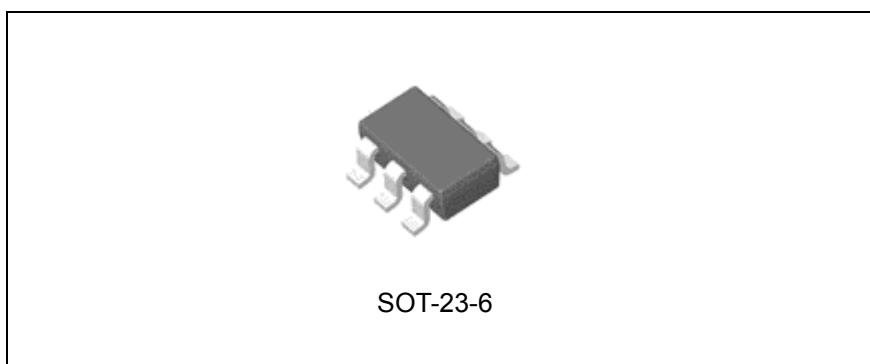


Figure 1. Package Type of AP4306

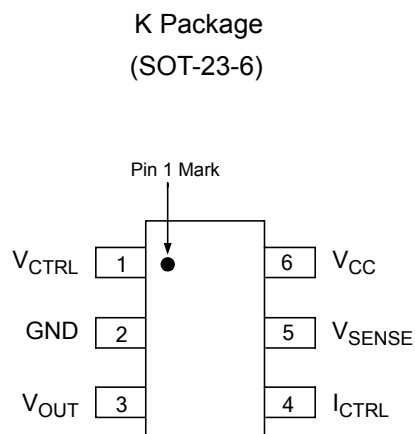
**CONSTANT VOLTAGE AND CONSTANT CURRENT CONTROLLER****AP4306****Pin Configuration**

Figure 2. Pin Configuration of AP4306 (Top View)

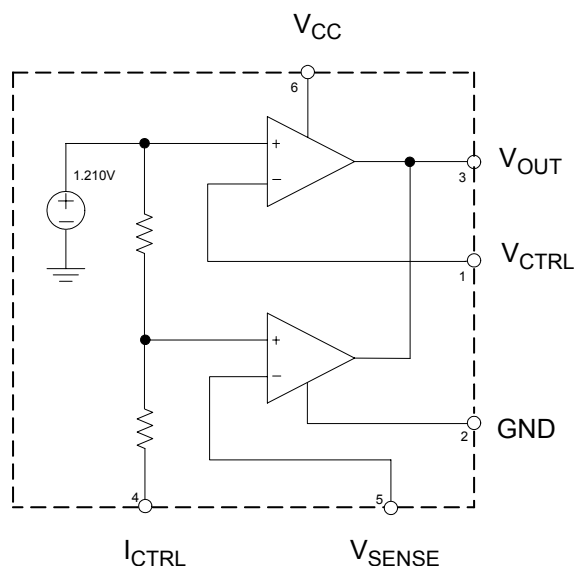
Pin Description

Pin Number	Pin Name	Function
1	V_{CTRL}	Input pin of the voltage control loop.
2	GND	Ground.
3	V_{OUT}	Output pin. Sinking current only.
4	I_{CTRL}	Input pin of the current control loop.
5	V_{SENSE}	Input pin of the current control loop.
6	V_{CC}	Power supply.



CONSTANT VOLTAGE AND CONSTANT CURRENT CONTROLLER AP4306

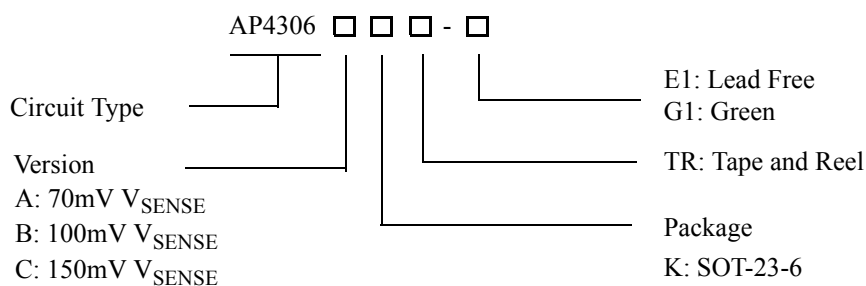
Functional Block Diagram



For A, B, C Versions

Figure 3. Functional Block Diagram of AP4306

Ordering Information



Package	Version	Part Number		Marking ID		Packing Type
		Lead Free	Green	Lead Free	Green	
SOT-23-6	70mV V_{SENSE}	AP4306AKTR-E1	AP4306AKTR-G1	E7L	G7L	Tape & Reel
	100mV V_{SENSE}	AP4306BKTR-E1	AP4306BKTR-G1	E7M	G7M	Tape & Reel
	150mV V_{SENSE}	AP4306CKTR-E1	AP4306CKTR-G1	E7N	G7N	Tape & Reel

BCD Semiconductor's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant. Products with "G1" suffix are available in green package.

**CONSTANT VOLTAGE AND CONSTANT CURRENT CONTROLLER****AP4306****Absolute Maximum Ratings (Note 1)**

Parameter		Symbol	Value	Unit
Power Supply Voltage		V_{CC}	20	V
Input Voltage		V_{IN}	-0.3 to V_{CC}	V
Junction Temperature		T_J	150	°C
Storage Temperature		T_{STG}	-65 to 150	°C
Lead Temperature (Soldering, 5sec)		T_{LEAD}	260	°C
Thermal Resistance (Junction to Ambient)	SOT-23-6	θ_{JA}	250	°C/W

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Recommended Operating Conditions

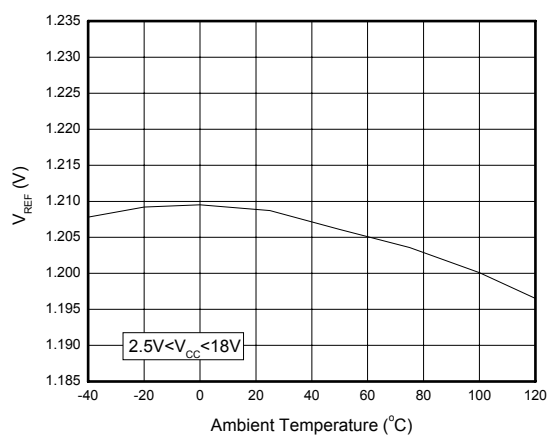
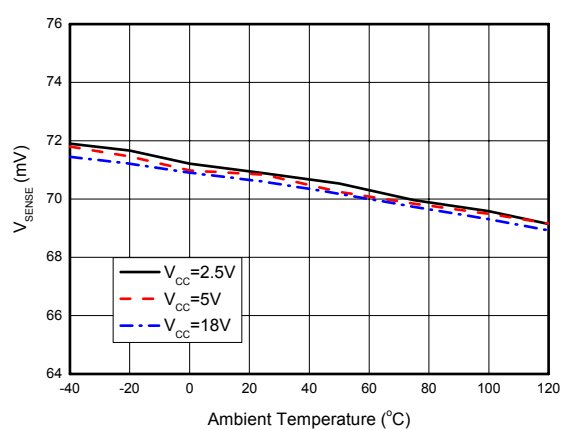
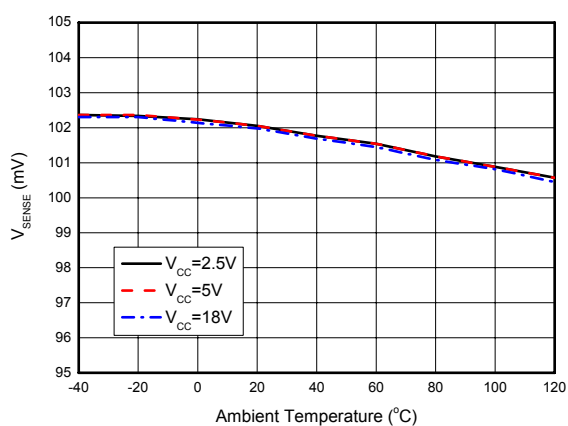
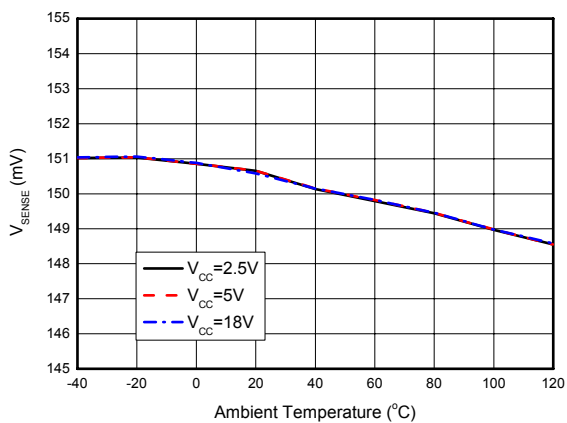
Parameter	Symbol	Min	Max	Unit
Power Supply Voltage	V_{CC}	2.5	18	V
Operating Temperature Range	T_A	-40	105	°C

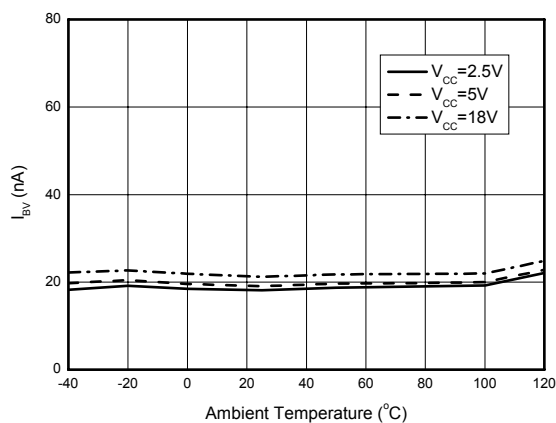
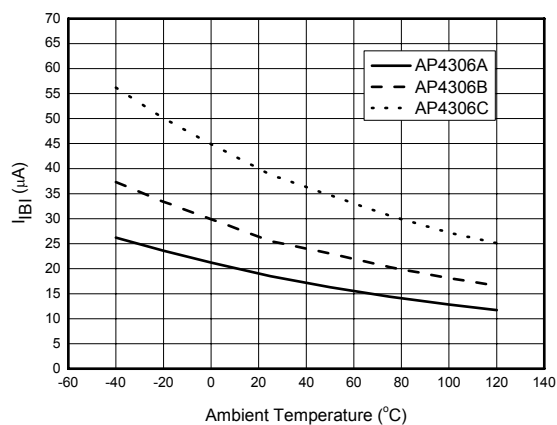
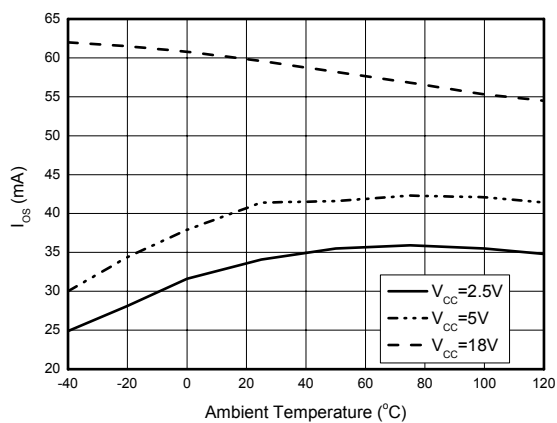
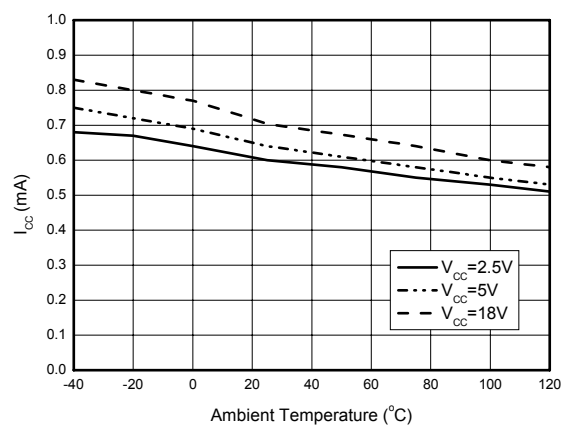
**CONSTANT VOLTAGE AND CONSTANT CURRENT CONTROLLER****AP4306****Electrical Characteristics**(V_{CC}=5V, T_A=25°C, unless otherwise specified.)

Parameter	Symbol	Conditions		Min	Typ	Max	Unit
TOTAL CURRENT CONSUMPTION							
Total Supply Current Not Including the Output Sinking	I _{CC}	T _A =25°C			0.5	1	mA
		-40°C<T _A <105°C			0.6		
VOLTAGE CONTROL LOOP							
Transconductance Gain (V _{CTRL}). Sink Current Only	G _{mv}	T _A =25°C		1	3.5		mA/mV
		-40°C<T _A <105°C			2.5		
Voltage Control Loop Reference	V _{REF}	A Version	T _A =25°C	1.186	1.21	1.234	V
			-40°C<T _A <105°C	1.162		1.258	
		B, C Versions	T _A =25°C	1.204	1.21	1.216	
			-40°C<T _A <105°C	1.186		1.234	
Input Bias Current (V _{CTRL})	I _{IBV}	T _A =25°C			50		nA
		-40°C<T _A < 105°C			100		
CURRENT CONTROL LOOP							
Transconductance Gain (I _{CTRL}). Sink Current Only	G _{mi}	T _A =25°C		1.5	7		mA/mV
		-40°C<T _A < 105°C		1.5	7		
Current Control Loop Reference	V _{SENSE}	A Version	T _A =25°C	66.5	70	73.5	mV
			-40°C<T _A <105°C	63		77	
		B Version	T _A =25°C	97	100	103	
			-40°C<T _A <105°C	94		106	
		C Version	T _A =25°C	147	150	153	
			-40°C<T _A <105°C	143		157	
Current Out of Pin I _{CTRL} at V _{SENSE}	I _{IBI}	A Version	T _A =25°C		18		μA
			-40°C<T _A <105°C		35		
		B Version	T _A =25°C		25		
			-40°C<T _A <105°C		50		
		C Version	T _A =25°C		37.5		
			-40°C<T _A <105°C		75		
OUTPUT STAGE							
Low Output Voltage at 10mA Sinking Current	V _{OL}	T _A =25°C			100		mV
		-40°C<T _A < 105°C			100		
Output Short Circuit Current. Output to V _{CC} . Sink Current Only	I _{OS}	T _A =25°C			27	50	mA
		-40°C<T _A <105°C			35		

Thermal Impedance

Parameter	Symbol	Value	Unit
Thermal Resistance (Junction to Case)	θ _{JC}	84	°C/W

**Typical Performance Characteristics**Figure 4. AP4306 V_{REF} vs. Ambient TemperatureFigure 5. AP4306A V_{SENSE} vs. Ambient TemperatureFigure 6. AP4306B V_{SENSE} vs. Ambient TemperatureFigure 7. AP4306C V_{SENSE} vs. Ambient Temperature

**Typical Performance Characteristics (Continued)**Figure 8. AP4306 I_{BV} vs. Ambient TemperatureFigure 9. AP4306 I_{BI} vs. Ambient TemperatureFigure 10. AP4306 I_{OS} vs. Ambient TemperatureFigure 11. AP4306 I_{CC} vs. Ambient Temperature

Typical Application


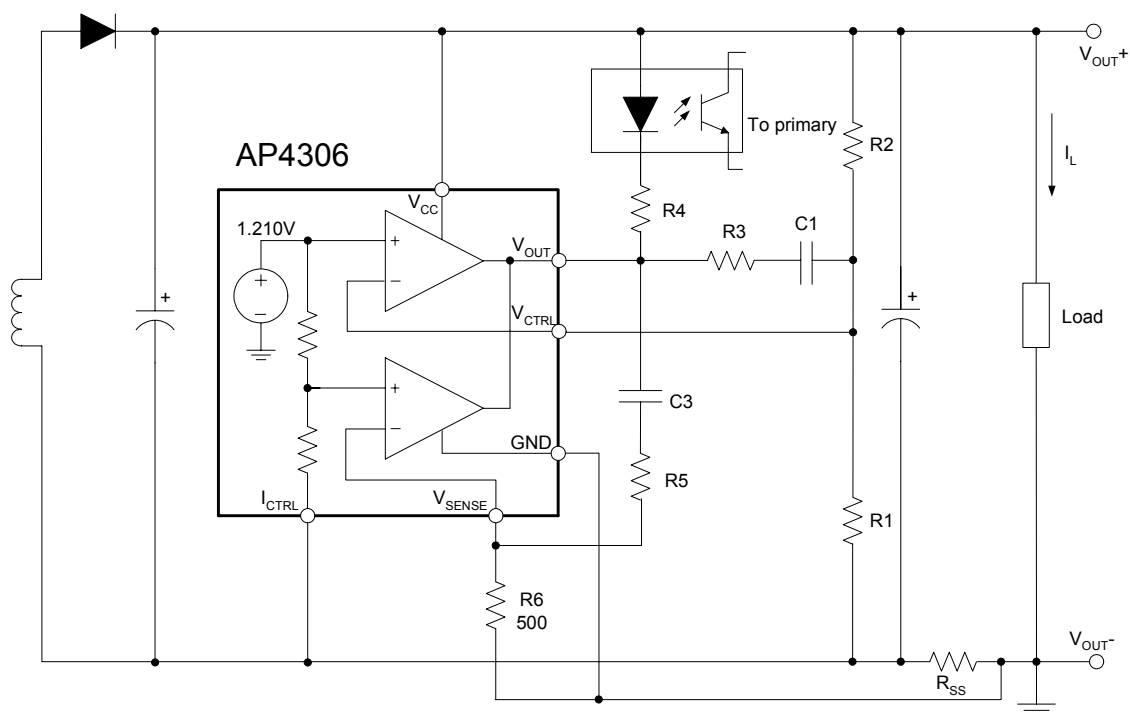


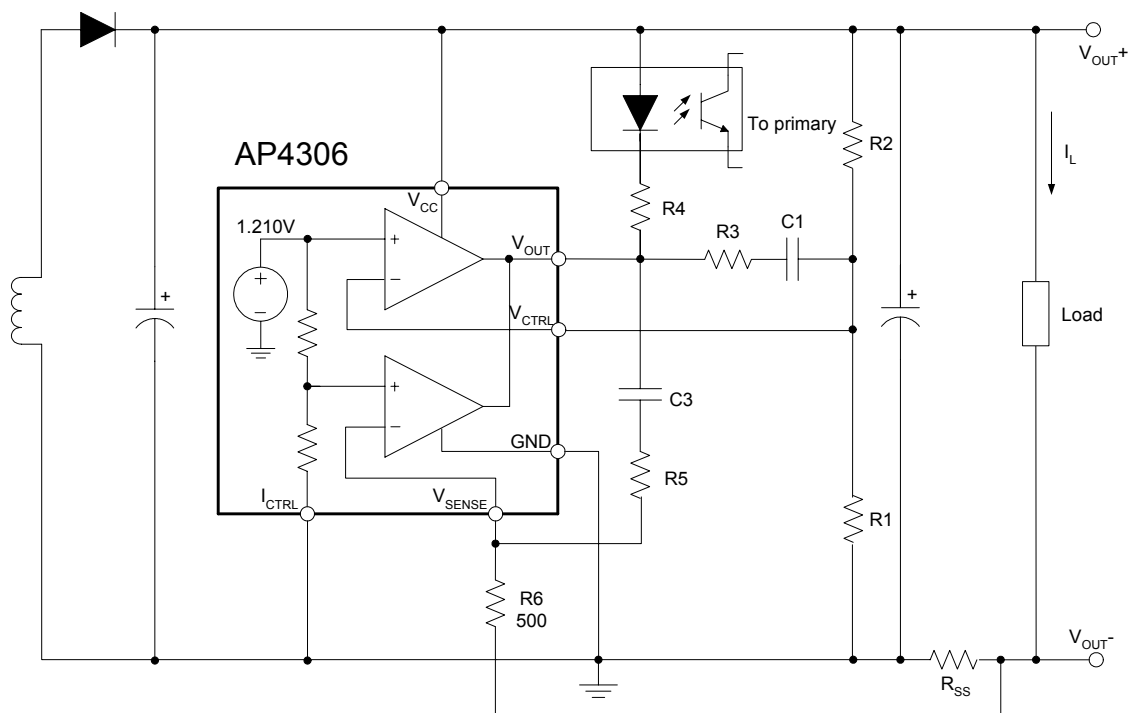
Figure 12. Typical Application 1 of AP4306

Typical Application (Continued)


$$V_{OUT} = [V_{REF} + (I_L \times R_{SS})] \times \frac{R1 + R2}{R1} - (I_L \times R_{SS}) \quad (V)$$

$$CurrentLimit = \frac{V_{SENSE}}{R_{SS}} \quad (A)$$

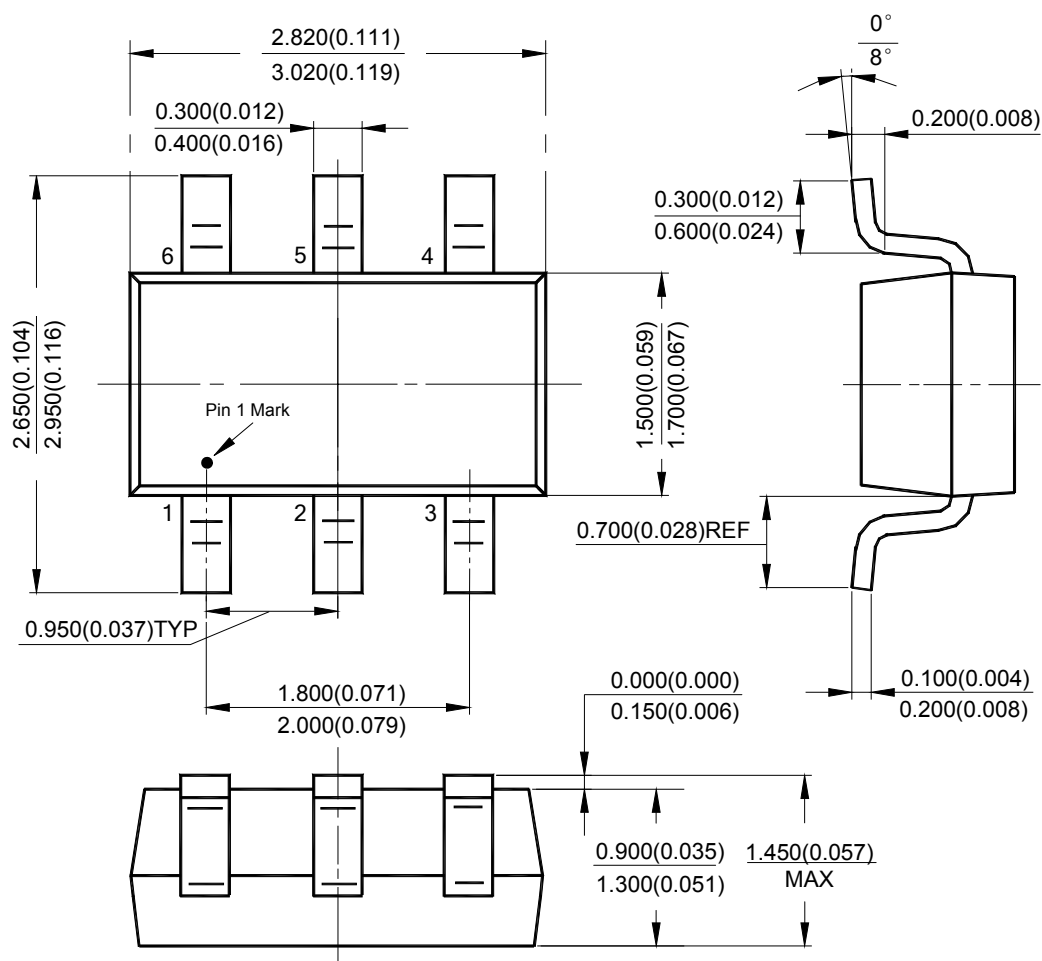
Figure 13. Typical Application 2 of AP4306

Typical Application (Continued)


$$V_{OUT} = V_{REF} \times \frac{R1 + R2}{R1} - (I_L \times R_{SS}) \quad (V)$$

$$CurrentLimit = \frac{V_{SENSE} \times V_{REF}}{(V_{SENSE} + V_{REF}) \times R_{SS}} \quad (A)$$

Figure 14. Typical Application 3 of AP4306

**CONSTANT VOLTAGE AND CONSTANT CURRENT CONTROLLER****AP4306****Mechanical Dimensions****SOT-23-6****Unit: mm(inch)**



BCD Semiconductor Manufacturing Limited

<http://www.bcdsemi.com>

IMPORTANT NOTICE

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

MAIN SITE

- Headquarters

BCD Semiconductor Manufacturing Limited

No. 1600, Zi Xing Road, Shanghai ZiZhu Science-based Industrial Park, 200241, China
Tel: +86-21-24162266, Fax: +86-21-24162277

- Wafer Fab

Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd.

800 Yi Shan Road, Shanghai 200233, China
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

REGIONAL SALES OFFICE

Shenzhen Office

Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd., Shenzhen Office

Unit A Room 1203, Skyworth Bldg., Gaoxin Ave. I.S., Nanshan District, Shenzhen, China
Tel: +86-755-8826 7951
Fax: +86-755-8826 7865

Taiwan Office

BCD Semiconductor (Taiwan) Company Limited

4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei, Taiwan
Tel: +886-2-2656 2808
Fax: +886-2-2656 2806

USA Office

BCD Semiconductor Corp.

30920 Huntwood Ave. Hayward, CA 94544, USA
Tel : +1-510-324-2988
Fax: +1-510-324-2788



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.