



### High PSRR, low drop linear regulator IC



SO-8



DFN6 (2x2)



DFN6 (3x3)

#### Features

- Input voltage from 2.5 V to 18 V
- 20 V AMR
- Any fixed output voltages, from 1.2 V to 12 V in 100 mV steps (from 1.2 V to 6.6 V in 50 mV steps) available on request
- Adjustable version from 1.18 V to  $V_{IN} - V_{DROP(MAX)}$
- Guaranteed output current 1.2 A
- Typical dropout 350 mV @ 1.2 A
- Undervoltage lockout
- Enable function
- Internal thermal, current and power limitation
- High PSRR: 87 dB @ 120 Hz, 75 dB @ 1 kHz
- Operating temperature range: -40 °C to 125 °C
- Packages SO-8 batwing plastic micropackage, DFN6 (3x3) and DFN6 (2x2)

#### Applications

- Consumer
- Industrial
- SMPS
- Point-of-load
- DC-DC post-regulation

Maturity status link

LDL212

#### Description


The **LDL212** provides 1.2 A of maximum current from an input voltage range from 2.5 V to 18 V, with a typical dropout voltage of 350 mV @ 1.2 A.

The high power supply rejection ratio of 87 dB at 120 Hz, and more than 40 dB at 100 kHz, makes the **LDL212** suitable for direct regulation in SMPS and secondary linear regulation in DC-DC converters. The **LDL212** goes to shutdown mode due to the enable logic control function, reducing the total current consumption.

The device also includes the current limit, SOA and thermal protections.


## 1 Block diagram

**Figure 1. Block diagram (fixed)**

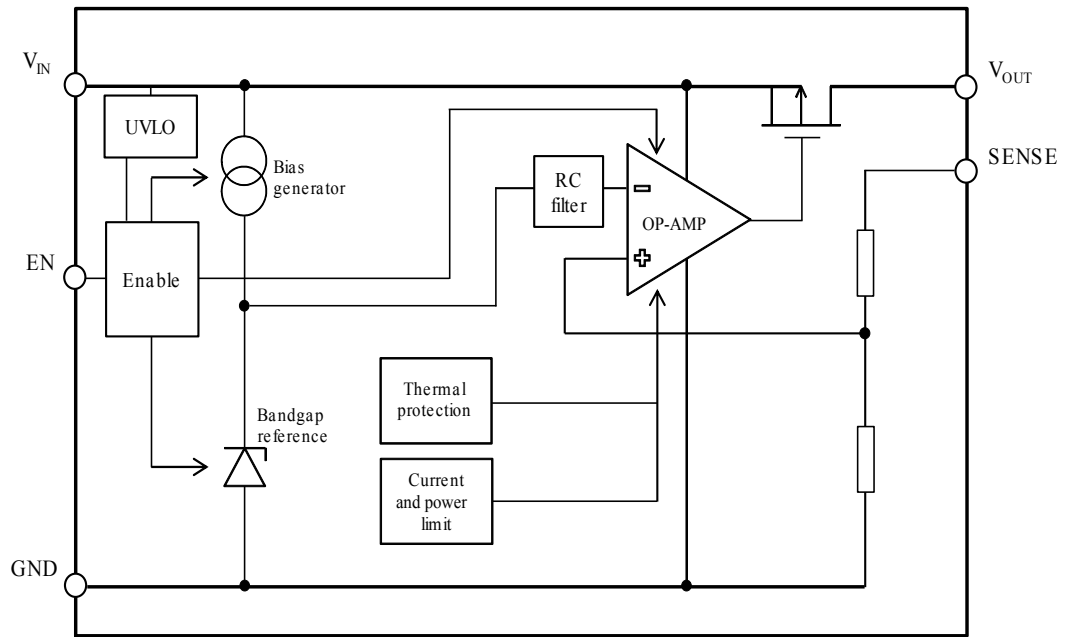

GIPD251120151438MT

**Figure 2. Block diagram (adjustable)**

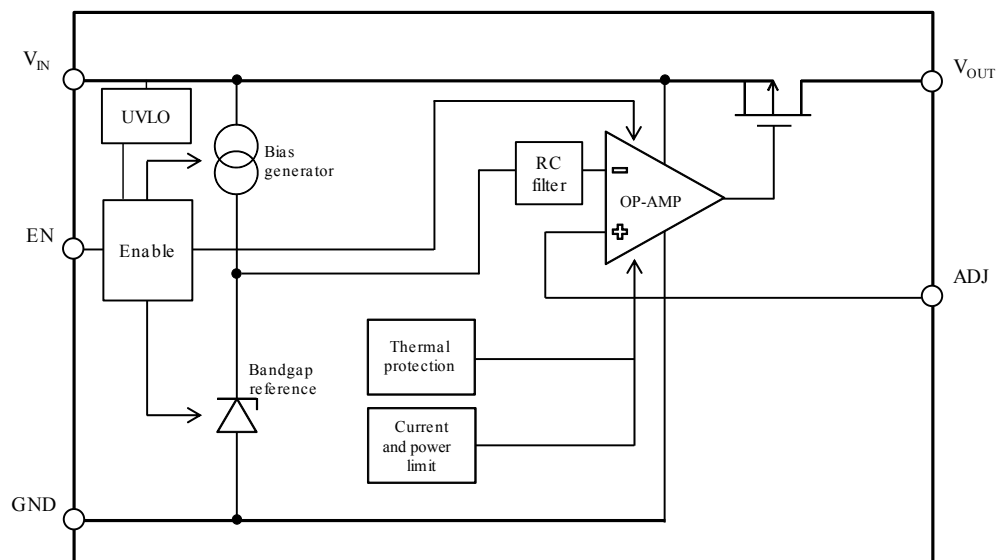

GIPD251120151438bMT

## 2 Pin configuration

**Figure 3. Pin configuration (top view)**



GIPD261120151015MT


**Table 1. Pin description**

| Pin name  | Pin number (SO-8) | Pin number (DFN6) | Description                                                            |
|-----------|-------------------|-------------------|------------------------------------------------------------------------|
| $V_{IN}$  | 4                 | 4                 | Input voltage                                                          |
| $V_{OUT}$ | 1                 | 3                 | Output voltage                                                         |
| GND       | 2, 3, 6, 7        | 1                 | Ground                                                                 |
| ADJ/sense | 8                 | 2                 | Feedback pin for adjustable version / $V_{OUT}$ sense on fixed version |
| EN        | 5                 | 6                 | Enable pin. The device is in off-state when this pin is pulled low     |
| NC        | -                 | 5                 | Not connected                                                          |
| GND       | -                 | exposed pad       | Exposed pad must be connected to GND                                   |

1. The sense pin on the fixed version must be connected to  $V_{OUT}$  for proper operation.

### 3 Typical application


**Figure 4. Typical application circuit (adjustable version)**

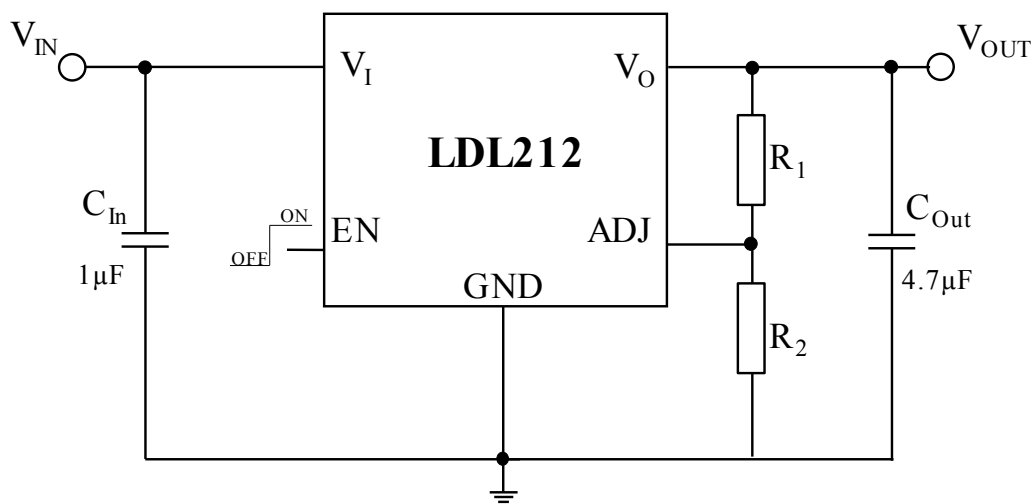

Adjustable version

GIPD011220151346MT

**Figure 5. Typical application circuit (fixed version)**

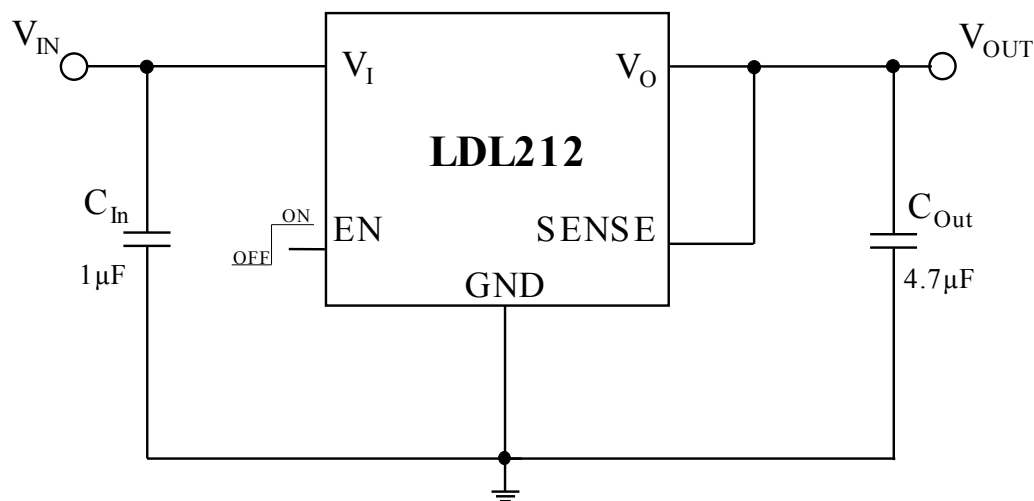

Fixed version

GIPD011220151347MT

**Note:** *R1 and R2 are calculated according to the following formula:  $R_1 = R_2 \times (V_{OUT}/V_{ADJ} - 1)$ . The output voltage of the adjustable version can be set from 1.18 V to  $V_{IN} - V_{DROP(MAX)}$ , where  $V_{DROP(MAX)}$  is the maximum dropout voltage, as defined in [Table 4. Electrical characteristics](#).*

## 4 Maximum ratings

**Table 2. Absolute maximum ratings**

| Symbol      | Parameter                            | Value                   | Unit |
|-------------|--------------------------------------|-------------------------|------|
| $V_{IN}$    | DC input voltage                     | - 0.3 to 20             | V    |
| $V_{OUT}$   | DC output voltage                    | - 0.3 to $V_{IN} + 0.3$ | V    |
| $V_{EN}$    | Enable input voltage                 | - 0.3 to $V_{IN} + 0.3$ | V    |
| $V_{SENSE}$ | Output sense pin voltage             | - 0.3 to $V_{IN} + 0.3$ | V    |
| $V_{ADJ}$   | ADJ pin voltage                      | - 0.3 to 2              | V    |
| $I_{OUT}$   | Output current                       | Internally limited      | mA   |
| $P_D$       | Power dissipation                    | Internally limited      | mW   |
| $T_{STG}$   | Storage temperature range            | - 55 to 150             | °C   |
| $T_{OP}$    | Operating junction temperature range | - 40 to 125             | °C   |

**Note:** *Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied.*

**Table 3. Thermal data**

| Symbol                            | Parameter                              | Value | Unit |
|-----------------------------------|----------------------------------------|-------|------|
| SO-8 batwing plastic micropackage | Thermal resistance junction-to-case    | 20    | °C/W |
|                                   | Thermal resistance junction-to-ambient | 55    |      |
| DFN6 (2x2)                        | Thermal resistance junction-to-case    | 15    |      |
|                                   | Thermal resistance junction-to-ambient | 65    |      |
| DFN6 (3x3)                        | Thermal resistance junction-to-case    | 10    |      |
|                                   | Thermal resistance junction-to-ambient | 55    |      |

## 5 Electrical characteristics

$T_J = 25\text{ }^{\circ}\text{C}$ ,  $V_{IN} = V_{OUT(NOM)} + 1\text{ V}$ ,  $C_{IN} = 1\text{ }\mu\text{F}$ ,  $C_{OUT} = 4.7\text{ }\mu\text{F}$ ,  $I_{OUT} = 10\text{ mA}$ ,  $V_{EN} = V_{IN}$ , unless otherwise specified. ( For  $V_{OUT(NOM)} \leq 1.5\text{ V}$ ,  $V_{IN} = 2.7\text{ V}$ .)

**Table 4. Electrical characteristics**


| Symbol            | Parameter                               | Test conditions                                                           | Min. | Typ.   | Max.   | Unit                                    |  |
|-------------------|-----------------------------------------|---------------------------------------------------------------------------|------|--------|--------|-----------------------------------------|--|
| V <sub>IN</sub>   | Operating input voltage                 |                                                                           | 2.5  |        | 18     | V                                       |  |
| V <sub>UVLO</sub> | Turn-on threshold                       |                                                                           |      | 2.3    | 2.4    | V                                       |  |
|                   | Hysteresis                              |                                                                           |      | 200    |        | mV                                      |  |
| V <sub>OUT</sub>  | V <sub>OUT</sub> accuracy               | I <sub>OUT</sub> = 10 mA                                                  | -2   |        | 2      | %                                       |  |
|                   |                                         | T <sub>J</sub> = 25 °C                                                    |      |        |        |                                         |  |
|                   |                                         | I <sub>OUT</sub> = 10 mA                                                  | -3   |        | 3      | %                                       |  |
|                   |                                         | -40 °C < T <sub>J</sub> < 125 °C                                          |      |        |        |                                         |  |
| V <sub>ADJ</sub>  | Adjustable pin voltage                  | V <sub>IN</sub> = 2.5 V, I <sub>OUT</sub> = 10 mA                         |      | 1.18   |        | V                                       |  |
|                   |                                         | T <sub>J</sub> = 25 °C                                                    | -2   |        | +2     | %                                       |  |
|                   |                                         | V <sub>IN</sub> = 2.5 V, I <sub>OUT</sub> = 10 mA                         | -3   |        | +3     | %                                       |  |
|                   |                                         | -40 °C < T <sub>J</sub> < 125 °C                                          |      |        |        |                                         |  |
| I <sub>ADJ</sub>  | Adjustable pin current                  | V <sub>IN</sub> = 2.5 V, I <sub>OUT</sub> = 10 mA                         |      | 20     |        | nA                                      |  |
| ΔV <sub>OUT</sub> | Line regulation                         | V <sub>OUT</sub> + 1 V ≤ V <sub>IN</sub> ≤ 18 V, I <sub>OUT</sub> = 10 mA |      | 0.002  | 0.01   | %/V                                     |  |
| ΔV <sub>OUT</sub> | Load regulation                         | I <sub>OUT</sub> = 10 mA to 1.2 A                                         |      | 0.0001 | 0.0005 | %/mA                                    |  |
| V <sub>DROP</sub> | Dropout voltage <sup>(1)</sup>          | I <sub>OUT</sub> = 1.2 A V <sub>OUT</sub> > 3 V                           |      | 350    | 600    | mV                                      |  |
|                   | Dropout voltage for SO-8 <sup>(1)</sup> | -40 °C < T <sub>J</sub> < 125 °C                                          |      |        | 700    |                                         |  |
| eN                | Output noise voltage                    | 10 Hz to 100 kHz, I <sub>OUT</sub> = 100 mA                               |      | 60     |        | μV <sub>RMS</sub> /<br>V <sub>OUT</sub> |  |
| SVR               | Supply voltage rejection                | V <sub>IN</sub> = V <sub>OUT(NOM)</sub> + 1 V ± V <sub>RIPPLE</sub>       |      | 87     |        | dB                                      |  |
|                   |                                         | V <sub>RIPPLE</sub> = 0.5 V, f = 120 Hz                                   |      |        |        |                                         |  |
|                   |                                         | V <sub>IN</sub> = V <sub>OUT(NOM)</sub> + 1 V ± V <sub>RIPPLE</sub>       |      | 75     |        |                                         |  |
|                   |                                         | V <sub>RIPPLE</sub> = 0.5 V, f = 1 kHz                                    |      |        |        |                                         |  |
|                   |                                         | V <sub>IN</sub> = V <sub>OUT(NOM)</sub> + 1 V ± V <sub>RIPPLE</sub>       |      | 50     |        |                                         |  |
|                   |                                         | V <sub>RIPPLE</sub> = 0.5 V, f = 100 kHz                                  |      |        |        |                                         |  |
| I <sub>Q</sub>    | Quiescent current                       | I <sub>OUT</sub> = 0 mA to 1.2 A                                          |      | 250    | 380    | μA                                      |  |
|                   |                                         | -40 °C < T <sub>J</sub> < 125 °C                                          |      |        |        |                                         |  |
|                   |                                         | V <sub>IN</sub> input current in OFF mode                                 |      | 0.3    | 1.5    |                                         |  |
|                   |                                         | V <sub>EN</sub> = GND V <sub>IN</sub> = 18 V                              |      |        |        |                                         |  |
| I <sub>SC</sub>   | Short-circuit current                   | R <sub>L</sub> = 0                                                        | 1.5  | 2      |        | A                                       |  |
| V <sub>EN</sub>   | Enable input logic low                  | V <sub>IN</sub> = 2.5 V to 18 V<br>-40 °C < T <sub>J</sub> < 85 °C        |      |        | 0.4    | V                                       |  |
|                   | Enable input logic high                 | V <sub>IN</sub> = 2.5 V to 18 V                                           | 1.2  |        |        |                                         |  |

| Symbol     | Parameter                   | Test conditions                                                  | Min. | Typ. | Max. | Unit               |
|------------|-----------------------------|------------------------------------------------------------------|------|------|------|--------------------|
| $V_{EN}$   |                             | $-40\text{ }^{\circ}\text{C} < T_J < 85\text{ }^{\circ}\text{C}$ |      |      |      | V                  |
| $I_{EN}$   | Enable input current        |                                                                  |      | 1.5  |      | $\mu\text{A}$      |
|            |                             | $V_{EN} = V_{IN}, V_{IN} = 18\text{ V}$                          |      | 16   | 20   |                    |
| $T_{ON}$   | Turn-on time <sup>(2)</sup> |                                                                  |      | 120  |      | $\mu\text{s}$      |
| $T_{SHDN}$ | Thermal shutdown            |                                                                  |      | 175  |      | $^{\circ}\text{C}$ |
|            | Hysteresis                  |                                                                  |      | 25   |      |                    |


1. Dropout voltage is the input-to-output voltage difference at which the output voltage is 100 mV below its nominal value. This specification is not valid for output voltages below 2.2 V.
2. Turn-on time is the time measured between the enable input just exceeding  $V_{EN}$  high value and the output voltage just reaching 95% of its nominal value.

## 6 Typical performance characteristics


**Figure 6. Output voltage vs. temperature**  
( $V_{IN} = 2.5\text{ V}$ ,  $V_{OUT} = V_{ADJ}$ ,  $I_{OUT} = 0\text{ mA}$ )

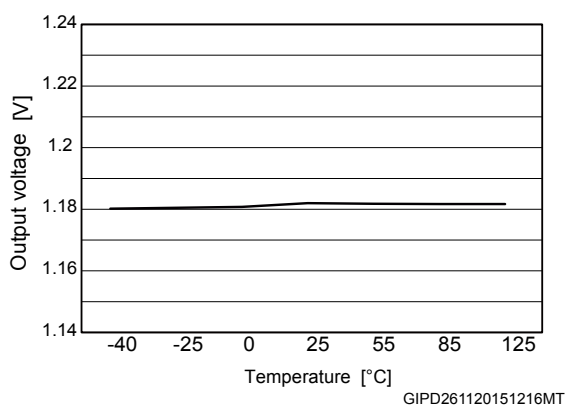


**Figure 7. Output voltage vs. temperature**  
( $V_{IN} = 2.5\text{ V}$ ,  $V_{OUT} = V_{ADJ}$ ,  $I_{OUT} = 1200\text{ mA}$ )

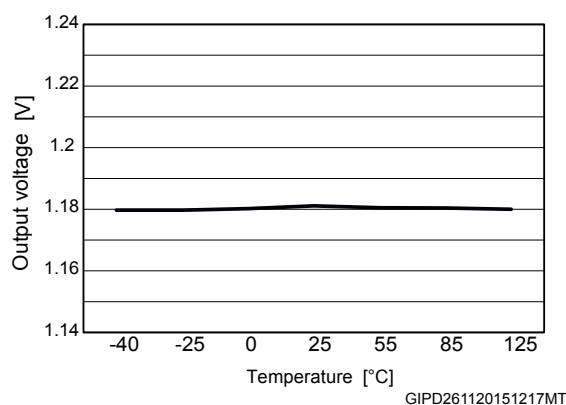

**Figure 8. Output voltage vs. temperature** ( $V_{IN} = 6\text{ V}$ ,  $V_{OUT} = 5\text{ V}$ ,  $I_{OUT} = 10\text{ mA}$ )

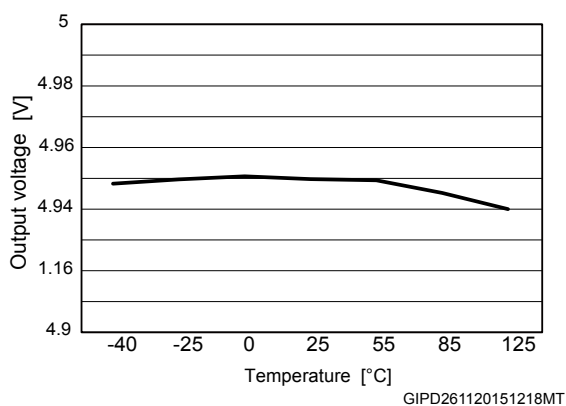


**Figure 9. Output voltage vs. temperature** ( $V_{IN} = 6\text{ V}$ ,  $V_{OUT} = 5\text{ V}$ ,  $I_{OUT} = 1200\text{ mA}$ )

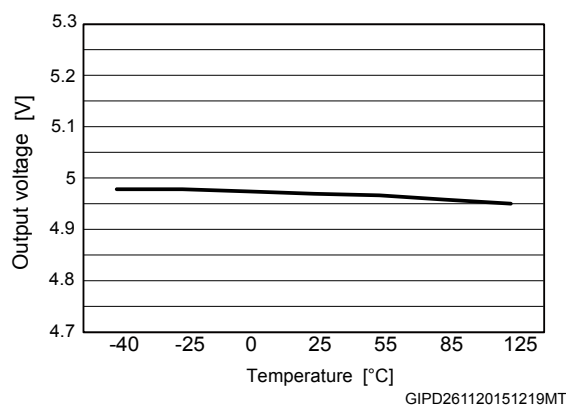





**Figure 10. Line regulation vs. temperature ( $V_{IN} = 6$  to 18 V,  $V_{OUT} = 5$  V,  $I_{OUT} = 10$  mA )**

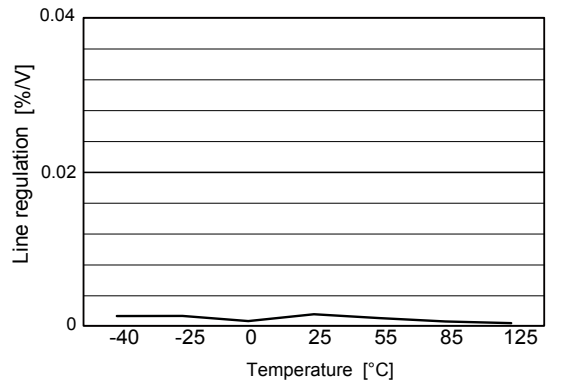


**Figure 11. Line regulation vs. temperature ( $V_{IN} = 2.5$  to 18 V,  $V_{OUT} = V_{ADJ}$ ,  $I_{OUT} = 10$  mA)**

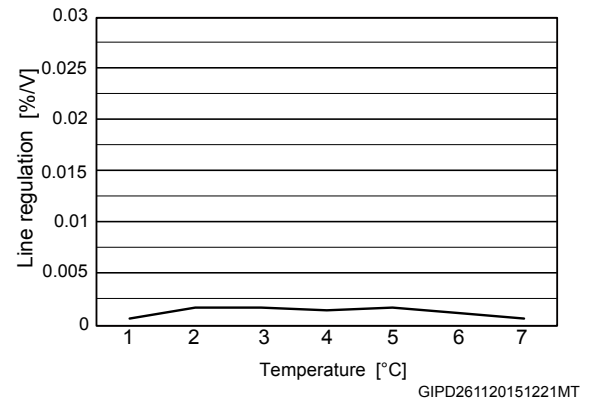


**Figure 12. Load regulation vs. temperature ( $V_{IN} = 6$  V,  $V_{OUT} = 5$  V,  $I_{OUT} = 10$  to 1200 mA )**

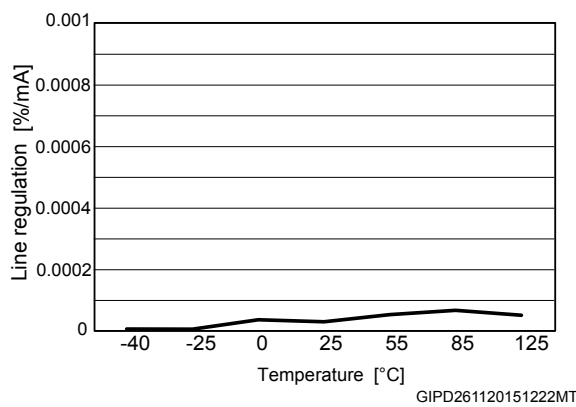


**Figure 13. Load regulation vs. temperature ( $V_{IN} = 2.5$  V,  $V_{OUT} = V_{ADJ}$ ,  $I_{OUT} = 0$  to 1200 mA)**

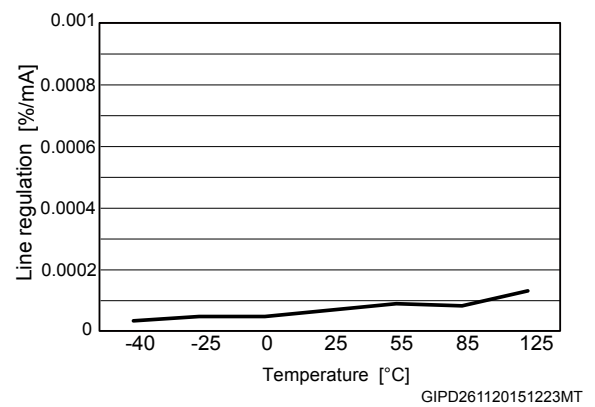


**Figure 14. Enable thresholds vs. temperature ( $V_{OUT} = V_{ADJ}$ )**

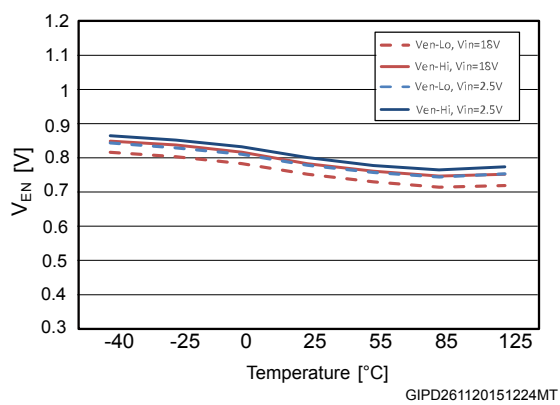


**Figure 15. Enable thresholds vs. temperature ( $V_{OUT} = 5$  V)**

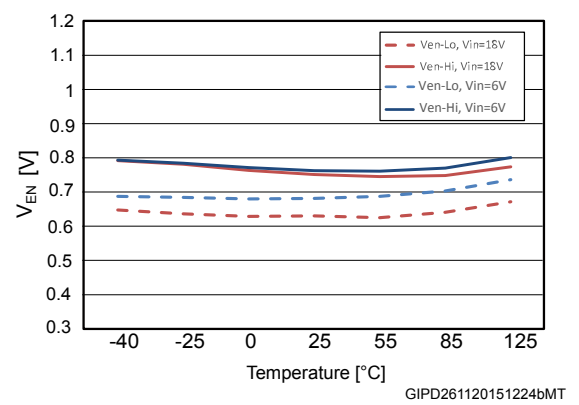


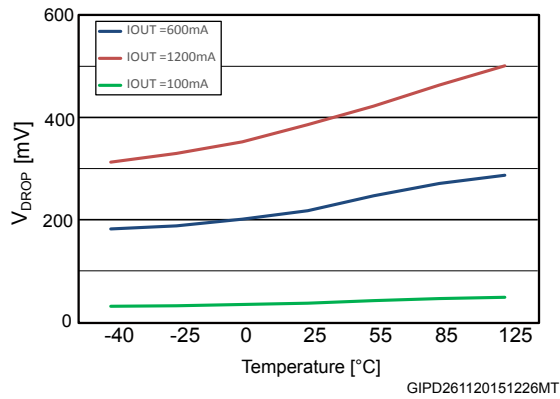**Figure 16. Dropout voltage vs. temperature**


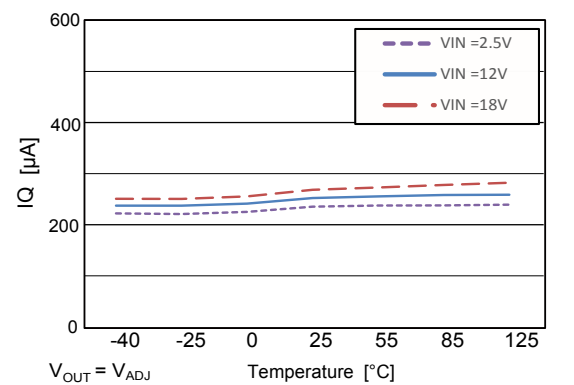
GIPD261120151226MT

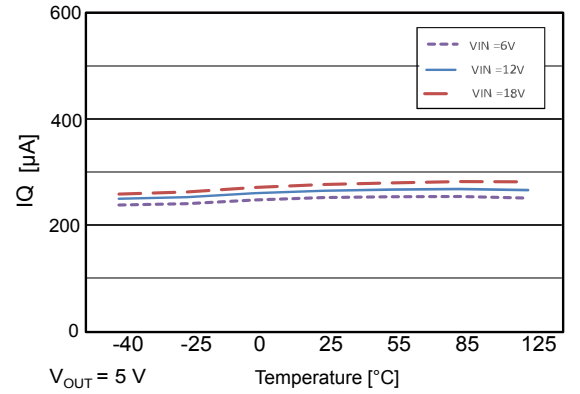**Figure 17. Quiescent current vs. temperature ( $V_{OUT} = 5\text{ V}$ ,  $I_{OUT} = 0\text{ mA}$ )**


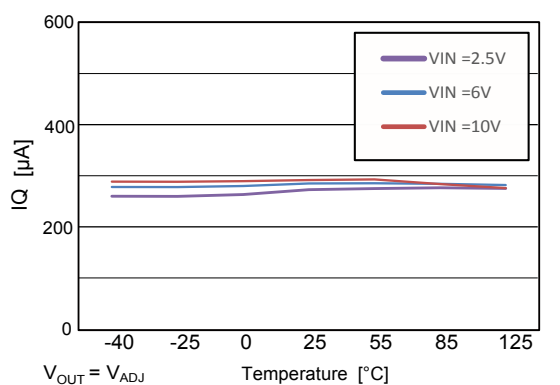
GIPD261120151226bMT

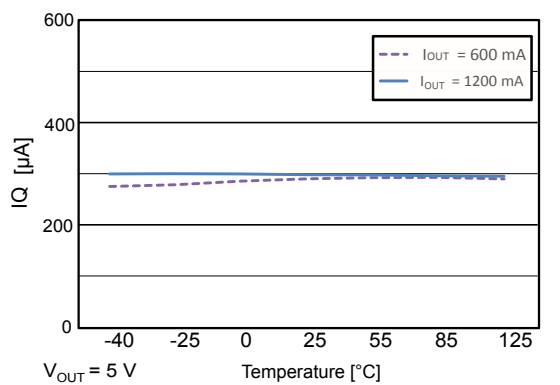**Figure 18. Quiescent current vs. temperature ( $V_{OUT} = 5\text{ V}$ ,  $I_{OUT} = 600\text{ mA}$ ,  $1.2\text{ A}$ )**


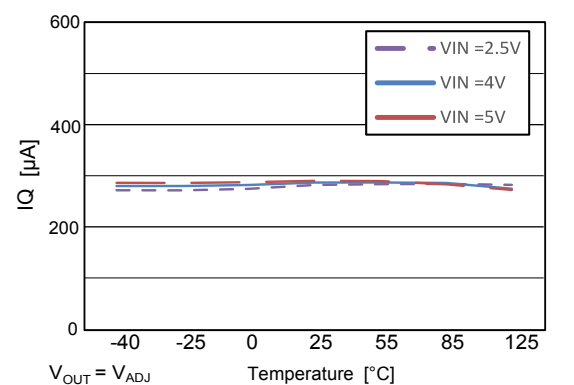
GIPD261120151227MT

**Figure 19. Quiescent current vs. temperature ( $V_{OUT} = V_{ADJ}$ ,  $I_{OUT} = 0\text{ mA}$ )**


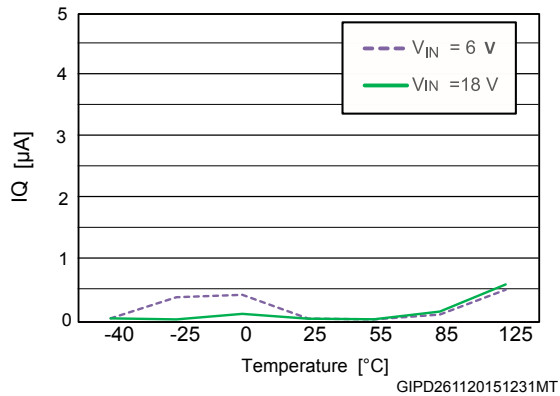
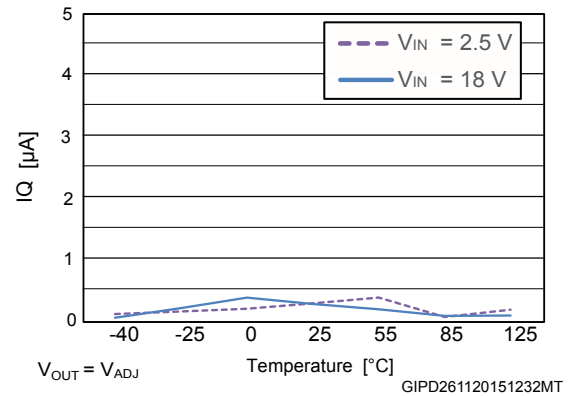
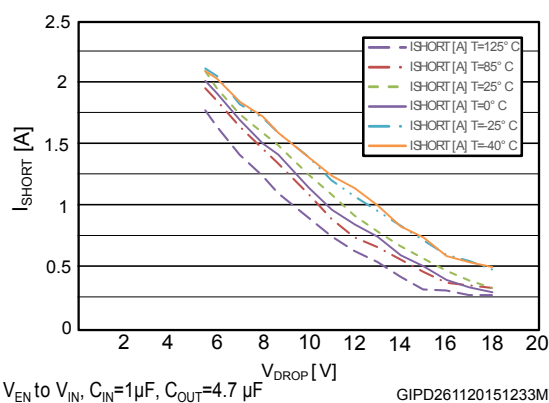
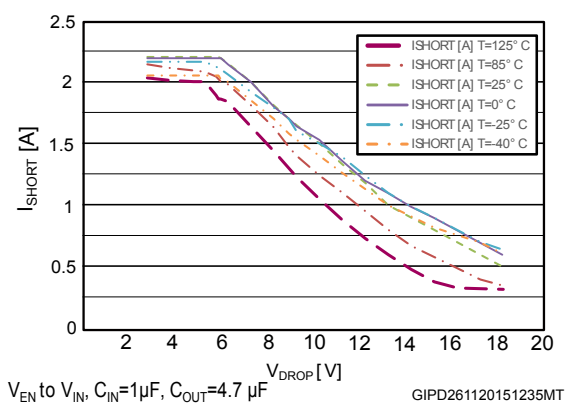
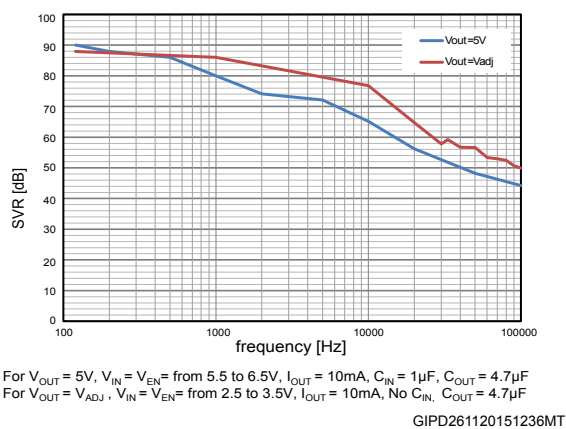
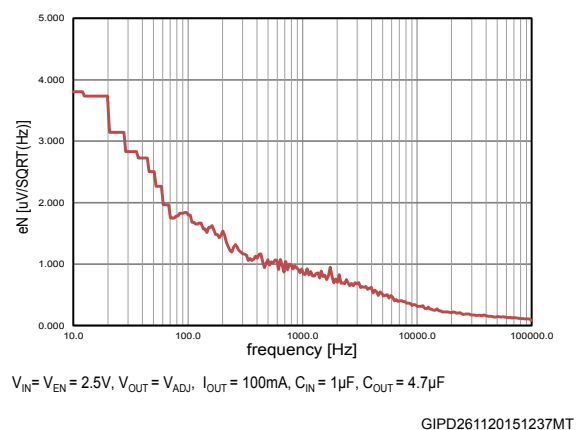
GIPD261120151228MT


**Figure 20. Quiescent current vs. temperature ( $V_{OUT} = V_{ADJ}$ ,  $I_{OUT} = 600\text{ mA}$ )**


GIPD261120151229MT


**Figure 21. Quiescent current vs. temperature ( $V_{OUT} = V_{ADJ}$ ,  $I_{OUT} = 1.2\text{ A}$ )**


GIPD261120151230MT


**Figure 22. Off-state current vs. temperature**  
 $(V_{OUT} = 5\text{ V})$ 

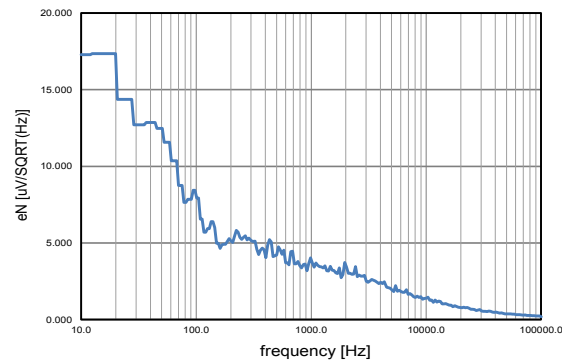**Figure 23. Off-state current vs. temperature**  
 $(V_{OUT} = V_{ADJ})$ 

**Figure 24. Short-circuit current vs. dropout voltage**  
 $(V_{OUT} = 5\text{ V})$ 

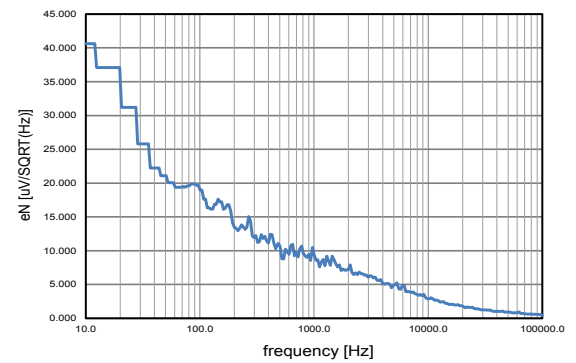**Figure 25. Short-circuit current vs. dropout voltage**  
 $(V_{OUT} = V_{ADJ})$ 

**Figure 26. SVR vs. frequency**

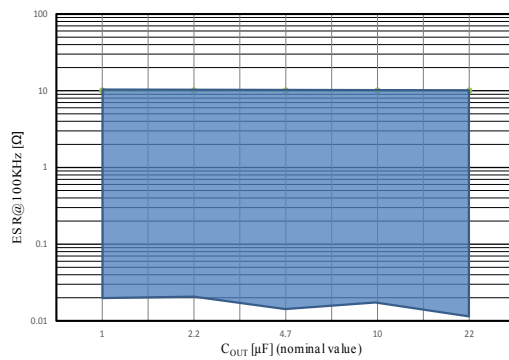**Figure 27. Output noise spectral density**  
 $(V_O = V_{ADJ})$ 


**Figure 28. Output noise spectral density ( $V_O = 5\text{ V}$ )**


$V_{IN} = V_{EN} = 6\text{ V}$ ,  $V_{OUT} = 5\text{ V}$ ,  $I_{OUT} = 100\text{ mA}$ ,  $C_{IN} = 1\text{ }\mu\text{F}$ ,  $C_{OUT} = 4.7\text{ }\mu\text{F}$   
GIPD261120151238MT


**Figure 29. Output noise spectral density ( $V_O = 12\text{ V}$ )**


$V_{IN} = V_{EN} = 6\text{ V}$ ,  $V_{OUT} = 5\text{ V}$ ,  $I_{OUT} = 100\text{ mA}$ ,  $C_{IN} = 1\text{ }\mu\text{F}$ ,  $C_{OUT} = 4.7\text{ }\mu\text{F}$   
GIPD261120151239MT

**Figure 30. Stability plan ( $V_{OUT} = 5\text{ V}$ )**


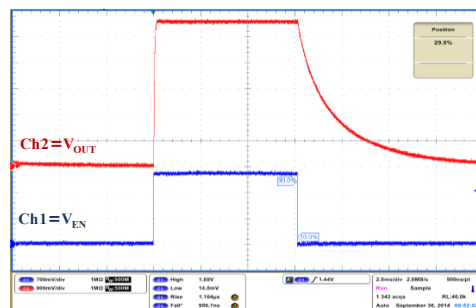
$V_{EN} = V_{IN} = \text{from } 6\text{ V to } 18\text{ V}$ ,  $I_{OUT} = \text{from } 10\text{ mA to } 1.2\text{ A}$   
(according to Max  $I_{OUT}$  vs  $V_{drop}$  characteristics),  $C_{IN} = 1\text{ }\mu\text{F}$

GIPD301120151004MT

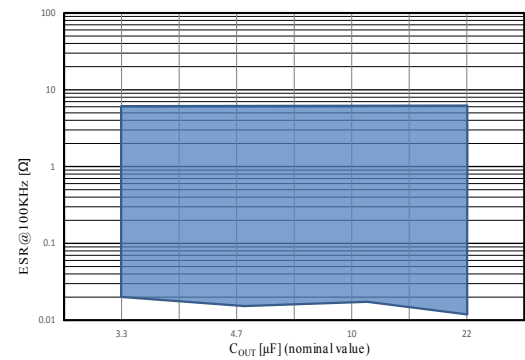**Figure 31. Stability plan ( $V_{OUT} = V_{ADJ}$ )**


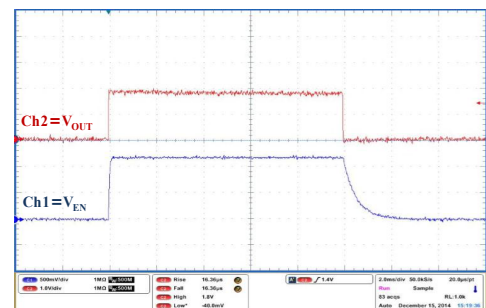
$V_{EN} = V_{IN} = \text{from } 2.5\text{ V to } 18\text{ V}$ ,  $I_{OUT} = \text{from } 10\text{ mA to } 1.2\text{ A}$   
(according to Max  $I_{OUT}$  vs  $V_{drop}$  characteristics),  $C_{IN} = 1\text{ }\mu\text{F}$

GIPD301120151005MT

**Figure 32. Startup with enable ( $V_{OUT} = 5\text{ V}$ )**


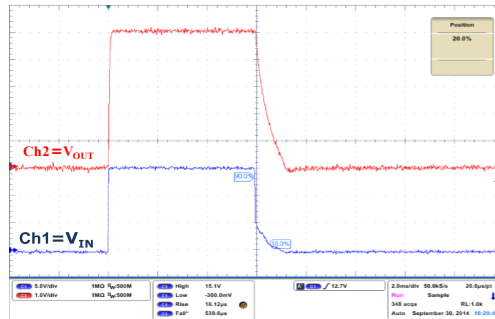
$V_{IN} = 15\text{ V}$ ,  $V_{EN}$  from 0 to 2 V,  $I_{OUT} = 10\text{ mA}$ ,  $C_{IN} = C_{OUT} = 1\text{ }\mu\text{F}$ ,  $T_{rise} = 1\text{ }\mu\text{s}$

GIPD301120151405MT


**Figure 33. Startup with enable ( $V_{OUT} = V_{ADJ}$ )**


$V_{IN} = 15\text{ V}$ ,  $V_{EN}$  from 0 to 2 V,  $I_{OUT} = 10\text{ mA}$ ,  $C_{IN} = C_{OUT} = 1\text{ }\mu\text{F}$ ,  $T_{rise} = 1\text{ }\mu\text{s}$


GIPD301120151406MT

**Figure 34. Turn-on time ( $V_{OUT} = 5\text{ V}$ )**

 $V_{EN} = V_{IN}$  = from 0 to 15 V,  $I_{OUT} = 10\text{ mA}$ ,  $C_{OUT} = 1\text{ }\mu\text{F}$ ,  $T_{rise} = 10\text{ }\mu\text{s}$ 

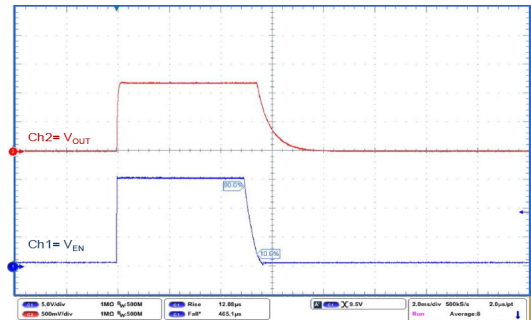
GIPD301120151407MT

**Figure 35. Turn-on time ( $V_{OUT} = V_{ADJ}$ )**

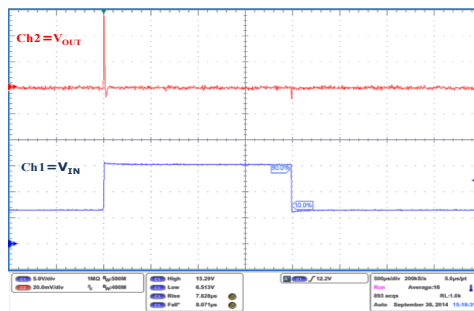 $V_{EN} = V_{IN}$  = from 0 to 15 V,  $I_{OUT} = 10\text{ mA}$ ,  $C_{IN} = 1\text{ }\mu\text{F}$ ,  $C_{OUT} = 4.7\text{ }\mu\text{F}$ ,  $t_{rise} = 10\text{ }\mu\text{s}$ 

GIPD301120151408MT

**Figure 36. Line transient ( $V_{OUT} = 5\text{ V}$ )**

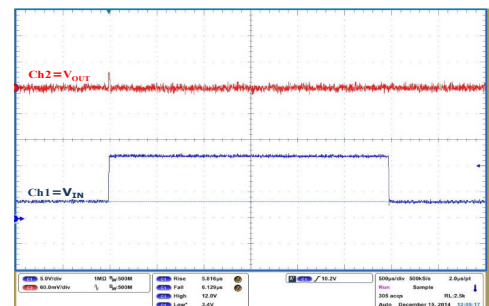 $V_{IN}$  = from 6 to 15 V,  $I_{OUT} = 10\text{ mA}$ ,  $C_{OUT} = 4.7\text{ }\mu\text{F}$ ,  $t_r = 5\text{ }\mu\text{s}$ 

GIPD301120151409MT


**Figure 37. Line transient ( $V_{OUT} = V_{ADJ}$ )**

 $V_{IN}$  = from 3.5 to 15 V,  $I_{OUT} = 10\text{ mA}$ , NO  $C_{IN}$ ,  $C_{OUT} = 4.7\text{ }\mu\text{F}$ ,  $t_r = 5\text{ }\mu\text{s}$ 

GIPD301120151410MT

**Figure 38. Load transient ( $V_{OUT} = 5\text{ V}$ )**

 $V_{EN}$  to  $V_{CC}$ ,  $V_{IN} = 6\text{ V}$ ,  $I_{OUT}$  = from 10 mA to 1.2 A,  $C_{IN} = 1\text{ }\mu\text{F}$ ,  $C_{OUT} = 4.7\text{ }\mu\text{F}$ ,  $T_{rise} = 5\text{ }\mu\text{s}$ 

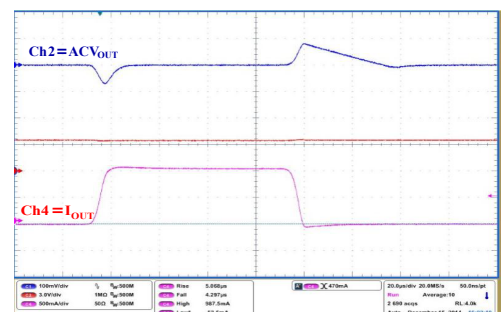GIPD301120151411MT

**Figure 39. Load transient ( $V_{OUT} = V_{ADJ}$ )**

 $V_{EN}$  to  $V_{CC}$ ,  $V_{IN} = 3.5\text{ V}$ ,  $I_{OUT}$  = from 10 mA to 1.2 A,  $C_{IN} = 1\text{ }\mu\text{F}$ ,  $C_{OUT} = 4.7\text{ }\mu\text{F}$ ,  $T_{rise} = 5\text{ }\mu\text{s}$ 


GIPD301120151412MT

## 7 Package information

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

### 7.1 DFN6 (3x3) package information

Figure 40. DFN6 (3x3) package outline

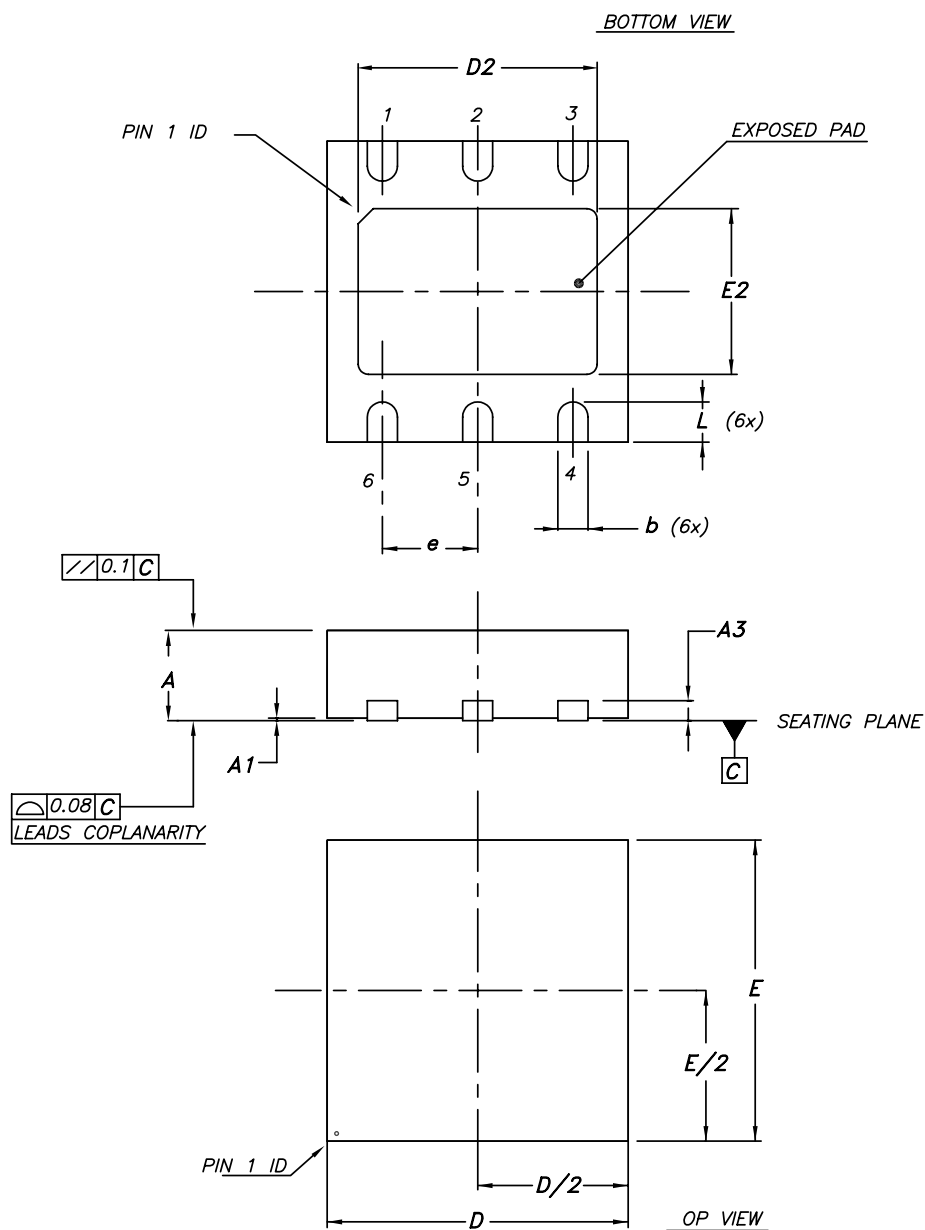


7946637\_C

**Table 5. DFN6 (3x3) mechanical data**

| Dim. | mm   |      |      |
|------|------|------|------|
|      | Min. | Typ. | Max. |
| A    | 0.80 |      | 1    |
| A1   | 0    | 0.02 | 0.05 |
| A3   |      | 0.20 |      |
| b    | 0.23 |      | 0.45 |
| D    | 2.90 | 3    | 3.10 |
| D2   | 2.23 |      | 2.50 |
| E    | 2.90 | 3    | 3.10 |
| E2   | 1.50 |      | 1.75 |
| e    |      | 0.95 |      |
| L    | 0.30 | 0.40 | 0.50 |

**Figure 41. DFN6 (3x3) recommended footprint**


*FOOTPRINT RECOMMENDED*

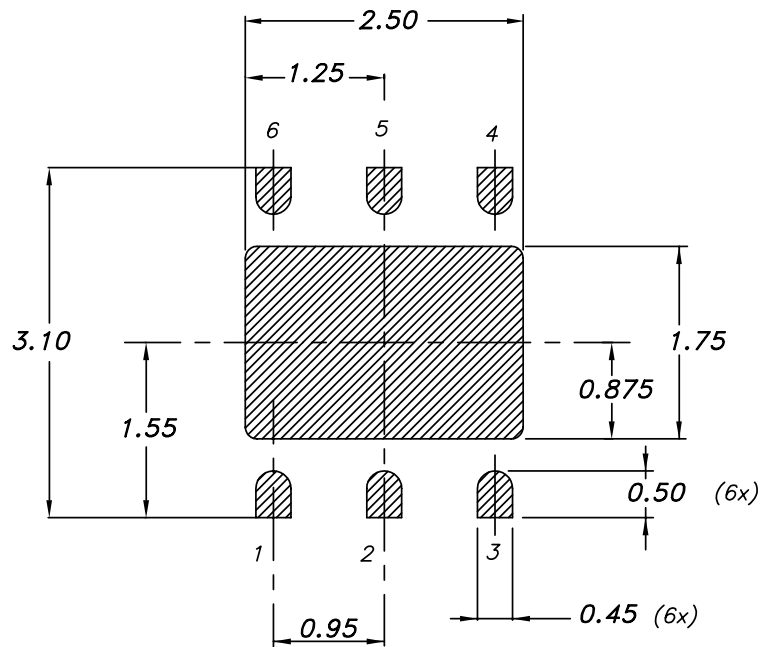

7946637\_C

## 7.2

**Figure 42. DFN6 (3x3) tape outline**

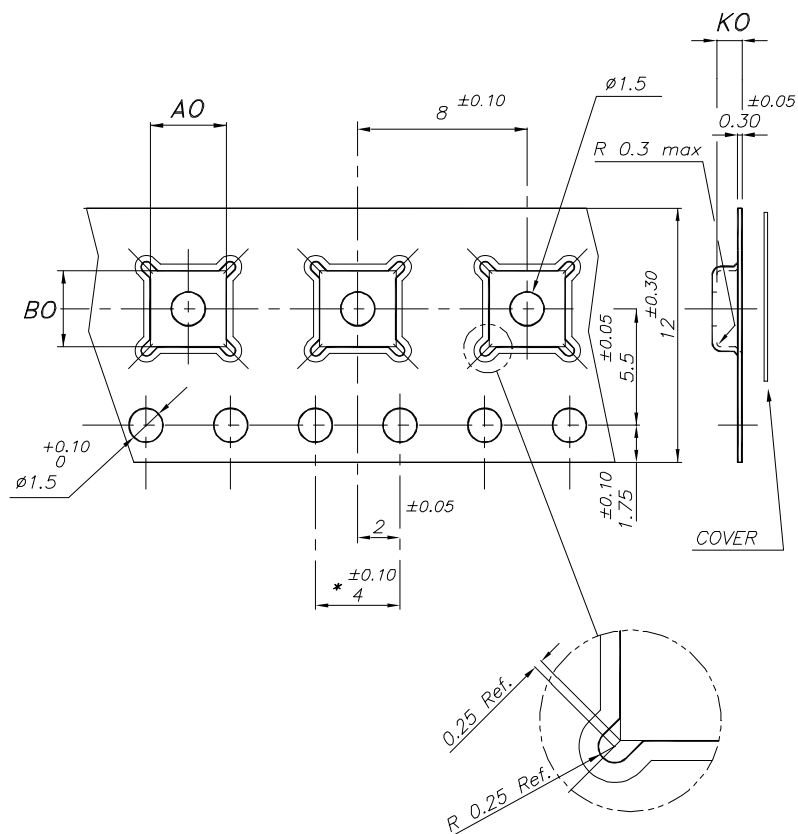


\*  
- 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.20$

7875978\_N



Figure 43. DFN6 (3x3) reel outline

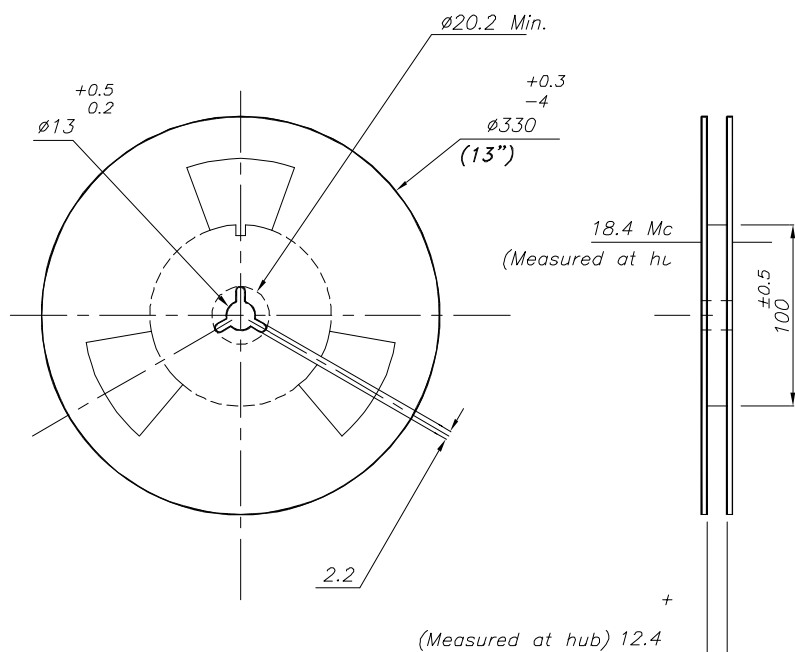


7875978\_N

Table 6. DFN6 (3x3) tape and reel mechanical data

| Dim. | mm   |      |      |
|------|------|------|------|
|      | Min. | Typ. | Max. |
| A0   | 3.20 | 3.30 | 3.40 |
| B0   | 3.20 | 3.30 | 3.40 |
| K0   | 1    | 1.10 | 1.20 |

## 7.3 DFN6 (2x2) package information

**Figure 44. DFN6 (2x2) package outline**

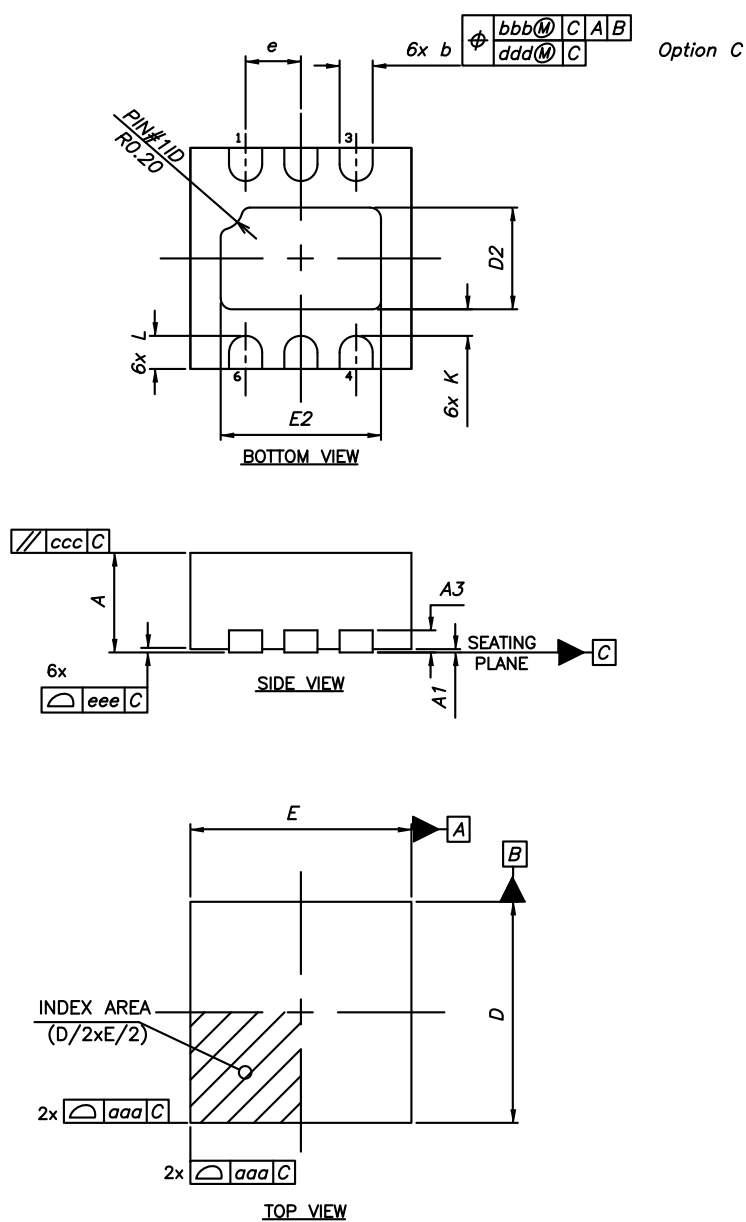


7733060

Table 7. DFN6 (2x2) mechanical data

| Dim. | mm   |           |      |
|------|------|-----------|------|
|      | Min. | Typ.      | Max. |
| A    | 0.70 | 0.75      | 0.80 |
| A1   | 0.00 | 0.02      | 0.05 |
| A3   | -    | 0.203 ref | -    |
| b    | 0.25 | 0.30      | 0.35 |
| D    | -    | 2.00      | -    |
| E    | -    | 2.00      | -    |
| e    | -    | 0.50      | -    |
| D2   | 0.77 | 0.92      | 1.02 |
| E2   | 1.30 | 1.45      | 1.55 |
| K    | 0.15 | -         | -    |
| L    | 0.20 | 0.30      | 0.40 |
| aaa  | -    | 0.05      | -    |
| bbb  | -    | 0.10      | -    |
| ccc  | -    | 0.10      | -    |
| ddd  | -    | 0.05      | -    |
| eee  | -    | 0.08      | -    |

Figure 45. DFN6 (2x2) recommended footprint

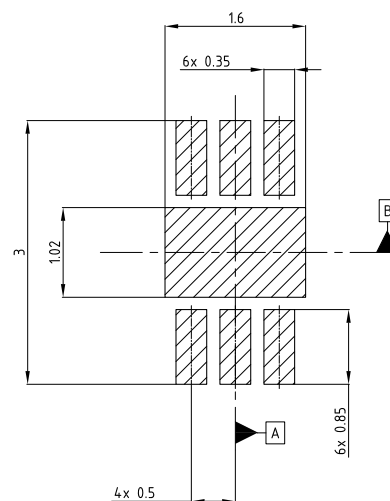


Notes:

- 1) This footprint is able to ensure insulation up to 32 Vrms (according to CEI IEC 664-1)
- 2) The device must be positioned within  $\oplus 0.02$  A B

7733060 revE

## 7.4 DFN6 (2x2) packing information

Figure 46. DFN6 (2 x 2 mm) reel outline

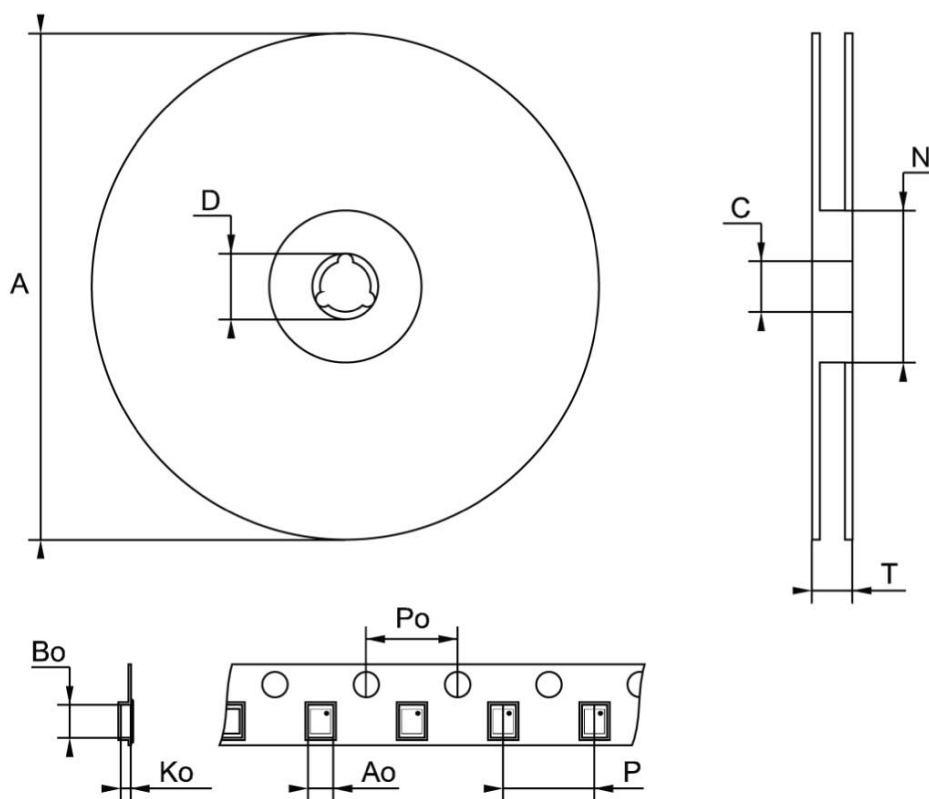


Note: Drawing not in scale

Table 8. DFN6 (2 x 2 mm) tape and reel mechanical data

| Dim. | mm   |      |      |
|------|------|------|------|
|      | Min. | Typ. | Max. |
| A    |      |      | 180  |
| C    | 12.8 |      | 13.2 |
| D    | 20.2 |      |      |
| N    | 60   |      |      |
| T    |      |      | 14.4 |
| A0   |      | 2.4  |      |
| B0   |      | 2.4  |      |
| K0   |      | 1.3  |      |
| P0   |      | 4    |      |
| P    |      | 4    |      |

## 7.5 SO8 package information

Figure 47. SO-8 batwing package outline

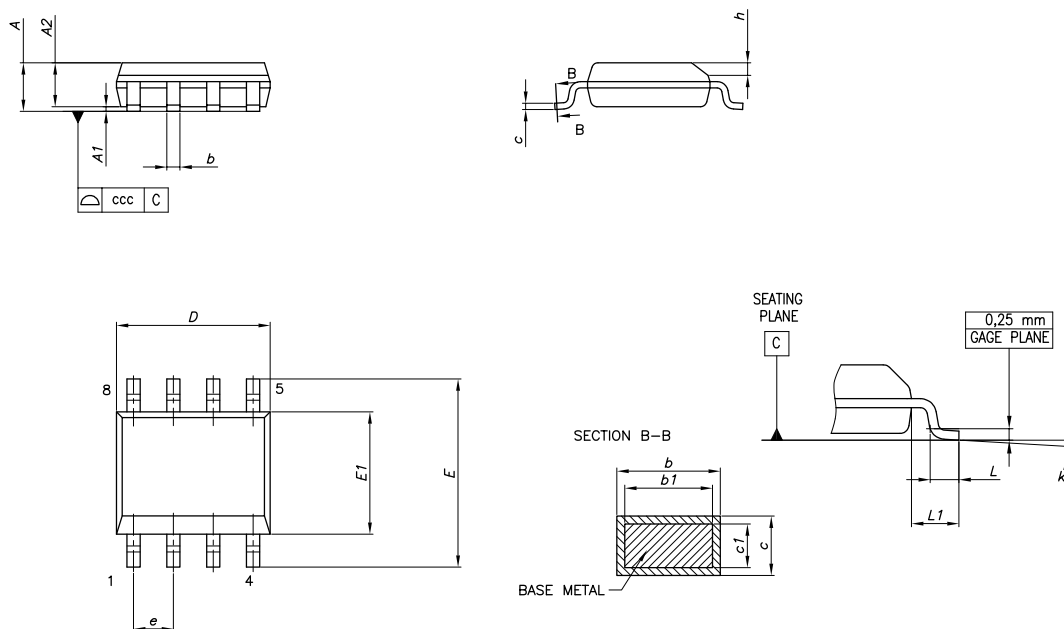


0016023\_G

Table 9. SO-8 batwing mechanical data

| Dim. | mm   |      |      |
|------|------|------|------|
|      | Min. | Typ. | Max. |
| A    |      |      | 1.75 |
| A1   | 0.10 |      | 0.25 |
| A2   | 1.25 |      |      |
| b    | 0.31 |      | 0.51 |
| b1   | 0.28 |      | 0.48 |
| c    | 0.10 |      | 0.25 |
| c1   | 0.10 |      | 0.23 |
| D    | 4.80 | 4.90 | 5.00 |
| E    | 5.80 | 6.00 | 6.20 |
| E1   | 3.80 | 3.90 | 4.00 |
| e    |      | 1.27 |      |
| h    | 0.25 |      | 0.50 |
| L    | 0.40 |      | 1.27 |
| L1   |      | 1.04 |      |
| L2   |      | 0.25 |      |
| k    | 0°   |      | 8°   |
| ccc  |      |      | 0.10 |

Figure 48. SO-8 batwing recommended footprint

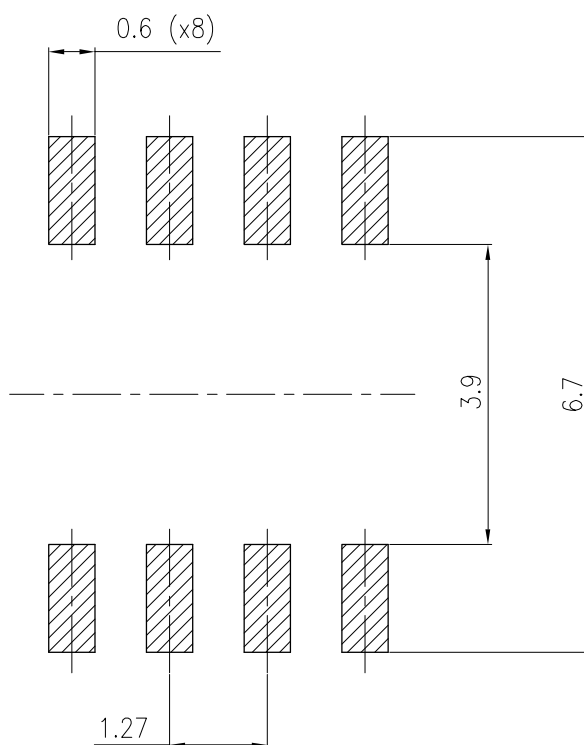

0016023\_GU

## 8 Ordering information

**Table 10. Order code**

| DFN6 (3x3)                 | DFN6 (2x2)  | SO-8 batwing plastic micropackage | Output voltage (V) |
|----------------------------|-------------|-----------------------------------|--------------------|
| LDL212PU12R <sup>(1)</sup> |             |                                   | 1.2                |
| LDL212PU15R                |             |                                   | 1.5                |
| LDL212PU18R <sup>(1)</sup> |             |                                   | 1.8                |
| LDL212PU25R <sup>(1)</sup> |             |                                   | 2.5                |
| LDL212PU30R <sup>(1)</sup> |             |                                   | 3                  |
|                            | LDL212PV33R | LDL212D33R                        | 3.3                |
| LDL212PU50R                |             |                                   | 5                  |
| LDL212PUR                  | LDL212PVR   | LDL212DR                          | Adjustable         |

1. Available on request.

## Revision history

**Table 11. Document revision history**

| Date        | Revision | Changes                                                                                                                    |
|-------------|----------|----------------------------------------------------------------------------------------------------------------------------|
| 02-Mar-2016 | 1        | Initial release.                                                                                                           |
| 19-Sep-2016 | 2        | Updated Table 3: "Thermal data" and Section 5: "Electrical characteristics".<br>Minor text changes.                        |
| 17-Sep-2018 | 3        | Added: GND pin name in Table 1. Pin description and new order code LDL212D33R in Table 10. Order code.                     |
| 16-Apr-2019 | 4        | In Table 10. Order code, in LDL2012D33R the note has been removed.<br>Updated GND description in Table 1. Pin description. |
| 21-Feb-2020 | 5        | Added dropout voltage for SO-8 in <a href="#">Table 4. Electrical characteristics</a> .                                    |



## Contents

|          |                                            |           |
|----------|--------------------------------------------|-----------|
| <b>1</b> | <b>Block diagram</b>                       | <b>2</b>  |
| <b>2</b> | <b>Pin configuration</b>                   | <b>3</b>  |
| <b>3</b> | <b>Typical application</b>                 | <b>4</b>  |
| <b>4</b> | <b>Maximum ratings</b>                     | <b>5</b>  |
| <b>5</b> | <b>Electrical characteristics</b>          | <b>6</b>  |
| <b>6</b> | <b>Typical performance characteristics</b> | <b>8</b>  |
| <b>7</b> | <b>Package information</b>                 | <b>14</b> |
| 7.1      | DFN6 (3x3) package information             | 14        |
| 7.2      | DFN6 (3x3) packing information             | 16        |
| 7.3      | DFN6 (2x2) package information             | 18        |
| 7.4      | DFN6 (2x2) packing information             | 20        |
| 7.5      | SO8-batwing package information            | 21        |
| 7.6      | SO8-batwing packing information            | 0         |
| <b>8</b> | <b>Ordering information</b>                | <b>23</b> |
|          | <b>Revision history</b>                    | <b>24</b> |
|          | <b>Contents</b>                            | <b>25</b> |
|          | <b>List of tables</b>                      | <b>26</b> |
|          | <b>List of figures</b>                     | <b>27</b> |

## List of tables

|                  |                                                         |    |
|------------------|---------------------------------------------------------|----|
| <b>Table 1.</b>  | Pin description . . . . .                               | 3  |
| <b>Table 2.</b>  | Absolute maximum ratings . . . . .                      | 5  |
| <b>Table 3.</b>  | Thermal data . . . . .                                  | 5  |
| <b>Table 4.</b>  | Electrical characteristics . . . . .                    | 6  |
| <b>Table 5.</b>  | DFN6 (3x3) mechanical data . . . . .                    | 15 |
| <b>Table 6.</b>  | DFN6 (3x3) tape and reel mechanical data . . . . .      | 17 |
| <b>Table 7.</b>  | DFN6 (2x2) mechanical data . . . . .                    | 19 |
| <b>Table 8.</b>  | DFN6 (2 x 2 mm) tape and reel mechanical data . . . . . | 20 |
| <b>Table 9.</b>  | SO-8 batwing mechanical data . . . . .                  | 21 |
| <b>Table 10.</b> | Order code . . . . .                                    | 23 |
| <b>Table 11.</b> | Document revision history . . . . .                     | 24 |

## List of figures

|            |                                                                                                                              |    |
|------------|------------------------------------------------------------------------------------------------------------------------------|----|
| Figure 1.  | Block diagram (fixed).                                                                                                       | 2  |
| Figure 2.  | Block diagram (adjustable).                                                                                                  | 2  |
| Figure 3.  | Pin configuration (top view)                                                                                                 | 3  |
| Figure 4.  | Typical application circuit (adjustable version).                                                                            | 4  |
| Figure 5.  | Typical application circuit (fixed version).                                                                                 | 4  |
| Figure 6.  | Output voltage vs. temperature ( $V_{IN} = 2.5\text{ V}$ , $V_{OUT} = V_{ADJ}$ , $I_{OUT} = 0\text{ mA}$ )                   | 8  |
| Figure 7.  | Output voltage vs. temperature ( $V_{IN} = 2.5\text{ V}$ , $V_{OUT} = V_{ADJ}$ , $I_{OUT} = 1200\text{ mA}$ )                | 8  |
| Figure 8.  | Output voltage vs. temperature ( $V_{IN} = 6\text{ V}$ , $V_{OUT} = 5\text{ V}$ , $I_{OUT} = 10\text{ mA}$ )                 | 8  |
| Figure 9.  | Output voltage vs. temperature ( $V_{IN} = 6\text{ V}$ , $V_{OUT} = 5\text{ V}$ , $I_{OUT} = 1200\text{ mA}$ )               | 8  |
| Figure 10. | Line regulation vs. temperature ( $V_{IN} = 6\text{ to }18\text{ V}$ , $V_{OUT} = 5\text{ V}$ , $I_{OUT} = 10\text{ mA}$ )   | 9  |
| Figure 11. | Line regulation vs. temperature ( $V_{IN} = 2.5\text{ to }18\text{ V}$ , $V_{OUT} = V_{ADJ}$ , $I_{OUT} = 10\text{ mA}$ )    | 9  |
| Figure 12. | Load regulation vs. temperature ( $V_{IN} = 6\text{ V}$ , $V_{OUT} = 5\text{ V}$ , $I_{OUT} = 10\text{ to }1200\text{ mA}$ ) | 9  |
| Figure 13. | Load regulation vs. temperature ( $V_{IN} = 2.5\text{ V}$ , $V_{OUT} = V_{ADJ}$ , $I_{OUT} = 0\text{ to }1200\text{ mA}$ )   | 9  |
| Figure 14. | Enable thresholds vs. temperature ( $V_{OUT} = V_{ADJ}$ )                                                                    | 9  |
| Figure 15. | Enable thresholds vs. temperature ( $V_{OUT} = 5\text{ V}$ )                                                                 | 9  |
| Figure 16. | Dropout voltage vs. temperature                                                                                              | 10 |
| Figure 17. | Quiescent current vs. temperature ( $V_{OUT} = 5\text{ V}$ , $I_{OUT} = 0\text{ mA}$ )                                       | 10 |
| Figure 18. | Quiescent current vs. temperature ( $V_{OUT} = 5\text{ V}$ , $I_{OUT} = 600\text{ mA}$ , $1.2\text{ A}$ )                    | 10 |
| Figure 19. | Quiescent current vs. temperature ( $V_{OUT} = V_{ADJ}$ , $I_{OUT} = 0\text{ mA}$ )                                          | 10 |
| Figure 20. | Quiescent current vs. temperature ( $V_{OUT} = V_{ADJ}$ , $I_{OUT} = 600\text{ mA}$ )                                        | 10 |
| Figure 21. | Quiescent current vs. temperature ( $V_{OUT} = V_{ADJ}$ , $I_{OUT} = 1.2\text{ A}$ )                                         | 10 |
| Figure 22. | Off-state current vs. temperature ( $V_{OUT} = 5\text{ V}$ )                                                                 | 11 |
| Figure 23. | Off-state current vs. temperature ( $V_{OUT} = V_{ADJ}$ )                                                                    | 11 |
| Figure 24. | Short-circuit current vs. dropout voltage ( $V_{OUT} = 5\text{ V}$ )                                                         | 11 |
| Figure 25. | Short-circuit current vs. dropout voltage ( $V_{OUT} = V_{ADJ}$ )                                                            | 11 |
| Figure 26. | SVR vs. frequency                                                                                                            | 11 |
| Figure 27. | Output noise spectral density ( $V_O = V_{ADJ}$ )                                                                            | 11 |
| Figure 28. | Output noise spectral density ( $V_O = 5\text{ V}$ )                                                                         | 12 |
| Figure 29. | Output noise spectral density ( $V_O = 12\text{ V}$ )                                                                        | 12 |
| Figure 30. | Stability plan ( $V_{OUT} = 5\text{ V}$ )                                                                                    | 12 |
| Figure 31. | Stability plan ( $V_{OUT} = V_{ADJ}$ )                                                                                       | 12 |
| Figure 32. | Startup with enable ( $V_{OUT} = 5\text{ V}$ )                                                                               | 12 |
| Figure 33. | Startup with enable ( $V_{OUT} = V_{ADJ}$ )                                                                                  | 12 |
| Figure 34. | Turn-on time ( $V_{OUT} = 5\text{ V}$ )                                                                                      | 13 |
| Figure 35. | Turn-on time ( $V_{OUT} = V_{ADJ}$ )                                                                                         | 13 |
| Figure 36. | Line transient ( $V_{OUT} = 5\text{ V}$ )                                                                                    | 13 |
| Figure 37. | Line transient ( $V_{OUT} = V_{ADJ}$ )                                                                                       | 13 |
| Figure 38. | Load transient ( $V_{OUT} = 5\text{ V}$ )                                                                                    | 13 |
| Figure 39. | Load transient ( $V_{OUT} = V_{ADJ}$ )                                                                                       | 13 |
| Figure 40. | DFN6 (3x3) package outline                                                                                                   | 14 |
| Figure 41. | DFN6 (3x3) recommended footprint                                                                                             | 15 |
| Figure 42. | DFN6 (3x3) tape outline                                                                                                      | 16 |
| Figure 43. | DFN6 (3x3) reel outline                                                                                                      | 17 |
| Figure 44. | DFN6 (2x2) package outline                                                                                                   | 18 |
| Figure 45. | DFN6 (2x2) recommended footprint                                                                                             | 19 |
| Figure 46. | DFN6 (2 x 2 mm) reel outline                                                                                                 | 20 |
| Figure 47. | SO-8 batwing package outline                                                                                                 | 21 |
| Figure 48. | SO-8 batwing recommended footprint                                                                                           | 22 |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2020 STMicroelectronics – All rights reserved



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.