

COOPER

**Bussmann®**



# Consumer Aftermarket Product Catalog

Fuse Holders and Taps

**COOPER** Bussmann

## Fuse Holders & Taps

Cooper Bussmann offers a complete line of fuse holders to install either blade-type or glass tube fuses. Choose water resistant and/or splash-proof versions for extra protection in special applications. Four types of connectors are available to meet the needs of technicians and do-it-yourselfers:

- **Wire Loop.** To install, simply cut the wire, strip ends and attach each end to the circuit. Requires the use of additional connectors.
- **Crimp-On.** Strip wire and insert into fuse holder. Crimp the connections tightly, and you're done. No additional hardware needed.

- **Self-Stripping.** Easy to install — simply locate fuse holder at a convenient spot along the wire. Snap fuse holder closed around wire to pierce insulation automatically.
- **Quick-Connect.** Attach fully insulated female push-on terminal onto the 1/4" quick-connect terminals.


When selecting a fuse holder, always match the device to the wire being fused. Using an undersized fuse holder will increase electrical resistance in the circuit and reduce performance. NOTE: Never install a fuse with a larger amp rating than specified for the holder.

### Blade-Type Fuse Holders

#### In-Line Fuse Holders for ATM Fuses

| Part No.  | Blister Pack | Tri-Lingual Blister | Maximum Volts/Amps | Leadwire | Description            |
|-----------|--------------|---------------------|--------------------|----------|------------------------|
| HHL       | X            |                     | 32V/20A            | 2x4"/#16 | Holder with cover      |
| HHM       | X            | X                   | 32V/30A            | 2x4"/#12 | Holder with cover      |
| HHU       | X            |                     | 32V/30A            | 2x4"/#12 | Water-resistant holder |
| ATM-FHID* |              | X                   | 32V/20A            | 2x4"/#16 | Illuminating holder    |


\* For use with regular ATM fuses. For details on the easyD™ line of illuminating ATM blade fuses, see page 9.

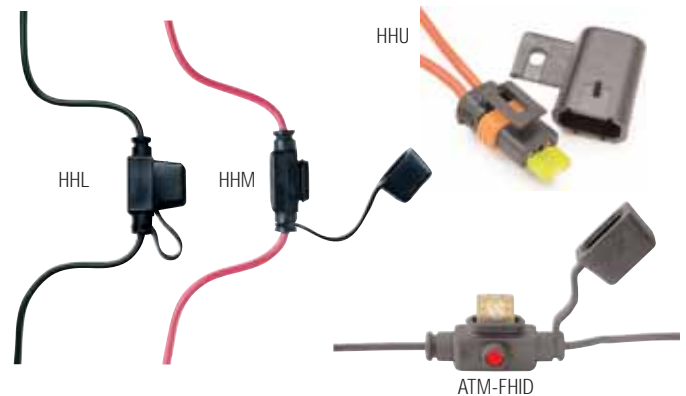

#### In-Line Fuse Holders for ATC Fuses

| Part No.  | Blister Pack | Tri-Lingual Blister | Maximum Volts/Amps | Leadwire   | Description                       |
|-----------|--------------|---------------------|--------------------|------------|-----------------------------------|
| HHC       | X            | X                   | 32V/20A            | 2x4"/#16   | Yellow water-resistant holder     |
| HHD       | X            | X                   | 32V/30A            | 2x4"/#12   | Heavy-duty fuse holder            |
| HHD-30    | X            |                     | 32V/30A            | 2x4"/#12   | Holder with ATC-30A fuse          |
| HHF       | X            |                     | 32V/20A            | 2x4"/#16   | Holder with protective cover      |
| HHG       | X            | X                   | 32V/30A            | 2x4"/#12   | Heavy-duty holder with cover      |
| HHR       | X            |                     | 32V/30A            | 2x5"/#12   | Heavy-duty water-resistant holder |
| HHS       | X            |                     | 32V/20A            | #18 to #14 | Self-stripping fuse holder        |
| ATC-FHID* |              | X                   | 32V/20A            | 2x6"/#16   | Illuminating holder               |

\* For use with regular ATC fuses. For details on the easyD™ line of illuminating ATC blade fuses, see page 9.

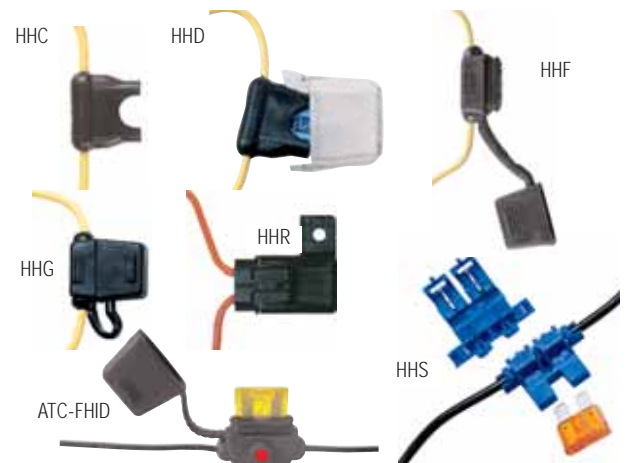

#### In-Line Fuse Holders for Maxi Fuses

| Part No. | Volts/Amps | Leadwire | Description            |
|----------|------------|----------|------------------------|
| HHX      | 32V/20-60A | 2x5"/#6  | Fuse holder with cover |




## Fuse Holders & Taps

### Fuse Taps For ATM and ATC Fuses


Tap into an existing circuit to power a mobile phone, stereo components, etc. with Cooper Bussmann fuse tap accessories.

| Part No.   | Description  |
|------------|--|
| BP/ATM-TAP | 5-Count: Taps into existing ATM fuse for additional non-fused circuit, includes crimp-on connector that attaches easily to the power lead for electronic gear. |
| BP/ATC-TAP | 5-Count: Taps into existing ATC fuse by fitting over the leg for additional non-fused circuit, includes crimp-on connector.                                    |
| BP/HHH     | Converts ATM fuse circuit into two fusible circuits. Inserts into ATM fuse block, added circuit 10A max.   |
| BP/HHA     | Converts an ATC fuse circuit into two fusible circuits. Inserts into ATC fuse block, added circuit 10A max.  |

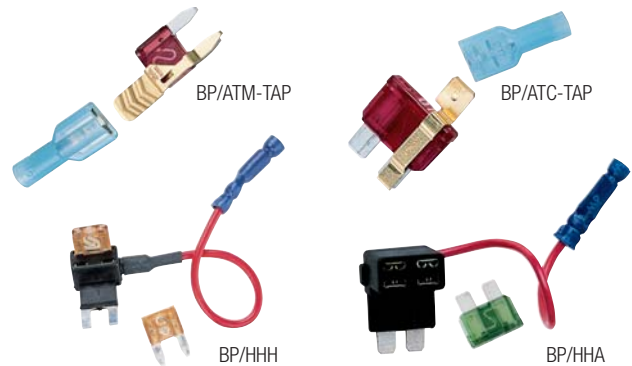

### Glass Tube In-Line Holders For 1/4" Diameter Fuses

| Part No. | Blister Pack | Tri-Lingual | Fuse/Size                      | Ratings Volts/Amps | Leads/Terminals        | Description Feature  |
|----------|--------------|-------------|--------------------------------|--------------------|------------------------|--|
| HFA      |              |             | 1/4" x 1 1/4"                  | 250V/20A           | Crimp #12 to 16 wire   | Water-resistant-black body   |
| HFB      | X            | X           | 1/4" x 1 1/4"                  | 32V/30A            | Crimp #12 to 18 wire   | Water-resistant-yellow body  |
| HHB      | X            | X           | 1/4" x 7/8" to 1 1/4"          | 32V/30A            | Crimp #12 to 16 wire   | Universal-yellow body  |
| HHK      | X            | X           | 1/4" x 5/8" to 1 1/4" & SFE-20 | 32V/20A            | #14 leadwire/yellow    | Universal nylon, twist lock, no fuse-black body                                  |
| HHN      | X            |             | 1/4" x 1 1/4"                  | 32V/30A            | #12 leadwire/yellow    | Nylon heavy-duty w/ AGC-30 fuse-white body                                       |
| HMJ      | X            | X           | For SFE-20 (included)          | 32V/20A            | 8" of #14 leadwire/bk  | With fuse and wire loop leads-black body   |
| HMK      | X            | X           | 1/4" x 1 1/4" & SFE-20         | 32V/30A            | #12 leadwire/bk        | No fuse, wire loop leads-black body  |
| HRH      |              |             | For SFE-9 (included)           | 32V/9A             | 19" of #14 leadwire    | With fuse and wire loop leads-black body   |
| HRI      |              |             | For SFE-14 (included)          | 32V/14A            | 19" of #14 leadwire/bk | With fuse and wire loop leads-gray body  |
| HRJ      |              |             | For SFE-20 (included)          | 32V/20A            | 19" of #14 leadwire/bk | With fuse and wire loop leads-black body   |
| HRK      | X            | X           | 1/4" dia. x 7/8" to 1 1/4"     | 32V/15A            | #14 leadwire/bk        | Universal with wire loop leads and springs for different fuse lengths-black body |



### Panel-Mount Holders For 1/4" x 1 1/4" Fuses

| Part No. | Blister Pack | Max. Panel Thickness | Knob Type           | Description/Mounting                      | Terminals                                | Ratings Volts/Amps |
|----------|--------------|----------------------|---------------------|---|--|--------------------|
| HKP      | X            | 0.3"                 | Knob                | High-profile cover knob, rear hexnut      | Solder terminals                         | 250V/30A           |
| HKP-HH   | X            | 0.3"                 | Knob                | High-profile cover knob, rear hexnut      | 1/4" quick-connect terminals             | 250V/15A           |
| HTB-26I  |              | 0.3"                 | Knob                | Low-profile cover knob, rear hexnut       | In-line 1/4" quick-connect terminals     | 250V/20A           |
| HTB-38I  |              | 0.3"                 | Screwdriver/slotted | Low-profile cover knob, rear hexnut       | Right angle 1/4" quick-connect terminals | 250V/20A           |
| HTB-68I  |              | 0.3"                 | Knob                | Low-profile cover knob, front hexnut      | Right angle 1/4" quick-connect terminals | 250V/20A           |
| HTB-88I  |              | 0.125"               | Knob                | Low-profile cover knob, through-hole snap | Right angle 1/4" quick-connect terminals | 250V/20A           |





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.