1300 Henley Court
Pullman, WA 99163
509.334.6306
www.digilentinc.com

PmodCMPS™ Reference Manual

Revised May 24, 2016
This manual applies to the PmodCMPS rev. A

Overview

The Digilent PmodCMPS features the popular Honeywell HMC5883L 3-axis digital compass and can add compass heading readings to any Digilent host board with an I²C interface.

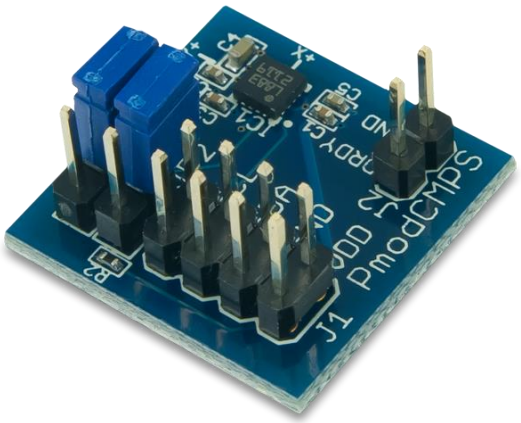

The PmodCMPS.

Features include:

- 3-axis digital compass
- 2 milli-gauss Field Resolution in ±8 gauss fields
- 160 Hz maximum data output rate
- Optional pull-up resistors for SCL and SDA pins
- Small PCB size for flexible designs 0.8" × 0.8" (2.0 cm × 2.0 cm)
- 2×4-pin connector with I2C interface
- Follows Digilent Pmod Interface Specification
- Library and example code available in resource center

1 Functional Description

The PmodCMPS utilizes Honeywell's HMC5883L with Anisotropic Magnetoresistive (AMR) technology. In plain English, this means that the three sensors (one for each coordinate direction) have very little interference with each other so that accurate data can be retrieved from the Pmod.

2 Interfacing with the Pmod

The PmodCMPS communicates with the host board via the I²C protocol. Jumpers JP1 and JP2 provide optional 2.2kΩ pull-up resistors to use for the Serial Data and Serial Clock lines. The 7-bit address for this on-board chip is 0x1E, making the 8-bit address for a read command 0x3D and 0x3C for a write command.

By default, the PmodCMPS starts out in Single Measurement mode so that the compass takes a single measurement, sets the Data Ready pin high, and then places itself into Idle Mode. While in Idle Mode, major sources of power consumption are (not surprisingly) disabled, such as the internal ADC which collects the voltage measurements. However, you can still access all of the registers with their most recent data value through the I²C

Copyright Digilent, Inc. All rights reserved.
Other product and company names mentioned may be trademarks of their respective owners.

bus. To change the PmodCMPS from idle mode back into Single Measurement or Continuous Measurement mode, the user must write to the Mode Register (0x02).

When reading data from the PmodCMPS, all six data registers, corresponding to the upper and lower bytes of each Cartesian coordinate direction, must be read. Since the internal register address pointer automatically increments after a register has been successfully read, it is possible to read from all six registers with a single command. An example how this might look is given below:

Command byte									Address byte								
0	0	1	1	1	1	0	1	(ACK)	0	0	0	0	0	0	1	1	(ACK)
MSB X									LSB X								
SX	SX	SX	SX	sb	MSB	b9	b8	(ACK)	b7	b6	b5	b4	b3	b2	b1	b0	(ACK)
MSB Z									LSB Z								
SX	SX	SX	SX	sb	MSB	b9	b8	(ACK)	b7	b6	b5	b4	b3	b2	b1	b0	(ACK)
MSB Y									LSB Y								
SX	SX	SX	SX	sb	MSB	b9	b8	(ACK)	b7	b6	b5	b4	b3	b2	b1	b0	(STOP)

Table 1. Command and address bytes.
***Note:** SX stands for a sign extension of the sign bit (sb).*

2.1 Pinout Description Table

Header J1		
Pins	Signal	Description
1 & 5	SCL	Serial Clock
2 & 6	SDA	Serial Data
3 & 7	GND	Power Supply Ground
4 & 8	VCC	Power Supply (3.3V)

Header J2	
Pin	Signal	Description
1	DRDY	Data Ready
2	GND	Power Supply Ground
Jumper JP1	
Loaded State	SDA line uses a 2.2kΩ pull-up resistor
Jumper JP2	
Loaded State	SCL line uses a 2.2kΩ pull-up resistor

Table 1. Connector J1: Pin descriptions as labeled on the Pmod.

The PmodCMPS also offers a self test mode to help calibrate any data that is being received from the module.

Any external power applied to the PmodCMPS must be within 2.16V and 3.6V; therefore, when using Pmod headers on Digilent system boards, the supply voltage must be at 3.3V.

3 Physical Dimensions

The pins on the pin header are spaced 100 mil apart. The PCB is 0.8 inches long on the sides parallel to the pins on the pin header and 0.8 inches long on the sides perpendicular to the pin header.

Copyright Digilent, Inc. All rights reserved.
Other product and company names mentioned may be trademarks of their respective owners.

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.