

ADJUSTABLE LOW DROPOUT VOLTAGE REGULATOR WITH ON/OFF CONTROL


■ GENERAL DESCRIPTION

The NJM2387A is an adjustable low dropout voltage regulator. The output current is up to 1.0A and dropout voltage is 0.2V typ. at $I_o=0.5A$.

OFF control quiescent current is drastically reduced compare with the current NJM2387 through changing ON/OFF control circuit.

The NJM2387A is suitable for power module, TV, Display, car stereo and low power applications.

■ PACKAGE OUTLINE




NJM2387ADL3

■ FEATURES

- Low Dropout Voltage $\Delta V_{I-O}=0.2V$ typ. at $I_o=0.5A$
- Output Current $I_o(\text{max.})=1.0A$
- Reference Voltage $V_{ref}=1.26V \pm 2\%$
- ON/OFF Control
- Internal Short Circuit Current Limit
- Internal Overvoltage Protection
- Internal Thermal Overload Protection
- Bipolar Technology
- Package Outline TO-252-5

■ PIN CONFIGURATION




NJM2387ADL3

PIN FUNCTION

1. V_{IN}
2. ON/OFF CONTROL
3. V_{OUT}
4. V_{ADJ}
5. GND

■ EQUIVALENT CIRCUIT

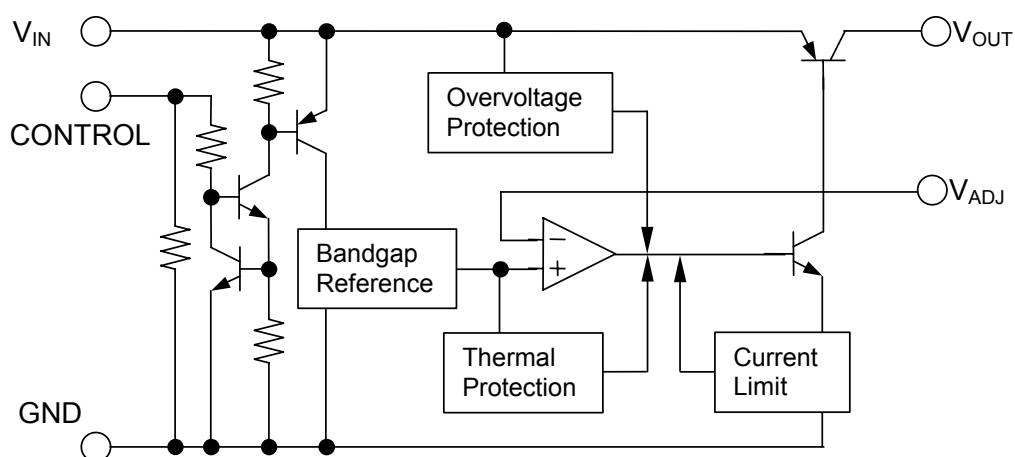

NJM2387ADL3

NJM2387A

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{IN}	+35	V
Control Voltage	V_{CONT}	+35(*1)	V
Adjust Terminal Voltage	V_{ADJ}	+6	V
Output Current	I_O	1.0	A
Power Dissipation	P_D	$10(T_C \leq 25^\circ\text{C}) / 1(T_A \leq 25^\circ\text{C})$	W
Operating Junction Temperature Range	T_J	-40 ~ +150	°C
Operating Temperature Range	T_{opr}	-40 ~ +85	°C
Storage Temperature Range	T_{stg}	-50 ~ +150	°C

(*1): When input voltage is less than +35V, the absolute maximum control voltage is equal to the input voltage.


■ ELECTRICAL CHARACTERISTICS ($V_{IN}=15V$, $V_O=10V$, $I_O=0.5A$, $R_1=1k\Omega$, $C_{IN}=0.33\mu F$, $C_O=22\mu F$, $T_J=25^\circ\text{C}$)

Measurement is conducted by pulse testing.

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Input Voltage	V_{IN}	-	3.8	-	30	V
Output Voltage	$V_{O(ADJ)}$	-	1.5	-	20	V
Reference Voltage	V_{ref}	-	1.235	1.26	1.285	V
Line Regulation	$\Delta V_O / \Delta V_{IN}$	$V_{IN}=V_O+1V \sim V_O+17V$	-	0.04	0.16	%/V
Load Regulation	$\Delta V_O / \Delta I_O$	$V_{IN}=V_O+2V, I_O=0A \sim 1.0A$	-	0.2	1.4	%/A
Average Temperature Coefficient of Output Voltage	$\Delta V_O / \Delta T$	$T_J=0 \sim +125^\circ\text{C}$	-	± 0.02	-	%/°C
Quiescent Current	I_Q	$I_O=0A$, $V_{CONT}=2.7V$ Except I_{CONT}	-	-	5	mA
OFF Control Quiescent Current	$I_{Q(OFF)}$	$V_{CONT}=0V$	-	-	1	μA
Dropout Voltage	ΔV_{I-O}	$I_O=0.5A$	-	0.2	0.5	V
Ripple Rejection	RR	$V_{in}=V_O+2V$, $e_{in}=0.5V_{rms}$ $e_{in}=0.5V_{rms}$, $f=120Hz$	52	65	-	dB
ON Control Voltage	$V_{CONT(ON)}$		2.0(*2)	-	-	V
OFF Control Voltage	$V_{CONT(OFF)}$		-	-	0.4	V
ON Control Current	$I_{CONT(ON)}$	$V_C=2.7V$	10	30	50	μA
OFF Control Current	$I_{CONT(OFF)}$	$V_C=0.4V$	1	3	5	μA

(*2): When ON/OFF CONTROL Terminal is open, Output Voltage is OFF.


■ TEST CIRCUIT

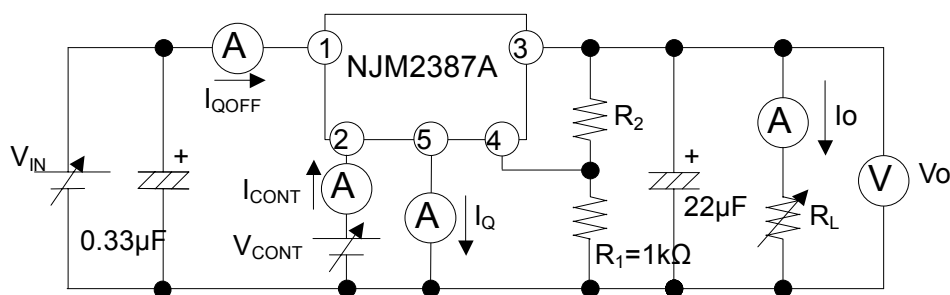

$$V_o = V_{ref} \times (1 + R_2/R_1)$$

■ TYPICAL APPLICATION


① In the case where ON/OFF Control is not required:

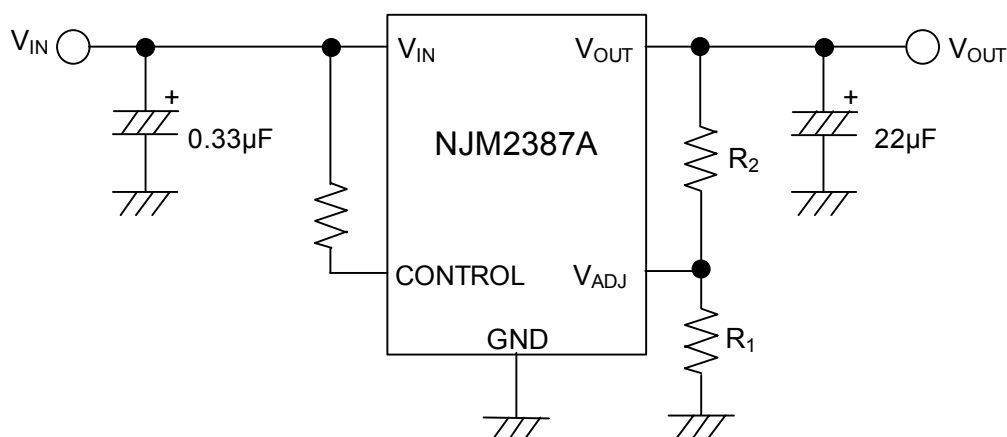

Connect control terminal to V_{IN} terminal.

The quiescent current can be reduced by using a resistance "R". Instead, it increases the minimum operating voltage. For further information, please refer to Figure "Output Voltage vs. Control Voltage".

② In use of ON/OFF CONTROL:






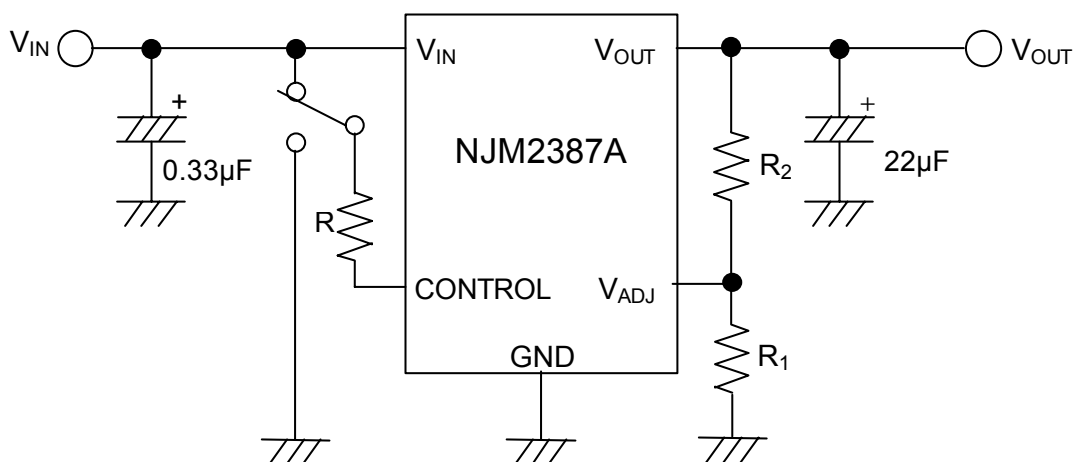


State of control terminal:







- "H" → output is enabled.
- "L" or "open" → output is disabled.

NJM2387A






■ ELECTRICAL CHARACTERISTICS

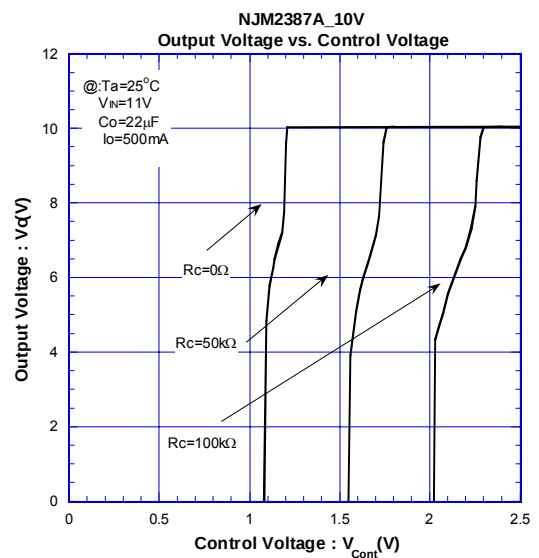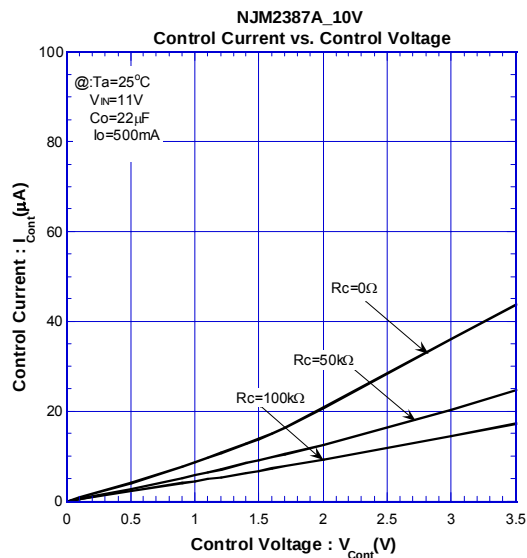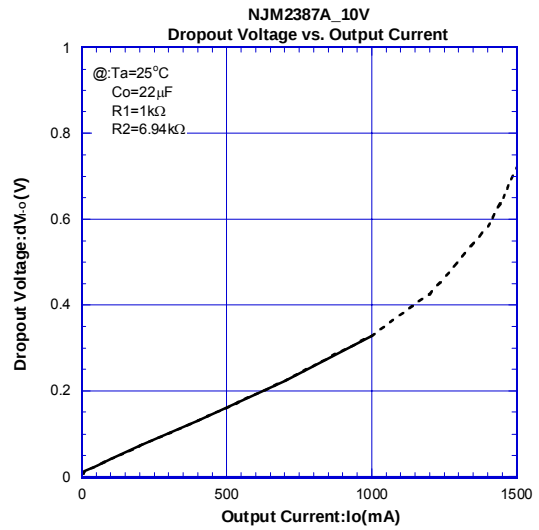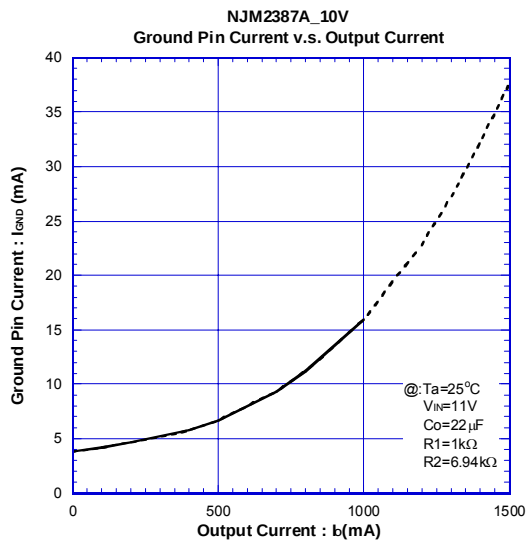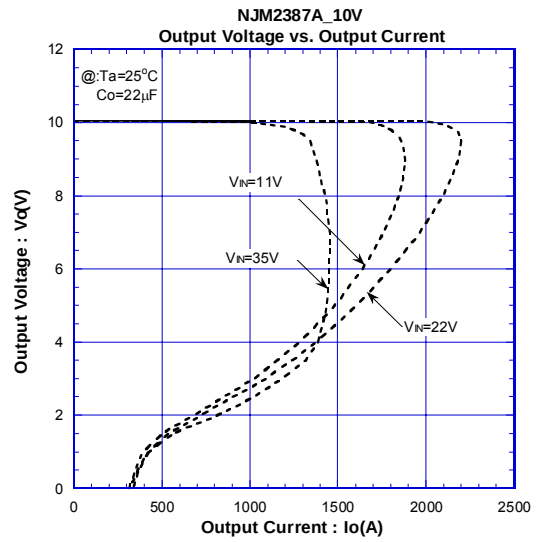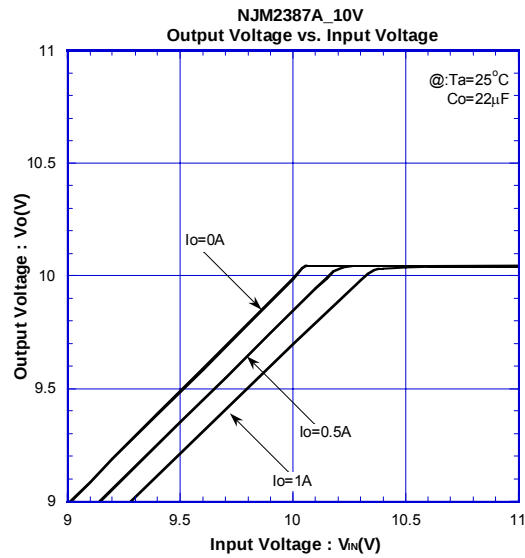





ELECTRICAL CHARACTERISTICS

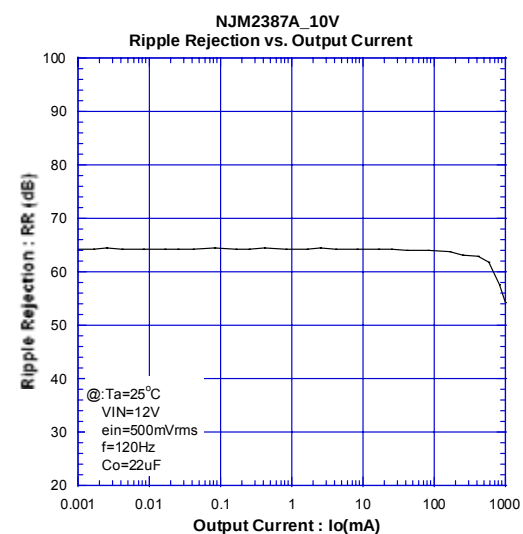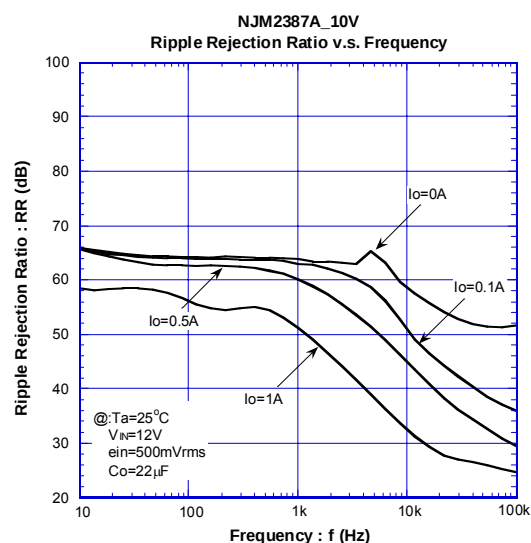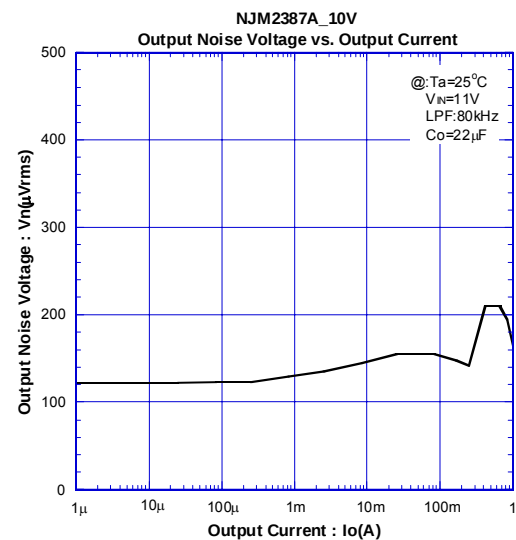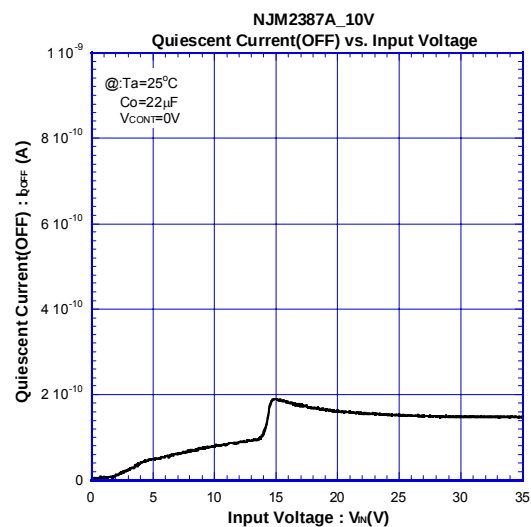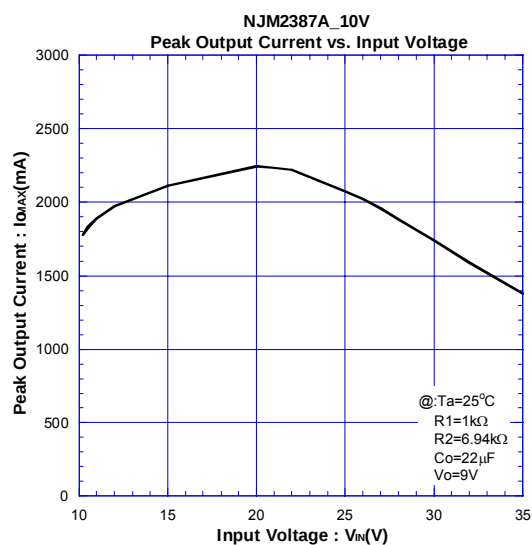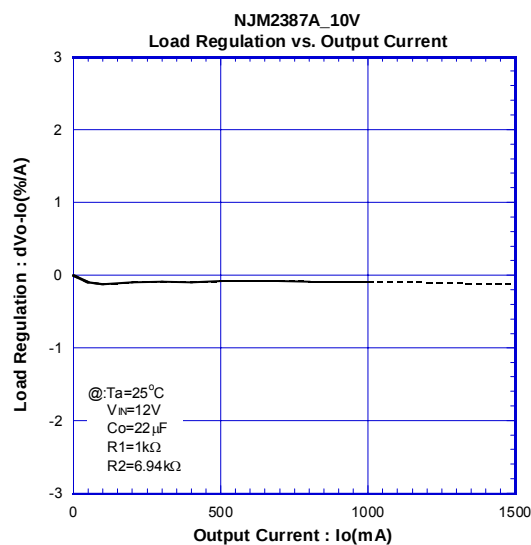





■ ELECTRICAL CHARACTERISTICS

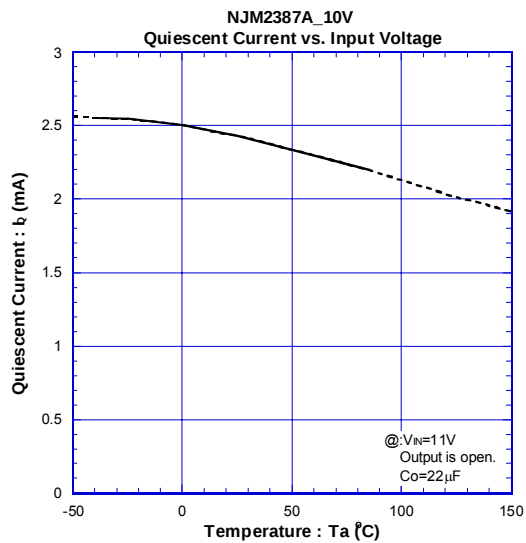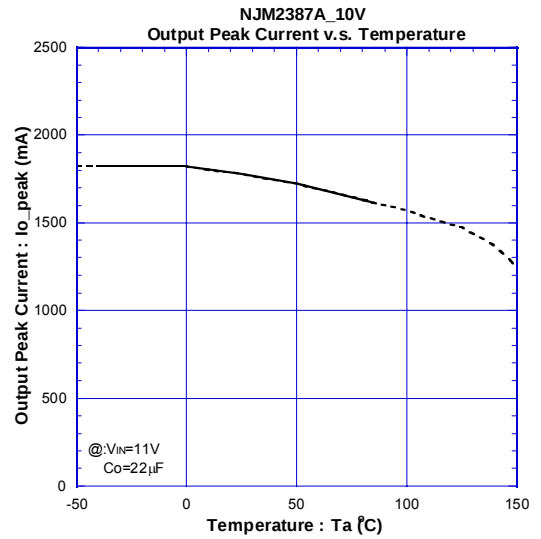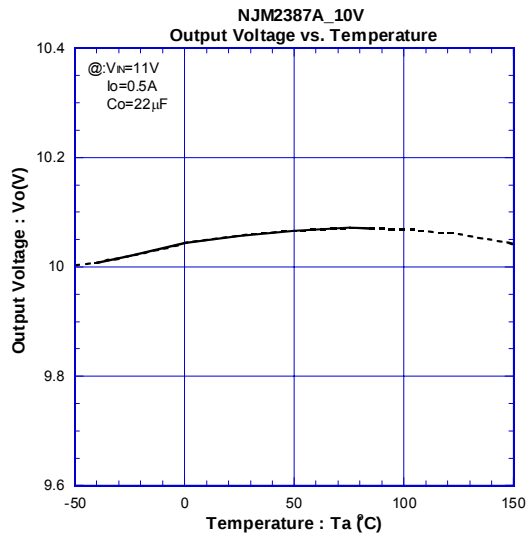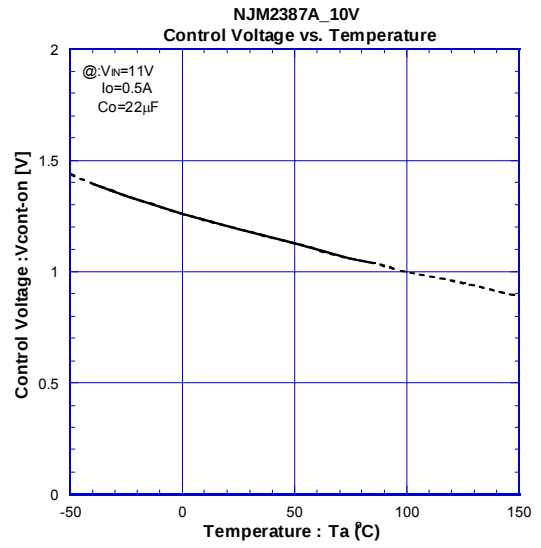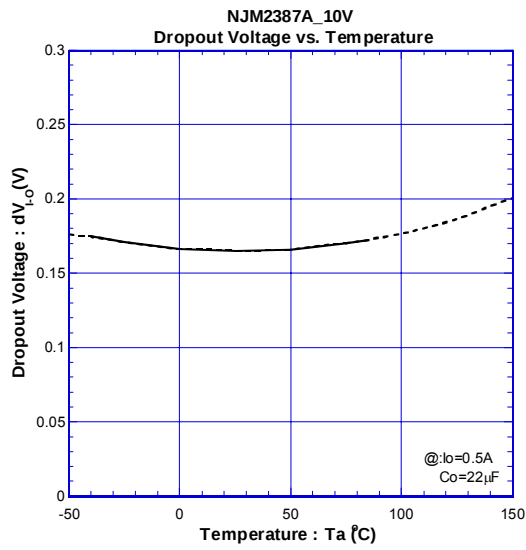

■ ELECTRICAL CHARACTERISTICS

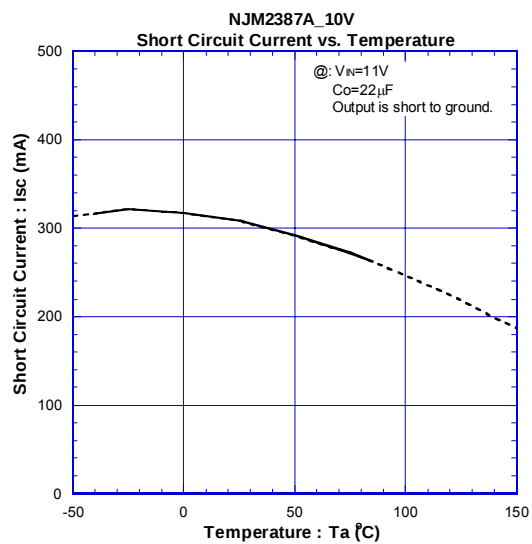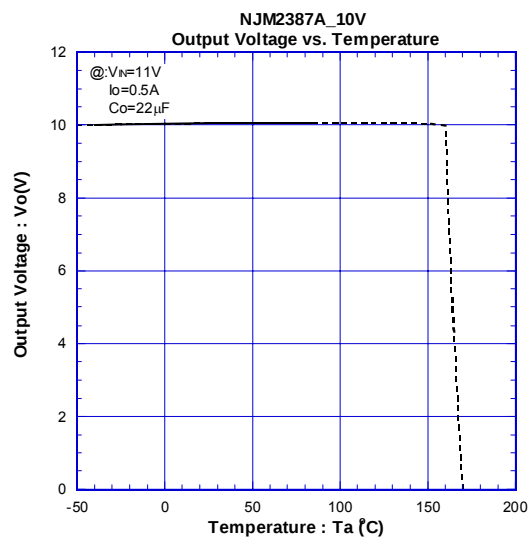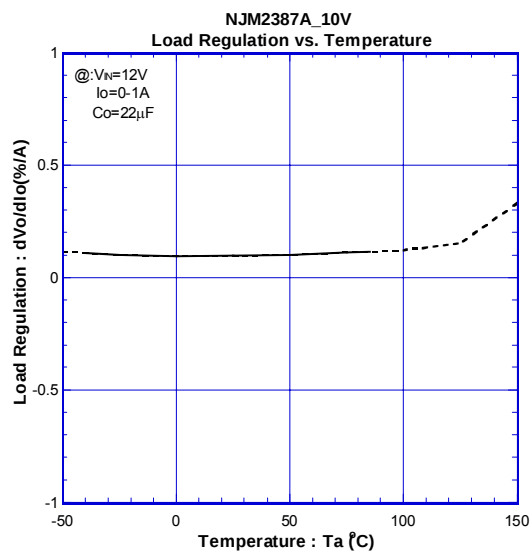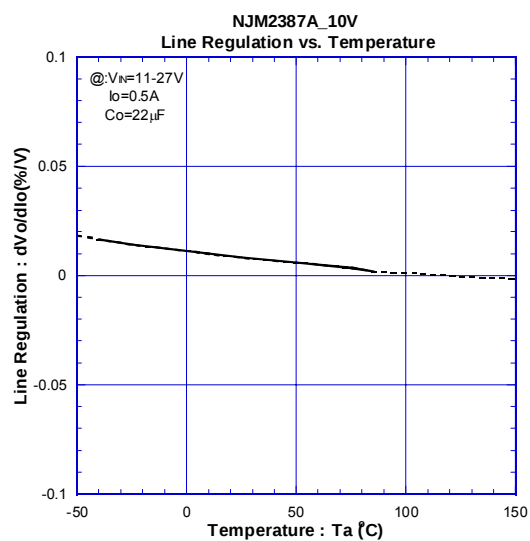

ELECTRICAL CHARACTERISTICS

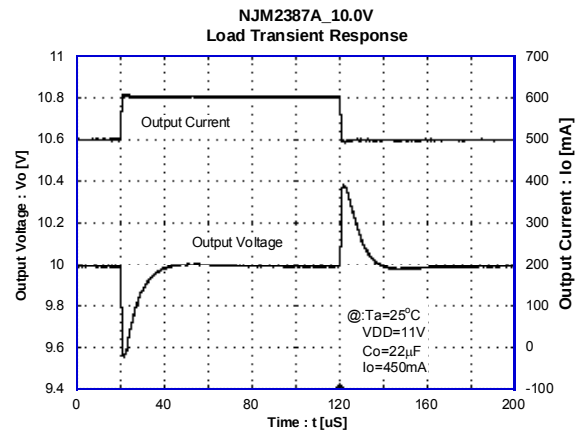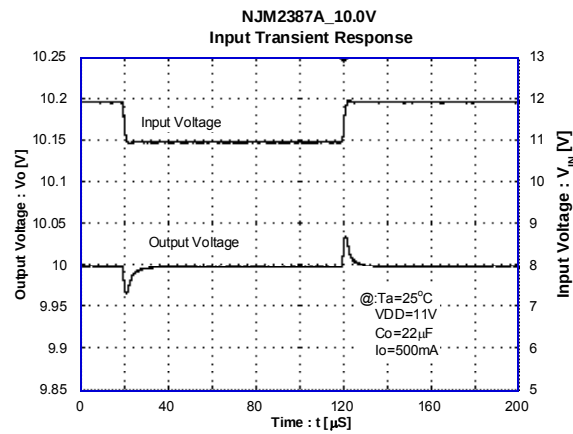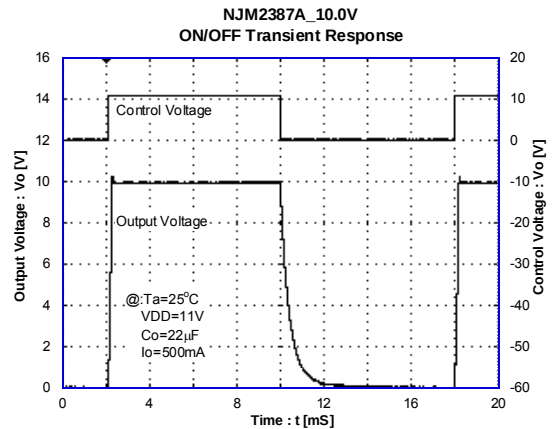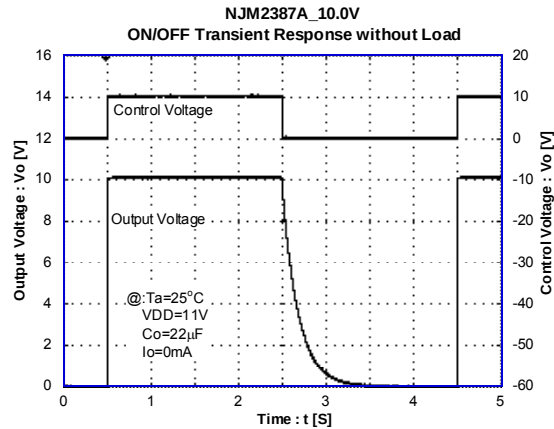

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2387ALD3-TE2](#) [NJM2387ALD3-TE1](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.