



**NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED**



**THIS PAGE INTENTIONALLY LEFT BLANK**



MICROWAVE CORPORATION v03.0514



# HMC587LC4B


## WIDEBAND MMIC VCO w/ BUFFER AMPLIFIER, 5 - 10 GHz

### Typical Applications

Low noise wideband MMIC VCO for applications such as:

- Industrial/Medical Equipment
- Test & Measurement Equipment
- Military Radar, EW & ECM

### Functional Diagram

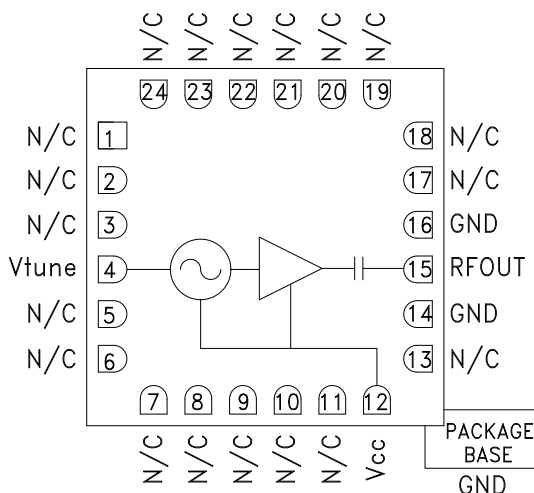

### Features

Wide Tuning Bandwidth

Pout: +5 dBm

Low SSB Phase Noise: -95 dBc/Hz @100 kHz

No External Resonator Needed

Single Positive Supply: +5V @ 55 mA

RoHS Compliant 4 x 4 mm SMT Package

### General Description

The HMC587LC4B is a wideband GaAs InGaP Voltage Controlled Oscillator which incorporates the resonator, negative resistance device, and varactor diode. Output power and phase noise performance are excellent over temperature due to the oscillator's monolithic construction. The Vtune port accepts an analog tuning voltage from 0 to +18 volts. The HMC587LC4B VCO operates from a single +5V supply, consumes only 55 mA of current, and is housed in a RoHS compliant SMT package. This wideband VCO uniquely combines the attributes of ultra small size, low phase noise, low power consumption, and wide tuning range.

### Electrical Specifications, $T_A = +25^\circ\text{C}$ , $V_{CC} = +5\text{V}$

| Parameter                                              | Min.       | Typ. | Max. | Units                 |
|--------------------------------------------------------|------------|------|------|-----------------------|
| Frequency Range                                        | 5.0 - 10.0 |      |      | GHz                   |
| Power Output                                           | 0          | 5    |      | dBm                   |
| SSB Phase Noise @ 100 kHz Offset                       |            | -95  |      | dBc/Hz                |
| SSB Phase Noise @ 10 kHz Offset                        |            | -65  |      | dBc/Hz                |
| Tune Voltage (Vtune)                                   | 0          |      | 18   | V                     |
| Supply Current (Icc) ( $V_{CC} = +5.0\text{V}$ )       | 40         |      | 75   | mA                    |
| Tune Port Leakage Current ( $V_{tune} = +18\text{V}$ ) |            |      | 10   | $\mu\text{A}$         |
| Output Return Loss                                     |            | 7    |      | dB                    |
| 2nd Harmonic                                           |            | -15  |      | dBc                   |
| Pulling (into a 2.0:1 VSWR)                            |            | 4    |      | MHz pp                |
| Pushing @ $V_{tune} = +5\text{V}$                      |            | 15   |      | MHz/V                 |
| Frequency Drift Rate                                   |            | 0.8  |      | MHz/ $^\circ\text{C}$ |


For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at [www.hittite.com](http://www.hittite.com)


Application Support: Phone: 978-250-3343 or [apps@hittite.com](mailto:apps@hittite.com)

## WIDEBAND MMIC VCO w/ BUFFER AMPLIFIER, 5 - 10 GHz


**Frequency vs. Tuning Voltage,  $V_{cc} = +5V$**

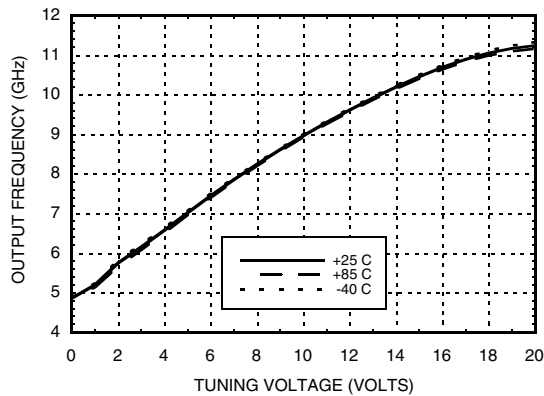


**Frequency vs. Tuning Voltage,  $T = 25^{\circ}C$**

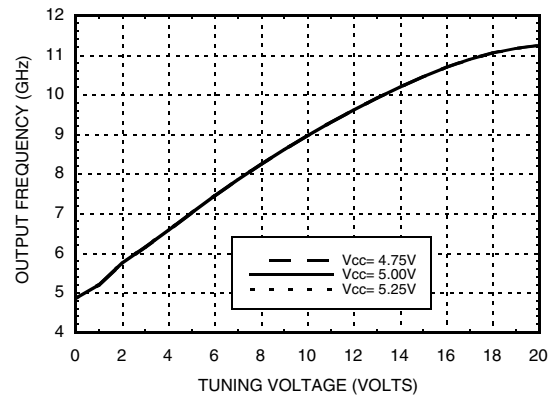


**Sensitivity vs. Tuning Voltage,  $V_{cc} = +5V$**

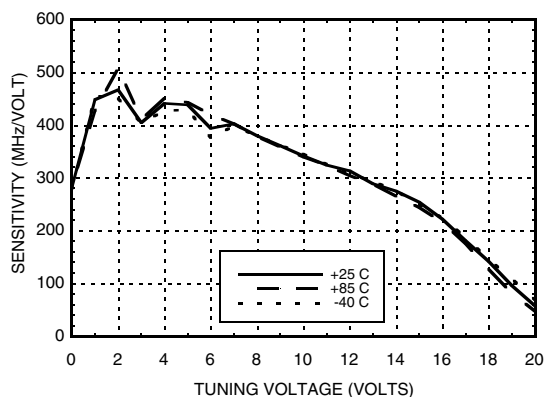


**Output Power vs.  
Tuning Voltage,  $V_{cc} = +5V$**

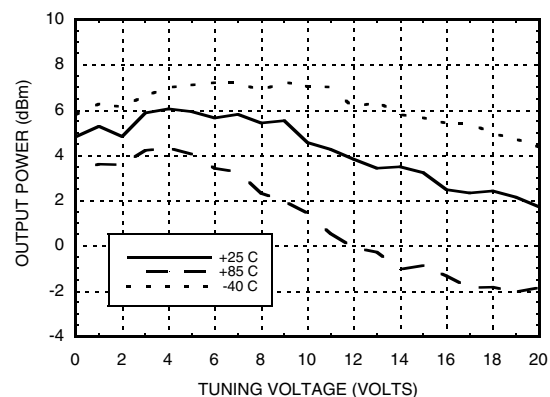

**SSB Phase Noise vs. Tuning Voltage**

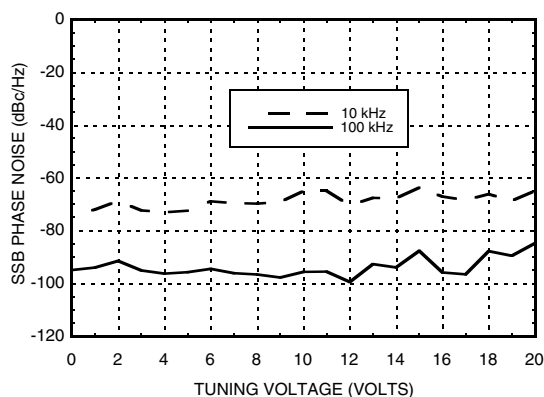

**Typical SSB Phase Noise @  $V_{tune} = +5V$**

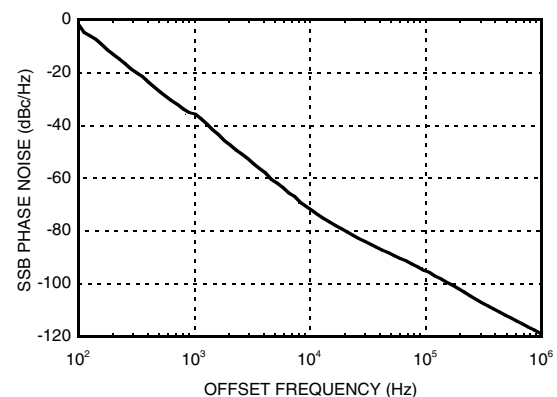




MICROWAVE CORPORATION v03.0514

**HMC587LC4B****WIDEBAND MMIC VCO w/ BUFFER  
AMPLIFIER, 5 - 10 GHz****Absolute Maximum Ratings**

|                                                                           |                |
|---------------------------------------------------------------------------|----------------|
| Vcc                                                                       | +5.5 Vdc       |
| Vtune                                                                     | 0 to +22V      |
| Junction Temperature                                                      | 135 °C         |
| Continuous P <sub>diss</sub> (T = 85°C)<br>(derate 12.5 mW/°C above 85°C) | 625 mW         |
| Thermal Resistance<br>(junction to ground paddle)                         | 80 °C/W        |
| Storage Temperature                                                       | -65 to +150 °C |
| Operating Temperature                                                     | -40 to +85 °C  |

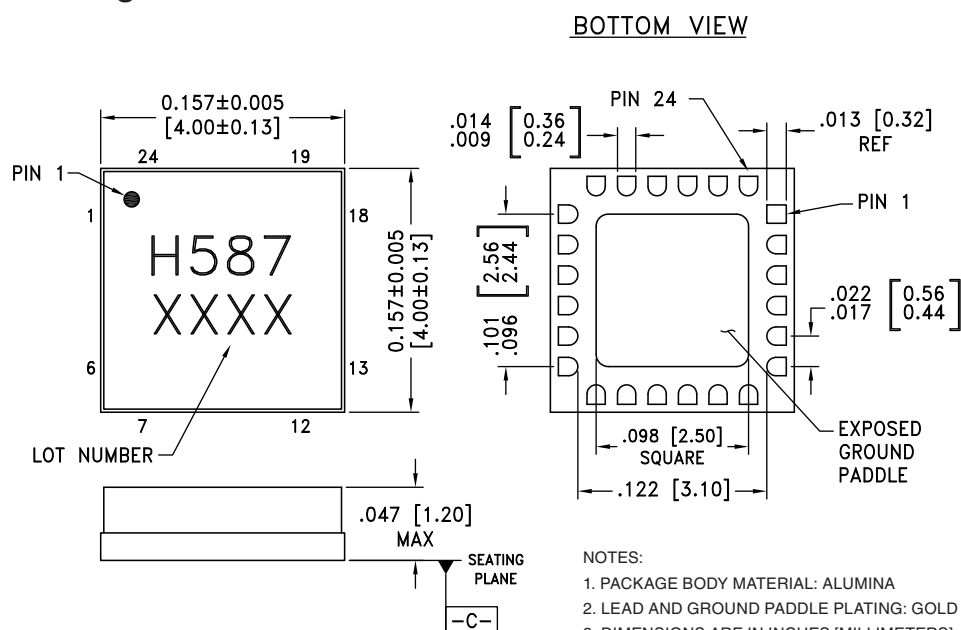**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS****Outline Drawing****Package Information**

| Part Number | Package Body Material | Lead Finish      | MSL Rating          | Package Marking <sup>[2]</sup> |
|-------------|-----------------------|------------------|---------------------|--------------------------------|
| HMC587LC4B  | Alumina, White        | Gold over Nickel | MSL3 <sup>[1]</sup> | H587<br>XXXX                   |




[1] Max peak reflow temperature of 260 °C

[2] 4-Digit lot number XXXX

For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824


Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at [www.hittite.com](http://www.hittite.com)Application Support: Phone: 978-250-3343 or [apps@hittite.com](mailto:apps@hittite.com)

### Pin Descriptions

| Pin Number                    | Function | Description                                                                                                                                                                           | Interface Schematic                                                                  |
|-------------------------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| 1 - 3, 5 - 11,<br>13, 17 - 24 | N/C      | No Connection. These pins may be connected to RF/DC ground. Performance will not be affected.                                                                                         |                                                                                      |
| 4                             | Vtune    | Control Voltage and Modulation Input. Modulation bandwidth dependent on drive source impedance. See "Determining the FM Bandwidth of a Wideband Varactor Tuned VCO" application note. |   |
| 12                            | Vcc      | Supply Voltage Vcc= +5V                                                                                                                                                               |   |
| 14, 16                        | GND      | Package bottom has an exposed metal paddle that must also be RF & DC grounded.                                                                                                        |   |
| 15                            | RFOUT    | RF output (AC coupled)                                                                                                                                                                |  |



MICROWAVE CORPORATION v03.0514

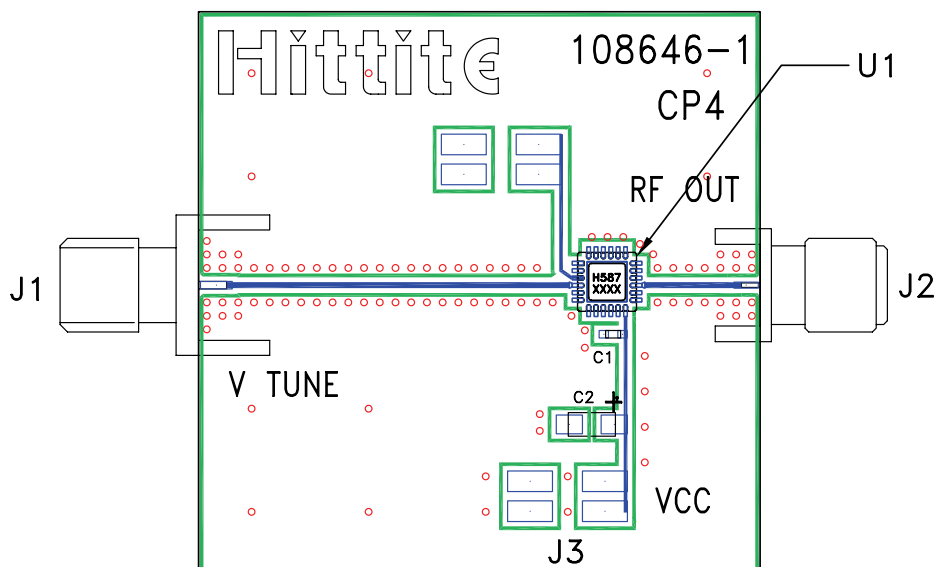**HMC587LC4B****WIDEBAND MMIC VCO w/ BUFFER  
AMPLIFIER, 5 - 10 GHz****Evaluation PCB****List of Materials for Evaluation PCB 108648 [1]**

| Item    | Description                         |
|---------|-------------------------------------|
| J1      | PCB Mount SMA RF Connector, Johnson |
| J2      | PCB Mount SMA Connector, SRI        |
| J3      | DC Header                           |
| C1      | 1000 pF Capacitor, 0402 Pkg.        |
| C2      | 4.7 μF Capacitor, Tantalum          |
| U1      | HMC587LC4B VCO                      |
| PCB [2] | 108646 Eval Board                   |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed ground paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.



MICROWAVE CORPORATION

v03.0514



## HMC587LC4B

**WIDEBAND MMIC VCO w/ BUFFER  
AMPLIFIER, 5 - 10 GHz**

WIDEBAND VCOS - SMT





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.