

# Photologic® Slotted Optical Switch

## OPB960, OPB970, OPB980, OPB990 Series



### Features:

- Choice of logic and output driver circuits
- Choice of aperture size, covered or open
- Wire or PCB leads
- Choice of mounting features
- Direct TTL, LSTTL, CMOS Interface



### Description:

The OPB960/ 970/ 980/ 990 series of non-contact Photologic® slotted optical switches provides flexibility in meeting application specific requirements for the design engineer.

Building from a standard housing with a 0.125" (3.18mm) wide slot, the user can specify output logic state, output driver circuit, aperture width, aperture surface and mounting tab locations. Furthermore, an option of wire or PCB leads allows electrical interface flexibility.

The device body is an opaque plastic which minimizes sensitivity to both visible and near-infrared external light sources which may impact operation. Aperture width choices provide different optical resolution for motion sensing. A covered aperture provides dust protection, while an open aperture provides maximum protection against external light sources.

Electrical operation is over a wide supply voltage range. LED emissions are near-infrared (850—940nm). Detector digital output logic choices of buffer or inverter with totem-pole or open-collector driver circuit simplify interface for various electrical requirements.

Custom electrical, wire and cabling services are available.


Contact your local representative or OPTEK for more information. Compliant to EU RoHS Directive 2002/95/EC .

### Applications:

For more information see Application notes 201, 213

- Speed and direction indication
- Mechanical switch replacement
- Printers - Top of form, End of travel, Home position.
- Rotary encoders
- Mechanical limit indication
- Sliding Door Automotive and Lift gate applications

### Part Number Guide

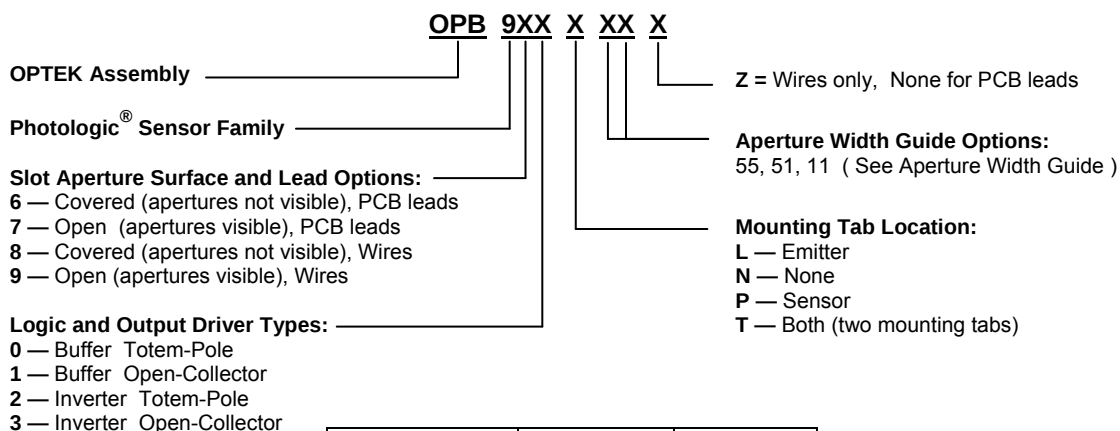

| Logic Type | Input LED | Output Logic State |
|------------|-----------|--------------------|
| Buffer     | OFF       | LOW = 0            |
| Inverter   | OFF       | HIGH = 1           |



RoHS

OPTEK reserves the right to make any changes at any time in order to improve design and to supply the best product possible.

# Photologic® Slotted Optical Switch OPB960, OPB970, OPB980, OPB990 Series





## PACKAGE OUTLINE for OPB960 and OPB970 Series



TABLE 1

| Lead No. | Function |
|----------|----------|
| 1        | Anode    |
| 2        | Cathode  |
| 3        | Vcc      |
| 4        | Output   |
| 5        | Ground   |



| APERTURE WIDTH GUIDE       |                |                |
|----------------------------|----------------|----------------|
| CODE                       | LED            | SENSOR         |
| 55                         | .050" [1.27mm] | .050" [1.27mm] |
| 51                         | .050" [1.27mm] | .010" [0.25mm] |
| 11                         | .010" [0.25mm] | .010" [0.25mm] |
| Lengths are .050" [1.27mm] |                |                |



L - TAB



T - TAB



P - TAB

### Notes:

- (1) RMA flux recommended. Duration can be extended to 10 seconds max.
- (2) Feature controlled at body.
- (3) Highly activated water soluble fluxes may attack plastic. Recommend trial to verify application.
- (4) Maximum lead soldering temperature [1.6mm from case for 5 seconds with soldering iron] 260° C.
- (5) Cathode lead may be shorter.
- (6) Part number marking may be on any side.

OPTEK reserves the right to make any changes at any time in order to improve design and to supply the best product possible.

# Photologic® Slotted Optical Switch OPB960, OPB970, OPB980, OPB990 Series




## PACKAGE OUTLINE for OPB980 and OPB990 Series

TABLE 2


| Wire Color | Function |
|------------|----------|
| Red        | Anode    |
| Black      | Cathode  |
| White      | Vcc      |
| Blue       | Output   |
| Green      | Ground   |

| APERTURE WIDTH GUIDE       |                |                |
|----------------------------|----------------|----------------|
| CODE                       | LED            | SENSOR         |
| 55                         | .050" [1.27mm] | .050" [1.27mm] |
| 51                         | .050" [1.27mm] | .010" [0.25mm] |
| 11                         | .010" [0.25mm] | .010" [0.25mm] |
| Lengths are .050" [1.27mm] |                |                |

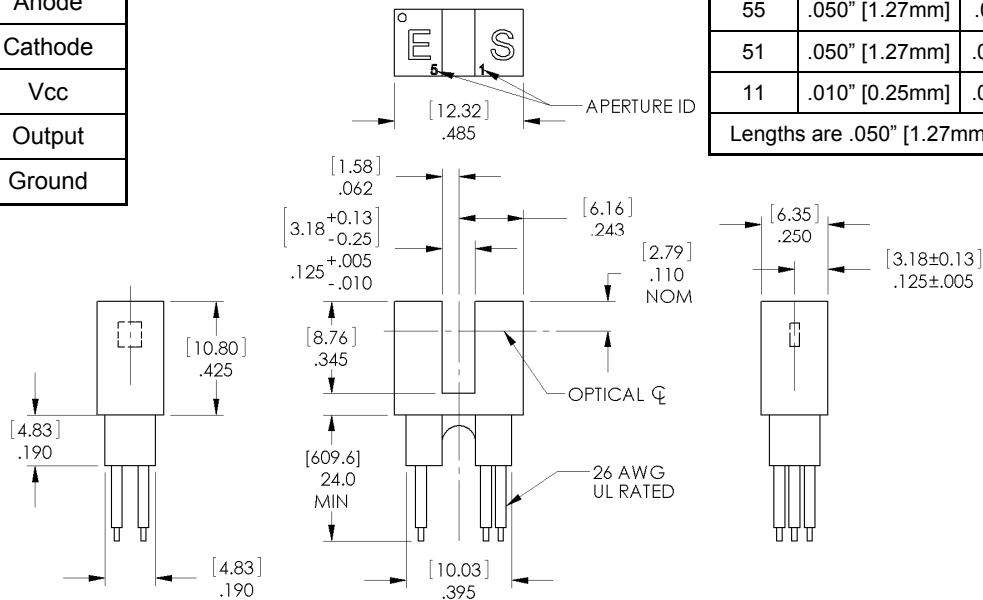

N - TAB

DIMENSIONS ARE IN INCHES AND [MILLIMETERS].  
TOLERANCES ARE  $\pm .010$  [0.25]

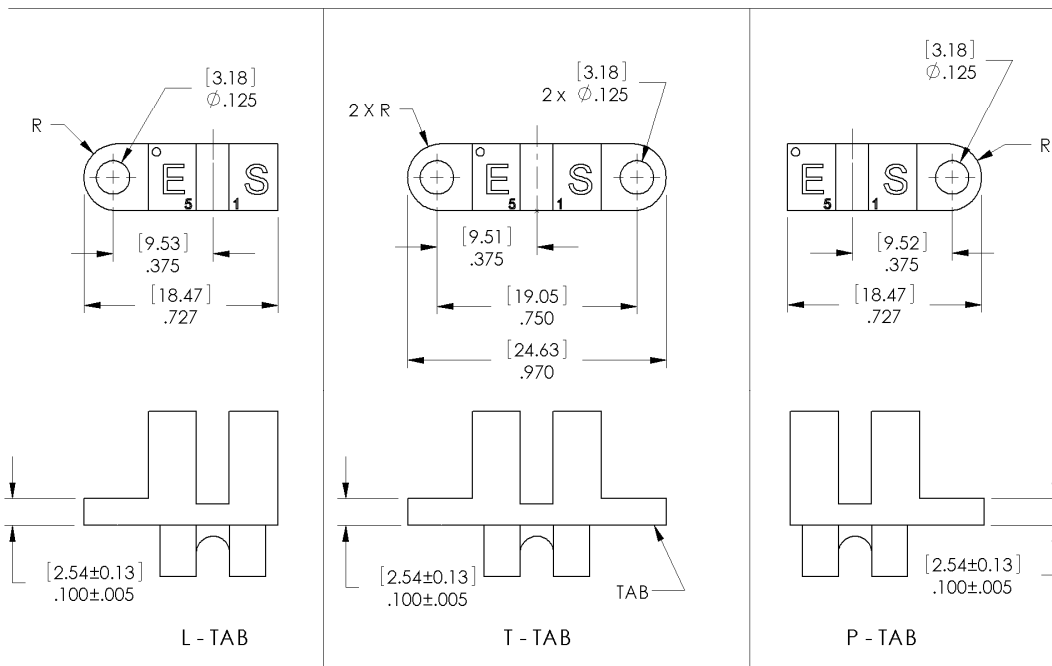

### Notes:

- (7) Wire is 26AWG, UL Rated PVC insulation.
- (8) Ideal torque for bolt or screw 0.45 to 0.68 Nm ( 4 to 6 Lb-in ).
- (9) When using a thread lock compound, ND Industries "ND Vibra-Tite® Formula 3" will avoid stress cracking plastic.
- (10) Plastic is soluble in chlorinated hydrocarbons and ketones. Methanol or isopropanol are recommended as cleaning agents.

OPTEK reserves the right to make any changes at any time in order to improve design and to supply the best product possible.


## Absolute Maximum Ratings

|                                                                       |                        |
|-----------------------------------------------------------------------|------------------------|
| Storage Temperature Range                                             | -40°C to +85° C        |
| Operating Temperature Range                                           | -40°C to +70° C        |
| <b>Input Diode (E)</b>                                                |                        |
| Input Diode Power Dissipation                                         | 100 mW <sup>(11)</sup> |
| Input Diode Forward D.C. Current, T <sub>A</sub> = 25°C               | 40 mA <sup>(14)</sup>  |
| Input Diode Reverse D.C. Voltage, T <sub>A</sub> = 25°C               | 2 V                    |
| <b>Sensor (S)</b>                                                     |                        |
| Supply Voltage (V <sub>CC</sub> to Ground)                            | 18 V <sup>(13)</sup>   |
| Output Photologic <sup>®</sup> Power Dissipation                      | 200 mW <sup>(12)</sup> |
| Voltage at Output Lead (Open-Collector Output), T <sub>A</sub> = 25°C | 35V                    |
| Short Circuit Output Current to Ground (I <sub>OS</sub> ) 1 sec Max.  | 30 mA                  |

### Notes:

- (11) Derate linearly 2.22 mW / °C above 25° C.
- (12) Derate linearly 4.44 mW / °C above 25° C.
- (13) Prior to 2004 Vcc was limited to 5.5V maximum.
- (14) Do not connect input diode directly to a voltage source without an external current limiting resistor.

## Block Diagram

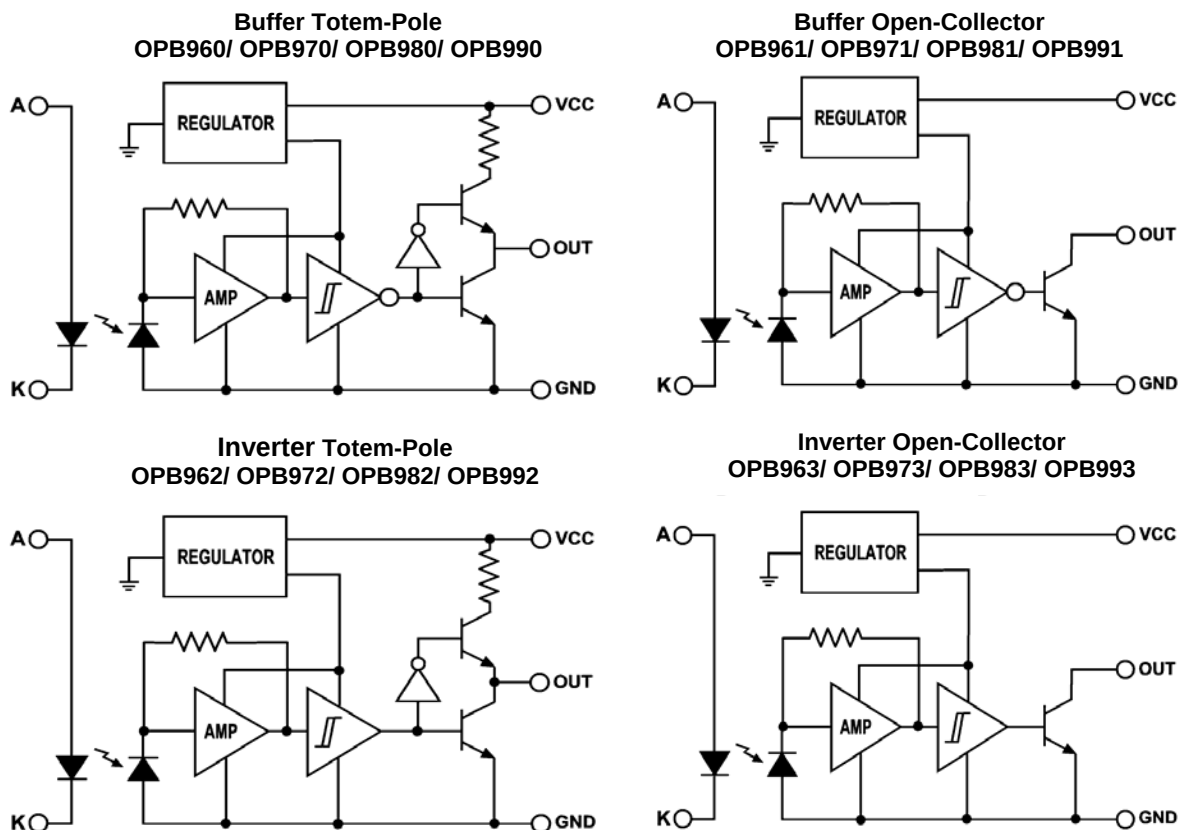

OPTEK reserves the right to make any changes at any time in order to improve design and to supply the best product possible.

# Photologic® Slotted Optical Switch

## OPB960, OPB970, OPB980, OPB990 Series



### Electrical Characteristics (T<sub>A</sub> = -40° C to +70° C unless otherwise noted)

| SYMBOL | PARAMETER | MIN | TYP | MAX | UNITS | TEST CONDITIONS |
|--------|-----------|-----|-----|-----|-------|-----------------|
|--------|-----------|-----|-----|-----|-------|-----------------|

#### Input Diode (See OP140 / OP240 LED for additional information)

|                |                 |   |   |      |    |                                                |
|----------------|-----------------|---|---|------|----|------------------------------------------------|
| V <sub>F</sub> | Forward Voltage | - | - | 1.70 | V  | I <sub>F</sub> = 20 mA, T <sub>A</sub> = 25° C |
| I <sub>R</sub> | Reverse Current | - | - | 100  | μA | V <sub>R</sub> = 2.0 V, T <sub>A</sub> = 25° C |

#### Coupled (See OPL560 Detector for additional information)


|                                         |                                                                                       |                      |     |     |    |                                                                                                                   |
|-----------------------------------------|---------------------------------------------------------------------------------------|----------------------|-----|-----|----|-------------------------------------------------------------------------------------------------------------------|
| V <sub>CC</sub>                         | Operating D.C. Supply Voltage                                                         | 4.5                  | -   | 16  | V  |                                                                                                                   |
| I <sub>CC</sub>                         | Supply Current                                                                        | -                    | -   | 12  | mA | V <sub>CC</sub> = 4.5V to 16V                                                                                     |
| V <sub>OL</sub>                         | Low Level Output Voltage:<br>Buffer Totem-Pole      OPB960,OPB970<br>OPB980,OPB990    | -                    | -   | 0.4 | V  | V <sub>CC</sub> = 4.5V, I <sub>OL</sub> = 12.8mA<br>I <sub>F</sub> = 0 mA <sup>(14)</sup>                         |
|                                         | Buffer Open-Collector    OPB961,OPB971<br>OPB981,OPB991                               |                      |     |     |    |                                                                                                                   |
|                                         | Inverter Totem-Pole      OPB962,OPB972<br>OPB982,OPB992                               |                      |     |     |    | V <sub>CC</sub> = 4.5V, I <sub>OL</sub> = 12.8mA<br>I <sub>F</sub> = 15 mA                                        |
|                                         | Inverter Open-Collector   OPB963,OPB973<br>OPB983,OPB993                              |                      |     |     |    |                                                                                                                   |
| V <sub>OH</sub>                         | High Level Output Voltage:<br>Buffer Totem-Pole      OPB960,OPB970<br>OPB980,OPB990   | V <sub>CC</sub> -2.1 | -   | -   | V  | V <sub>CC</sub> = 4.5V to 16V, I <sub>OH</sub> = -800μA<br>I <sub>F</sub> = 15 mA                                 |
|                                         | Inverter Totem-Pole      OPB962,OPB972<br>OPB982,OPB992                               |                      |     |     |    | V <sub>CC</sub> = 4.5V to 16V, I <sub>OH</sub> = -800μA<br>I <sub>F</sub> = 0 mA <sup>(14)</sup>                  |
| I <sub>OH</sub>                         | High Level Output Current:<br>Buffer Open-Collector    OPB961,OPB971<br>OPB981,OPB991 | -                    | -   | 100 | μA | V <sub>CC</sub> = 4.5V to 16V, V <sub>OH</sub> = 30V<br>I <sub>F</sub> = 15 mA                                    |
|                                         | Inverter Open-Collector   OPB963,OPB973<br>OPB981,OPB991                              |                      |     |     |    | V <sub>CC</sub> = 4.5V to 16V, V <sub>OH</sub> = 30V<br>I <sub>F</sub> = 0 mA <sup>(14)</sup>                     |
| I <sub>F</sub> (+)                      | LED Positive-Going Threshold Current <sup>(16)</sup>                                  | -                    | -   | 15  | mA | V <sub>CC</sub> = 5.0V, T <sub>A</sub> = 25° C                                                                    |
| I <sub>F</sub> (+) / I <sub>F</sub> (-) | Hysteresis Ratio                                                                      | -                    | 1.5 | -   | -  | V <sub>CC</sub> = 5.0V                                                                                            |
| t <sub>R</sub> , t <sub>F</sub>         | Output Rise Time, Output Fall Time                                                    | -                    | 70  | -   | ns | V <sub>CC</sub> = 5.0V, I <sub>F peak</sub> = 15 mA, T <sub>A</sub> = 25° C<br>100 kHz square wave, C = 10pF max. |
| t <sub>PLH</sub> , t <sub>PHL</sub>     | Propagation Delay Time<br>Low to High, High to Low                                    | -                    | 5.0 | -   | μs | R <sub>L</sub> = 360 Ω to GND (Totem-Pole)<br>R <sub>L</sub> = 1KΩ pull-up (Open-Collector)                       |

#### Notes:


- 14) Normal application would be with light source blocked, simulated by I<sub>F</sub> = 0 mA.
- 15) All parameters are tested using pulse techniques.
- 16) An increasing current applied to the LED which causes the output logic state to change.  
For proper application I<sub>F</sub>(+), LED current, should be more than the stated maximum.

OPTEK reserves the right to make any changes at any time in order to improve design and to supply the best product possible.

Logic Output vs Left to Right Bocking Distance (X-Axis Blocked)

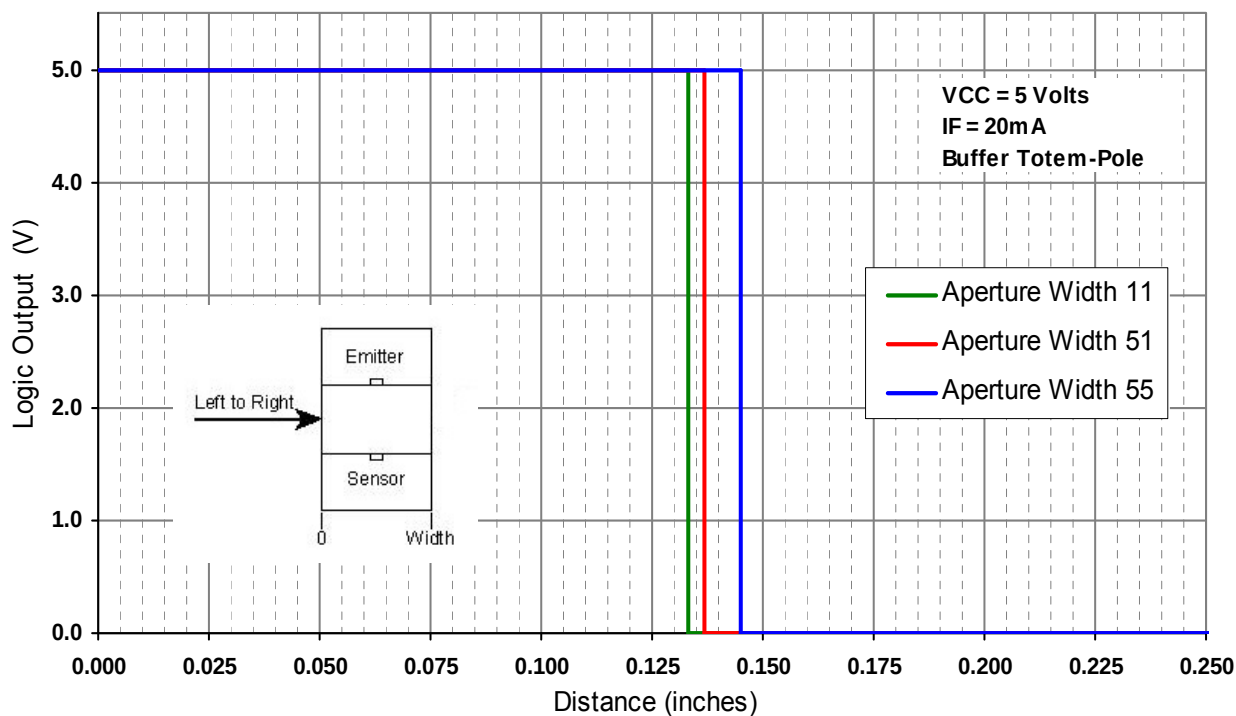

Logic Output vs Top to Bottom Bocking Distance (Y-Axis Blocked)

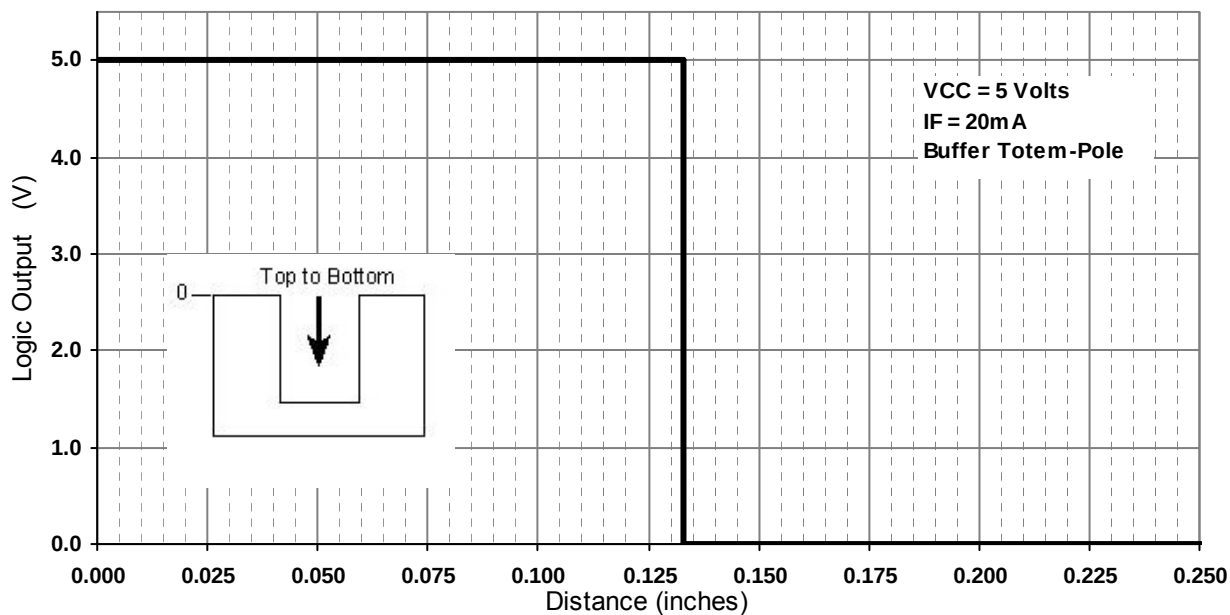

OPTEK reserves the right to make any changes at any time in order to improve design and to supply the best product possible.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.