




## FineAdjust Applicator Specification Sheet Part No. 63860-1500



### FEATURES


- Quick punch removal with the push of a button for fast and easy tooling change
- Applicator designed to industry standard mounting and shut height 135.80mm (5.346")
- Quick set-up time; plus the crimp height, track and feed adjustments can be set without removing the applicator from the press
- Fine adjustment allows users to achieve target with little effort by adjusting in increments of .015mm (.0006") for conductor crimp height and .063mm (.0025") for insulation height
- Independent adjustment rings allow users to quickly adjust the conductor or insulation crimp height without affecting each other
- Directly adapts to most automatic wire processing machines

### SCOPE

Products: Mini-Fit Jr.™ Crimp Terminal 16 AWG with smaller insulation OD's.

| Terminal Series No.                                                                                                                                                                                                                                                                       | Terminal Order No. |            |            |            | Wire Size |                 | Insulation Diameter |           | Strip Length |           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|------------|------------|-----------|-----------------|---------------------|-----------|--------------|-----------|
|                                                                                                                                                                                                                                                                                           |                    |            |            |            | AWG       | mm <sup>2</sup> | mm                  | In.       | mm           | In.       |
| 5556                                                                                                                                                                                                                                                                                      | 39-00-0077         | 39-00-0118 | 39-00-0173 | 39-00-0204 | 16        | 1.31            | 1.80-2.45           | .071-.096 | 3.00-3.50    | .118-.138 |
|                                                                                                                                                                                                                                                                                           | 39-00-0079         | 39-00-0141 | 39-00-0179 | 39-00-0211 |           |                 |                     |           |              |           |
|                                                                                                                                                                                                                                                                                           | 39-00-0089         | 39-00-0157 | 39-00-0185 | 39-00-0217 |           |                 |                     |           |              |           |
|                                                                                                                                                                                                                                                                                           | 39-00-0093         | 39-00-0167 | 39-00-0198 | 39-00-0447 |           |                 |                     |           |              |           |
|                                                                                                                                                                                                                                                                                           | 39-00-0112         |            |            |            |           |                 |                     |           |              |           |
| 5558                                                                                                                                                                                                                                                                                      | 39-00-0081         | 39-00-0099 | 39-00-0147 | 40-01-0855 | 16        | 1.31            | 1.80-2.45           | .071-.096 | 3.00-3.50    | .118-.138 |
|                                                                                                                                                                                                                                                                                           | 39-00-0083         | 39-00-0124 | 39-00-0223 | 98-00-0176 |           |                 |                     |           |              |           |
|                                                                                                                                                                                                                                                                                           | 39-00-0095         | 39-00-0130 | 39-00-0449 |            |           |                 |                     |           |              |           |
| 44476                                                                                                                                                                                                                                                                                     | 44476-3111         | 44476-3211 |            |            | 16        | 1.31            | 1.80-2.45           | .071-.096 | 3.00-3.50    | .118-.138 |
| 44478                                                                                                                                                                                                                                                                                     | 44478-3111         | 44478-3211 |            |            | 16        | 1.31            | 1.80-2.45           | .071-.096 | 3.00-3.50    | .118-.138 |
| 44485                                                                                                                                                                                                                                                                                     | 44485-3211         | 44485-3311 | 44485-3411 |            | 16        | 1.31            | 1.80-2.45           | .071-.096 | 3.00-3.50    | .118-.138 |
| 45750                                                                                                                                                                                                                                                                                     | 45750-3111         | 45750-3211 |            |            | 16        | 1.31            | 2.20-2.45           | .087-.096 | 3.00-3.50    | .118-.138 |
| 46012                                                                                                                                                                                                                                                                                     | 46012-3111         | 46012-3211 |            |            | 16        | 1.31            | 2.20-2.45           | .087-.096 | 3.00-3.50    | .118-.138 |
| 46018                                                                                                                                                                                                                                                                                     | 46018-3541         |            |            |            | 16        | 1.31            | 2.20-2.45           | .087-.096 | 3.00-3.50    | .118-.138 |
| 46083                                                                                                                                                                                                                                                                                     | 46083-3111         | 46083-3121 | 46083-3211 | 46083-3221 | 16        | 1.31            | 2.20-2.45           | .087-.096 | 3.00-3.50    | .118-.138 |
| 46098                                                                                                                                                                                                                                                                                     | 46098-3541         |            |            |            | 16        | 1.31            | 2.20-2.45           | .087-.096 | 3.00-3.50    | .118-.138 |
| <p>⚠ This Applicator will crimp the above terminals and wires.<br/>However it provides optimum A-620 Class 2 crimps for 16 AWG wire<br/>with insulation O.D. 2.20-2.45mm (example UL1007).<br/>Applicator 63860-1200 should be used for insulation O.D. 2.45-3.15mm (example UL1015).</p> |                    |            |            |            |           |                 |                     |           |              |           |

## DEFINITION OF TERMS

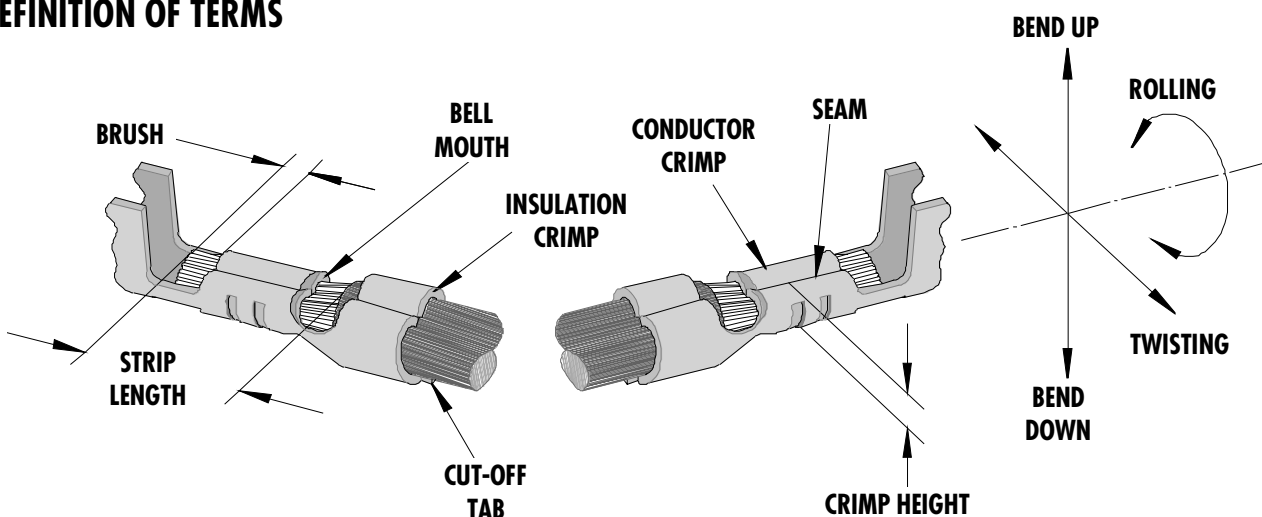

The above terminal drawing is a generic terminal representation. It is not an image of a terminal listed in the scope.

## CRIMP SPECIFICATION

| Terminal Series No. | Bell mouth |           | Cut-off Tab Max. |      | Conductor Brush |           |
|---------------------|------------|-----------|------------------|------|-----------------|-----------|
|                     | mm         | In.       | mm               | In.  | mm              | In.       |
| 5556                | 0.20-0.50  | .008-.020 | 0.30             | .012 | 0.00-1.00       | .000-.039 |
| 5558                | 0.20-0.50  | .008-.020 | 0.30             | .012 | 0.00-1.00       | .000-.039 |
| 44476               | 0.20-0.50  | .008-.020 | 0.30             | .012 | 0.00-1.00       | .000-.039 |
| 44478               | 0.20-0.50  | .008-.020 | 0.30             | .012 | 0.00-1.00       | .000-.039 |
| 44485               | 0.20-0.50  | .008-.020 | 0.30             | .012 | 0.00-1.00       | .000-.039 |
| 45750               | 0.20-0.50  | .008-.020 | 0.30             | .012 | 0.00-1.00       | .000-.039 |
| 46012               | 0.20-0.50  | .008-.020 | 0.30             | .012 | 0.00-1.00       | .000-.039 |
| 46018               | 0.20-0.50  | .008-.020 | 0.30             | .012 | 0.00-1.00       | .000-.039 |
| 46083               | 0.20-0.50  | .008-.020 | 0.30             | .012 | 0.00-1.00       | .000-.039 |
| 46098               | 0.20-0.50  | .008-.020 | 0.30             | .012 | 0.00-1.00       | .000-.039 |

| Terminal Series No. | Bend up | Bend down | Twist  | Roll | Punch Width (Ref) |      |            |      | Seam<br><br>Seam shall not be open<br>And no wire allowed out<br>of the crimping area |
|---------------------|---------|-----------|--------|------|-------------------|------|------------|------|---------------------------------------------------------------------------------------|
|                     |         |           |        |      | Conductor         |      | Insulation |      |                                                                                       |
|                     | Degree  |           | Degree |      | mm                | In.  | mm         | In.  |                                                                                       |
| 5556                | 5       | 2         | 5      | 15   | 1.90              | .075 | 2.60       | .102 |                                                                                       |
| 5558                | 5       | 2         | 5      | 15   | 1.90              | .075 | 2.60       | .102 |                                                                                       |
| 44476               | 5       | 2         | 5      | 15   | 1.90              | .075 | 2.60       | .102 |                                                                                       |
| 44478               | 5       | 2         | 5      | 15   | 1.90              | .075 | 2.60       | .102 |                                                                                       |
| 44485               | 5       | 2         | 5      | 15   | 1.90              | .075 | 2.60       | .102 |                                                                                       |
| 45750               | 5       | 2         | 5      | 15   | 1.90              | .075 | 2.60       | .102 |                                                                                       |
| 46012               | 5       | 2         | 5      | 15   | 1.90              | .075 | 2.60       | .102 |                                                                                       |
| 46018               | 5       | 2         | 5      | 15   | 1.90              | .075 | 2.60       | .102 |                                                                                       |
| 46083               | 5       | 2         | 5      | 15   | 1.90              | .075 | 2.60       | .102 |                                                                                       |
| 46098               | 5       | 2         | 5      | 15   | 1.90              | .075 | 2.60       | .102 |                                                                                       |

After crimping, the crimp profiles should measure the following:

| Terminal Series No. | Wire Size |                 | Conductor    |           |                   |      | Pull Force Min. |      |
|---------------------|-----------|-----------------|--------------|-----------|-------------------|------|-----------------|------|
|                     |           |                 | Crimp Height |           | Crimp Width (Ref) |      |                 |      |
|                     | AWG       | mm <sup>2</sup> | mm           | In.       | mm                | In.  | N               | Lb.  |
| 5556                | 16        | 1.31            | 1.14-1.24    | .045-.049 | 1.97              | .078 | 68.4            | 15.4 |
| 5558                | 16        | 1.31            | 1.14-1.24    | .045-.049 | 1.97              | .078 | 68.4            | 15.4 |
| 44476               | 16        | 1.31            | 1.14-1.24    | .045-.049 | 1.97              | .078 | 68.4            | 15.4 |
| 44478               | 16        | 1.31            | 1.14-1.24    | .045-.049 | 1.97              | .078 | 68.4            | 15.4 |
| 44485               | 16        | 1.31            | 1.14-1.24    | .045-.049 | 1.97              | .078 | 68.4            | 15.4 |
| 45750               | 16        | 1.31            | 1.14-1.24    | .045-.049 | 1.97              | .078 | 68.4            | 15.4 |
| 46012               | 16        | 1.31            | 1.14-1.24    | .045-.049 | 1.97              | .078 | 68.4            | 15.4 |
| 46018               | 16        | 1.31            | 1.14-1.24    | .045-.049 | 1.97              | .078 | 68.4            | 15.4 |
| 46083               | 16        | 1.31            | 1.14-1.24    | .045-.049 | 1.97              | .078 | 68.4            | 15.4 |
| 46098               | 16        | 1.31            | 1.14-1.24    | .045-.049 | 1.97              | .078 | 68.4            | 15.4 |

 Tool Qualification Notes:

1. Pull Force should be measured with no influence from the insulation crimp.
2. The above specifications are guidelines to an optimum crimp.

**PARTS LIST**

| <b>FineAdjust Applicator 63860-1500</b>                                      |                 |                        |                          |                 |
|------------------------------------------------------------------------------|-----------------|------------------------|--------------------------|-----------------|
| <b>Item</b>                                                                  | <b>Order No</b> | <b>Engineering No.</b> | <b>Description</b>       | <b>Quantity</b> |
| <b>Perishable Tooling</b>                                                    |                 |                        |                          |                 |
|                                                                              | 63860-1570      | 63860-1570             | Tool Kit (All "Y" Items) | REF             |
| 1                                                                            | 63444-1909      | 63444-1909             | Conductor Punch          | 1 Y             |
| 2                                                                            | 63445-1943      | 63445-1943             | Conductor Anvil          | 1 Y             |
| 3                                                                            | 63446-2610      | 63446-2610             | Insulation Punch         | 1 Y             |
| 4                                                                            | 63445-2610      | 63445-2610             | Insulation Anvil         | 1 Y             |
| 5                                                                            | 63443-0002      | 63443-0002             | Cut-Off Plunger Front    | 1 Y             |
| 6                                                                            | 63443-0012      | 63443-0012             | Plunger Retainer Front   | 1 Y             |
| <b>Other Components</b>                                                      |                 |                        |                          |                 |
| 7                                                                            | 11-18-4083      | 60707-8                | Front Cover              | 1               |
| 8                                                                            | 11-24-1067      | 4996-4                 | Cut-off Plunger Spring   | 1               |
| 9                                                                            | 11-40-4039      | 8302-5                 | Plunger Striker Front    | 1               |
| 10                                                                           | 63443-0009      | 63443-0009             | Scrap Chute Front        | 1               |
| 11                                                                           | 63443-0021      | 63443-0021             | Lower Tooling Key        | 1               |
| 12                                                                           | 63443-2408      | 63443-2408             | Anvil Mount              | 1               |
| 13                                                                           | 63443-4018      | 63443-4018             | Wire Stop                | 1               |
| 14                                                                           | 63443-6003      | 63443-6003             | Rear Cover               | 1               |
| <b>Frame</b>                                                                 |                 |                        |                          |                 |
| 15                                                                           | 63800-4901      | 63800-4901             | Top                      | 1               |
| 16                                                                           | 63801-3281      | 63801-3281             | Base                     | 1               |
| 17                                                                           | 63801-4650      | 63801-4650             | Track                    | 1               |
| <b>Hardware</b>                                                              |                 |                        |                          |                 |
| 18                                                                           | N/A             | N/A                    | M3 by 6 Long SHCS        | 2**             |
| 19                                                                           | N/A             | N/A                    | M4 by 6 Long SHCS        | 1**             |
| 20                                                                           | N/A             | N/A                    | M4 by 12 Long BHCS       | 2**             |
| 21                                                                           | N/A             | N/A                    | M4 by 16 Long SHCS       | 1**             |
| 22                                                                           | N/A             | N/A                    | M4 by 20 Long SHCS       | 1**             |
| 23                                                                           | N/A             | N/A                    | M4 by 50 Long SHCS       | 1**             |
| 24                                                                           | N/A             | N/A                    | 3MM by 6 Long Roll Pin   | 1**             |
| 25                                                                           | N/A             | N/A                    | #10-32 by 1/4" Long BHCS | 1**             |
| ** Available from an industrial supply company such as MSC (1-800-645-7270). |                 |                        |                          |                 |

# Assembly Drawing

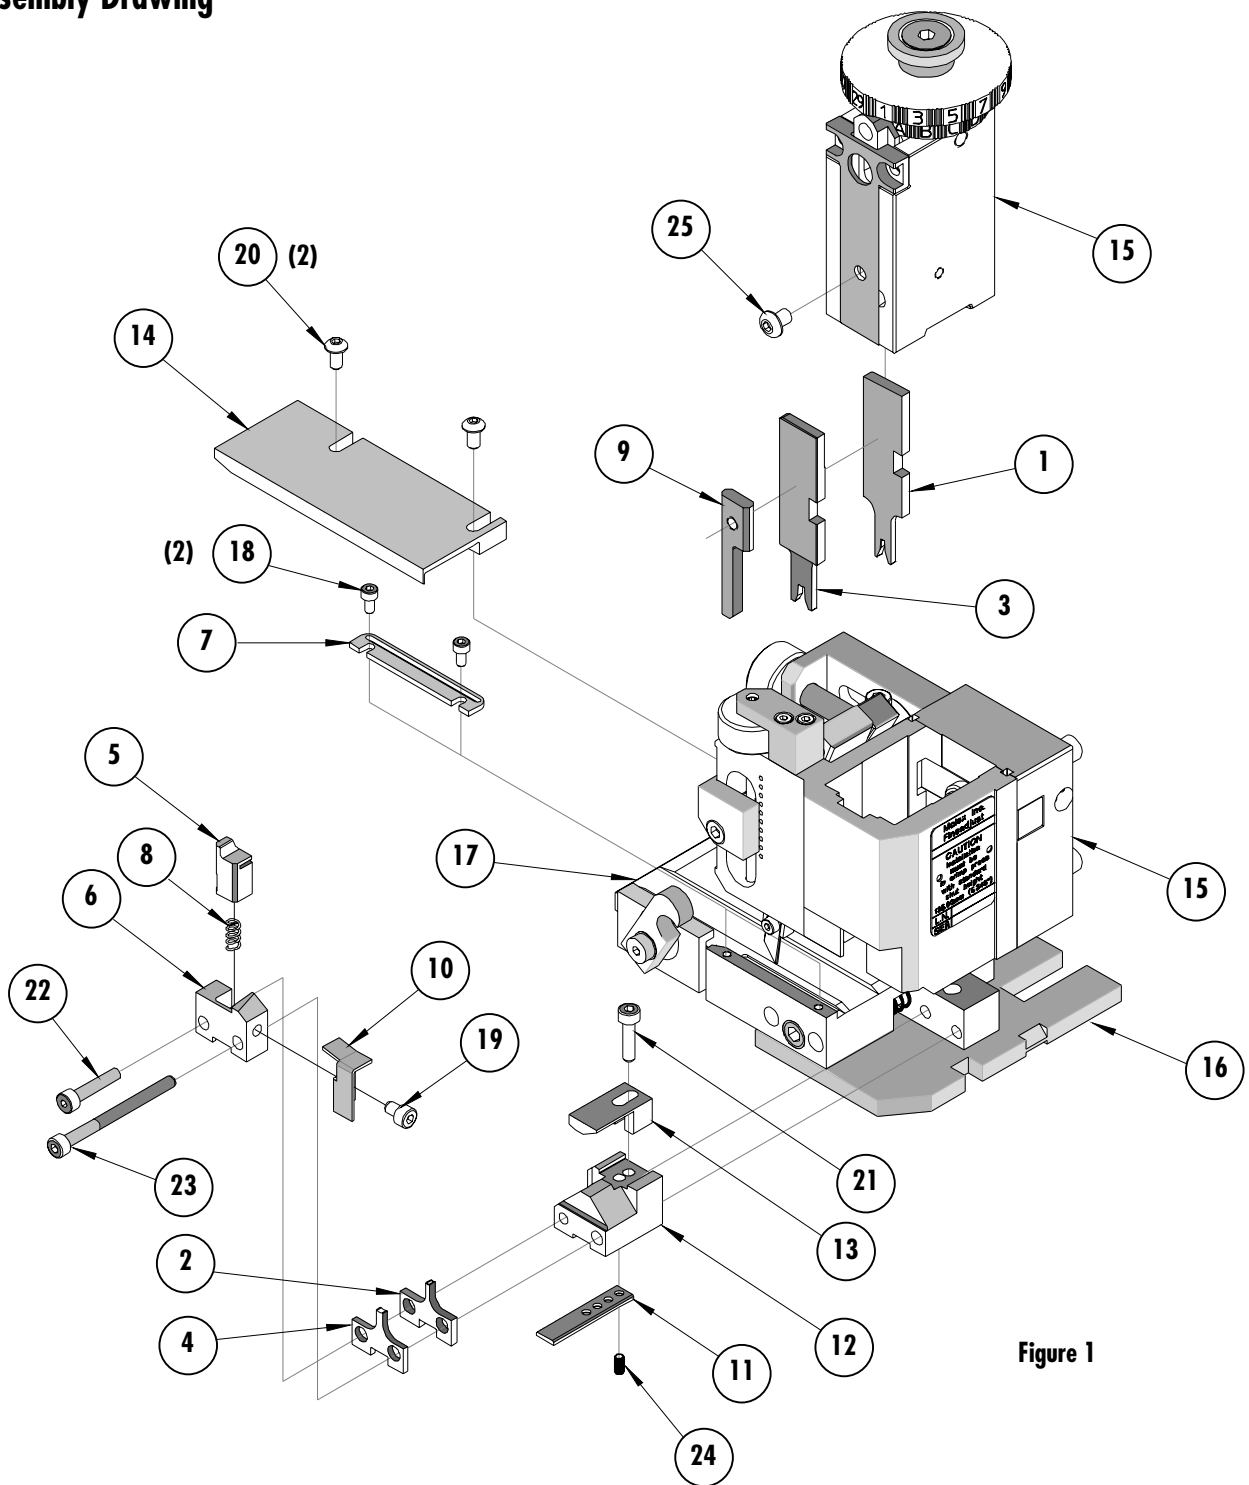


Figure 1

## NOTES

1. Molex recommends an extra perishable tooling kit be maintained at your facility.
2. Verify tooling alignment by manually cycling the press and Applicator before crimping under power. Check that all screws are tight.
3. Slugs, Terminals, Dirt and Oil should be kept clear of work area.
4. Wear safety glasses at all times.
5. For recommended maintenance refer to the FineAdjust Manual.

**CAUTION:** This applicator should only be used in a press with a shut height of 135.80 mm (5.346"). Tooling damage could result at a lower setting.

**CAUTION:** To prevent injury never operate this Applicator without the guards supplied with the press or wire-processing machine in place. Reference the press or wire processing manufacturer's instruction manual.

**CAUTION:** Molex crimp specifications are valid only when used with Molex terminals, applicators and tooling.

**Americas Headquarters**

Lisle, Illinois 60532 U.S.A.  
1-800-78MOLEX  
amerinfo@molex.com

**Far East North Headquarters**

Yamato, Kanagawa, Japan  
81-462-65-2324  
feninfo@molex.com

**Far East South Headquarters**

Jurong, Singapore  
65-6-268-6868  
fesinfo@molex.com

**European Headquarters**

Munich, Germany  
49-89-413092-0  
eurinfo@molex.com

**Corporate Headquarters**

2222 Wellington Ct.  
Lisle, IL 60532 U.S.A.  
630-969-4550  
Fax: 630-969-1352

Visit our Web site at <http://www.molex.com>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.