



Micro Commercial Components  
 20736 Marilla Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

**1N5338B  
 THRU  
 1N5369B**

**Features**

- Zener Voltage From 5.1V to 51V
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Lead Free Finish/RoHS Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)
- Marking : Cathode band and type number

**5 Watt  
 Zener Diode  
 5.1 to 51 Volts**

**Maximum Ratings:**

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- 5 Watt DC Power Dissipation
- Maximum Forward Voltage @ 1A: 1.2 Volts
- Power Derating: 40 mW/°C Above 75°C
- Maximum thermal resistance: 25C/W from junction to ambient

DO-15

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.230	.300	5.80	7.60	
B	.104	.140	2.60	3.60	
C	.026	.034	.70	.90	
D	1.000	---	25.40	---	

**Mechanical Data**

Case: JEDEC DO-15.  
 Terminals: Solder plated , solderable per MIL-STD-750,  
 Method 2026.  
 Standard Packaging: 52mm tape

Note: 1. High Temperature Solder Exemption Applied, see EU Directive Annex 7.

**1N5338B THRU 1N5369B**

ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C unless otherwise noted, V<sub>F</sub>=1.2 Max @ I<sub>F</sub>=1A for all types).

MCC PART NUMBER	REGULATOR VOLTAGE V <sub>Z</sub> (Note2)	TEST CURRENT I <sub>ZT</sub>	MAXIMUM DYNAMIC IMPEDANCE Z <sub>ZK</sub> (@I <sub>ZT</sub> ) (Note2)	MAXIMUM REVERSE CURRENT I <sub>R</sub>	TEST VOLTAGE V <sub>R</sub>	MAXIMUM REGULATOR CURRENT I <sub>ZM</sub> (Note5)	MAXIMUM DYNAMIC KNEE IMPEDANCE ZZK@ 1.0mA (Note2)	MAXIMUM SURGE CURRENT I <sub>s</sub> (Note3)	MAXIMUM VOLTAGE REGULATION (Note4)
	VOLTS	mA	OHMS	μA	VOLTS	mA	ohms	A	VOLTS
1N5338B	5.1	240	1.5	1.0	1.0	930	400	14.4	0.39
1N5339B	5.6	220	1.0	1.0	2.0	865	400	13.4	0.25
1N5340B	6.0	200	1.0	1.0	3.0	790	300	12.7	0.19
1N5341B	6.2	200	1.0	1.0	3.0	765	200	12.4	0.10
1N5342B	6.8	175	1.0	10	5.2	700	200	11.5	0.15
1N5343B	7.5	175	1.5	10	5.7	630	200	10.7	0.15
1N5344B	8.2	150	1.5	10	6.2	580	200	10	0.20
1N5345B	8.7	150	2.0	10	6.6	545	200	9.5	0.20
1N5346B	9.1	150	2.0	7.5	6.9	520	150	9.2	0.22
1N5347B	10	125	2.0	5.0	7.6	475	125	8.6	0.22
1N5348B	11	125	2.5	5.0	8.4	430	125	8.0	0.25
1N5349B	12	100	2.5	2.0	9.1	395	125	7.5	0.25
1N5350B	13	100	2.5	1.0	9.9	365	100	7.0	0.25
1N5351B	14	100	2.5	1.0	10.6	340	75	6.7	0.25
1N5352B	15	75	2.5	1.0	11.5	315	75	6.3	0.25
1N5353B	16	75	2.5	1.0	12.2	295	75	6.0	0.30
1N5354B	17	70	2.5	0.5	12.9	280	75	5.8	0.35
1N5355B	18	65	2.5	0.5	13.7	264	75	5.5	0.40
1N5356B	19	65	3.0	0.5	14.4	250	75	5.3	.040
1N5357B	20	65	3.0	0.5	15.2	237	75	5.1	.040
1N5358B	22	50	3.5	0.5	16.7	216	75	4.7	0.45
1N5359B	24	50	3.5	0.5	18.2	198	100	4.4	0.55
1N5360B	25	50	4.0	0.5	19	190	110	4.3	0.55
1N5361B	27	50	5.0	0.5	20.6	176	120	4.1	0.60
1N5362B	28	50	6.0	0.5	21.2	170	130	3.9	0.60
1N5363B	30	40	8.0	0.5	22.8	158	140	3.7	0.60
1N5364B	33	40	10	0.5	25.1	144	150	3.5	0.60
1N5365B	36	30	11	0.5	27.4	132	160	3.3	0.65
1N5366B	39	30	14	0.5	29.7	122	170	3.1	0.65
1N5367B	43	30	20	0.5	32.7	110	190	2.8	0.70
1N5368B	47	25	25	0.5	35.8	100	210	2.7	0.80
1N5369B	51	25	27	0.5	38.8	93	230	2.5	0.90

NOTE:

1. TOLERANCE AND VOLTAGE DESIGNATION - The JEDEC type numbers shown indicate a tolerance of +/-10% with guaranteed limits on only V<sub>Z</sub>, I<sub>R</sub>, I<sub>s</sub>, and V<sub>F</sub> as shown in the electrical characteristics table. Units with guaranteed limits on all seven parameters are indicated by suffix "B" for +/-5% tolerance.
2. ZENER VOLTAGE (V<sub>Z</sub>) AND IMPEDANCE (Z<sub>ZT</sub> & Z<sub>ZK</sub>) - Test conditions for Zener voltage and impedance are as follows; I<sub>Z</sub> is applied 40+/-10 ms prior to reading. Mounting contacts are located from the inside edge of mounting clips to the body of the diode(T<sub>a</sub>=25°C )

1N5338B THRU 1N5369B

3. SURGE CURRENT ( $I_r$ ) - Surge current is specified as the maximum allowable peak, non-recurrent square-wave current with a pulse width, PW, of 8.3 ms. The data given in Figure 5 may be used to find the maximum surge current for a square wave of any pulse width between 1 ms and 1000ms by plotting the applicable points on logarithmic paper. Examples of this, using the 6.8v, is shown in Figure 6. Mounting contact located as specified in Note 3. ( $T_A=25^\circ\text{C}$ ).
4. VOLTAGE REGULATION ( $V_z$ ) - Test conditions for voltage regulation are as follows:  $V_z$  measurements are made at 10% and then at 50% of the  $I_z$  max value listed in the electrical characteristics table. The test currents are the same for the 5% and 10% tolerance devices. The test current time duration for each  $V_z$  measurement is 40+/- 10 ms. ( $T_A=25^\circ\text{C}$ ). Mounting contact located as specified in Note2.
5. MAXIMUM REGULATOR CURRENT ( $I_{ZM}$ ) - The maximum current shown is based on the maximum voltage of a 5% type unit. Therefore, it applies only to the B-suffix device. The actual  $I_{ZM}$  for any device may not exceed the value of 5 watts divided by the actual  $V_z$  of the device.  $T_L=75^\circ\text{C}$  at maximum from the device body.

APPLICATION NOTE:

Since the actual voltage available from a given Zener diode is temperature dependent, it is necessary to determine junction temperature under any set of operating conditions in order to calculate its value. The following procedure is recommended:

Lead Temperature,  $T_L$ , should be determined from:

$$T_L = \theta_{LA} P_D + T_A$$

$\theta_{LA}$  is the lead-to-ambient thermal resistance and  $P_D$  is the power dissipation.

Junction Temperature,  $T_J$ , may be found from:

$$T_J = T_L + \Delta T_{JL}$$

$\Delta T_{JL}$  is the increase in junction temperature above the lead temperature and may be found from Figure 4 for a train of power pulses or from Figure 1 for dc power.

$$\Delta T_{JL} = \theta_{JL} P_D$$

For worst-case design, using expected limits of  $I_z$ , limits of  $P_D$  and the extremes of  $T_J$  ( $\Delta T_J$ ) may be estimated. Changes in voltage,  $V_Z$ , can then be found from:

$$\Delta V = \theta_{VZ} \Delta T_J$$

$\theta_{VZ}$ , the Zener voltage temperature coefficient, is found from Figures 2 and 3.

Under high power-pulse operation, the Zener voltage will vary with time and may also be affected significantly by the zener resistance. For best regulation, keep current excursions as low as possible.

Data of Figure 4 should not be used to compute surge capability. Surge limitations are given in Figure 5. They are lower than would be expected by considering only junction temperature, as current crowding effects cause temperatures to be extremely high in small spots resulting in device degradation should the limits of Figure 5 be exceeded.

RATING AND CHARACTERISTICS CURVES  
1N5338B THRU 1N5369B

TEMPERATURE COEFFICIENTS

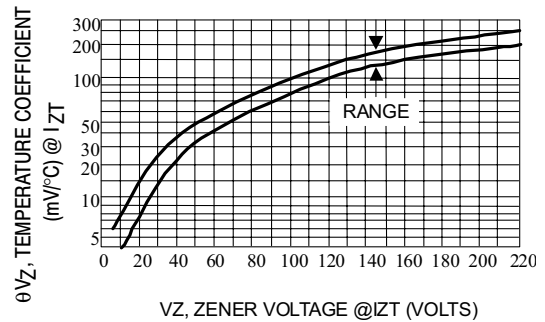
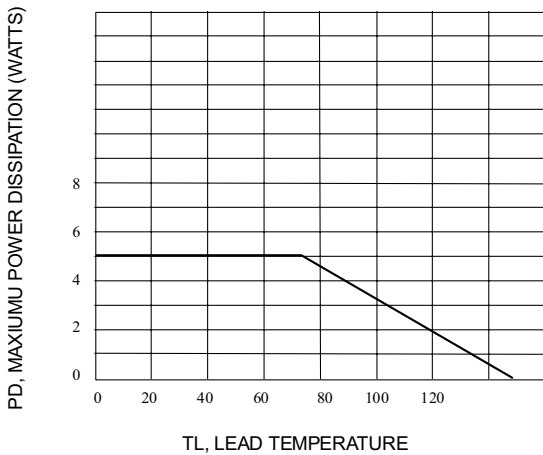


Fig. 1-POWER TEMPERATURE DERATING CURVE

Fig. 2-TEMPERATURE COEFFICIENT-RANGE FOR UNITS 6 TO 51 VOLTS

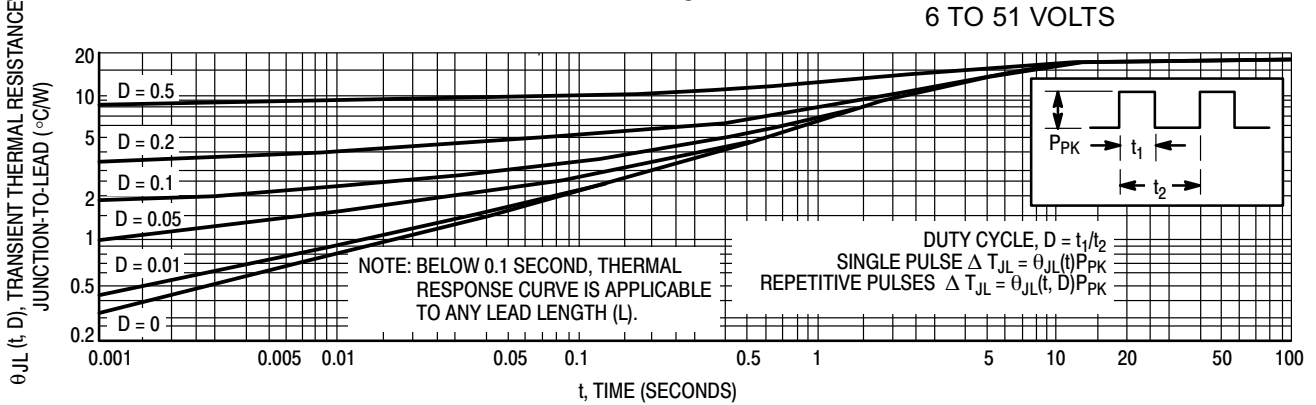


Figure 3. Typical Thermal Response  
L, Lead Length = 3/8 Inch

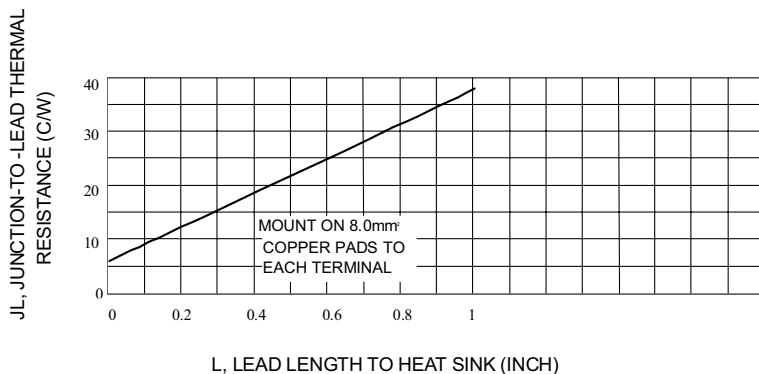


Fig. 4-TYPICAL THERMAL RESISTANCE

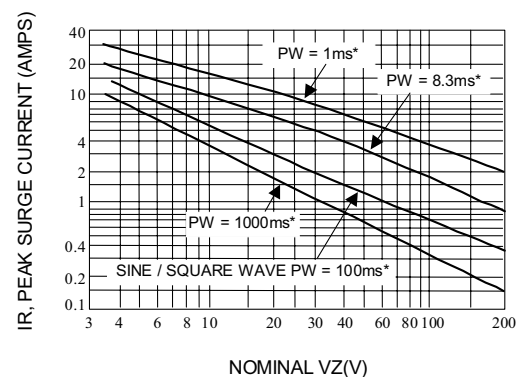


Fig. 5-MAXIMUM NON-REPETITIVE SURGE CURRENT VERSUS NOMINAL ZENER VOLTAGE (SEE NOTE 3)

RATING AND CHARACTERISTICS CURVES  
1N5338B THRU 1N5369B

ZENER VOLTAGE VERSUS ZENER CURRENT  
(FIGURES 7,8)

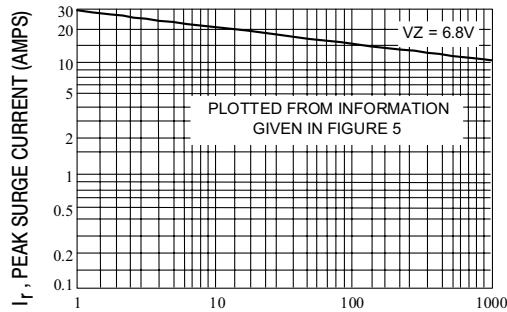


Fig. 6-PEAK SURGE CURRENT VERSUS PULSE WIDTH(SEE NOTE 3)

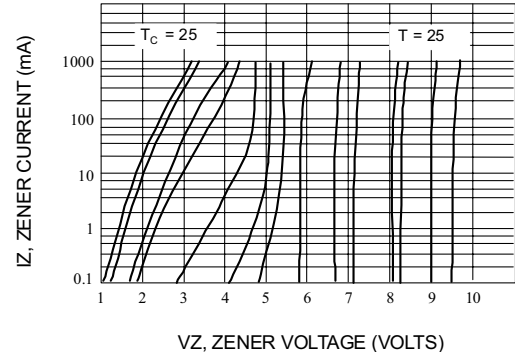


Fig. 7-ZENER VOLTAGE VERSUS ZENER CURRENT  
 $V_Z = 6.8$  THRU 10 VOLTS

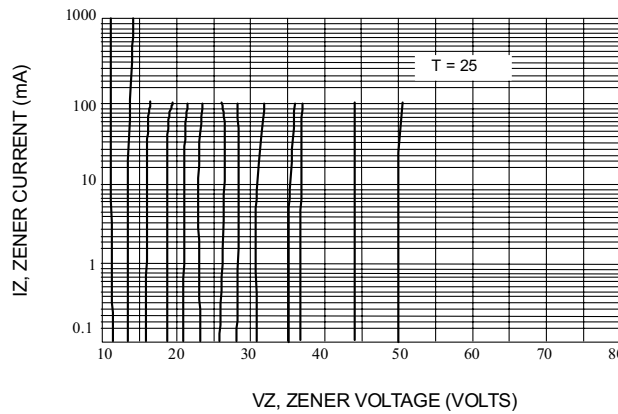


Fig. 8-ZENER VOLTAGE VERSUS ZENER CURRENT  
 $V_Z = 11$  THRU 51 VOLTS

\*\*\* Data of Figure 3 should not be used to compute surge capability. Surge limitations are given in Figure 5. They are lower than would be expected by considering only junction temperature, as current crowding effects cause temperatures to be extremely high in small spots resulting in device degradation should the limits of Figure. 5 be exceeded



Micro Commercial Components

### Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 4Kpcs/Reel
Part Number-AP	Ammo Packing: 3Kpcs/Ammo Box
Part Number-BP	Bulk: 25Kpcs/Carton

**\*\*\*IMPORTANT NOTICE\*\*\***

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

**\*\*\*LIFE SUPPORT\*\*\***

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

**\*\*\*CUSTOMER AWARENESS\*\*\***

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

[www.mccsemi.com](http://www.mccsemi.com)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.