

# Discontinued

RFM products are now  
Murata products.

## RF1414D


- Ideal Front-End Filter for European Wireless Receivers
- Low-Loss, Coupled-Resonator Quartz Design
- Simple External Impedance Matching
- Complies with Directive 2002/95/EC (RoHS)



The RF1414D is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter designed to provide front-end selectivity in 372.500 MHz receivers. Receiver designs using this filter include superhet with 10.7 MHz or 500 kHz IF, direct conversion and superregen. Typical applications of these receivers are wireless remote-control and security.

This coupled-resonator filter (CRF) uses selective null placement to provide suppression, typically greater than 40 dB, of the LO and image spurious responses of superhet receivers with 10.7 MHz IF. Murata's advanced SAW design and fabrication technology is utilized to achieve high performance and very low loss with simple external impedance matching.

## 372.500 MHz SAW Filter



**SM3838-8 Case**  
**3.8 x 3.8**

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units	
Center Frequency at 25°C    Absolute Frequency	f <sub>c</sub>	1, 2, 3		372.500		MHz	
Insertion Loss	I <sub>L</sub> <sub>MIN</sub>	1, 3		2.1	3.0	dB	
3 dB Bandwidth	BW <sub>3</sub>	1, 3	350		500	kHz	
Rejection Attenuation: (relative to ILmin)	10 - 354 MHz 354 - 364 MHz 364 - 369 MHz 369 - 370 MHz 374 - 378 MHz 378 - 380 MHz 380 - 382 MHz 382 - 389 MHz 389 - 550 MHz 550 - 1000 MHz	1, 3	45 35 25 14 25 15 20 25 45 40	50 40 30 15 30 20 25 28 50 45		dB	
Temperature    Freq. Temp. Coefficient	F <sub>TC</sub>			0.032			
Frequency Aging	Absolute Value during the First Year	f <sub>A</sub>	5		≤10		
Impedance @ f <sub>c</sub>	Input Z <sub>IN</sub> = R <sub>IN</sub>   C <sub>IN</sub>	Z <sub>IN</sub>	1	27.8 // 2.3 pf			
	Output Z <sub>OUT</sub> = R <sub>OUT</sub>   C <sub>OUT</sub>	Z <sub>OUT</sub>		41 // 2.3 pf			
Lid Symbolization (Y=year WW=week S=shift)							
Standard Reel Quantity		Reel Size 7 Inch	9	500 Pieces/Reel			
		Reel Size 13 Inch		3000 Pieces/Reel			



**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**


### NOTES:

1. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture which is connected to a 50 Ω test system with VSWR ≤ 1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f<sub>c</sub>. Note that insertion loss and bandwidth and passband shape are dependent on the impedance matching component values and quality.
2. The frequency f<sub>c</sub> is defined as the midpoint between the 3dB frequencies.
3. Where noted specifications apply over the entire specified operating temperature range of -40°C to +90°C.
4. The turnover temperature, T<sub>O</sub>, is the temperature of maximum (or turnover) frequency, f<sub>c</sub>. The nominal frequency at any case temperature, T<sub>C</sub>, may be calculated from: f = f<sub>c</sub> [1 - F<sub>TC</sub> (T<sub>O</sub> - T<sub>C</sub>)<sup>2</sup>].
5. Frequency aging is the change in f<sub>c</sub> with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing significantly in subsequent years.
6. The design, manufacturing process, and specifications of this device are subject to change.
7. One or more of the following U.S. Patents apply: 4,54,488, 4,616,197, and others pending.
8. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
9. Tape and Reel Standard Per ANSI / EIA 481.


Rating	Value	Units
Input Power Level	10	dBm
DC Voltage	12	VDC
Storage Temperature	-40 to +125	°C
Operable Temperature Range	-40 to +125	°C
Soldering Temperature (10 seconds / 5 cycles max.)	260	°C

### Electrical Connections

Pin	Connection
1	Input
2	Input Ground
3	Ground
4	Case Ground
5	Output
6	Output Ground
7	Ground
8	Case Ground

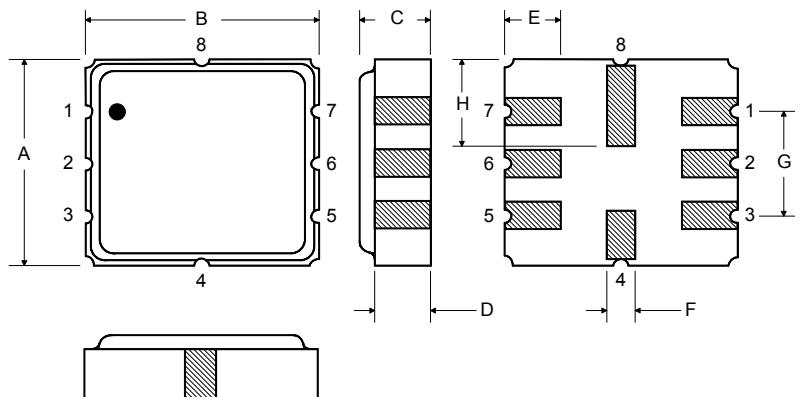

### Matching Circuit to 50Ω

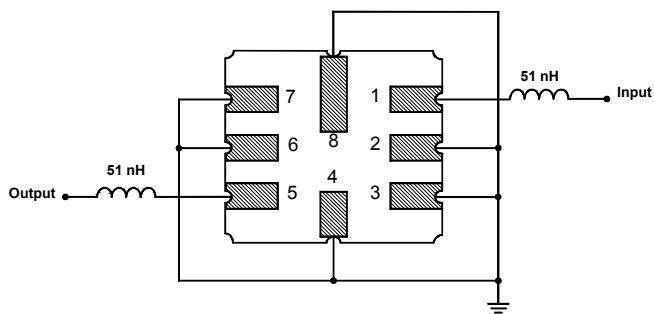

Optional


### Electrical Connections

Pin	Connection
1	Input Ground
2	Input
3	Input Ground
4	Case Ground
5	Output Ground
6	Output
7	Output Ground
8	Case Ground

### Case Dimensions

Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	3.6	3.8	4.0	0.14	0.15	0.16
B	3.6	3.8	4.0	0.14	0.15	0.16
C	1.00	1.20	1.40	0.04	0.05	0.055
D	0.95	1.10	1.25	0.033	0.043	0.05
E	0.90	1.0	1.10	0.035	0.04	0.043
F	0.50	0.6	0.70	0.020	0.024	0.028
G	2.39	2.54	2.69	0.090	0.100	0.110
H	1.40	1.75	2.05	0.055	0.069	0.080

### Matching Circuit to 50Ω

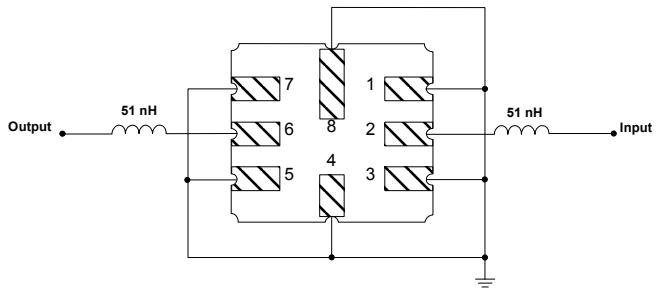



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: [org@eplast1.ru](mailto:org@eplast1.ru)

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.