



300mA Low-Noise CMOS LDO

AP139


■ Features

- Very low dropout voltage
- Low current consumption: Typ.45 μ A, Max. 60 μ A
- Output voltage: 1.5V, 1.8V, 2.0V, 2.5V, 2.8V, 3.0V, 3.3V, and 3.5V
- Guaranteed 300mA output
- Input range up to 7.0V
- Thermal shutdown
- Current limiting
- Stability with low ESR capacitors
- Low temperature coefficient
- **Pb-free** package: SOT23-5L, TSOT23-5L


■ Applications

- Battery-powered devices
- Personal communication devices
- Home electric/electronic appliances
- PC peripherals

■ Pin Assignments



■ Ordering Information

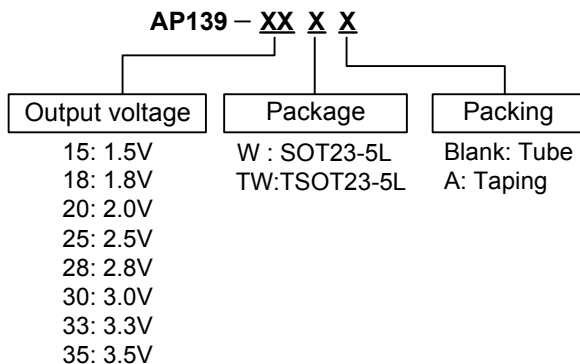

■ General Descriptions

The AP139 is a positive voltage linear regulator utilizing CMOS technology. The features that include low quiescent current (45 μ A typ.), low dropout voltage, and high output voltage accuracy, make it ideal for battery applications. EN input connected to CMOS has low bias current. The space-saving SOT23-5L and TSOT23-5L package is attractive for “Pocket” and “Hand Held” applications.

This rugged device has both thermal shutdown, and current limit protections to prevent device failure under the “Worst” operating conditions.


In a low noise, regulated supply application, a 10nF capacitor is necessary to be placed in between Bypass and Ground.

The AP139 is stable with a low ESR output capacitor of 1.0 μ F or greater.

■ Pin Descriptions

Pin Name	Pin No.	Function
V _{IN}	1	Power Supply
GND	2	Ground
EN	3	Enable Pin
BYP	4	Bypass Signal Pin
V _{OUT}	5	Output

■ Block Diagram

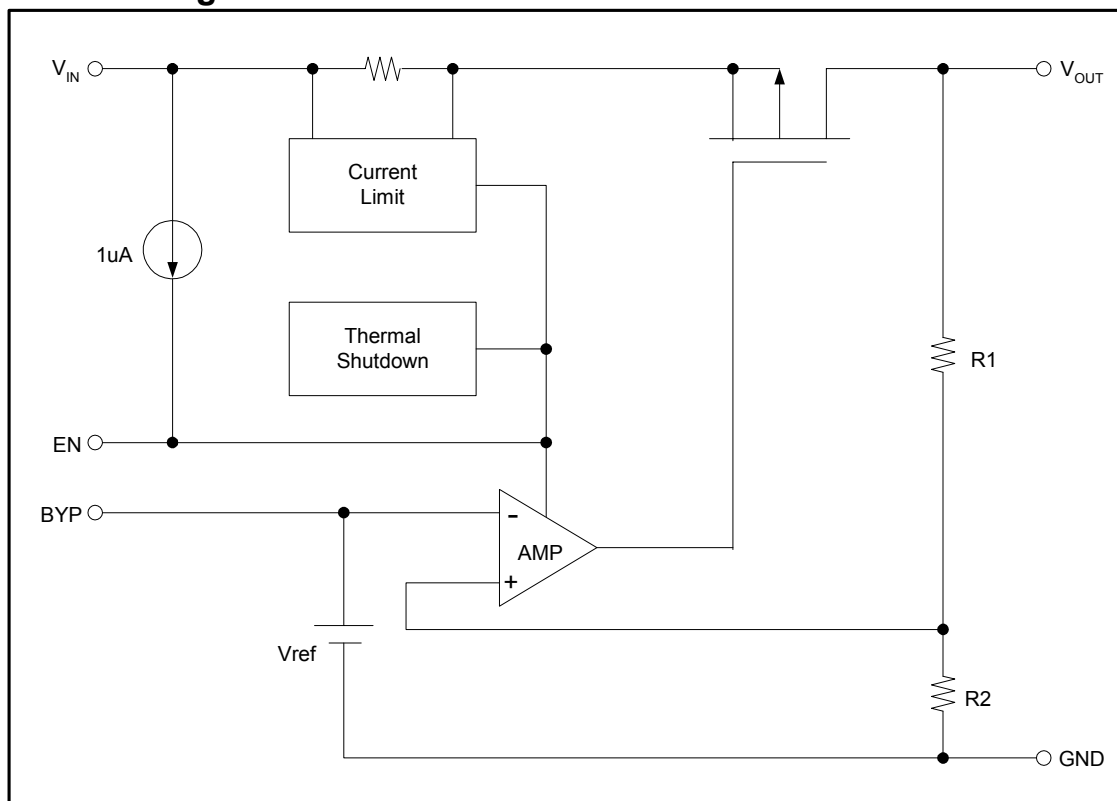

■ Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
V_{IN}	Input Voltage	+7	V
I_{OUT}	Output Current	$P_D / (V_{IN} - V_O)$	mA
V_{OUT}	Output Voltage	GND - 0.3 to $V_{IN} + 0.3$	V
	ESD Classification	B	
T_A	Ambient Temperature Range	-40 to +85	°C
T_J	Junction Temperature Range	-40 to +125	°C

■ Thermal Information

Symbol	Parameter		Maximum	Unit
θ_{jc}	Thermal Resistance	SOT23-5L	160	°C/W
P_D	Internal Power Dissipation ($\Delta T = 100^\circ\text{C}$)	SOT23-5L	250	mW
T_J	Maximum Junction Temperature		150	°C
T_{Lead}	Maximum Lead Temperature (10 sec)		300	°C


■ Electrical Characteristics

(T_A=+25°C, unless otherwise noted.)







Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V _{IN}	Input Voltage		Note 1	-	7	V
I _Q	Quiescent Current	I _O =0mA	-	45	60	μA
I _{STB}	Standby Current	V _{IN} =5.0V, V _{OUT} =0V, V _{EN} < V _{EL}	-	2.0	3.0	μA
V _{OUT}	Output Voltage Accuracy	I _O =1mA, V _{IN} =5V	-2	-	2	%
	V _{OUT} Temperature Coefficient		-	50	-	ppm/°C
V _{DROPOUT}	Dropout Voltage	I _O =1mA to 300mA, V _{OUT} =V _{O(NOM)} -1.5%	V _O = 1.5V	-	-	1.5
			V _O = 1.8V	-	-	1.2
			V _O = 2V	-	-	1
			V _O = 2.5V	-	-	0.6
			V _O ≥ 2.8V	-	-	0.45
I _{OUT}	Output Current		300	-	-	mA
I _{LIMIT}	Current Limit	V _{OUT} > 1.05V	300	450	-	mA
I _{short}	Short Circuit Current	V _{CC} =5V, V _{out} <1.05V	-	150	300	mA
ΔV _{LINE}	Line Regulation	I _{OUT} =5mA, V _{IN} =5~7V	-	0.1	0.3	%
ΔV _{LOAD}	Load Regulation	I _O =1mA to 300mA, V _{IN} =5V	-	0.3	1	%
PSRR	Power Supply Rejection	I _O =100mA, C _O =2.2μF ceramic	f=1KHz	-	60	-
			f=10KHz	-	50	-
			f=100KHz	-	40	-
PSRR	Power Supply Rejection	I _O =100mA, C _O =2.2μF ceramic, C _{BYP} =20nF	f=1KHz	-	75	-
			f=10KHz	-	55	-
			f=100KHz	-	30	-
V _{EH}	EN Input Threshold	Output ON	1.7	-	-	V
V _{EL}		Output OFF	-	-	0.8	V
I _{EN}	Enable Pin Current		-	-	<0.1	μA
OTS	Over Temperature Shutdown		-	130	-	°C
OTH	Over Temperature Hysteresis		-	20	-	°C

Note 1.: V_{IN(MIN)}=V_{OUT}+V_{DROPOUT}


■ Typical Application

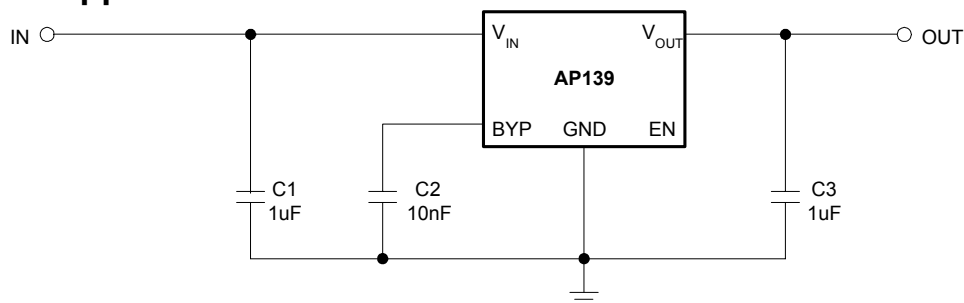

■ Typical Performance Characteristics

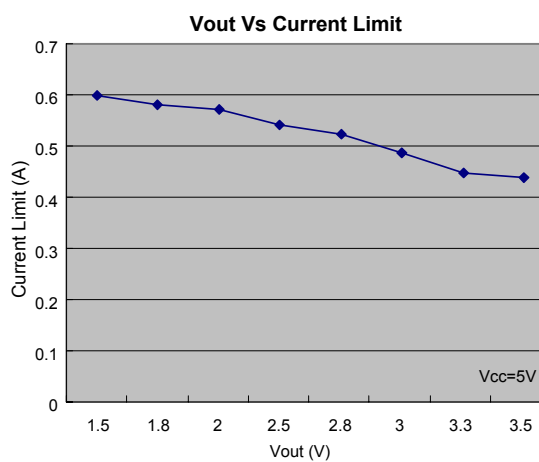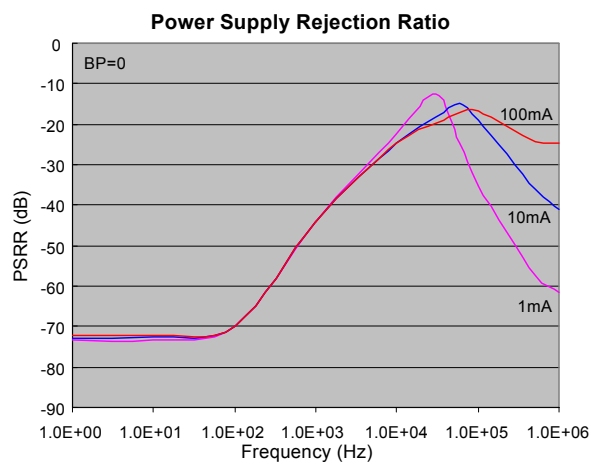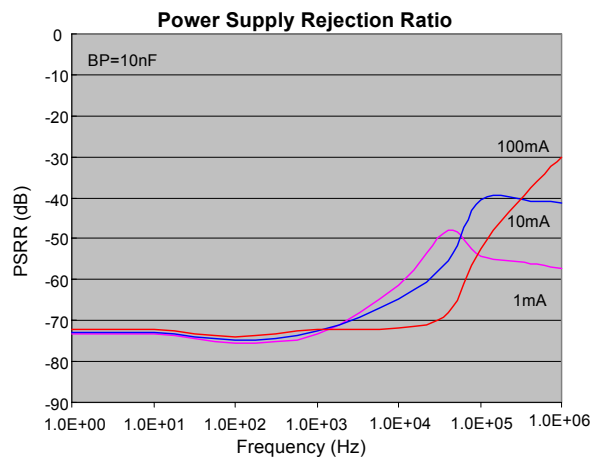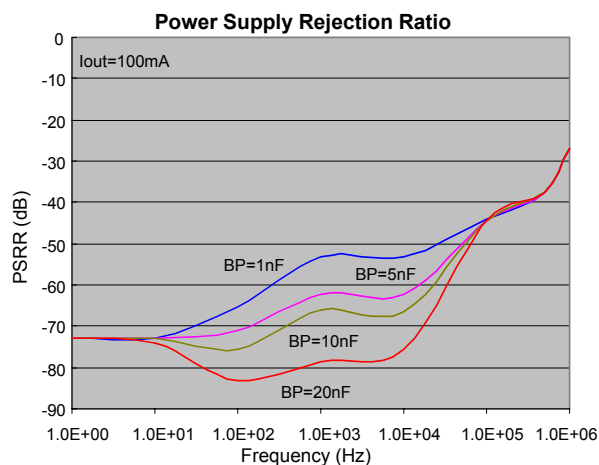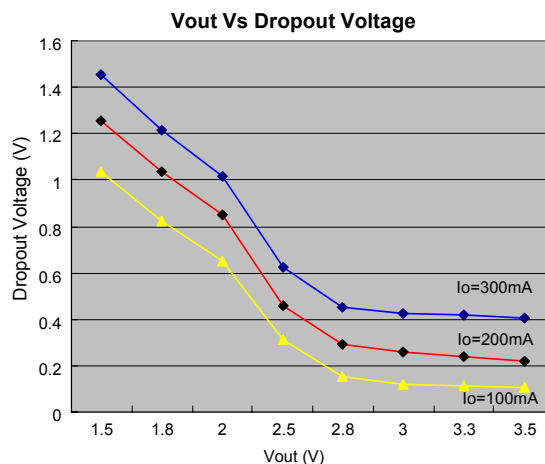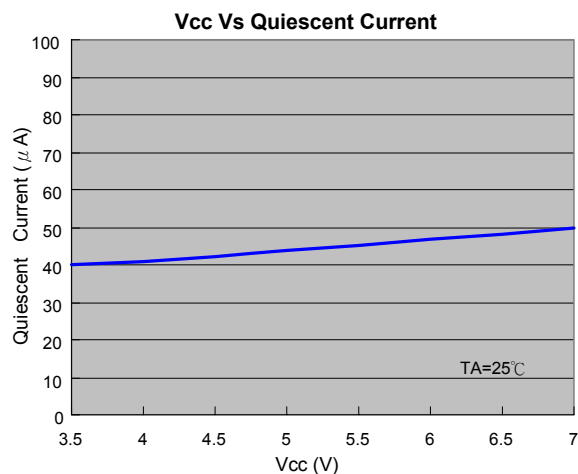

■ Typical Performance Characteristics (Continued)

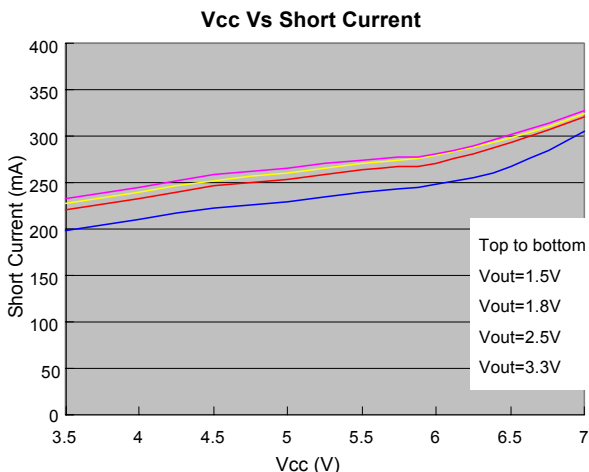

■ Function Description

The AP139 of CMOS regulators contain a PMOS pass transistor, voltage reference, error amplifier, over-current protection, thermal shutdown.

The P-channel pass transistor receives data from the error amplifier, over-current protection, and thermal protection circuits. During normal operation, the error amplifier compares the output voltage to a precision reference. Over-current and thermal shutdown circuits become active when the junction temperature exceeds 130°C, or the current exceeds 300mA. During thermal shutdown, the output voltage remains low. Normal operation is restored when the junction temperature drops below 110°C.

The AP139 switches from voltage mode to current mode when the load exceeds the rated output current. This prevents over-stress.



Enable

The enable pin normally floats high. When actively, pulled low, the PMOS pass transistor shut off, and all internal circuits are powered down. In this state, the quiescent current is less than 2μA. This pin behaves much like an electronic switch.

External Capacitor

The AP139 is stable with a low ESR output capacitor to ground of 1.0μF or greater. It can keep stable even with higher ESR capacitors. A second capacitor is recommended between the input and ground to stabilize VIN. The input capacitor should be larger than 0.1μF to have a beneficial effect. All capacitors should be placed in close proximity to the pins. A “quiet” ground termination is desirable.

■ Marking Information

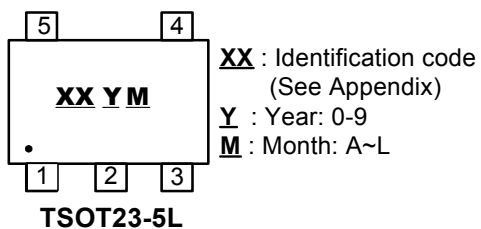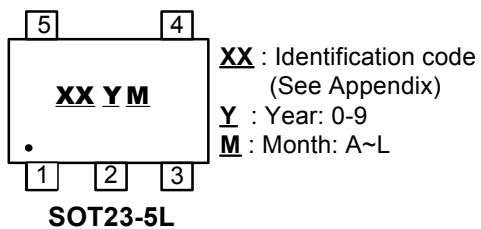


Appendix

Identification Code	Output version
N0	AP139-1.5V
N1	AP139-1.8V
N2	AP139-2.0V
N3	AP139-2.5V
N4	AP139-2.8V
N5	AP139-3.0V
N6	AP139-3.3V
N7	AP139-3.5V

■ Package Information


(1)Package Type: SOT23-5L

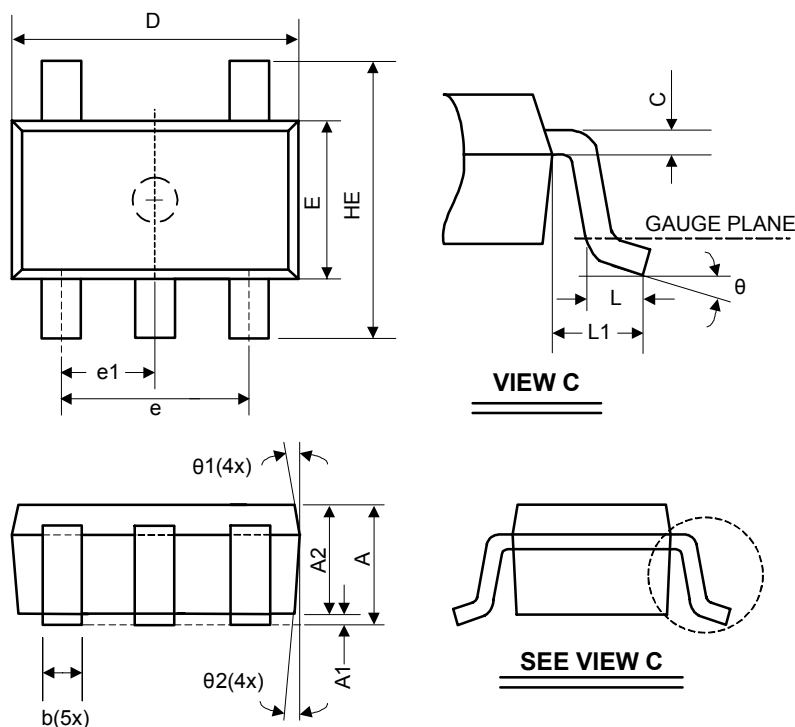

Symbol	Dimensions In Millimeters			Dimensions In Inches		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	1.05	-	1.35	0.041	-	0.053
A1	0.05	-	0.15	0.002	-	0.006
A2	1.00	1.10	1.20	0.039	0.043	0.047
b	0.25	-	0.50	0.010	-	0.020
C	0.08	-	0.20	0.003	-	0.008
D	2.70	2.90	3.00	0.106	0.114	0.118
E	1.50	1.60	1.70	0.059	0.063	0.067
HE	2.60	2.80	3.00	0.102	0.110	0.118
L	0.30	-	0.60	0.012	-	0.024
L1	0.50	0.60	0.70	0.020	0.024	0.028
e	1.80	1.90	2.00	0.071	0.075	0.079
e1	0.85	0.95	1.05	0.033	0.037	0.041
θ	0°	5°	10°	0°	5°	10°
θ1	3°	5°	7°	3°	5°	7°
θ2	6°	8°	10°	6°	8°	10°

■ Package Information (Continued)

(2) Package Type: TSOT23-5L

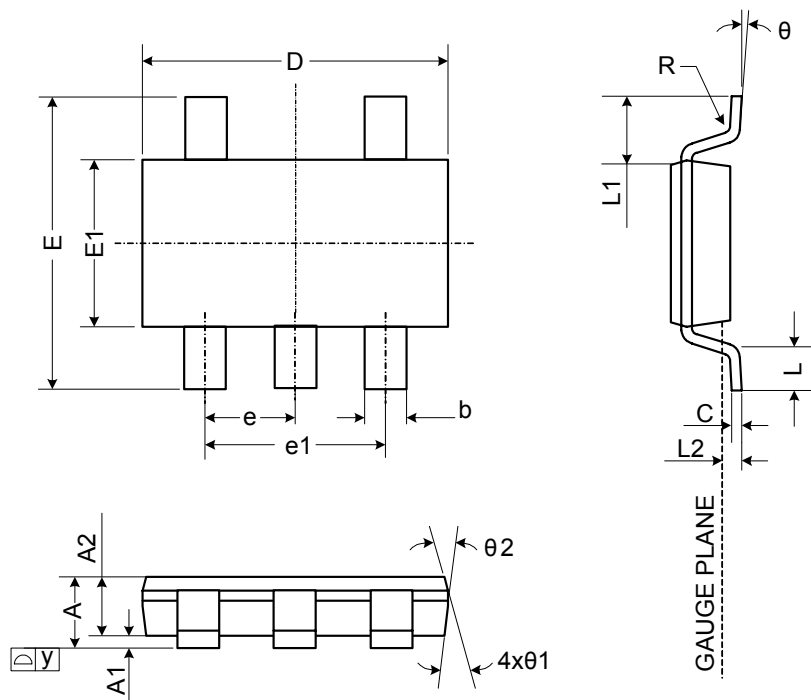

Symbol	Dimensions In Millimeters			Dimensions In Inches		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	0.75	-	0.90	0.030	-	0.035
A1	0.00	-	0.10	0.000	-	0.004
A2	0.70	0.75	0.80	0.028	0.030	0.031
b	0.35	-	0.51	0.014	-	0.020
C	0.10	-	0.25	0.004	-	0.010
D	2.80	2.90	3.00	0.110	0.114	0.118
E	2.60	2.80	3.00	0.102	0.110	0.118
E1	1.50	1.60	1.70	0.059	0.063	0.067
e	0.95 BSC.			0.037		
e1	1.90 BSC.			0.075		
L	0.37	-	-	0.015	-	-
L1	0.60 REF.			0.024		
L2	0.25 BSC.			0.010		
y	-	-	0.10	-	-	0.004
R	0.10	-	-	0.004	-	-
θ	0°	-	8°	0°	-	8°
θ1	7° NOM.			7° NOM.		
θ2	5° NOM.			5° NOM.		



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.