

Circuit Breaker for Equipment thermal, 2 pole, Rocker actuation, with undervoltage



Thermal circuit breaker  
Snap-in version  
Rocker actuation



Thermal circuit breaker  
Snap-in version  
Rocker actuation

See below:

[Approvals and Compliances](#)

### Description

- Thermal circuit breaker
- 1 or 2 pole thermal overload protection
- Positively trip-free release
- High configurability
- Rocker non-illuminated or illuminated
- Snap-in version
- Quick connect terminal 6.3 x 0.8 mm or screw clamp terminal M3.5 x 6 mm (lineside P1, P2)

### Applications

- Power tools
- Industrial appliances
- Power supplies

### References

Alternative: Standard version [TA45-2R](#)

### Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Distributor-Stock-Check](#), [Detailed request for product](#), [Product News](#)

### Technical Data

|                                                    |                                                                                                                                                                                                                                                                        |
|----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated Voltage AC                                   | 240 VAC                                                                                                                                                                                                                                                                |
| Rated Voltage DC                                   | 60 VDC                                                                                                                                                                                                                                                                 |
| Rated current range AC                             | 0.05 - 20 A                                                                                                                                                                                                                                                            |
| Conditional short circuit capacity I <sub>nc</sub> | IEC 60934: PC1, AC 240 V: 1 kA                                                                                                                                                                                                                                         |
| Short circuit capacity I <sub>cn</sub>             | IEC 60934:<br>At I <sub>n</sub> < 3 A/ 240 VAC: 10xI <sub>n</sub> (max. 3 Zykl.)<br>At I <sub>n</sub> ≥ 3 A/ 240 VAC: 300A (max. 3 Zykl.)<br>At I <sub>n</sub> < 3 A/ 60 VDC: 10xI <sub>n</sub> (max. 3 Zykl.)<br>At I <sub>n</sub> ≥ 3 A/ 48 VDC: 120A (max. 3 Zykl.) |
| Degree of Protection                               | from front side IP40 acc. to IEC 60529                                                                                                                                                                                                                                 |
| Dielectric Strength                                | 4 kVAC                                                                                                                                                                                                                                                                 |
| Insulation Resistance                              | 500VDC > 100 MΩ                                                                                                                                                                                                                                                        |
| Lifetime                                           | mechanical: 50'000 switching cycles<br>AC: 1 x I <sub>r</sub> :<br>50'000 switching cycles<br>DC: 1 x I <sub>r</sub> :<br>50'000 switching cycles                                                                                                                      |

|                           |                                                                                                                 |
|---------------------------|-----------------------------------------------------------------------------------------------------------------|
| Overload                  | AC: min. 40 trips<br>@ 6 x I <sub>r</sub><br>DC: min. 40 trips<br>@ 4 x I <sub>r</sub>                          |
| Allowable Operation Temp. | -10 °C to 55 °C                                                                                                 |
| Vibration Resistance      | ± 0.75 mm @ 5 - 60 Hz<br>acc. to IEC 60068-2-6, test Fc<br>10 G @ 60 - 500 Hz<br>acc. to IEC 60068-2-6, test Fc |
| Shock Resistance          | 30 G / 18 ms<br>acc. to IEC 60068-2-27, test Ea                                                                 |
| Possible Tripping Types   | Thermal<br>Undervoltage release<br>Remote trip<br>Mechanical lock-out latch                                     |
| Actuation Type            | Rocker                                                                                                          |
| Weight                    | 50 - 60 g                                                                                                       |

### Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

## Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: TA45

| Approval Logo                                                                    | Certificates                  | Certification Body | Description                              |
|----------------------------------------------------------------------------------|-------------------------------|--------------------|------------------------------------------|
|  | <a href="#">VDE Approvals</a> | VDE                | VDE Certificate Number: 40019880         |
|  | <a href="#">UL Approvals</a>  | UL                 | UL File Number: E71572                   |
|  | <a href="#">CCC Approvals</a> | CCC                | CCC Certificate Number: 2020970307001847 |

## Product standards

Product standards that are referenced

| Organization                                                                     | Design                | Standard          | Description                                                           |
|----------------------------------------------------------------------------------|-----------------------|-------------------|-----------------------------------------------------------------------|
|  | Designed according to | IEC 60934         | Circuit-breakers for equipment (CBE)                                  |
|  | Designed according to | UL 1077           | Standard for Supplementary Protectors for Use in Electrical Equipment |
|  | Designed according to | CSA C22.2 No. 235 | Supplementary Protectors                                              |
|  | Designed according to | GB 17701          | Circuit-breaker for equipment                                         |

## Application standards

Application standards where the product can be used

| Organization                                                                      | Design                         | Standard       | Description                                                                                                          |
|-----------------------------------------------------------------------------------|--------------------------------|----------------|----------------------------------------------------------------------------------------------------------------------|
|  | Designed for applications acc. | IEC/UL 62368-1 | IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment. |


## Compliances

The product complies with following Guide Lines

| Identification                                                                     | Details                                      | Initiator   | Description                                                                                                                                                                                           |
|------------------------------------------------------------------------------------|----------------------------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <a href="#">CE declaration of conformity</a> | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|  | <a href="#">RoHS</a>                         | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863                                                                                                                                                    |
|  | <a href="#">China RoHS</a>                   | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.                                                                                  |
|  | <a href="#">REACH</a>                        | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.                               |

# Dimension [mm]


Undervoltage release, remote trip release

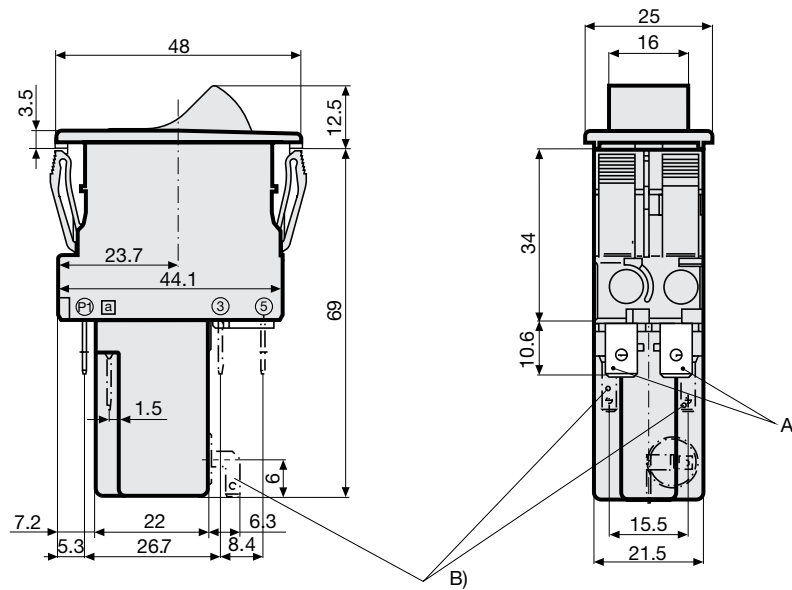

A) Quick connect terminal, IEC 61210, A6.3-0.8 mm

B) Quick connect terminal, IEC 61210, A2.8-0.8 mm


Mechanical lock-out latch

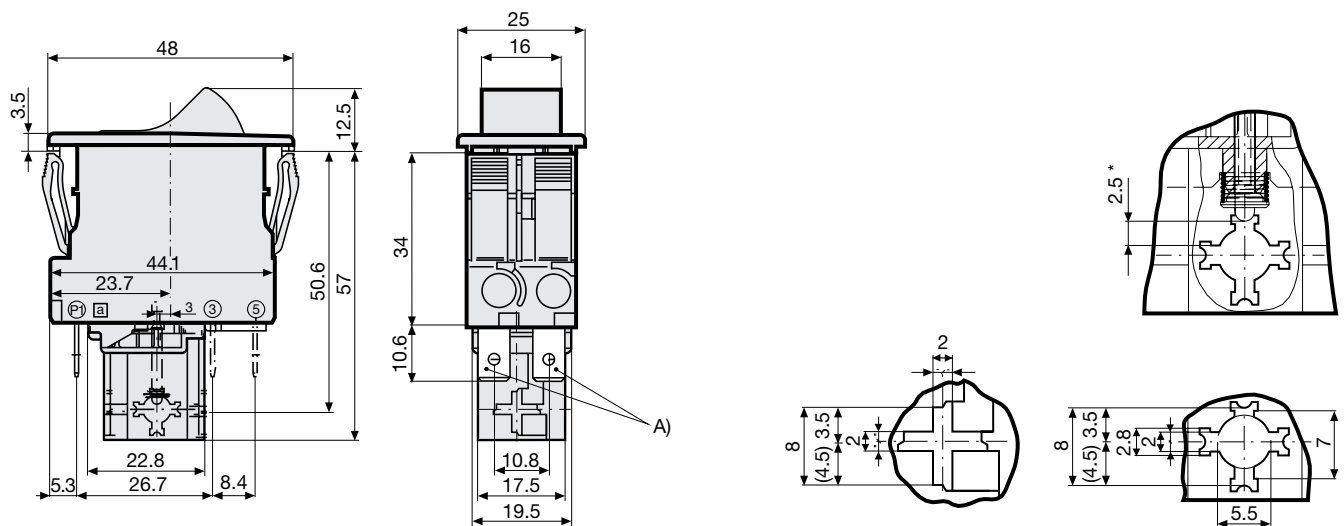


A) Quick connect terminal, IEC 61210, A6.3-0.8 mm

\*) max. switching stroke


Accessories / factory mounted  
AZM01 / Collar with cover, IP54

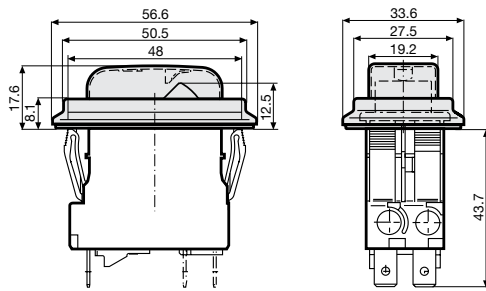


AZM02 / Raised collar with cover, narrow, IP54  
AZM03 / Raised collar, IP40

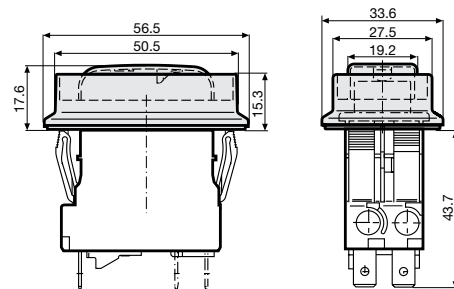


AZM10 / Collar with cover, narrow, IP54

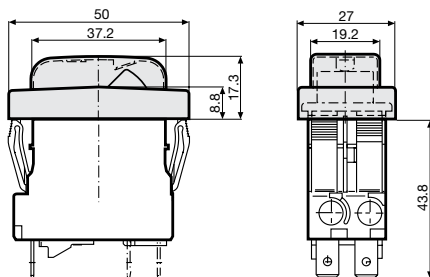


AZM11 / Partially raised collar with cover, narrow, IP54  
AZM12 / Partially raised collar without cover, narrow, IP40

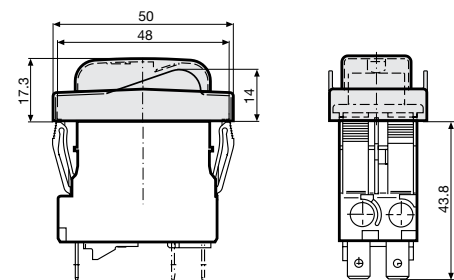

AZM13 / Raised collar narrow, IP40

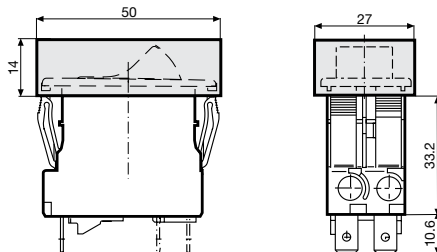


AZM14 / Raised collar with cover narrow, IP54

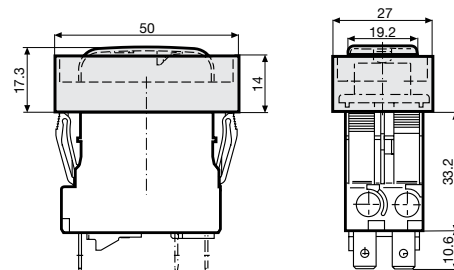


## Cut-out and pin-out

Cut-out snap-in type

Pin-out

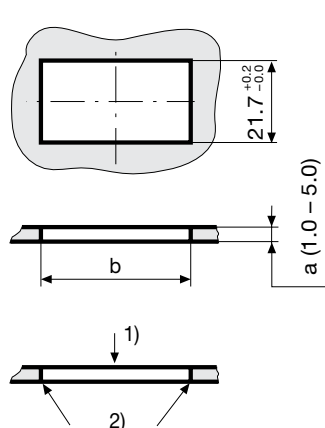


| a   | b           |
|-----|-------------|
| 1.0 | 44,5...45,0 |
| 1.5 | 44,5...45,0 |
| 2.0 | 44,7...45,2 |
| 2.5 | 44,7...45,2 |
| 3.0 | 44,8...45,3 |
| 4.0 | 44,9...45,4 |
| 5.0 | 45,0...45,5 |

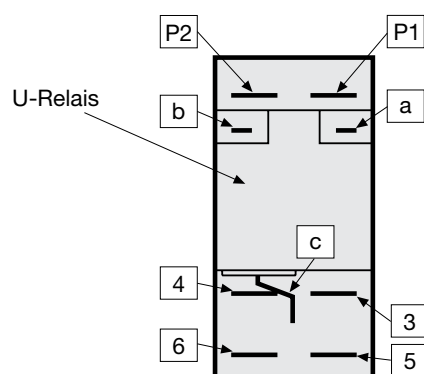


- 1) Assemble
- 2) edge must be sharp

## Diagrams


1 pole thermal overload protection




1 pole thermal overload protection, Shunt terminal



2 pole thermal overload protection



2 pole thermal overload protection, Shunt terminal



## Effect of ambient temperature

The units are calibrated for an ambient temperature of +23°C. To determine the rated current for a lower or higher ambient temperature, use a correction factor (typical value) from the table below:

| Ambient Temperature [°C] | Correction factor |
|--------------------------|-------------------|
| -10                      | 0.89              |
| -5                       | 0.91              |
| 0                        | 0.92              |
| +23                      | 1.00              |
| +30                      | 1.03              |
| +40                      | 1.08              |
| +55                      | 1.16              |

Example: Rated current = 5 A, Environmental temperature = 40 °C, --> Correction factor = 1.08, Resulting current = 5.5 A --> Fount to next higher rated current: 6 A


## Undervoltage release

|                                         |         |         |         |        |        |        |                     |
|-----------------------------------------|---------|---------|---------|--------|--------|--------|---------------------|
| Max. operating voltage                  |         |         |         |        |        |        | 1.1 Ue              |
| Rated operating voltage Ue              | 5 V     | 12 V    | 24 V    | 48 V   | 120 V  | 240 V  | 400 V <sup>1)</sup> |
| Current consumption (± 10%)             | 10.5 mA | 16.5 mA | 17.0 mA | 3.2 mA | 3.7 mA | 3.1 mA | 2.65 mA             |
| Highest reset level                     |         |         |         |        |        |        | 0.85 Ue             |
| Lowest trip level                       |         |         |         |        |        |        | 0.20 Ue             |
| Trip delay                              |         |         |         |        |        |        | 20 ms - 50 ms       |
| Impulse withstand voltage (1.2 / 50 µs) |         |         |         |        |        |        | ≥4 kV               |
| 1) only for 3pole                       |         |         |         |        |        |        |                     |

## Remote trip


|                                                      |                                       |           |
|------------------------------------------------------|---------------------------------------|-----------|
| Permissible impuls duration of the make contact (no) | Between terminal C and P1             | unlimited |
| Electrical load of the make contact (no)             | Current max. 12 mA / power max. 1.1 W |           |

## Time-Current-Curves

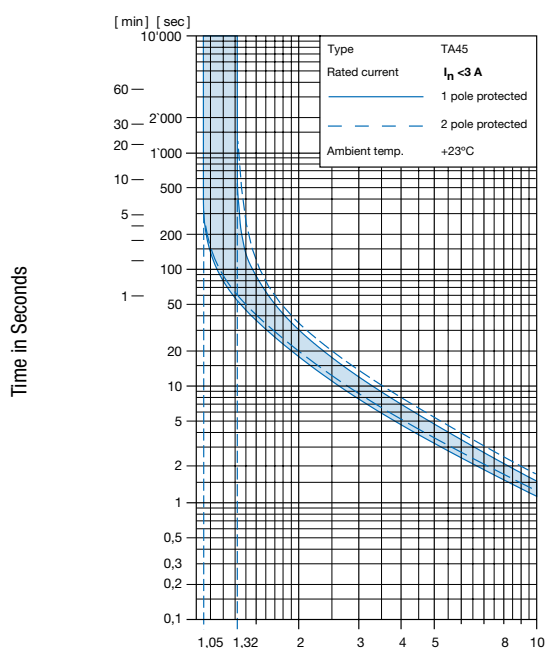


Multiple of Rated Current  $I_n$

Reference Temperature +23°

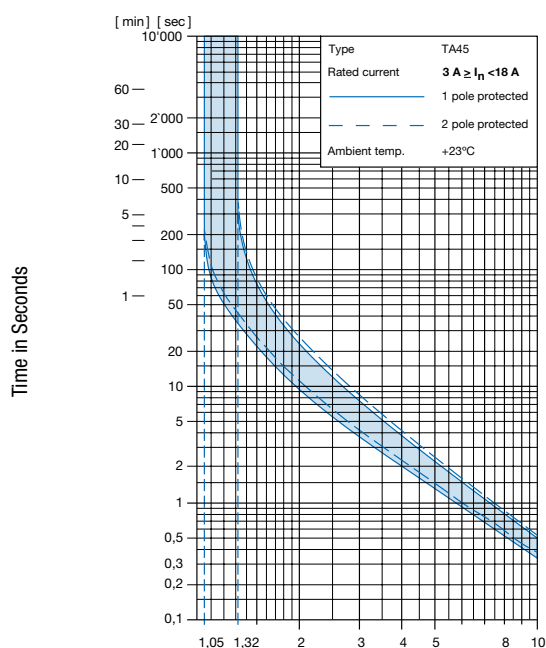

Multiple of Rated Current  $I_n$

Reference Temperature +23°

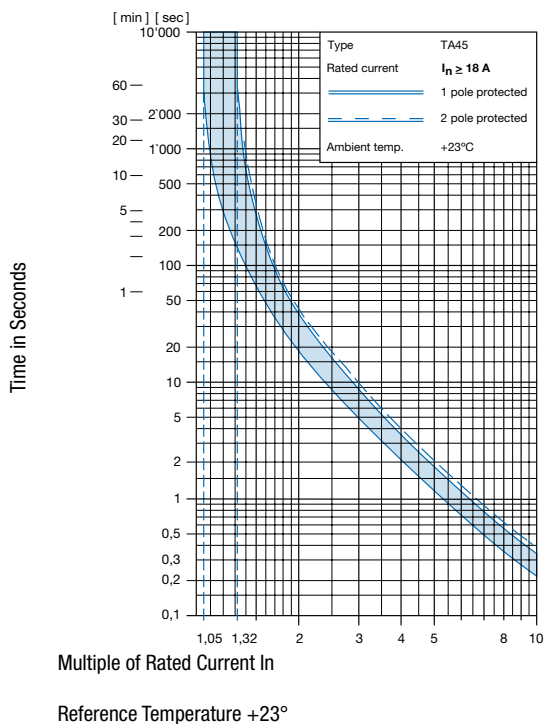

## Config. Code

TA45 - AK2 W F 120 A2 - AZM11

The characters are placeholders for the correspondingly keys of selections from the key tables.

TA45 - **AK2** W F 120 A2 - **AZM11** = Basic function

| Basic function                                                                                               | Configuration key |
|--------------------------------------------------------------------------------------------------------------|-------------------|
| 2-pole, rocker, 1pole overload protection, quick connect terminal, illuminated 220 V...240 V                 | A12               |
| 2-pole, rocker, 1pole overload protection, quick connect terminal, illuminated 110 V...120 V                 | A14               |
| 2-pole, rocker, 1pole overload protection, quick connect terminal, illuminated 20 V...26 V                   | A17               |
| 2-pole, rocker, 1pole overload protection, quick connect terminal, illuminated 10 V...13 V                   | A18               |
| 2-pole, rocker, 1pole overload protection, quick connect terminal, illuminated 4 V...7 V                     | A19               |
| 2-pole, rocker, 1pole overload protection, shunt terminal, quick connect terminal, illuminated 220 V...240 V | A22               |
| 2-pole, rocker, 1pole overload protection, shunt terminal, quick connect terminal, illuminated 110 V...120 V | A24               |
| 2-pole, rocker, 1pole overload protection, shunt terminal, quick connect terminal, illuminated 20 V...26 V   | A27               |
| 2-pole, rocker, 1pole overload protection, shunt terminal, quick connect terminal, illuminated 10 V...13 V   | A28               |
| 2-pole, rocker, 1pole overload protection, shunt terminal, quick connect terminal, illuminated 4 V...7 V     | A29               |
| 2-pole, rocker, 2pole overload protection, quick connect terminal, illuminated 220 V...240 V                 | A32               |
| 2-pole, rocker, 2pole overload protection, quick connect terminal, illuminated 110 V...120 V                 | A34               |
| 2-pole, rocker, 2pole overload protection, quick connect terminal, illuminated 20 V...26 V                   | A37               |
| 2-pole, rocker, 2pole overload protection, quick connect terminal, illuminated 10 V...13 V                   | A38               |

| Basic function                                                                                               | Configuration key |
|--------------------------------------------------------------------------------------------------------------|-------------------|
| 2-pole, rocker, 2pole overload protection, quick connect terminal, illuminated 4 V...7 V                     | A39               |
| 2-pole, rocker, 2pole overload protection, shunt terminal, quick connect terminal, illuminated 220 V...240 V | A42               |
| 2-pole, rocker, 2pole overload protection, shunt terminal, quick connect terminal, illuminated 110 V...120 V | A44               |
| 2-pole, rocker, 2pole overload protection, shunt terminal, quick connect terminal, illuminated 20 V...26 V   | A47               |
| 2-pole, rocker, 2pole overload protection, shunt terminal, quick connect terminal, illuminated 10 V...13 V   | A48               |
| 2-pole, rocker, 2pole overload protection, shunt terminal, quick connect terminal, illuminated 4 V...7 V     | A49               |
| 2-pole, rocker, 1pole overload protection, screw connection, illuminated 220 V...240 V                       | A62               |
| 2-pole, rocker, 1pole overload protection, screw connection, illuminated 110 V...120 V                       | A64               |
| 2-pole, rocker, 1pole overload protection, screw connection, illuminated 20 V...26 V                         | A67               |
| 2-pole, rocker, 1pole overload protection, screw connection, illuminated 10 V...13 V                         | A68               |
| 2-pole, rocker, 1pole overload protection, screw connection, illuminated 4 V...7 V                           | A69               |
| 2-pole, rocker, 1pole overload protection, shunt terminal, screw connection, illuminated 220 V...240 V       | A72               |
| 2-pole, rocker, 1pole overload protection, shunt terminal, screw connection, illuminated 110 V...120 V       | A74               |
| 2-pole, rocker, 1pole overload protection, shunt terminal, screw connection, illuminated 20 V...26 V         | A77               |
| 2-pole, rocker, 1pole overload protection, shunt terminal, screw connection, illuminated 10 V...13 V         | A78               |

| Basic function                                                                                                            | Configuration key |
|---------------------------------------------------------------------------------------------------------------------------|-------------------|
| 2-pole, rocker, 1pole overload protection, shunt terminal, screw connection, illuminated 4 V...7 V                        | A79               |
| 2-pole, rocker, 2pole overload protection, screw connection, illuminated 220 V...240 V                                    | A82               |
| 2-pole, rocker, 2pole overload protection, screw connection, illuminated 110 V...120 V                                    | A84               |
| 2-pole, rocker, 2pole overload protection, screw connection, illuminated 20 V...26 V                                      | A87               |
| 2-pole, rocker, 2pole overload protection, screw connection, illuminated 10 V...13 V                                      | A88               |
| 2-pole, rocker, 2pole overload protection, screw connection, illuminated 4 V...7 V                                        | A89               |
| 2-pole, rocker, 2pole overload protection, shunt terminal, screw connection, illuminated 220 V...240 V                    | A92               |
| 2-pole, rocker, 2pole overload protection, shunt terminal, screw connection, illuminated 110 V...120 V                    | A94               |
| 2-pole, rocker, 2pole overload protection, shunt terminal, screw connection, illuminated 20 V...26 V                      | A97               |
| 2-pole, rocker, 2pole overload protection, shunt terminal, screw connection, illuminated 10 V...13 V                      | A98               |
| 2-pole, rocker, 2pole overload protection, shunt terminal, screw connection, illuminated 4 V...7 V                        | A99               |
| 2-pole, rocker, 2pole overload protection, quick connect terminal, without illumination                                   | ABD               |
| 2-pole, rocker, 1pole overload protection, shunt terminal, quick connect terminal, without illumination                   | ABF               |
| 2-pole, rocker, 2pole overload protection, shunt terminal, quick connect terminal, without illumination                   | ABG               |
| 2-pole, rocker, 1pole overload protection, quick connect terminal, without illumination                                   | ABT               |
| 2-pole, rocker, 2pole overload protection, quick connect terminal, momentary switch, without illumination                 | AED               |
| 2-pole, rocker, 1pole overload protection, shunt terminal, quick connect terminal, momentary switch, without illumination | AEF               |
| 2-pole, rocker, 2pole overload protection, shunt terminal, quick connect terminal, momentary switch, without illumination | AEG               |
| 2-pole, rocker, 1pole overload protection, quick connect terminal, momentary switch, without illumination                 | AET               |
| 2-pole, rocker, 2pole overload protection, screw connection, without illumination                                         | AHD               |
| 2-pole, rocker, 1pole overload protection, shunt terminal, screw connection, without illumination                         | AHF               |
| 2-pole, rocker, 2pole overload protection, shunt terminal, screw connection, without illumination                         | AHG               |
| 2-pole, rocker, 1pole overload protection, screw connection, without illumination                                         | AHT               |
| 2-pole, rocker, 2pole overload protection, screw connection, momentary switch, without illumination                       | AJD               |
| 2-pole, rocker, 1pole overload protection, shunt terminal, screw connection, momentary switch, without illumination       | AJF               |
| 2-pole, rocker, 2pole overload protection, shunt terminal, screw connection, momentary switch, without illumination       | AJG               |
| 2-pole, rocker, 1pole overload protection, screw connection, momentary switch, without illumination                       | AJT               |

### TA45 - AK2 W F 120 A2 - AZM11 = Actuator colour

| Actuator colour    | Configuration key |
|--------------------|-------------------|
| Clear transparent  | 1                 |
| Red transparent    | 3                 |
| Green transparent  | 4                 |
| Orange transparent | 6                 |
| Black              | B                 |
| Green              | G                 |
| Red                | R                 |
| White              | W                 |

| Actuator colour | Configuration key |
|-----------------|-------------------|
| Orange          | X                 |
| Yellow          | Y                 |

### TA45 - AK2 W F 120 A2 - AZM11 = Legend

| Legend        | Configuration key |
|---------------|-------------------|
| embossed      | F                 |
| white printed | H                 |
| black printed | K                 |
| white printed | L                 |
| black printed | M                 |
| white printed | P                 |
| black printed | R                 |
| white printed | S                 |
| black printed | T                 |

### TA45 - AK2 W F 120 A2 - AZM11 = Rated current

| Rated current | Configuration key |
|---------------|-------------------|
| 0.05 A        | Z05               |
| 0.1 A         | J01               |
| 0.2 A         | J02               |
| 0.3 A         | J03               |
| 0.4 A         | J04               |
| 0.5 A         | J05               |
| 0.6 A         | J06               |
| 0.7 A         | J07               |
| 0.8 A         | J08               |
| 0.9 A         | J09               |
| 1.0 A         | J10               |
| 1.1 A         | J11               |
| 1.2 A         | J12               |
| 1.3 A         | J13               |
| 1.4 A         | J14               |
| 1.5 A         | J15               |
| 1.6 A         | J16               |
| 1.7 A         | J17               |
| 1.8 A         | J18               |
| 1.9 A         | J19               |
| 2.0 A         | J20               |
| 2.1 A         | J21               |

Other rated currents on request



| Rated current                   | Configuration key | Release / lock-out latch                                                    | Configuration key |
|---------------------------------|-------------------|-----------------------------------------------------------------------------|-------------------|
| 2.2 A                           | J22               | without release / lock-out latch                                            | C0                |
| 2.3 A                           | J23               | Undervoltage release with additional contact, rated voltage 240 V AC        | E2                |
| 2.5 A                           | J25               | Undervoltage release with additional contact, rated voltage 230 V AC        | E3                |
| 2.8 A                           | J28               | Undervoltage release with additional contact, rated voltage 120 V AC        | E4                |
| 3.0 A                           | 030               | Undervoltage release with additional contact, rated voltage 48 V AC / DC    | E6                |
| 3.5 A                           | 035               | Undervoltage release with additional contact, rated voltage 24 V AC / DC    | E7                |
| 4.0 A                           | 040               | Undervoltage release with additional contact, rated voltage 12 V AC / DC    | E8                |
| 4.5 A                           | 045               | Undervoltage release with additional contact, rated voltage 5 V AC / DC     | E9                |
| 5.0 A                           | 050               | Mechanical lock-out latch                                                   | S0                |
| 6.0 A                           | 060               | Undervoltage release, rated voltage 240 V AC                                | U2                |
| 6.5 A                           | 065               | Undervoltage release, rated voltage 230 V AC                                | U3                |
| 7.0 A                           | 070               | Undervoltage release, rated voltage 120 V AC                                | U4                |
| 7.5 A                           | 075               | Undervoltage release, rated voltage 48 V AC / DC                            | U6                |
| 8.0 A                           | 080               | Undervoltage release, rated voltage 24 V AC / DC                            | U7                |
| 9.0 A                           | 090               | Undervoltage release, rated voltage 12 V AC / DC                            | U8                |
| 10.0 A                          | 100               | Undervoltage release, rated voltage 5 V AC / DC                             | U9                |
| 11.0 A                          | 110               | Undervoltage release with 2 additional contacts, rated voltage 240 V AC     | Z2                |
| 12.0 A                          | 120               | Undervoltage release with 2 additional contacts, rated voltage 230 V AC     | Z3                |
| 13.0 A                          | 130               | Undervoltage release with 2 additional contacts, rated voltage 120 V AC     | Z4                |
| 14.0 A                          | 140               | Undervoltage release with 2 additional contacts, rated voltage 48 V AC / DC | Z6                |
| 15.0 A                          | 150               | Undervoltage release with 2 additional contacts, rated voltage 24 V AC / DC | Z7                |
| 16.0 A                          | 160               | Undervoltage release with 2 additional contacts, rated voltage 12 V AC / DC | Z8                |
| 17.0 A                          | 170               | Undervoltage release with 2 additional contacts, rated voltage 5 V AC / DC  | Z9                |
| 18.0 A                          | 180               |                                                                             |                   |
| 19.0 A                          | 190               |                                                                             |                   |
| 20.0 A                          | 200               |                                                                             |                   |
| Other rated currents on request |                   |                                                                             |                   |

TA45 - AK2 W F 120 **A2** - AZM11 = Release / lock-out latch

| Release / lock-out latch                        | Configuration key |
|-------------------------------------------------|-------------------|
| Remote trip release, rated voltage 240 V AC     | A2                |
| Remote trip release, rated voltage 230 V AC     | A3                |
| Remote trip release, rated voltage 120 V AC     | A4                |
| Remote trip release, rated voltage 48 V AC / DC | A6                |
| Remote trip release, rated voltage 24 V AC / DC | A7                |
| Remote trip release, rated voltage 12 V AC / DC | A8                |

TA45 - AK2 W F 120 **A2** - **AZM11** = Accessories

| Factory mounted accessories                         | Configuration key |
|-----------------------------------------------------|-------------------|
| Without cover                                       |                   |
| Collar with cover, IP54                             | AZM01             |
| Raised collar with cover, IP54                      | AZM02             |
| Raised collar, IP40                                 | AZM03             |
| Raised collar with cover narrow, IP54               | AZM10             |
| Partially raised collar with cover, narrow, IP54    | AZM11             |
| Partially raised collar without cover, narrow, IP40 | AZM12             |
| Raised collar narrow, IP40                          | AZM13             |
| Raised collar with cover narrow, IP54               | AZM14             |

For subsequent fitting accessories see:

[https://www.schurter.com/pdf/english/typ\\_TA45-ACC.pdf](https://www.schurter.com/pdf/english/typ_TA45-ACC.pdf)

## Variants

| Thermal overload protection | Addition | connection type        | Illumination               | Actuator colour    | Legend        | Rated current | Accessories                           | Config. Code          | Order Number              |
|-----------------------------|----------|------------------------|----------------------------|--------------------|---------------|---------------|---------------------------------------|-----------------------|---------------------------|
| 2-pole                      |          | Quick connect terminal | without illumination       | White              | black printed | 5.0 A         | Without cover                         | TA45-ABDWK050U3       | <a href="#">4430.1564</a> |
| 2-pole                      |          | Quick connect terminal | illumination 220 V...240 V | Orange transparent | white printed | 4.0 A         | Collar with cover, IP54               | TA45-A326L040U2-AZM01 | <a href="#">4430.2609</a> |
| 1-pole                      |          | Quick connect terminal | without illumination       | Yellow             | black printed | 8.0 A         | Raised collar with cover narrow, IP54 | TA45-ABTYK080E3-AZM10 | <a href="#">4430.2960</a> |
| 1-pole                      |          | Quick connect terminal | without illumination       | Orange             | black printed | 8.0 A         | Without cover                         | TA45-ABTXM080E2       | <a href="#">4430.3240</a> |

Most Popular.

| Thermal<br>overload pro-<br>tection | Addition | connection<br>type | Illumination | Actuator colour | Legend | Rated current | Accessories | Config. Code | Order Number |
|-------------------------------------|----------|--------------------|--------------|-----------------|--------|---------------|-------------|--------------|--------------|
|-------------------------------------|----------|--------------------|--------------|-----------------|--------|---------------|-------------|--------------|--------------|

Availability for all products can be searched real-time:<https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

|                |       |
|----------------|-------|
| Packaging Unit | 1 Pcs |
|----------------|-------|

Accessories

Description



TA45-ACC  
Accessories to TA45



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.