

LOW DROPOUT VOLTAGE REGULATOR WITH ON/OFF CONTROL

■ GENERAL DESCRIPTION

The NJM2370 is a low dropout positive voltage regulator with ON/OFF control. It has a low quiescent current, output current of 150mA and low dropout voltage of 0.1V (at $I_O=30\text{mA}$). Further it can be added an external noise bypass capacitor. It can improve the characteristics of output noise and ripple rejection by changing the capacitance value.

The NJM2370 is available in a small 5-lead SOT-89 package and thin 8-lead MSOP (VSP) and MSOP (TVSP) packages. These performances make it well-suited for battery-powered portable devices such as a mobile phone, PHS and movie camera.

■ PACKAGE OUTLINE



NJM2370U1
(SOT89-5)



NJM2370R
(MSOP8 (VSP8))



NJM2370RB1
(MSOP8 (TVSP8))


■ FEATURES

- Output Current (150mA min. ($V_O=0.3\text{V}$))
- Low Dropout Voltage (0.1V typ. ($I_O=30\text{mA}$))
- External Capacitor for Noise Bypass
- ON / OFF Control Function
- Over Current Limit
- Thermal Shutdown
- Bipolar Technology
- Package Outline

SOT-89-5, MSOP8 (VSP8)*, MSOP8 (TVSP8)**


*MEET JEDEC MO-187-DA, **MEET JEDEC MO-187-DA / THIN TYPE

■ PIN CONFIGURATION



NJM2370U1


PIN FUNCTION
 1. CONTROL
 2. GND
 3. NOISE BYPASS
 4. V_{OUT}
 5. V_{IN}



NJM2370R/RB1

PIN FUNCTION
 1. CONTROL
 2. GND
 3. NC
 4. NOISE BYPASS
 5. V_{OUT}
 6. NC
 7. NC
 8. V_{IN}

■ EQUIVALENT CIRCUIT

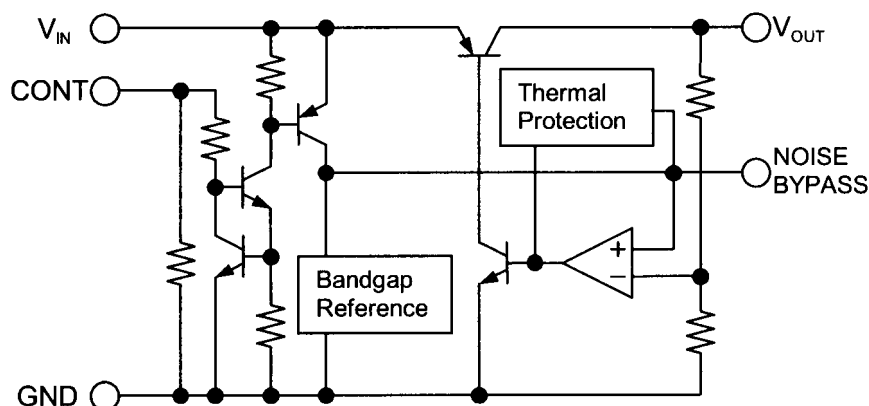

NJM2370

■ ABSOLUTE MAXIMUM RATINGS

(T_a=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V _{IN}	20	V
Control Voltage	V _{CONT}	20 (note 1)	V
Power Dissipation	P _D	(SOT-89) 350 MSOP8 (VSP8), MSOP8(TVSP8) 320	mW
Operating Temperature Range	T _{opr}	-40 to +85	°C
Storage Temperature Range	T _{stg}	-40 to +125	°C

(note 1) When input voltage is less than +20V, the absolute maximum control voltage is equal to the input voltage.


■ ELECTRICAL CHARACTERISTICS

(T_a=25°C)

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V _O	V _{IN} =V _O +1V, I _O =30mA	-3%	-	+3%	V
Quiescent Current 1	I _{Q1}	I _O =0mA, expect I _{CONT}	-	180	-	μA
Quiescent Current 2	I _{Q2}	CONTROL-GND short	-	-	100	nA
Output Current	I _O	(V _O -0.3V)	150	180	-	mA
Line Regulation	ΔV _O / ΔV _{IN}	V _{IN} =(V _O +1V) to (V _O +6V) V _O =2V to 14V	-	-	0.12	% / V
		V _{IN} =(V _O +1V) to (V _O +5V) V _O =15V	-	-	0.12	% / V
Load Regulation	ΔV _O / ΔI _O	I _O =0 to 60mA	-	-	0.03	% / mA
Dropout Voltage	ΔV _{I-O}	I _O =30mA	-	0.1	0.3	V
Ripple Rejection	R-R	f=400Hz, e _{in} =100mV _{P-P} V _{IN} =V _O +1.5V, I _O =10mA	-	60	-	dB
Average Temperature Coefficient of Output Voltage	ΔV _O / ΔT _a	T _a =-20 to 75°C, I _O =10mA V _{IN} =V _O +1.5V	-	0.2	-	mV / °C
Output Noise Voltage	V _{NO}	10Hz < f < 80kHz, I _O =10mA, V _O =3V	-	30	-	μVrms


(note 2) Please confirm the specification separately because some parameters depend on output voltage.

■ TEST CIRCUIT

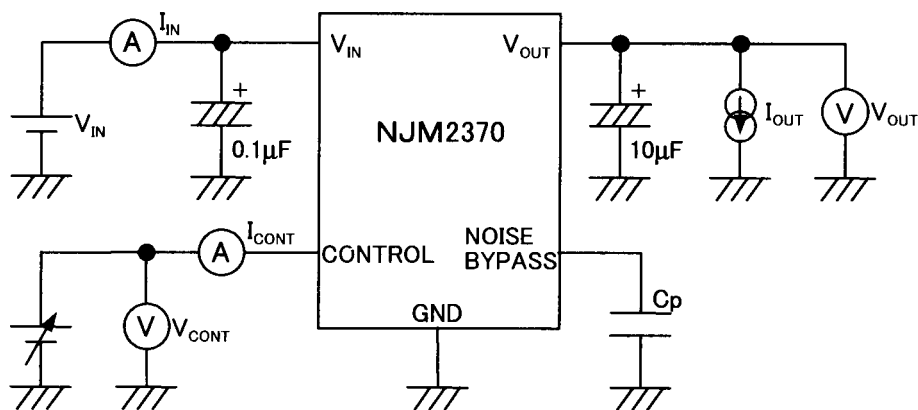

■ TYPICAL APPLICATION


(1) In Nonuse of ON / OFF Control

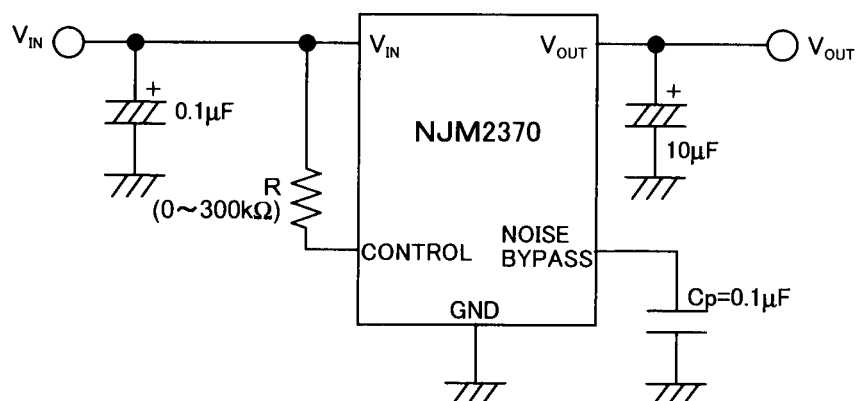

Connect control terminal (1Pin) to V_{IN} terminal (5Pin)

When a resistance "R" is connected, the quiescent current decreases, but minimum operating voltage increases. Please refer to a figure of Output Voltage vs. Control Voltage.

(2) In Use of ON / OFF CONTROL

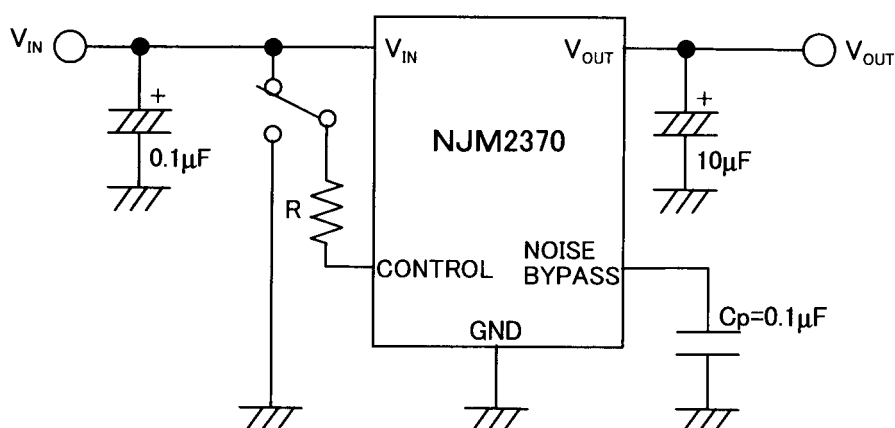

When the control terminal is "H", it is ON.

When the control terminal is "L" or "open", it is OFF.

*Noise bypass Capacitance C_p

Noise bypass capacitance C_p reduces noise generated by band-gap reference circuit.

Noise level and ripple rejection will be improved when larger C_p is used. Please refer to the typical characteristics to determine the value.

Use of smaller C_p value may induce oscillation.

Please make sure to use C_p value of greater than 0.1μF to avoid the problem.

NJM2370

■ OUTPUT VOLTAGE RANK LIST


Past Number	Output Voltage		Past Number	Output Voltage		Past Number	Output Voltage	
NJM2370U1/R/RB1-02	2.0V		NJM2370U1/R/RB1-31	3.1V		NJM2370U1/R/RB1-08	8.0V	(*1)
NJM2370U1/R/RB1-21	2.1V	(*1)	NJM2370U1/R/RB1-32	3.2V	(*1)	NJM2370U1/R/RB1-85	8.5V	
NJM2370U1/R/RB1-22	2.2V	(*1)	NJM2370U1/R/RB1-33	3.3V		NJM2370U1/R/RB1-09	9.0V	
NJM2370U1/R/RB1-23	2.3V	(*1)	NJM2370U1/R/RB1-35	3.5V		NJM2370U1/R/RB1-10	10.0V	
NJM2370U1/R/RB1-24	2.4V	(*1)	NJM2370U1/R/RB1-36	3.6V	(*1)	NJM2370U1/R/RB1-12	12.0V	
NJM2370U1/R/RB1-25	2.5V		NJM2370U1/R/RB1-37	3.7V	(*1)	NJM2370U1/R/RB1-13	13.0V	(*2)
NJM2370U1/R/RB1-26	2.6V	(*1)	NJM2370U1/R/RB1-38	3.8V	(*1)	NJM2370U1/R/RB1-D3	13.5V	
NJM2370U1/R/RB1-27	2.7V		NJM2370U1/R/RB1-39	3.9V	(*1)	NJM2370U1/R/RB1-15	15.0V	
NJM2370U1/R/RB1-28	2.8V	(*1)	NJM2370U1/R/RB1-04	4.0V		NJM2370U1/R/RB1-F5	15.5V	
NJM2370U1/R/RB1-29	2.9V	(*1)	NJM2370U1/R/RB1-05	5.0V				
NJM2370U1/R/RB1-03	3.0V		NJM2370U1/R/RB1-06	6.0V				

(*1) : MSOP8(VSP8), MSOP8(TVSP8) ONLY

(*2) : SOT-89-5 (5pin) ONLY

■ POWER DISSIPATION VS. AMBIENT TEMPERATURE


NJM2370 Power Dissipation
(Topr=-40 ~ +85 ,Tj=125)

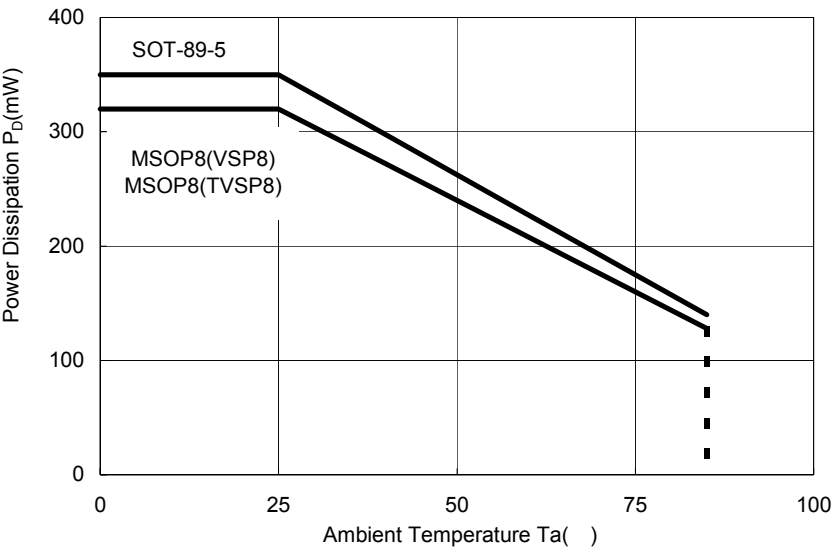

■ TYPICAL CHARACTERISTICS


NJM2370 3V Version Dropout Voltage

($V_{IN}=V_{CONT}$, $T_a=25^\circ\text{C}$)

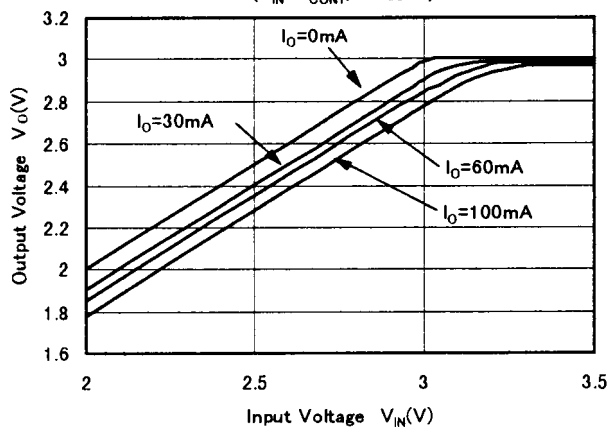


NJM2370 3V Version Load Regulation

($V_{IN}=V_{CONT}=4\text{V}$, $T_a=25^\circ\text{C}$)

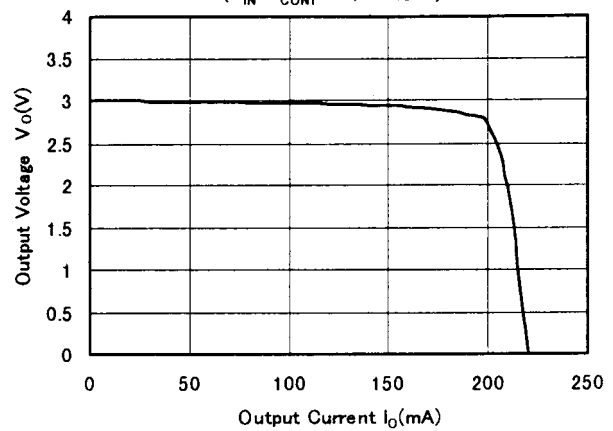


NJM2370 3V Version GND Current vs. Output Current

($V_{IN}=V_{CONT}=4\text{V}$, $T_a=25^\circ\text{C}$)

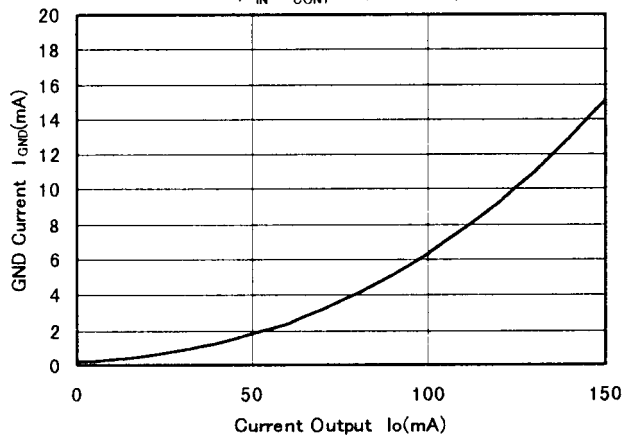


NJM2370 3V Version Dropout Voltage

($T_a=25^\circ\text{C}$)

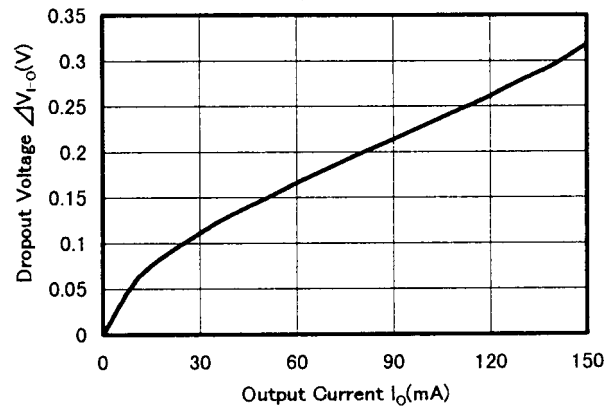


■ TYPICAL CHARACTERISTICS


NJM2370 3V Version Control Current vs. Control Voltage
($V_{IN}=4V, I_O=0mA, T_a=25^\circ C$)

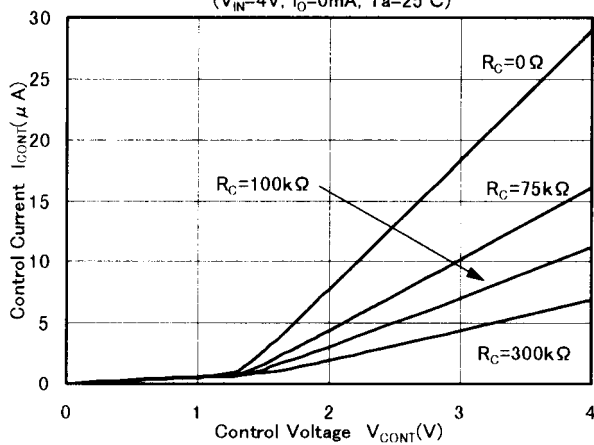


NJM2370 3V Version Output Voltage vs. Control Voltage
($V_{IN}=4V, I_O=0mA, T_a=25^\circ C$)

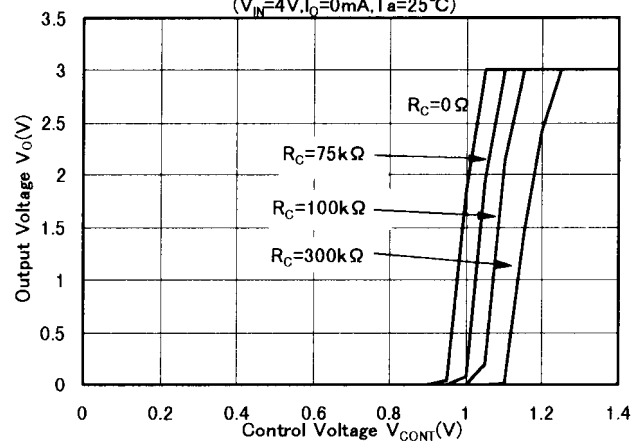

NJM2370 3V Version Output Noise Voltage vs. Noise Bypass Capacitor

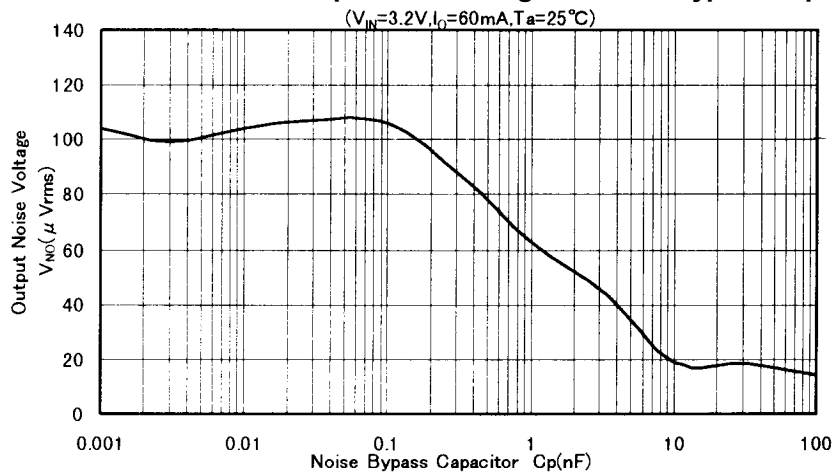


NJM2370 3V Version Ripple Rejection vs. Frequency

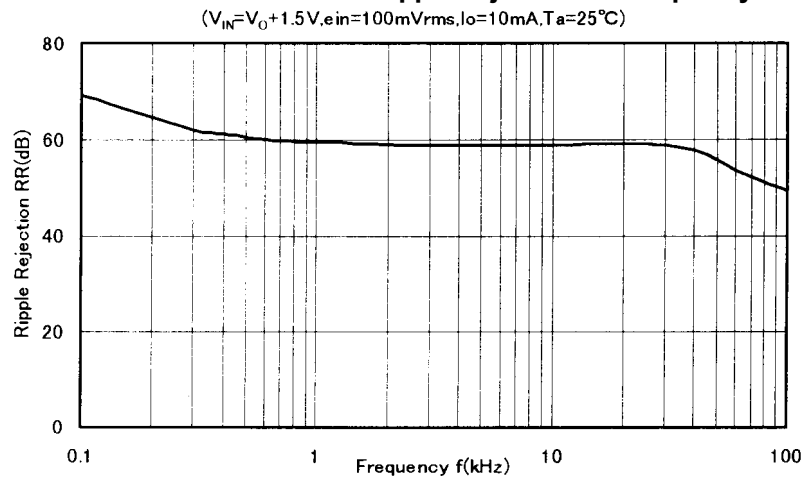


■ TYPICAL CHARACTERISTICS

Dropout Voltage vs. Ambient Temperature

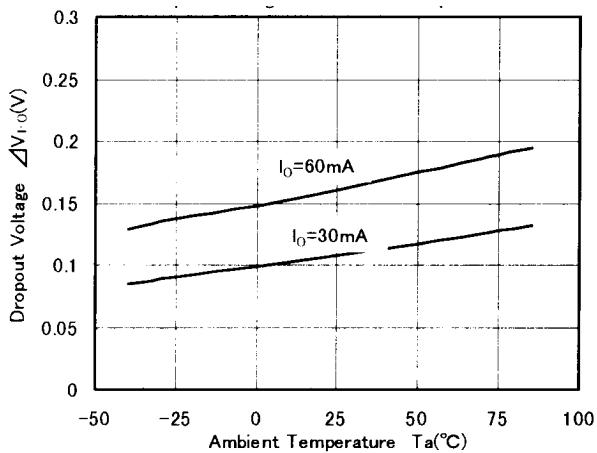


NJM2370 3V Version Control Current vs. Ambient Temperature

($V_{IN}=V_{CONT}=4\text{V}, R_C=0\Omega$)

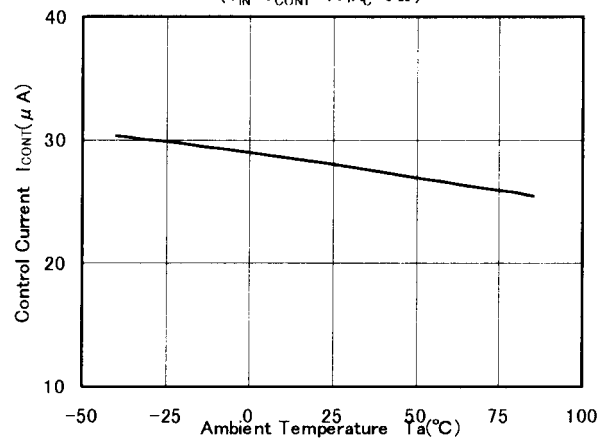


NJM2370 3V Version Quiescent Current 1 vs. Ambient Temperature

($V_{IN}=4\text{V}, I_O=0\text{mA}$)

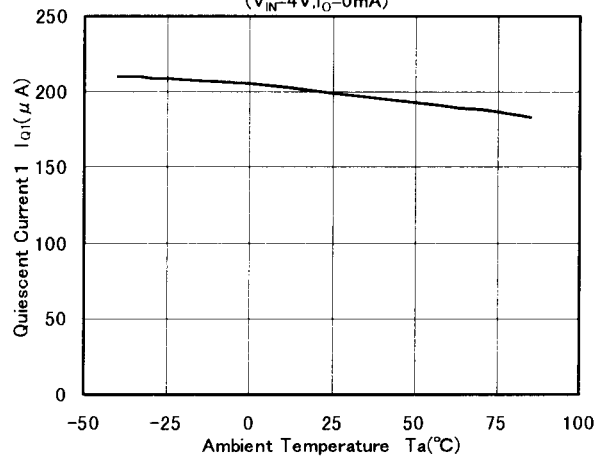

Thermal Shutdown

($V_{IN}=V_{CONT}=4\text{V}, I_O=10\text{mA}$)

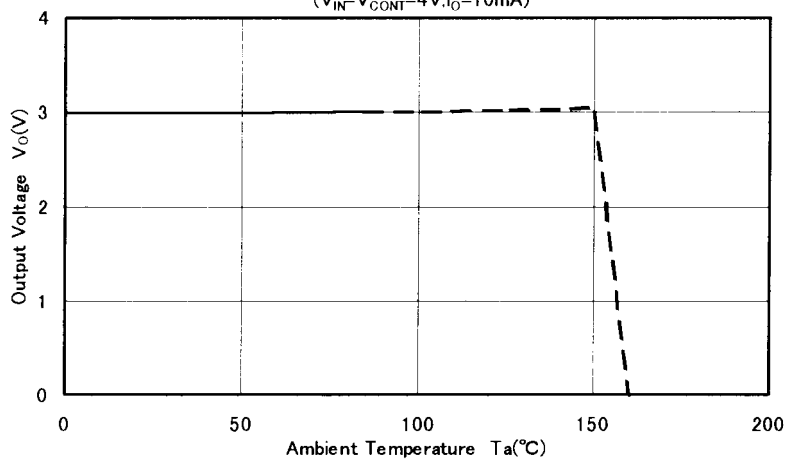

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NJR:

<u>NJM2370U09-TE2</u>	<u>NJM2370U09-TE1</u>	<u>NJM2370U04-TE1</u>	<u>NJM2370U39-TE1</u>	<u>NJM2370U36-TE1</u>	<u>NJM2370U06-TE1</u>
<u>NJM2370U03-TE1</u>	<u>NJM2370U35-TE1</u>	<u>NJM2370U28-TE1</u>	<u>NJM2370U30-TE1</u>	<u>NJM2370U24-TE1</u>	<u>NJM2370U22-TE1</u>
<u>NJM2370U29-TE1</u>	<u>NJM2370U10-TE1</u>	<u>NJM2370U38-TE1</u>	<u>NJM2370U37-TE1</u>	<u>NJM2370U05-TE1</u>	<u>NJM2370U05-TE2</u>
<u>NJM2370U26-TE1</u>	<u>NJM2370U47-TE1</u>	<u>NJM2370U08-TE1</u>	<u>NJM2370U12-TE1</u>	<u>NJM2370U32-TE1</u>	<u>NJM2370U23-TE1</u>
<u>NJM2370U15-TE1</u>	<u>NJM2370U27-TE1</u>	<u>NJM2370U33-TE1</u>	<u>NJM2370U25-TE1</u>	<u>NJM2370U21-TE1</u>	<u>NJM#2370U05-</u>
<u>TE1</u>	<u>NJM#2370R37-TE1</u>	<u>NJM#2370U03-TE1</u>	<u>NJM#2370U30-TE1</u>	<u>NJM#2370R03-TE1</u>	<u>NJM#2370U47-TE1</u>
<u>NJM#2370U05-TE2</u>	<u>NJM#2370U12-TE1</u>	<u>NJM#2370U09-TE1</u>	<u>NJM#2370U24-TE1</u>	<u>NJM#2370U38-TE1</u>	
<u>NJM#2370U27-TE1</u>	<u>NJM#2370U33-TE1</u>	<u>NJM#2370U09-TE2</u>	<u>NJM#2370U37-TE1</u>		



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.