

Features

- Operates DC - 4 GHz on Single Supply
- ASIC TTL / CMOS Driver
- Leadless 4 x 7 mm Chip Scale Plastic Package
- Low DC Power Consumption
- 50 Ohm Nominal Impedance
- Test Boards are Available
- Tape and Reel is Available
- Lead-Free CSP-2 Package
- 100% Matte Tin Plating over Copper
- Halogen-Free "Green" Mold Compound
- 260°C Reflow Compatible
- RoHS* Compliant Version of SW90-0003

Description

M/A-COM's MASWCC0010 is a SP4T absorptive pHEMT switch with integral TTL driver. This device is in an MLP plastic surface mount package. This switch offers excellent broadband performance and repeatability from DC to 4 GHz, while maintaining low DC power dissipation. The MASWCC0010 is ideally suited for wireless infrastructure applications.

Ordering Information

Part Number	Package
MASWCC0010	Bulk Packaging
MASWCC0010TR	1000 piece reel
MASWCC0010-TB	Sample Test Board

Note: Reference Application Note M513 for reel size information.

Pin Configuration^{2, 3, 4}

Pin No.	Function	Pin No.	Function
1	CP2	19	GND
2	Vee	20	NC ¹
3	NC ¹	21	GND
4	C4	22	RFC
5	C3	23	GND
6	C2	24	NC ¹
7	C1	25	RF3
8	NC ¹	26	GND
9	NC ¹	27	NC ¹
10	NC ¹	28	GND
11	NC ¹	29	RF4
12	NC ¹	30	GND
13	GND	31	NC ¹
14	RF1	32	Vee
15	GND	33	Vcc
16	NC ¹	34	NC ¹
17	GND	35	Vcc
18	RF2	36	CP1

1. NC = No Connection
2. For single supply operation VEE is internally generated and must remain isolated from external power supplies. Generated noise is typical of switching DC-DC converters. Connections and external components shown in functional schematic are required. 0.1µF Capacitors need to be located near pins 32 & 33.
3. The exposed pad centered on the package bottom must be connected to RF and DC ground. (For PQFN Packages)

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

GaAs SP4T Switch, Absorptive, Single Supply

DC - 4.0 GHz

Rev. V4

Electrical Specifications: $T_A = 25^\circ\text{C}$

Parameter	Test Conditions	Frequency	Units	Min.	Typ.	Max.
Insertion Loss	RFC-RF1, 2, 3, 4	DC - 4.0 GHz	dB	—	—	2.3
Isolation	—	DC - 4.0 GHz	dB	38	—	—
VSWR	On (RFC, RF1-RF4) Logic per Truth Table	DC - 4.0 GHz	Ratio	—	—	2.0:1
	Off (RF1-RF4) Logic per Truth Table	DC - 4.0 GHz	Ratio	—	—	2.0:1
1 dB Compression	—	50 MHz	dBm	—	+15	—
	—	0.5 - 4.0 GHz	dBm	—	+27	—
Input IP_3	Two-tone inputs up to +5 dBm	50 MHz	dBm	—	30	—
		0.5-4.0 GHz	dBm	—	40	—
Switching Speed	Ton (50% Control to 90% RF)	—	ns	—	35	—
	Toff (50% Control to 10% RF)	—	ns	—	20	—
	Trise (10% to 90% RF)	—	ns	—	12	—
	Tfall (90% to 10% RF)	—	ns	—	2	—
V_{CC}	—	—	V	4.5	5.0	5.5
V_{IL}	LOW-level input voltage	—	V	0.0	—	0.8
V_{IH}	HIGH-level input voltage	—	V	2.0	—	5.0
I_{in} (Input Leakage Current)	$V_{in} = V_{CC}$ or GND	—	μA	-1.0	—	1.0
$I_{CC}^{5,7}$	V_{CC} min to max, Logic "0" or "1"	—	mA	—	5	8
I_{CC}^8 (Quiescent Supply Current)	$V_{cntrl} = V_{CC}$ or GND	—	μA	—	250	400
Turn-on Current ⁶	For guaranteed start-up	—	mA	—	—	125
ΔI_{CC} (Additional Supply Current Per TTL Input Pin)	$V_{CC} = \text{Max}$, $V_{cntrl} = V_{CC} - 2.1 \text{ V}$	—	mA	—	—	1.0
Switching Noise	Generated from DC-DC Converter with recommended capacitors	3.5 MHz	dBm	—	-93	—
Thermal Resistance θ_{jc}	—	—	$^\circ\text{C/W}$	—	15	—

- During turn-on, the device requires an initial start up current (I_{CC}) specified as "Turn-on Current". Once operational, I_{CC} will drop to the specified levels. This is not applicable to dual supply operation.
- The DC-DC converter is guaranteed to start in 100 μs as long as the power supplies have the maximum turn-on current available for start-up.
- For single supply operation
- For dual supply operation

GaAs SP4T Switch, Absorptive, Single Supply DC - 4.0 GHz

Rev. V4

Absolute Maximum Ratings^{9,10}

Parameter	Absolute Maximum
Max. Input Power 0.05 GHz 0.5 - 4.0 GHz ¹¹	+27 dBm +34 dBm
V_{CC}^7	$-0.5V \leq V_{CC} \leq +6.0V$
V_{CC}^8	$-0.5V \leq V_{CC} \leq +7.0V$
V_{EE}^8	$-8.5V \leq V_{EE} \leq +0.5V$
$V_{CC} - V_{EE}^8$	$-0.5V \leq V_{CC} - V_{EE} \leq 14.5V$
V_{in}^{12}	$-0.5V \leq V_{in} \leq V_{CC} + 0.5V$
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +125°C

9. Exceeding any one or combination of these limits may cause permanent damage to this device.
10. M/A-COM does not recommend sustained operation near these survivability limits.
11. When the RF input is applied to the terminated port, the absolute maximum power is +30 dBm.
12. Standard CMOS TTL interface, latch-up will occur if logic signal is applied prior to power supply.

Truth Table (Switch)

C1	C2	C3	C4	RFC-RF1	RFC-RF2	RFC-RF3	RFC-RF4
1	0	0	0	On	Off	Off	Off
0	1	0	0	Off	On	Off	Off
0	0	1	0	Off	Off	On	Off
0	0	0	1	Off	Off	Off	On

"0" = TTL Low "1" = TTL High


Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

Recommended PCB Configuration¹³

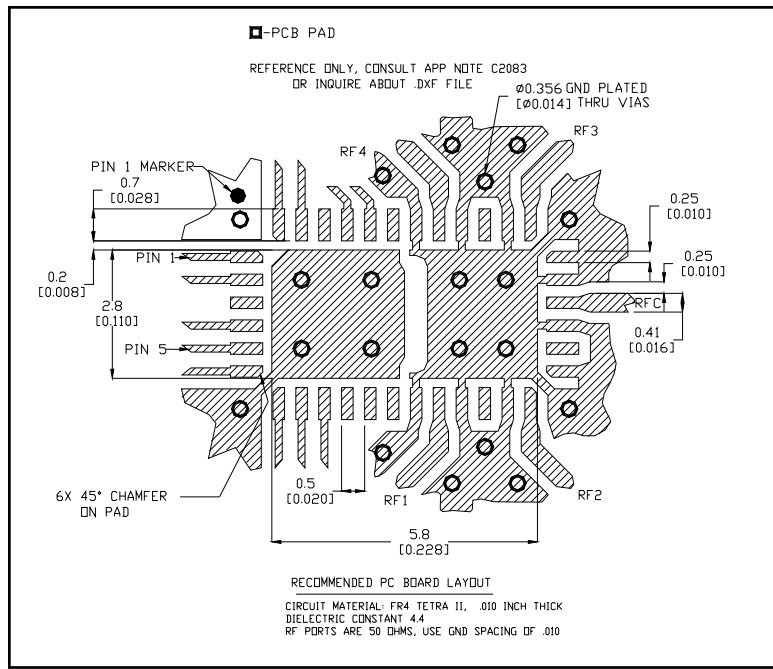


13. Application Note C2083 is available on line at www.macomtech.com

GaAs SP4T Switch, Absorptive, Single Supply DC - 4.0 GHz


Rev. V4

Functional Schematic

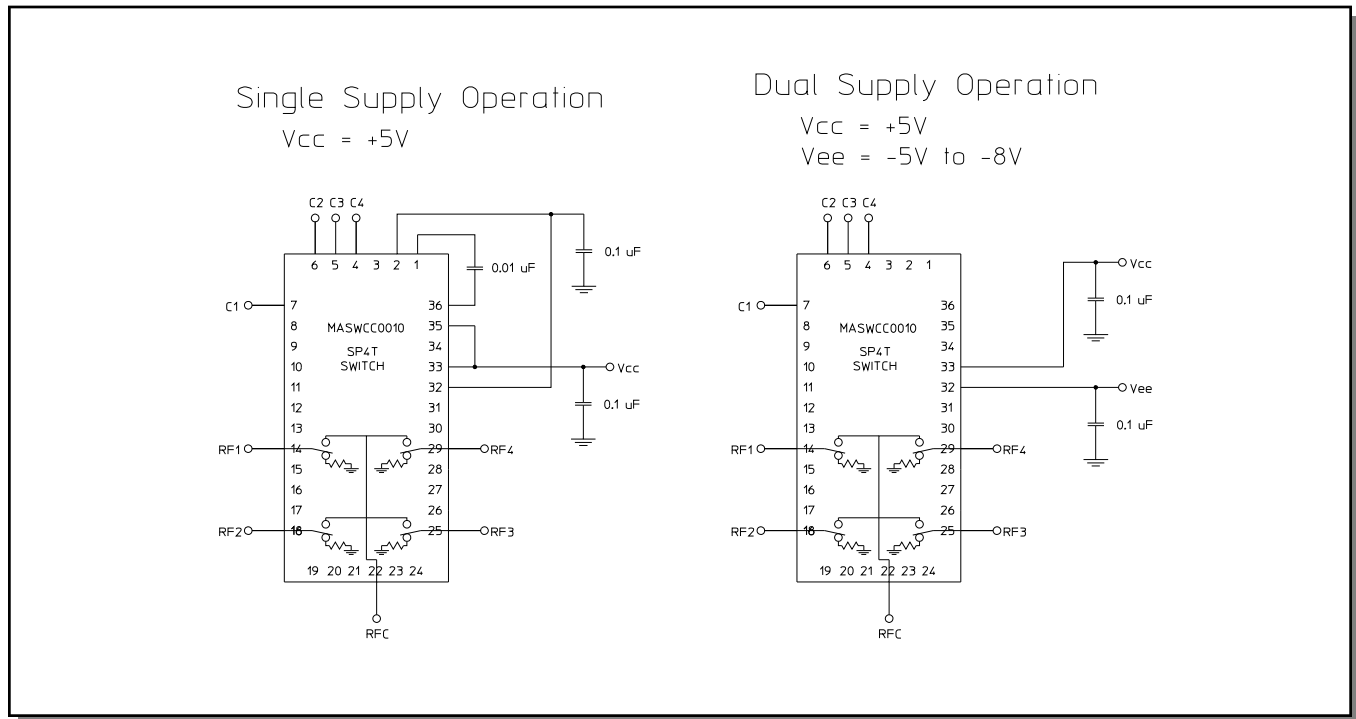


Typical Performance Curves

Insertion Loss vs. Frequency

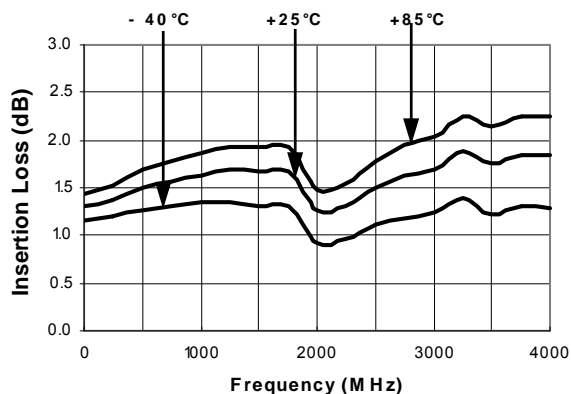


Isolation (dB) vs. Frequency

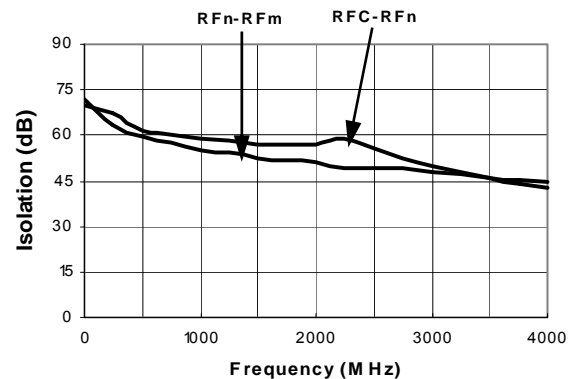

Rev. V4

On VSWR vs. Frequency

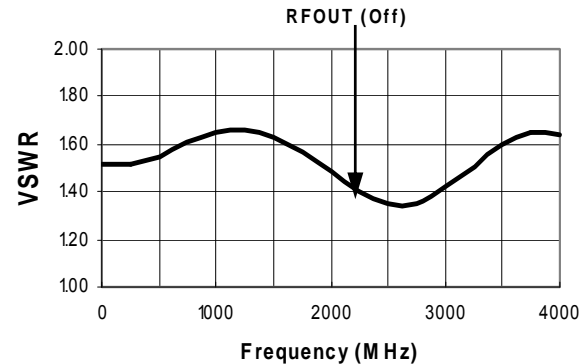

Technical drawing of a 36-pin connector assembly, showing top, side, and detail views with dimensions and labels.

Top View Labels:

- PIN #1 IDENTIFIER
- PART NUMBER
- LOT NUMBER (U2)
- DATE CODE
- LOT NUMBER (U2)

Top View Dimensions:

- Overall width: 36
- Overall height: 1.1575 (4.00)
- Pin pitch: .0157 ± .0039 (0.4 ± 0.1)
- Pin diameter: .0079 (0.20)
- Pin length: .0354 ± .0039 (0.90 ± 0.10)
- Pin spacing: .0020, .0000, 0.05, 0.00
- Seating plate thickness: .0137 (0.35)
- Seating plate width: .1063 ± .0039 (2.7 ± 0.1)
- Seating plate length: .0157 ± .0039 (0.4 ± 0.1)
- Seating plate thickness: .0079 MIN.
- Seating plate width: .0181 (0.46)
- Seating plate length: .1126 (2.86)
- Seating plate thickness: .2165 (5.5)
- Seating plate width: .2244 ± .0039 (5.7 ± 0.1)

Side View Labels:

- SEATING PLATE
- 2X FULL RAD.
- 36X
- 36X
- EXPOSED PAD

Side View Dimensions:

- Overall height: .0091 ± .0028 (0.23 ± 0.07)
- Pin length: .0155 in / 0.39 mm X 45 DEG. CHAMFER
- Pin diameter: .0197 (0.5)
- Pin spacing: .0787 (2)
- Pin length: .0984 (2.5)
- Pin diameter: .0197 (0.5)
- Pin spacing: .1126 (2.86)
- Pin length: .2165 (5.5)
- Pin width: .2244 ± .0039 (5.7 ± 0.1)

Notes:

- REFERENCE SPECIFIC PRODUCT OUTLINE DRAWING FOR ADDITIONAL DIMENSIONAL AND TOLERANCE INFORMATION.
- ALL DIMENSIONS SHOWN AS in/mm.

5

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.