


## Gallium Nitride 28V, 25W RF Power Transistor

Built using the SIGANTIC® NRF1 process - A proprietary GaN-on-Silicon technology

### FEATURES

- Optimized for broadband operation from DC-4000MHz
- 25W P<sub>3dB</sub> CW power at 3000MHz
- 16-20W P<sub>3dB</sub> CW power from 1000-2500MHz in application board with >45% drain efficiency
- 10-20W P<sub>3dB</sub> CW power from 30-1000MHz in application board with >50% drain efficiency
- High efficiency from 14 - 28V
- 4.0 °C/W R<sub>TH</sub> with maximum T<sub>J</sub> rating of 200 °C
- Robust up to 10:1 VSWR mismatch at all angles with no device damage at 90 °C flange
- Subject to EAR99 export control

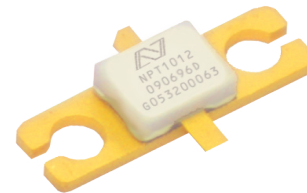


**DC – 4000 MHz  
25 Watt, 28 Volt  
GaN HEMT**




**RF Specifications (CW, 3000MHz):** V<sub>DS</sub> = 28V, I<sub>DQ</sub> = 225mA, T<sub>C</sub> = 25°C, Measured in Nitronex Test Fixture

Symbol	Parameter	Min	Typ	Max	Units
P <sub>3dB</sub>	Average Output Power at 3dB Gain Compression	43	44	-	dBm
P <sub>1dB</sub>	Average Output Power at 1dB Gain Compression	-	43	-	dBm
G <sub>SS</sub>	Small Signal Gain	12	13	-	dB
η	Drain Efficiency at 3dB Gain Compression	57	65	-	%
VSWR	10:1 VSWR at all phase angles	No damage to the device			

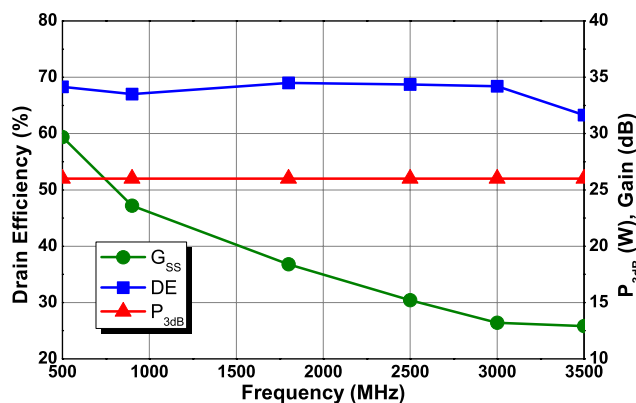

**Figure 1 - Typical CW Performance in Load-Pull, V<sub>DS</sub> = 28V, I<sub>DQ</sub> = 225mA**

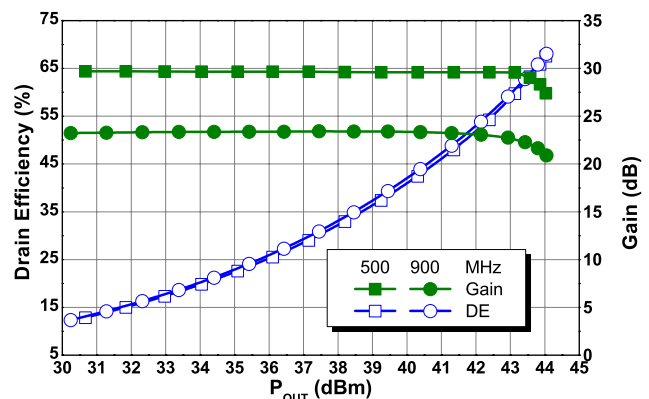

**Figure 2 - Typical CW Performance<sup>1</sup> in Load-Pull, V<sub>DS</sub> = 28V, I<sub>DQ</sub> = 225mA**

Note 1: 500MHz and 900MHz Load-Pull data collected using a 4.7 Ω resistor in the RF path added for stability

## DC Specifications: $T_C = 25^\circ\text{C}$

Symbol	Parameter	Min	Typ	Max	Units
<b>Off Characteristics</b>					
$V_{BDS}$	Drain-Source Breakdown Voltage ( $V_{GS} = -8\text{V}$ , $I_D = 8\text{mA}$ )	100	-	-	V
$I_{DLK}$	Drain-Source Leakage Current ( $V_{GS} = -8\text{V}$ , $V_{DS} = 60\text{V}$ )	-	-	4	mA
<b>On Characteristics</b>					
$V_T$	Gate Threshold Voltage ( $V_{DS} = 28\text{V}$ , $I_D = 8\text{mA}$ )	-2.3	-1.8	-1.3	V
$V_{GSQ}$	Gate Quiescent Voltage ( $V_{DS} = 28\text{V}$ , $I_D = 225\text{mA}$ )	-2.0	-1.5	-1.0	V
$R_{ON}$	On Resistance ( $V_{GS} = 2\text{V}$ , $I_D = 60\text{mA}$ )	-	0.44	0.55	$\Omega$
$I_{D,MAX}$	Drain Current ( $V_{DS} = 7\text{V}$ pulsed, 300 $\mu\text{s}$ pulse width, 0.2% duty cycle, $V_{GS} = 2.0\text{V}$ )	-	5.4	-	A

## Thermal Resistance Specification

Symbol	Parameter	Min	Typ	Max	Units
$\theta_{JC}$	Thermal Resistance (Junction-to-Case), $T_J = 180^\circ\text{C}$	-	4.0	-	$^\circ\text{C}/\text{W}$

## Absolute Maximum Ratings: Not simultaneous, $T_C = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Max	Units
$V_{DS}$	Drain-Source Voltage	100	V
$V_{GS}$	Gate-Source Voltage	-10 to 3	V
$I_G$	Gate Current	40	mA
$P_T$	Total Device Power Dissipation (Derated above $25^\circ\text{C}$ )	44	W
$T_{STG}$	Storage Temperature Range	-65 to 150	$^\circ\text{C}$
$T_J$	Operating Junction Temperature	200	$^\circ\text{C}$
HBM	Human Body Model ESD Rating (per JESD22-A114)	1B (+/-500V)	
MM	Machine Model ESD Rating (per JESD22-A115)	A (>100V)	
CDM	Charge Device Model ESD Rating (per JESD22-C101)	IV (>1000V)	


## Load-Pull Data, Reference Plane at Device Leads

$V_{DS}=28V$ ,  $I_{DQ}=225mA$ ,  $T_A=25^\circ C$  unless otherwise noted

**Table 1:** Optimum Source and Load Impedances<sup>1</sup> for CW Gain, Drain Efficiency, and Output Power Performance

Frequency (MHz)	$V_{DS}$ (V)	$Z_S$ ( $\Omega$ )	$Z_L$ ( $\Omega$ )	$P_{SAT}$ (W)	$G_{SS}$ (dB)	Drain Efficiency @ $P_{SAT}$ (%)
500	14	$7.0 + j8.2$	$8.6 + j7.4$	12	27.8	76
500	22	$7.0 + j8.2$	$9.7 + j11.3$	21	29.2	74
500	28	$7.0 + j8.2$	$9.7 + j14.1$	26	29.7	68
900	14	$5.8 + j3.1$	$6.8 + j4.7$	12	22.4	74
900	22	$5.8 + j3.1$	$9.6 + j5.3$	24	23.3	74
900	28	$5.8 + j3.1$	$9.8 + j 7.8$	26	23.6	67
1800	28	$3.5 - j3.6$	$6.9 + j2.0$	26	18.4	69
2500	14	$3.9 - j7.5$	$6.2 - j8.0$	13	13.7	70
2500	22	$4.8 - j7.0$	$5.5 - j4.1$	19	14.9	69
2500	28	$4.8 - j7.0$	$5.5 - j4.1$	26	15.2	69
3000	28	$5.3 - j8.8$	$5.3 - j6.4$	26	13.2	66
3500	28	$5.0 - j14.5$	$7.0 - j9.5$	26	12.9	63


Note 1: 500MHz and 900MHz Load-Pull data collected using a 4.7  $\Omega$  resistor in the RF path added for stability

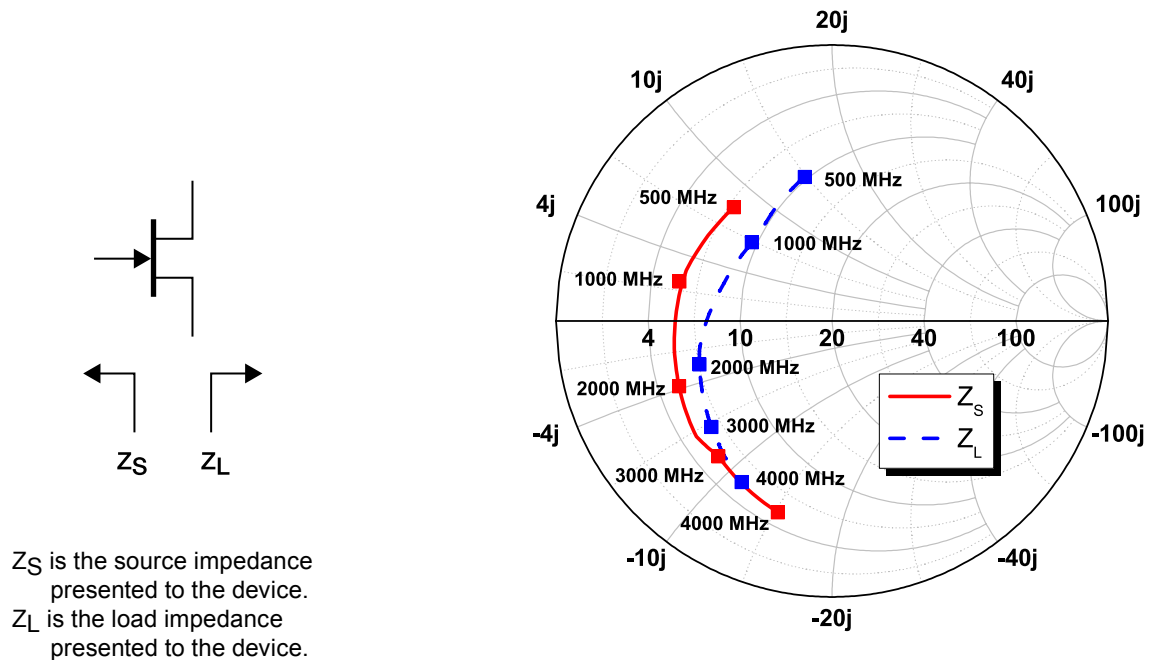


**Figure 3 -** Optimum Impedances for CW Performance,  $V_{DS} = 28V$

## Load-Pull Data, Reference Plane at Device Leads

$V_{DS}=28V$ ,  $I_{DQ}=225mA$ ,  $T_A=25^\circ C$  unless otherwise noted

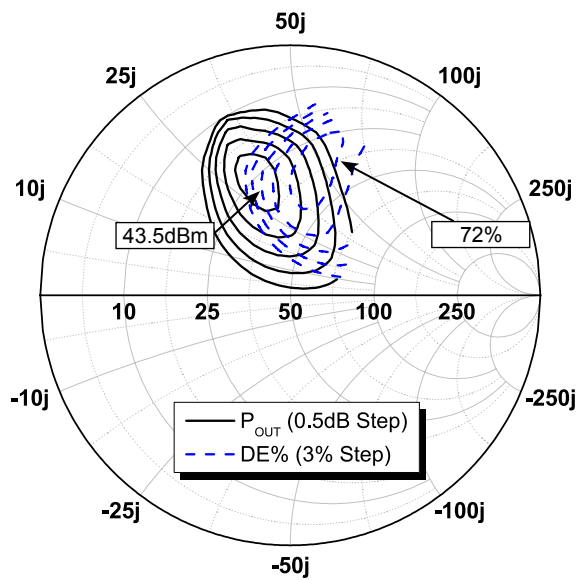


**Figure 4** - Load-Pull Contours<sup>1</sup>, 500MHz,  
 $P_{IN} = 14.5dBm$ ,  $Z_S = 7.0 + j8.2 \Omega$

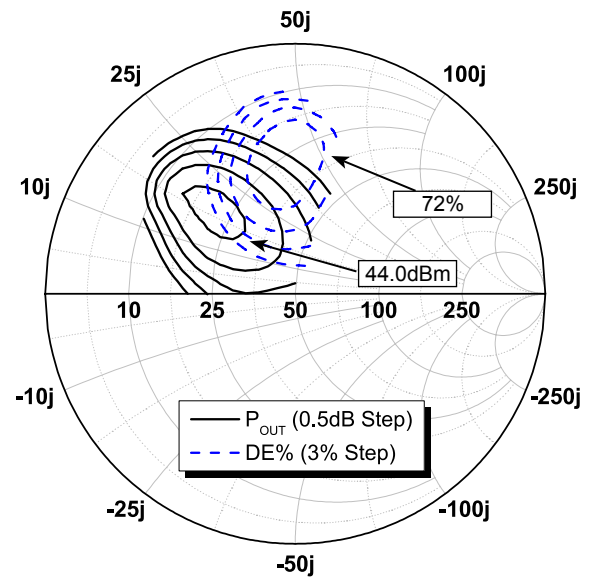


**Figure 5** - Load-Pull Contours<sup>1</sup>, 900MHz,  
 $P_{IN} = 21.0dBm$ ,  $Z_S = 5.8 + j3.1 \Omega$

Note 1: 500MHz and 900MHz Load-Pull data collected using a 4.7  $\Omega$  resistor in the RF path added for stability

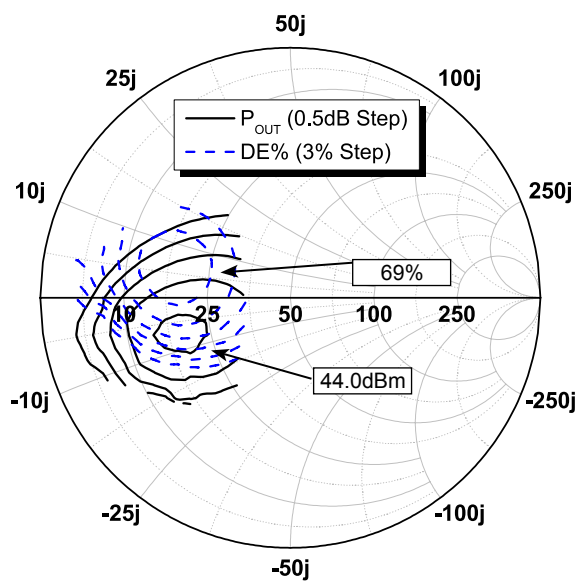


**Figure 6** - Load-Pull Contours, 1800MHz,  
 $P_{IN} = 26.5dBm$ ,  $Z_S = 3.5 - j3.6 \Omega$

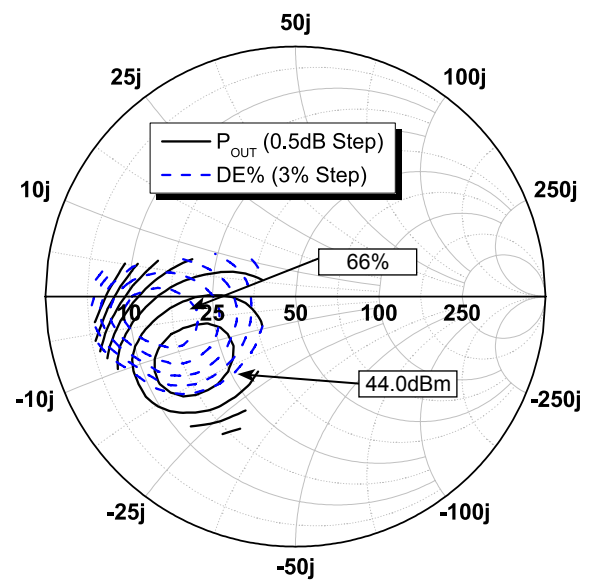


**Figure 7** - Load-Pull Contours, 2500MHz,  
 $P_{IN} = 29.4dBm$ ,  $Z_S = 4.8 - j7.0 \Omega$

## Load-Pull Data, Reference Plane at Device Leads


$V_{DS}=28V$ ,  $I_{DQ}=225mA$ ,  $T_A=25^\circ C$  unless otherwise noted

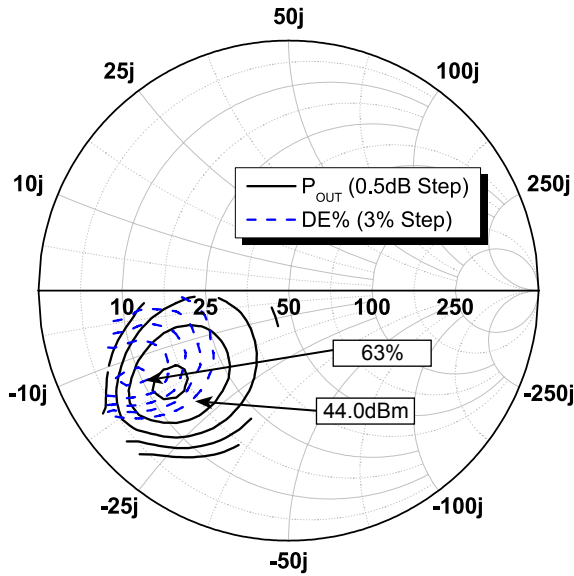


**Figure 8** - Load-Pull Contours, 3000MHz,  $P_{IN} = 31.7dBm$ ,  $Z_S = 5.3 - j8.8 \Omega$

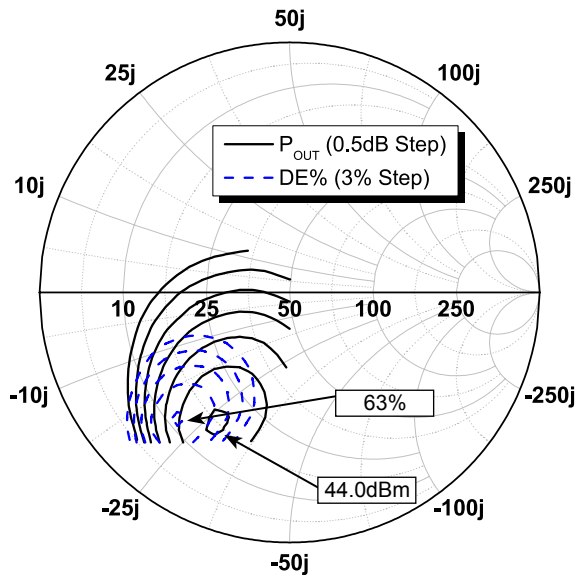

**Figure 9** - Load-Pull Contours, 3500MHz,  $P_{IN} = 33.5dBm$ ,  $Z_S = 5.0 - j14.5 \Omega$

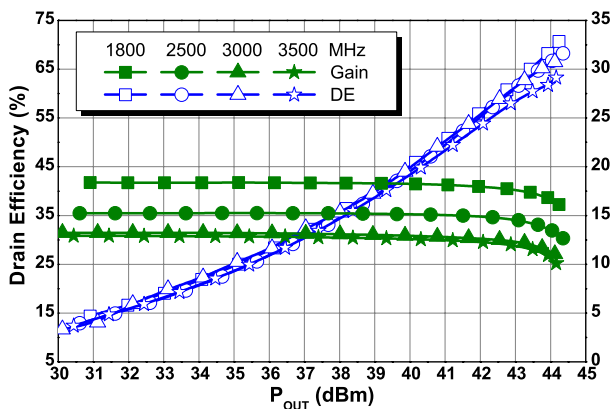

**Figure 10** - Typical CW Performance in Load-Pull

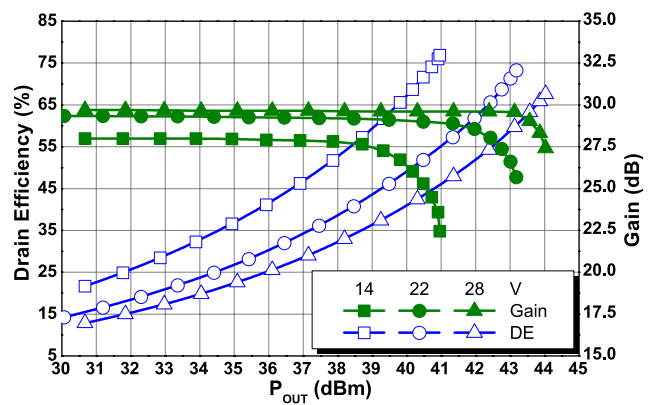


**Figure 11** - Typical CW Performance<sup>1</sup> Over Voltage in Load-Pull, 500MHz


Note 1: 500MHz and 900MHz Load-Pull data collected using a 4.7  $\Omega$  resistor in the RF path added for stability

## Load-Pull Data, Reference Plane at Device Leads

$V_{DS}=28V, I_{DQ}=225mA, T_A=25^{\circ}C$  unless otherwise noted

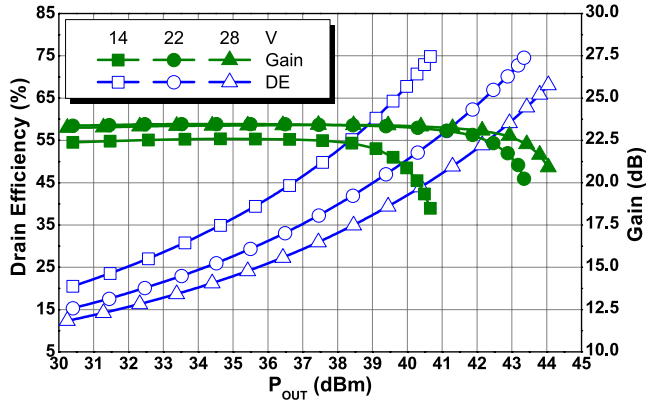


**Figure 12 - Typical CW Performance<sup>1</sup> Over Voltage in Load-Pull, 900MHz**

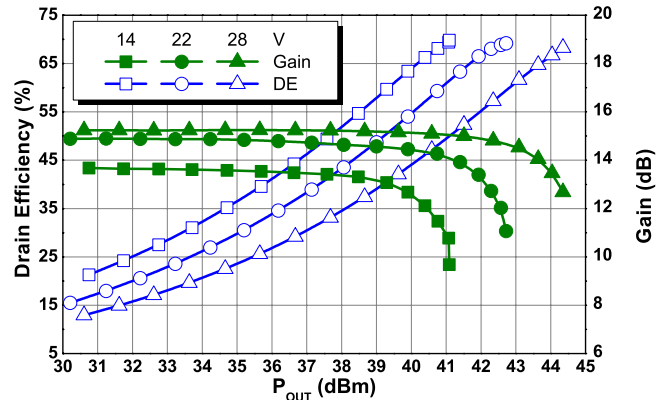


**Figure 13 - Typical CW Performance Over Voltage in Load-Pull, 2500MHz**


Note 1: 500MHz and 900MHz Load-Pull data collected using a 4.7  $\Omega$  resistor in the RF path added for stability

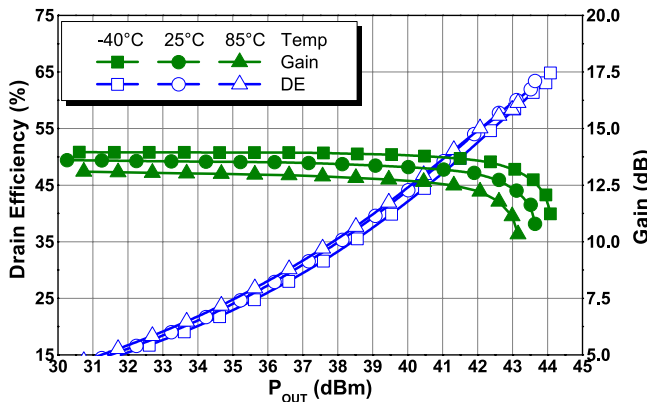


**Figure 14 - Typical CW Performance Over Temperature in Nitronex Test Fixture, 3000MHz**

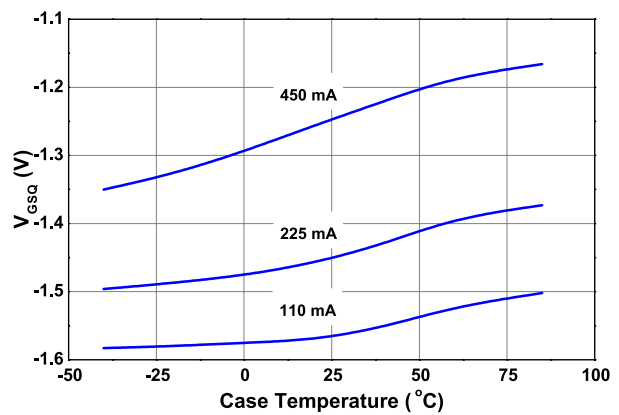

**Figure 15 - Quiescent Gate Voltage ( $V_{GSQ}$ ) Required to Reach  $I_{DQ}$  as a Function of Case Temperature,  $V_{DS} = 28V$**

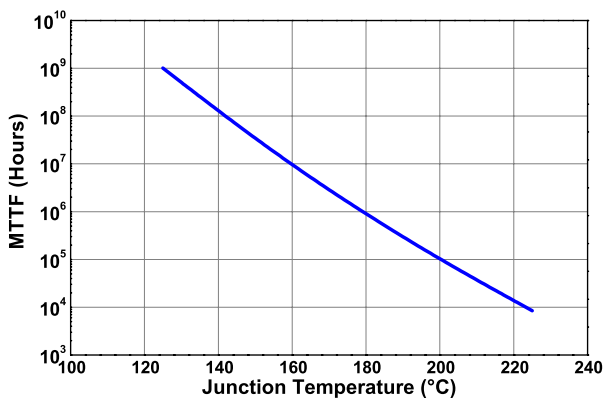

**Figure 16 - MTTF of NRF1 Devices as a Function of Junction Temperature**

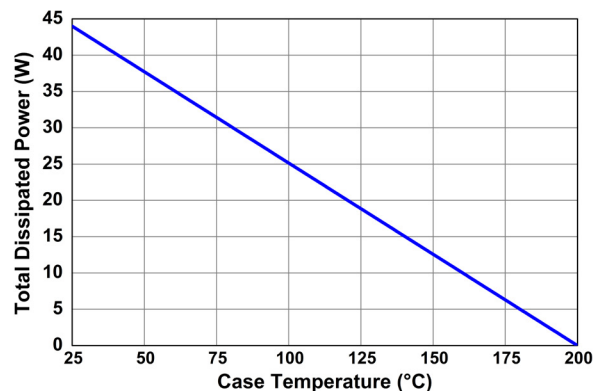

**Figure 17 - Power Derating Curve**


# NPT1012



## Ordering Information<sup>1</sup>

Part Number	Description
NPT1012B	NPT1012 in AC200B-2 Metal-Ceramic Bolt-Down Package

1: To find a Nitronex contact in your area, visit our website at <http://www.nitronex.com>

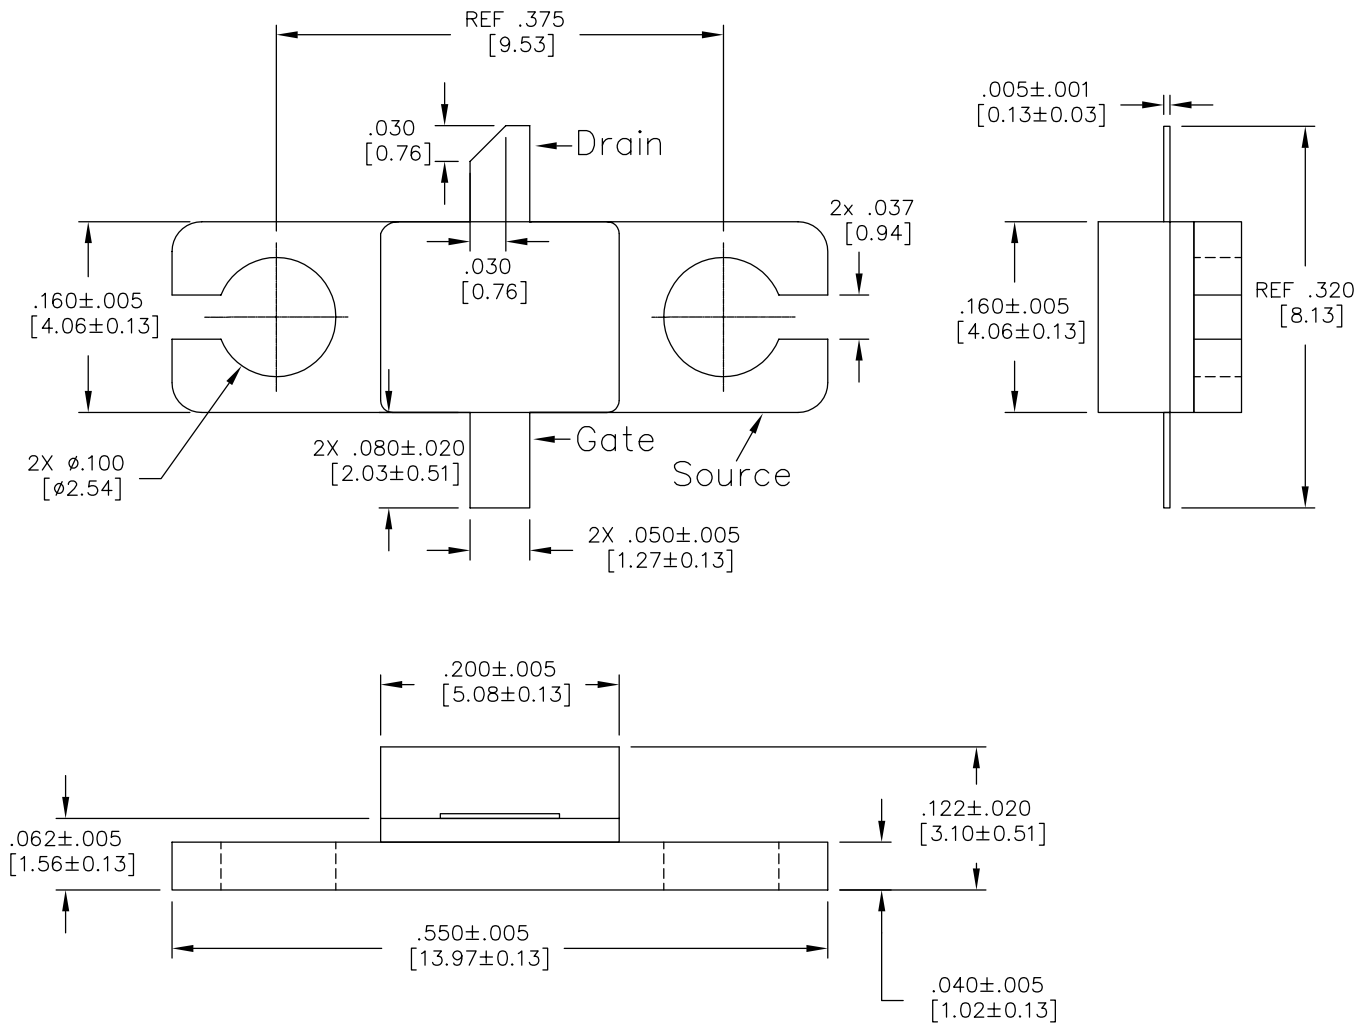

**Figure 18 - AC200B-2 Metal-Ceramic Package Dimensions and Pinout (all dimensions are in inches [mm])**

## Nitronex, LLC

2305 Presidential Drive  
Durham, NC 27703 USA  
+1.919.807.9100 (telephone)  
+1.919.807.9200 (fax)  
info@nitronex.com  
www.nitronex.com

## Additional Information

**This part is lead-free and is compliant with the RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).**

## Important Notice

Nitronex, LLC reserves the right to make corrections, modifications, enhancements, improvements and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to Nitronex terms and conditions of sale supplied at the time of order acknowledgment. The latest information from Nitronex can be found either by calling Nitronex at 1-919-807-9100 or visiting our website at [www.nitronex.com](http://www.nitronex.com).

Nitronex warrants performance of its packaged semiconductor or die to the specifications applicable at the time of sale in accordance with Nitronex standard warranty. Testing and other quality control techniques are used to the extent Nitronex deems necessary to support the warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Nitronex assumes no liability for applications assistance or customer product design. Customers are responsible for their product and applications using Nitronex semiconductor products or services. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

Nitronex does not warrant or represent that any license, either express or implied, is granted under any Nitronex patent right, copyright, mask work right, or other Nitronex intellectual property right relating to any combination, machine or process in which Nitronex products or services are used.

Reproduction of information in Nitronex data sheets is permitted if and only if said reproduction does not alter any of the information and is accompanied by all associated warranties, conditions, limitations and notices. Any alteration of the contained information invalidates all warranties and Nitronex is not responsible or liable for any such statements.

Nitronex products are not intended or authorized for use in life support systems, including but not limited to surgical implants into the body or any other application intended to support or sustain life. Should Buyer purchase or use Nitronex, LLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold Nitronex, LLC, its officers, employees, subsidiaries, affiliates, distributors, and its successors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, notwithstanding if such claim alleges that Nitronex was negligent regarding the design or manufacture of said products.

Nitronex and the Nitronex logo are registered trademarks of Nitronex, LLC.  
All other product or service names are the property of their respective owners.  
©Nitronex, LLC 2012. All rights reserved.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.