


## LSRU SERIES

### Load sensor



### Wiring Diagram

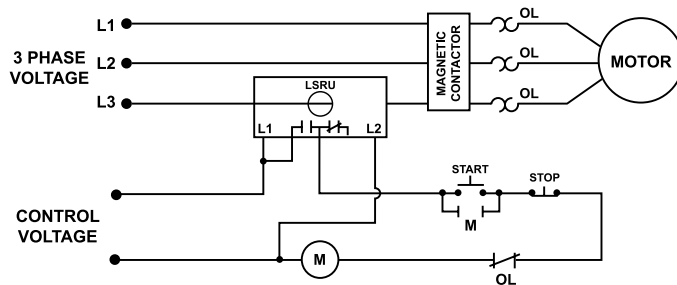

### Description

The LSRU Series is a microcontroller-based family of load sensors. The LSRU family of products employ three basic types of control logic: motor control logic, alarm logic and feed control logic.

#### Motor Control Logic

Several combinations of functions are available in the LSRU, including overcurrent and undercurrent or either overcurrent or undercurrent with variable trip, restart or extended restart delay settings. These various versions of the LSRU trip on the respective fault and then automatically reset after the restart delay expires, in preparation for the next motor start. LSRUs do not trip on undercurrent when the load turns off, this is recognized as a normal condition.

#### Alarm Logic

The LSRU-AL simply indicates whether the current is between the setpoints or outside of the setpoints. This product is best used with a PLC or other controller where status indication is desired.

#### Feed Control

The LSRU-FC is a load monitor intended to control feeder mechanisms in a variety of applications. It stops the feeder when the grinder, chipper, saw, auger, etc. nears overload. When the load is reduced to a preset level, the feeder is restarted.

### Features & Benefits

FEATURES	BENEFITS
<b>LED indicator</b>	Visual indication of relay status
<b>Built in current sensor</b>	Eliminates the need for a stand alone current transformer and also provides isolation between the monitored and control circuits
<b>Adjustable current sensing range</b>	Provides ability to precisely set the current trip point for any application

### Ordering Information

See next page.

# LSRU SERIES

## Ordering Information

MODEL	LINE VOLTAGE	CURRENT RANGE	DESCRIPTION
LSRU-024-AL-2	24VAC	5-25A	Alarm logic
LSRU-024-AL-3	24VAC	25-100A	Alarm logic
LSRU-115-AL-1.5	115VAC	0-10A	Alarm logic
LSRU-115-AL-2	115VAC	5-25A	Alarm logic
LSRU-115-AL-3	115VAC	25-100A	Alarm logic
LSRU-115-FC-1.5	115VAC	0-10A	Feed control logic
LSRU-115-OT-1.5	115VAC	0-10A	Motor control logic with overcurrent trip, adj trip delay (0.5-60s)
LSRU-115-OT-2	115VAC	5-25A	Motor control logic with overcurrent trip, adj trip delay (0.5-60s)
LSRU-115-OT-3	115VAC	25-100A	Motor control logic with overcurrent trip, adj trip delay (0.5-60s)
LSRU-115-OR-1.5	115VAC	0-10A	Motor control logic with overcurrent trip, adj restart delay (0.5-300s, manual)
LSRU-115-OR-2	115VAC	5-25A	Motor control logic with overcurrent trip, adj restart delay (0.5-300s, manual)
LSRU-115-UE-2	115VAC	5-25A	Motor control logic with undercurrent trip, adj ext restart delay (2-300m, manual)
LSRU-115-UT-2	115VAC	5-25A	Motor control logic with undercurrent trip, adj trip delay (0.5-60s)
LSRU-115-UT-3	115VAC	25-100A	Motor control logic with undercurrent trip, adj trip delay (0.5-60s)
LSRU-115-UR-2	115VAC	5-25A	Motor control logic with undercurrent trip, adj restart delay (0.5-300s, manual)
LSRU-115-OU-1.5	115VAC	0-10A	Motor control logic with overcurrent and undercurrent trip
LSRU-115-OU-2	115VAC	5-25A	Motor control logic with overcurrent and undercurrent trip
LSRU-115-OU-3	115VAC	25-100A	Motor control logic with overcurrent and undercurrent trip

**PART # KEY**

O = Overcurrent Trip

U = Undercurrent Trip

T = Adj. Trip Delay (0.5-60 seconds)

R = Adj. Restart Delay (0.5-300 seconds, Manual)

E = Adj. Extended Restart Delay (2-300 minutes, Manual)

1.5 = 0-10 Amps

2 = 5-25 Amps

3 = 25-100 Amps

## Specifications

### Functional Characteristics

<b>Isolation</b>	600VAC rms
<b>Power</b>	2 Watts
<b>Motor Acceleration Time</b>	2 seconds
<b>When not selected as an option:</b>	
<b>Fixed Trip Delay (-AL, -FC)</b>	0.5 second
<b>Fixed Restart Delay (-AL only)</b>	1 second
<b>(-FC only)</b>	as soon as current is within limits
<b>Input Characteristics</b>	
<b>Control Power</b>	24VAC or 115VAC
<b>Output Characteristics</b>	
<b>Output Contact Rating (SPDT)</b>	
<b>Pilot Duty</b>	480VA @ 240VAC
<b>General Purpose</b>	10A @ 240VAC

### General Characteristics

<b>Temperature Range</b>	-40° to 70°C (-40° to 158°F)
<b>Wire Size</b>	#12-24AWG
<b>Hole Size</b>	0.725" diameter
<b>Terminal Torque</b>	7 in.-lbs.
<b>Safety Marks</b>	
<b>CSA, CSA-NRTL/C</b>	(File #46510)
<b>CE</b>	
<b>Dimensions</b>	<b>H</b> 42.42 mm (1.67"); <b>W</b> 58.42 mm (2.3"); <b>D</b> 90.43 mm (3.56")
<b>Weight</b>	0.5 lb. (8 oz., 226.8 g)
<b>Mounting Method</b>	Four #6 screws 3/4" in length

**Caution:** This product should not be relied upon solely for safety of life or safety applications.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.