



SECURE
ENTERPRISE-READY
CELLULAR EXTENDER



DIGI EX15

Branch connectivity in a compact, affordable, all-in-one solution

Digi EX15 LTE cellular extenders offer gigabit Ethernet and Wi-Fi connectivity for retailers and other organizations that cannot tolerate network downtime and the negative impact on revenue streams and brand reputation.

A suite of upgradeable Digi CORE® plug-in LTE modems lets users select the cellular speeds that best fit their business requirements, including LTE Cat 4, LTE-Advanced Cat 6 and LTE-Advanced Cat 11 for data-intensive applications.

Combine a Digi EX15 with a dedicated wireline connection to ensure dual ISP connectivity, maximum uptime and complete business continuity for devices that must be “always on,” such as mobile kiosks, digital signs and POS systems.

You can use Digi EX15 for primary LTE connectivity, in addition to dual-connectivity/failover. Additionally, the serial port can provide out-of-band (OOB) management for remote, off-premise equipment.

Digi device management applications provide easy setup, configuration and support for Digi devices. Digi Remote Manager® offers secure, web-based device management for network visibility and control over your Digi enterprise routers and gateways after deployment. For fast and easy installations, a site survey battery, PoE injector and mounting accessories are included for proper placement based on optimal signal strength.

FEATURES AND BENEFITS

- LTE-certified Digi CORE plug-in modem
- Scalable cellular technology allows you to match speeds to applications and future proof your network
- Optimized connectivity to any Ethernet device
- Battery pack for site survey to identify optimal signal strength placement
- Multiple mounting options and accessories
- Serial port for remote, out-of-band management
- Securely deploy, monitor and control devices with Digi Remote Manager
- Zero-touch provisioning and cloud management

RELATED PRODUCTS



Digi 6310-DX



Digi 6330-MX



Digi CORE plug-in
LTE modem




Digi IX14




Digi Remote
Manager

APPLICATION EXAMPLE

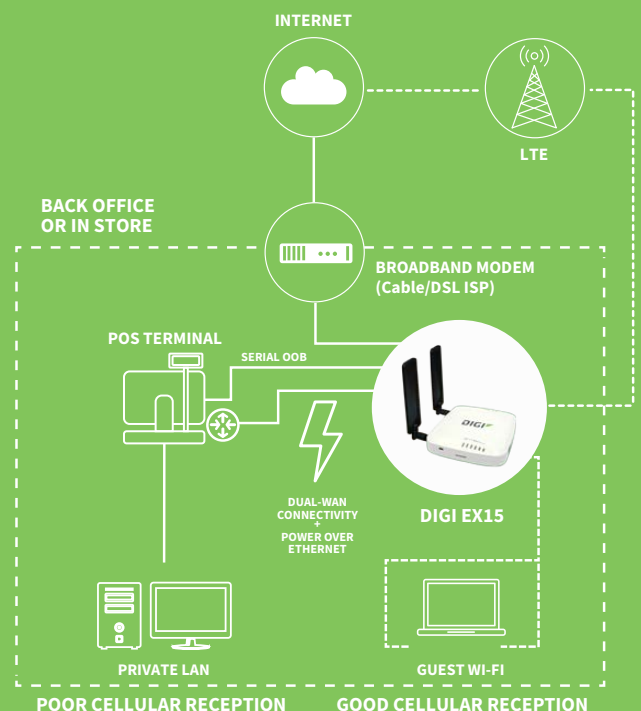

SPECIFICATIONS		DIGI® EX15	
CELLULAR CONNECTIVITY			
DIGI CORE PLUG-IN LTE MODEMS	LTE Cat 4 (US): B2, B4, B5, B12, B13; 3G: B2, B5; Transfer rate (max): 150 Mbps down, 50 Mbps up		
	LTE Cat 4 (EU): B1, B3, B7, B8, B20; 3G: B1, B8; 2G: B3, B8; Transfer rate (max): 150 Mbps, 50 Mbps up		
	LTE-A Cat 6 (GLB): B1, B2, B3, B4, B5, B7, B8, B12, B13, B20, B25, B26, B29, B30, B41; WCDMA: B1, B2, B3, B4, B5, B8; Transfer rate (max): 300 Mbps, 50 Mbps up		
	LTE-A Cat 11 (GLB): LTE FDD: B1, B2, B3, B4, B5, B7, B8, B12, B13, B17, B20, B25, B26, B29, B30, B66; LTE TDD: B38, B40, B41; 3G: B1, B2, B4, B5, B8; Transfer rate (max): 600 Mbps, 75 Mbps up		
CONNECTORS	(2) 50 Ω SMA (center pin: female)		
SIM SLOTS	(2) Mini-SIM (2FF); software selectable and hardware switchable		
SOFTWARE AND MANAGEMENT			
REMOTE MANAGEMENT	Digi Remote Manager; SNMP v1/v2c/v3 (user installed/managed)		
LOCAL MANAGEMENT	RIP, RIPng, OSPFv2, OSPFv3, BGP, Babel, IS-IS		
MANAGEMENT/ TROUBLESHOOTING TOOLS	FTP client, SCP; protocol analyzer with PCAP for Wireshark; event logging with Syslog and SMTP client; NTP/SNTP		
MEMORY	256 MB RAM, 512 MB flash		
ETHERNET			
PORTS	(2) RJ-45; 10/100/1000 Mbps (auto-sensing)		
WI-FI (OPTIONAL)			
CONNECTIVITY	2 x 2 MIMO 2.4/5 GHz: 802.11 b/g/n 2.4 GHz; 802.11 n/a/ac 5 GHz		
SERIAL			
PORTS	(1) RS-232 (RJ-45)		
PHYSICAL			
DIMENSIONS (L x W x H)	142 mm x 128 mm x 31 mm (5.6 in x 5.0 in x 1.2 in)		
WEIGHT	0.2 kg (7.0 oz)		
STATUS LEDs	LAN (link = solid, flashing = act), WAN (link = solid, flashing = act), LTE, 5 signal, SIM 1 and 2 LEDs		
ENCLOSURE	Plastic		
POWER REQUIREMENTS			
POWER INPUT	18 VDC 1 A		
OTHER	Remote mounting kit: temporary battery, passive PoE injector, mounting bracket and accessories		
ENVIRONMENTAL			
OPERATING TEMPERATURE	0° C to 40° C (32° F to 104° F)		
RELATIVE HUMIDITY	5% to 95% (non-condensing)		
APPROVALS			
CELLULAR	PTCRB; US: AT&T, Verizon, Canada; Europe		
EMISSIONS / IMMUNITY	FCC Part 15, Subpart B, Class A; CE, RCM; CAN ICES-3(B)/NMB-3(B)		
WARRANTY			
PRODUCT WARRANTY	3-year		

PRODUCT IMAGES

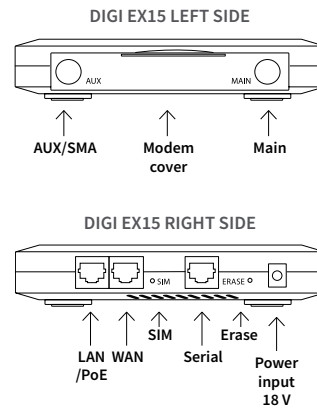

DIGI REMOTE MANAGER®



CAPABILITIES

- Centralized management of remote devices over 3G/4G/LTE
- Define standard configurations and automatically monitor individual devices for PCI security compliance
- Get alerts and create reports on performance statistics, including connection history, signal quality, latency, data usage and packet loss
- No servers or applications to operate and maintain
- Perform tasks across your entire device network in minutes
- Edit configurations and update firmware for individual devices or groups
- Monitor the status and location of remote devices via a web browser
- Activate or deactivate cellular lines and monitor data to ensure you never incur overage charges

INFRASTRUCTURE

- Hosted in a commercial-grade SAS 70-certified environment
- Superior availability, operating to 99.9% or greater
- Open APIs available to support application development

SECURITY

- Certified SSAE-16 facilities
- Over 175 security controls in place to protect your data
- Enables compliance with security frameworks like PCI, HIPAA, NIST
- Earned SkyHigh's Cloud Trust Program highest rating of Enterprise-Ready

PART NUMBERS	DIGI EX15
ASB-EX15-XX04-OUS	Digi EX15: 2-port GigE; RJ-45, RS-232, No Wi-Fi; LTE / HSPA+ Cat 4; Cellular certifications: PTCRB, AT&T, Verizon, US, Canada
ASB-EX15-XXE4-GLB	Digi EX15: 2-port GigE; RJ-45, RS-232, No Wi-Fi; LTE / HSPA+ Cat 4; Cellular certifications: PTCRB, Europe
ASB-EX15-XX06-GLB	Digi EX15: 2-port GigE; RJ-45, RS-232, No Wi-Fi; LTE-A / HSPA+ Cat 6; Cellular certifications: PTCRB, AT&T, Verizon, US, Canada, Europe
ASB-EX15-XX11-OUS	Digi EX15: 2-port GigE; RJ-45, RS-232, No Wi-Fi; LTE-A / HSPA+ Cat 11; Cellular certifications: PTCRB, AT&T, Verizon, US, Canada
ASB-EX15-XX11-GLB	Digi EX15: 2-port GigE; RJ-45, RS-232, No Wi-Fi; LTE-A / HSPA+ Cat 11; Cellular certifications: PTCRB, AT&T, Verizon, US, Canada, Europe
ASB-EX15-WX04-OUS	Digi EX15: 2-port GigE; RJ-45, RS-232, Wi-Fi; LTE / HSPA+ Cat 4; Cellular certifications: PTCRB, AT&T, Verizon, US, Canada
ASB-EX15-WXE4-GLB	Digi EX15: 2-port GigE; RJ-45, RS-232, Wi-Fi; LTE / HSPA+ Cat 4; Cellular certifications: PTCRB, Europe
ASB-EX15-WX06-GLB	Digi EX15: 2-port GigE; RJ-45, RS-232, Wi-Fi; LTE-A / HSPA+ Cat 6; Cellular certifications: PTCRB, AT&T, Verizon, US, Canada, Europe
ASB-EX15-WX11-OUS	Digi EX15: 2-port GigE; RJ-45, RS-232, Wi-Fi; LTE-A / HSPA+ Cat 11; Cellular certifications: PTCRB, AT&T, Verizon, US, Canada
ASB-EX15-WX11-GLB	Digi EX15: 2-port GigE; RJ-45, RS-232, Wi-Fi; LTE-A / HSPA+ Cat 11; Cellular certifications: PTCRB, AT&T, Verizon, US, Canada, Europe

PART NUMBERS	DIGI CORE PLUG-IN LTE MODEMS
ASB-1002-CM04-OUS	Digi CORE plug-in LTE modem; LTE / HSPA+ Cat 4; Cellular certifications: PTCRB, AT&T, Verizon, Canada
ASB-1002-CME4-GLB	Digi CORE plug-in LTE modem; LTE / HSPA+ Cat 4; Cellular certifications: PTCRB, RED, Europe
ASB-1002-CM06-GLB	Digi CORE plug-in LTE modem; LTE-A / HSPA+ Cat 6; Cellular certifications: PTCRB, RED, AT&T, Verizon, Canada, Europe
ASB-1003-CM11-GLB	Digi CORE plug-in LTE modem; LTE-A / HSPA+ Cat 11; Cellular certifications: PTCRB, RED, AT&T, Verizon, Canada, Europe

PART NUMBERS	ACCESSORIES
450061	18 V PSU power supply with barrel jack connector (replacement)
500157	Cable assembly passive POE power injector, white 2.1 mm barrel connector (replacement)
560083	Temporary site survey battery pack, 9 V with 152.4 mm power lead, 2.1 mm barrel connector (replacement)
170011	(1) Antenna extender: 48 mm circle antenna magnetic base (base connector: SMA jack); cable: low loss CLF; 50 cm length with SMA plug (replacement for optional Wi-Fi enabled models)
170017	(2) Cellular antenna (replacement)

FOR MORE INFORMATION
PLEASE VISIT **DIGI.COM**

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2020 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91004393
C9/220

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.