


Small Signal Product

Bi-directional TVS Diode Array

FEATURES


- Meet IEC61000-4-2 (ESD) $\pm 15\text{kV}$ (air), $\pm 8\text{kV}$ (contact)
- Meet IEC61000-4-4 (EFT) rating. 40A (5/50ns)
- Protects one Bi-directional I/O line
- Working Voltage : 24V
- Pb free version, RoHS compliant, and Halogen free

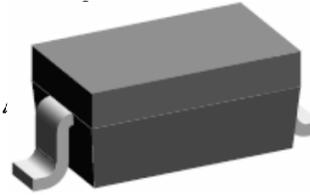

MECHANICAL DATA

- Case: SOD-323 small outline plastic package
- High temperature soldering guaranteed: 260°C/10s
- Weight: 48 \pm 5 mg (approximately)
- Terminal : Matte tin plated, lead free, solderable per MIL-STD-202, method 208 guaranteed
- Mounting position : Any

SOD-323



APPLICATION

- Cell Phone Handsets and Accessories
- Notebooks, Desktops, and Servers
- Keypads, Side Keys
- Portable Instrumentation
- Microprocessor Based Equipment
- Peripherals

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	VALUE		UNIT
		MIN	MAX	
IEC61000-4-2 ESD Voltage Air model Contact Model	V_{ESD} (Note 1)	± 15		kV
		± 8		
JESD22-A114-B ESD Voltage Per Human Body Model		-		
ESD Voltage Machine Model		-		
Peak Pulse Power	P_{PP} (Note 2)	500		W
Junction Temperature	T_J	150		$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ 150		$^\circ\text{C}$

Note 1: Device stressed with ten repetitive ESD pulses, per channel(I/O to GND)

PARAMETER	SYMBOL	VALUE		UNIT
		MIN	MAX	
Reverse Stand-Off Voltage	V_{RWM} (Note 1)		24	V
Reverse Breakdown Voltage $I_R = 1 \text{ mA}$	$V_{(\text{BR})}$	26.7		V
Reverse Leakage Current $V_R = 24 \text{ V}$	I_R		1	μA
Clamping Voltage $I_{\text{PP}} = 5 \text{ A}$ $I_{\text{PP}} = 17 \text{ A}$	V_C (Note 2)		40	V
			52	
Junction Capacitance $V_R = 0 \text{ V}, f = 1.0 \text{ MHz}$	C_J	50 (Typ.)		pF

Note 1: Other voltages available upon request

Note 2: Non-repetitive current pulse 8/20 μs exponential decay waveform according to IEC61000-4-5

Note 3: Per channel(I/O to GND unless otherwise specified)

Small Signal Product

RATINGS AND CHARACTERISTICS CURVES

(TA=25°C unless otherwise noted)

Fig. 1 Admissible Power Dissipation Curve

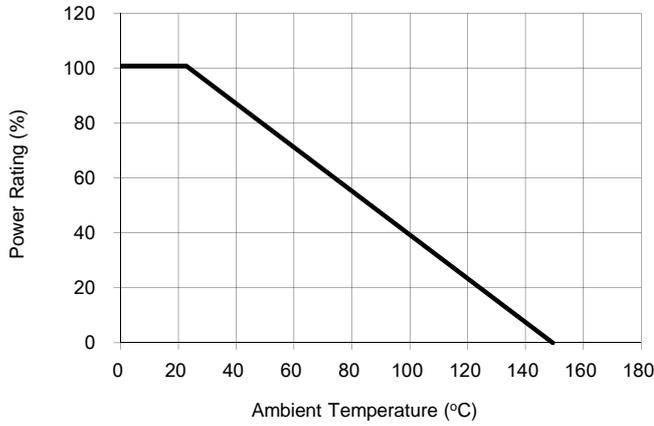


Fig. 2 Pulse Waveform

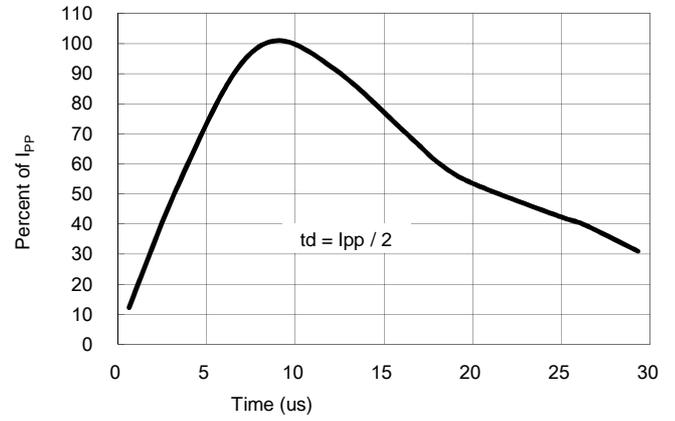


Fig. 3 Clamping Voltage VS. Peak Pulse Current

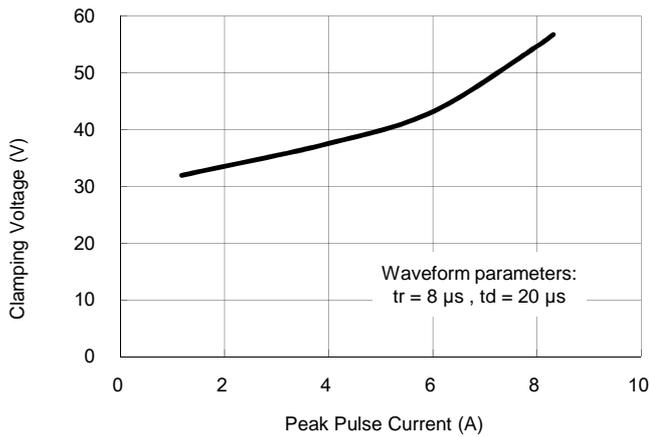


Fig. 4 Typical Junction Capacitance


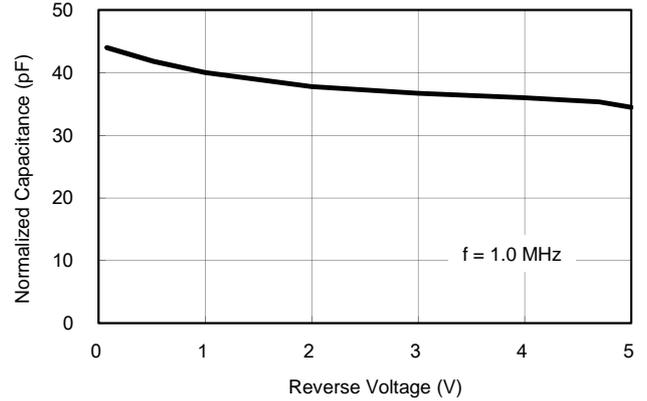


Fig. 5 Non-Repetitive Peak Pulse Power VS. Pulse Time

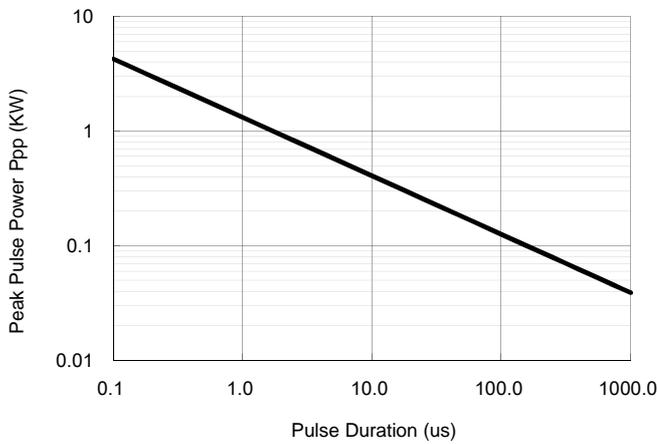

Small Signal Product


ORDERING INFORMATION						
PART NO.	MANUFACTURE CODE (Note 1)	PACKING CODE	GREEN COMPOUND CODE	PACKAGE	PACKING	MARKING
TESDC24V		RR	G	SOD-323	3K / 7" Reel	2H

Note 1: Indicator of manufacturing site for manufacture special control, if empty means no special control requirement

EXAMPLE					
PREFERRED P/N	PART NO.	MANUFACTURE CODE	PACKING CODE	GREEN COMPOUND CODE	DESCRIPTION
TESDC24V RRG	TESDC24V		RR	G	Green compound
TESDC24V-E0 RRG	TESDC24V	E0	RR	G	Green compound


Small Signal Product

DIMENSIONS

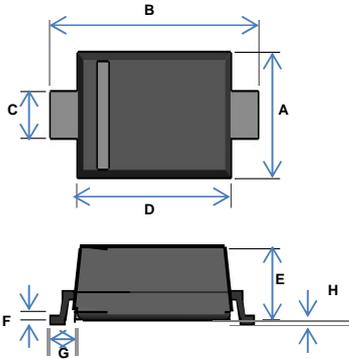

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	1.15	1.40	0.045	0.055
B	2.30	2.70	0.091	0.106
C	0.25	0.45	0.010	0.018
D	1.60	1.80	0.063	0.071
E	0.80	1.00	0.031	0.039
F	0.05	0.17	0.002	0.007
G	0.475 REF		0.19 REF	
H	-	0.10	-	0.004

SUGGESTED PAD LAYOUT

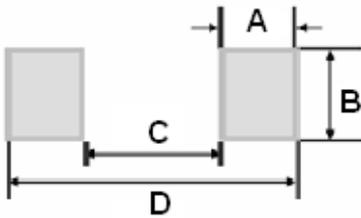

DIM.	Unit (mm)		Unit (inch)	
	Typ.		Typ.	
A	0.63		0.025	
B	0.83		0.033	
C	1.60		0.063	
D	2.85		0.112	

APPLICATION INFORMATION

- Designed to protect one data, I/O, or power supply line
- Designed to protect sensitive electronics from damage or latch-up due to ESD
- Designed to replace multilayer varistors (MLVs) in portable applications
- Features large cross-sectional area junctions for conducting high transient currents
- Offers superior electrical characteristics such as lower clamping voltage and no device degradation when compared to MLVs
- The combination of small size and high ESD surge capability makes them ideal for use in portable applications

CIRCUIT BOARD LAYOUT RECOMMENDATIONS

Good circuit board layout is critical for the suppression of ESD induced transients

- Place the ESD Protection Diode near the input terminals or connectors to restrict transient coupling
- Minimize the path length between the ESD Protection Diode and the protected line
- Minimize all conductive loops including power and ground loops
- The ESD transient return path to ground should be kept as short as possible
- Never run critical signals near board edges
- Use ground planes whenever possible

Small Signal Product**Notice**

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.