



# NJG1522KB2

## ■ ABSOLUTE MAXIMUM RATINGS

( $T_a=25^\circ\text{C}$ ,  $Z_S=Z_L=50\Omega$ )

| PARAMETERS        | SYMBOL    | CONDITIONS                          | RATINGS  | UNITS            |
|-------------------|-----------|-------------------------------------|----------|------------------|
| Input Power       | $P_{IN}$  | $V_{CTL(L)}=0V$ , $V_{CTL(H)}=2.7V$ | 28       | dBm              |
| Control Voltage   | $V_{CTL}$ | $V_{CTL(H)} - V_{CTL(L)}$           | 7.5      | V                |
| Power Dissipation | $P_D$     |                                     | 450      | mW               |
| Operating Temp.   | $T_{opr}$ |                                     | -30~+85  | $^\circ\text{C}$ |
| Storage Temp.     | $T_{stg}$ |                                     | -55~+125 | $^\circ\text{C}$ |

## ■ ELECTRICAL CHARACTERISTICS

( $V_{CTL(L)}=0V$ ,  $V_{CTL(H)}=2.7V$ ,  $Z_S=Z_L=50\Omega$ ,  $T_a=25^\circ\text{C}$ )

| PARAMETERS                           | SYMBOL            | CONDITIONS                                | MIN  | TYP | MAX | UNITS         |
|--------------------------------------|-------------------|---|------|-----|-----|---------------|
| Control voltage (Low)                | $V_{CTL(L)}$      |   | -0.2 | 0   | 0.2 | V             |
| Control voltage (High)               | $V_{CTL(H)}$      |   | 2.5  | 2.7 | 6.5 | V             |
| Control current                      | $I_{CTL}$         | $f=2.0\text{GHz}$ , $P_{IN}=10\text{dBm}$ | -    | 8   | 14  | $\mu\text{A}$ |
| Insertion loss 1                     | LOSS1             | $f=1.0\text{GHz}$ , $P_{IN}=0\text{dBm}$  | -    | 0.3 | 0.6 | dB            |
| Insertion loss 2                     | LOSS2             | $f=2.0\text{GHz}$ , $P_{IN}=0\text{dBm}$  | -    | 0.5 | 0.8 | dB            |
| Isolation 1<br>(PC-P1, PC-P2, P1-P2) | ISL1              | $f=1.0\text{GHz}$ , $P_{IN}=0\text{dBm}$  | 25.5 | 27  | -   | dB            |
| Isolation 2<br>(PC-P1, PC-P2, P1-P2) | ISL2              | $f=2.0\text{GHz}$ , $P_{IN}=0\text{dBm}$  | 25   | 27  | -   | dB            |
| Pin at 1dB<br>compression point      | $P_{-1\text{dB}}$ | $f=2.0\text{GHz}$                         | 20   | 24  | -   | dBm           |
| VSWR (PC, P1, P2)                    | VSWR              | $f=0.05\sim 2.2\text{GHz}$ , ON State     | -    | 1.3 | 1.6 |               |
| Switching time                       | $T_{SW}$          | $f=0.05\sim 2.5\text{GHz}$                | -    | 20  | -   | ns            |







## ■ TERMINAL INFORMATION

| No. | SYMBOL | DESCRIPTIONS   |
|-----|--------|--|
| 1   | P1     | RF port. This port is connected with PC port by controlling 6 <sup>th</sup> pin ( $V_{CTL(H)}$ ) to 2.5~6.5V and 4 <sup>th</sup> pin ( $V_{CTL(L)}$ ) to -0.2~+0.2V. An external capacitor is required to block the DC bias voltage of internal circuit. (50~100MHz: 0.01uF, 0.1~0.5GHz: 1000pF, 0.5~2.5GHz: 56pF)   |
| 2   | GND    | Ground terminal. Please connect this terminal with ground plane as close as possible for excellent RF performance.   |
| 3   | P2     | RF port. This port is connected with PC port by controlling 4 <sup>th</sup> pin ( $V_{CTL(H)}$ ) to 2.5~6.5V and 6 <sup>th</sup> pin ( $V_{CTL(L)}$ ) to -0.2~+0.2V. An external capacitor is required to block the DC bias voltage of internal circuit. (50~100MHz: 0.01uF, 0.1~0.5GHz: 1000pF, 0.5~2.5GHz: 56pF)   |
| 4   | VCTL2  | Control port 2. The voltage of this port controls PC to P2 state. The 'ON' and 'OFF' state is toggled by controlling voltage of this terminal such as high-state (2.5~6.5V) or low-state (-0.2~+0.2V). The voltage of 6 <sup>th</sup> pin have to be set to opposite state. The bypass capacitor has to be chosen to reduce switching time delay from 10pF~1000pF range. |
| 5   | PC     | Common RF port. In order to block the DC bias voltage of internal circuit, an external capacitor is required. (50~100MHz: 0.01uF, 0.1~0.5GHz: 1000pF, 0.5~2.5GHz: 56pF)  |
| 6   | VCTL1  | Control port 1. The voltage of this port controls PC to P2 state. The 'ON' and 'OFF' state is toggled by controlling voltage of this terminal such as high-state (2.5~6.5V) or low-state (-0.2~+0.2V). The voltage of 4 <sup>th</sup> pin have to be set to opposite state. The bypass capacitor has to be chosen to reduce switching time delay from 10pF~1000pF range. |

# NJG1522KB2







## ELECTRICAL CHARACTERISTICS

(0.1~3.0GHz, with Application circuit, Losses of external circuit are excluded)

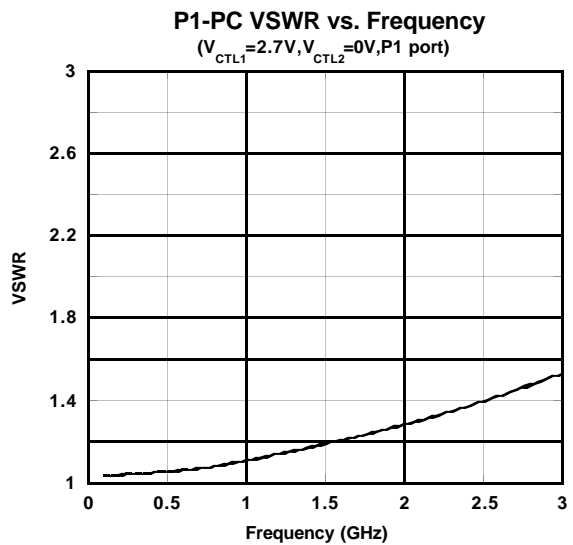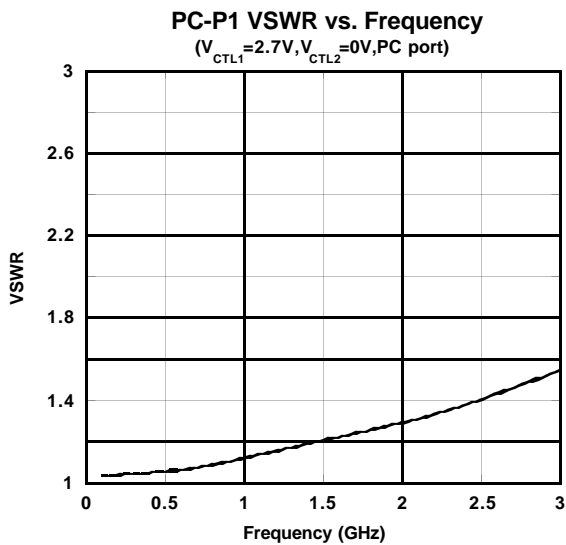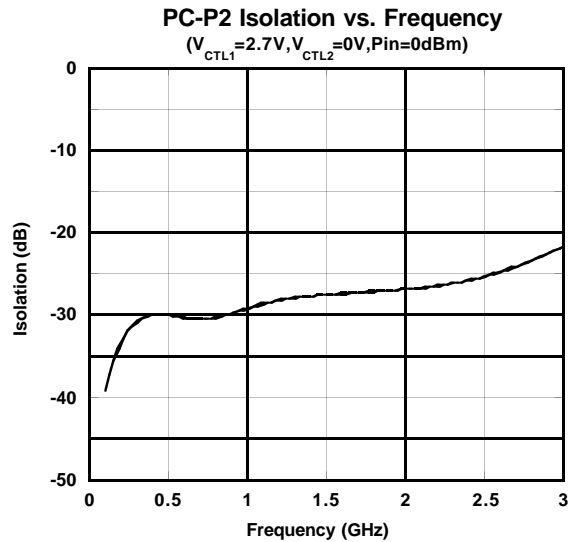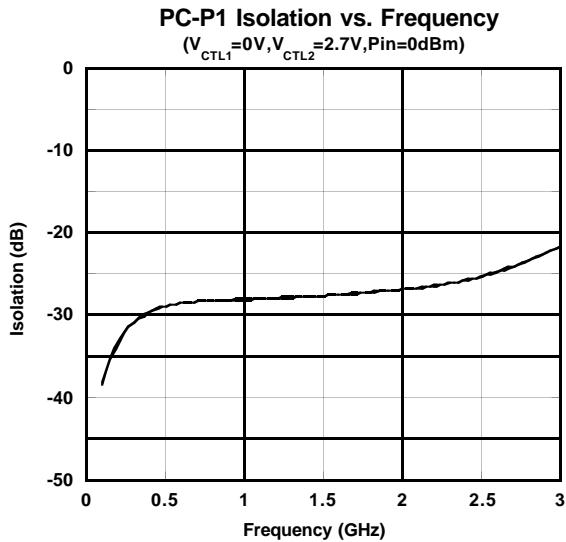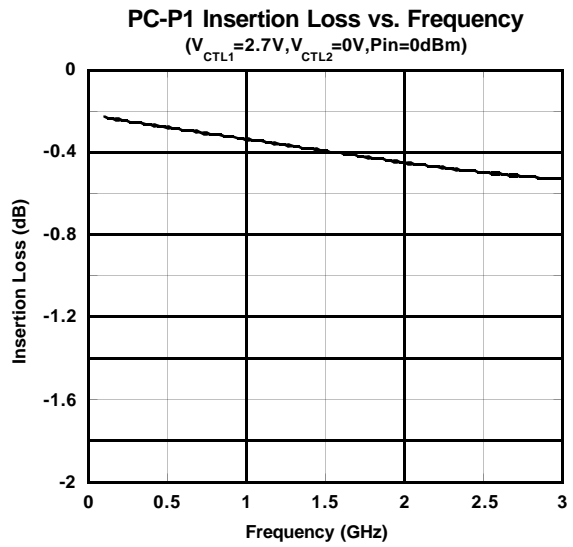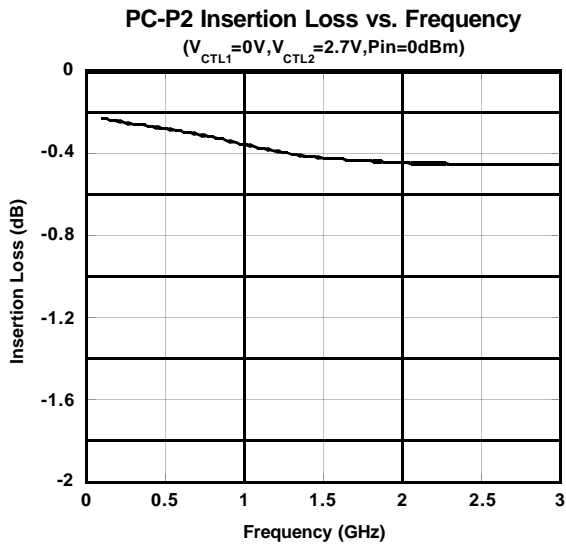

## ■ ELECTRICAL CHARACTERISTICS







(with application circuit, without DC Blocking Capacitor, Losses of external circuit are excluded)

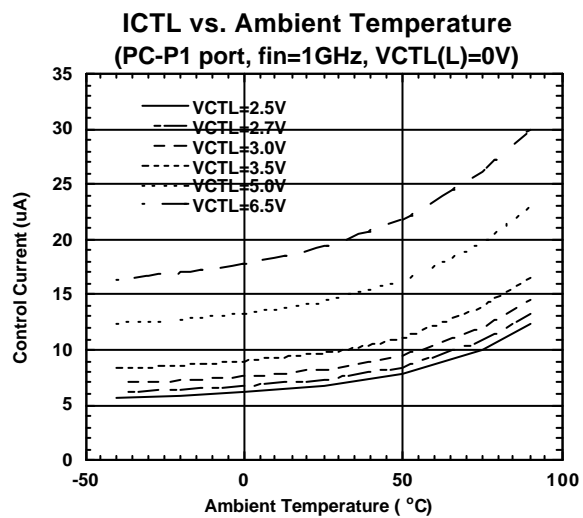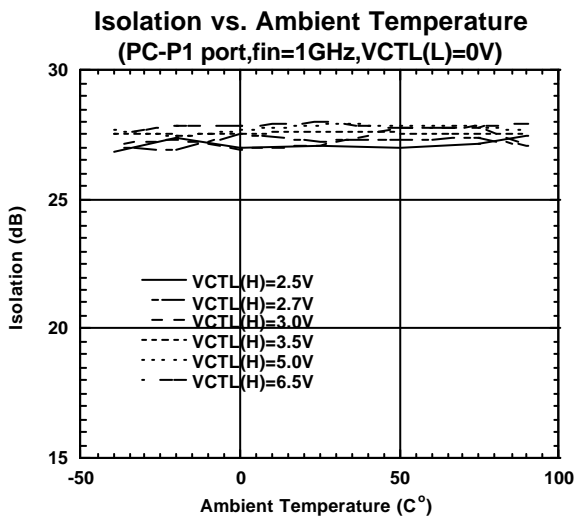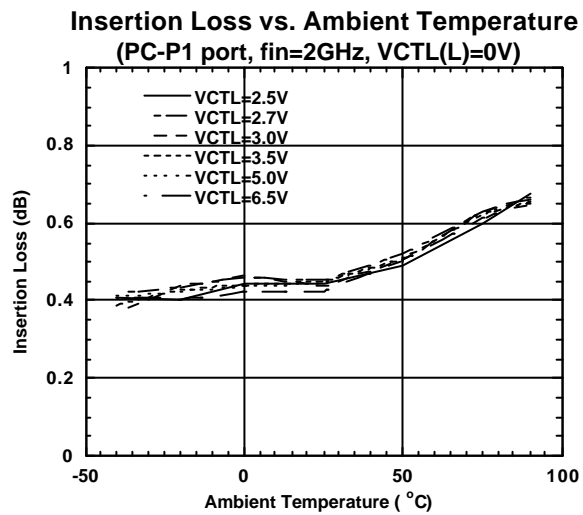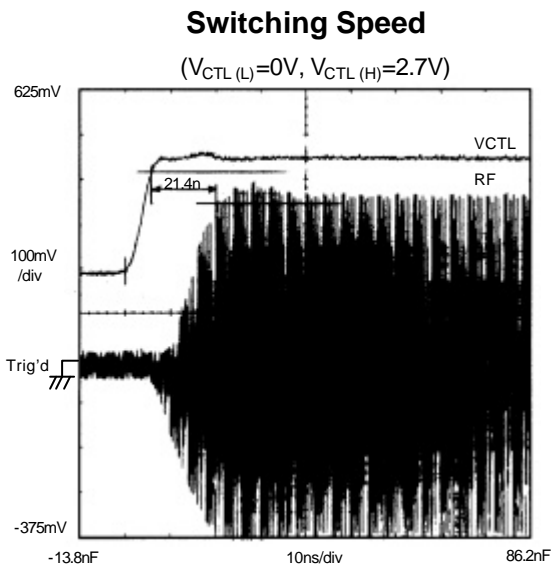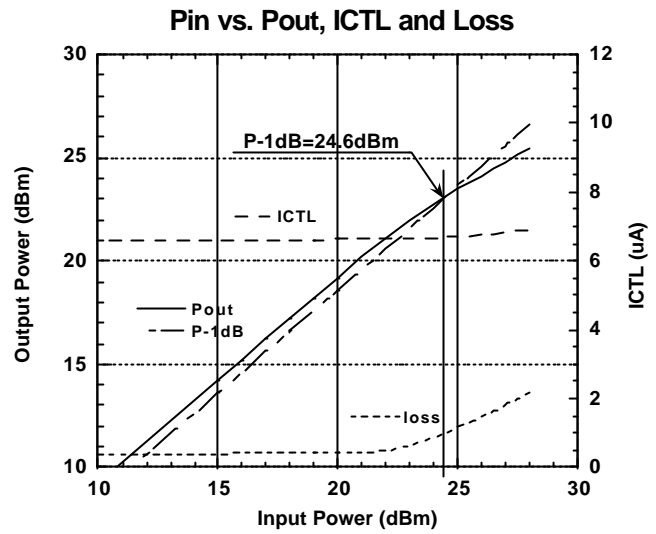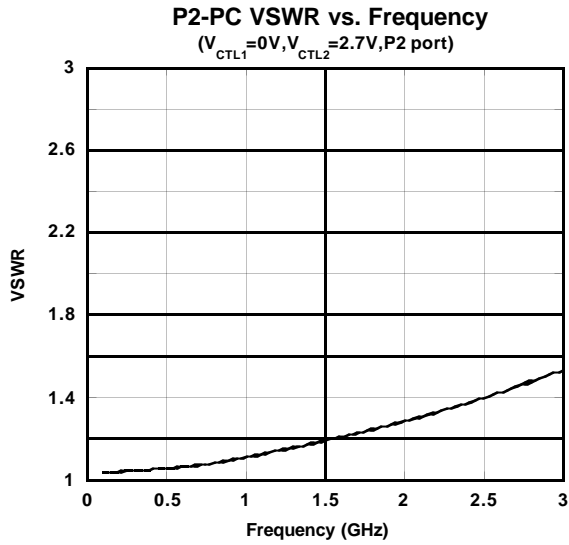

# NJG1522KB2







## ELECTRICAL CHARACTERISTICS

(f=50~100MHz, with Application circuit (Parts list 1), Losses of PCB, connector and DC blocking capacitor are included)

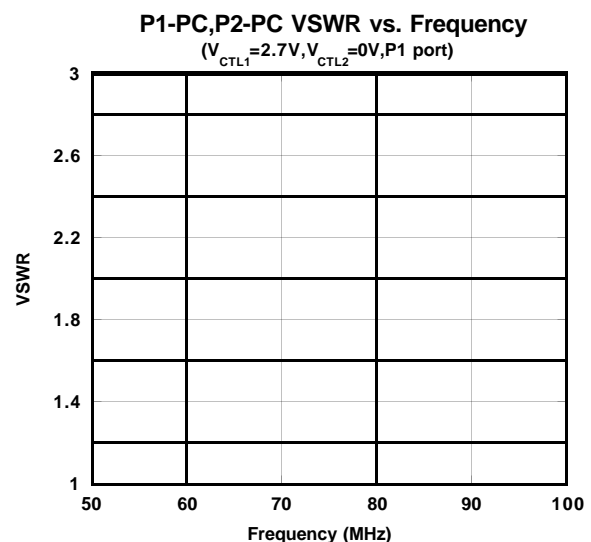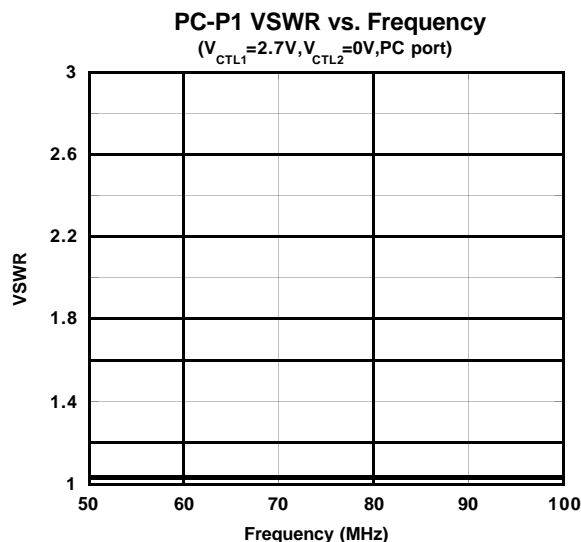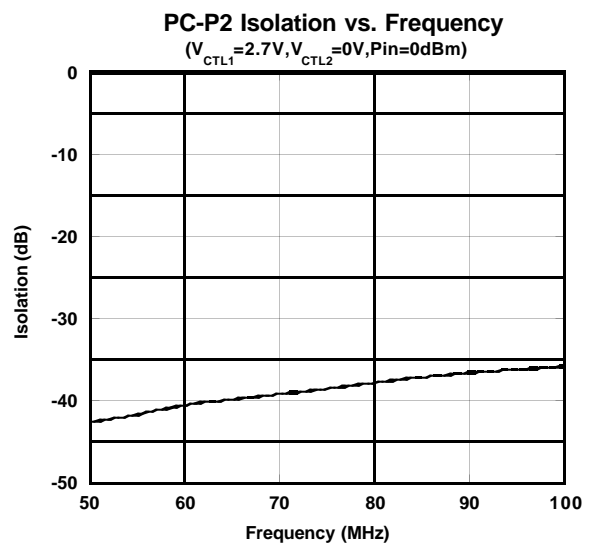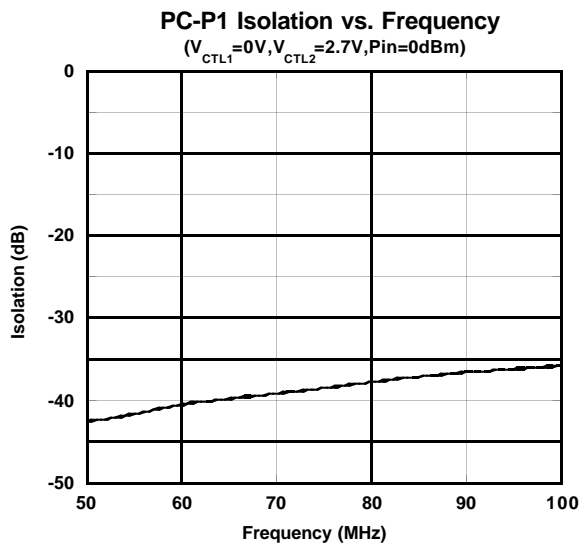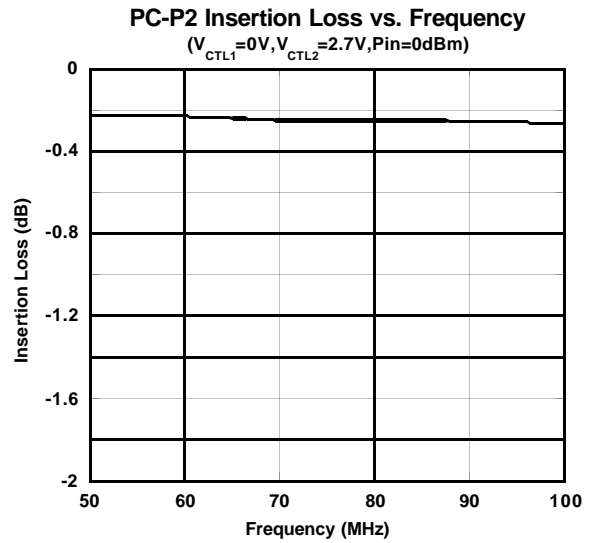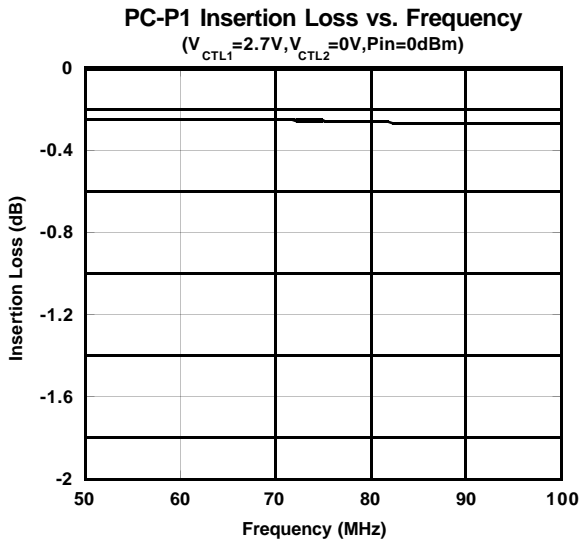

## ■ ELECTRICAL CHARACTERISTICS







(f=100~500MHz, with Application circuit (Parts list 2), Losses of PCB, connector and DC blocking capacitor are included)

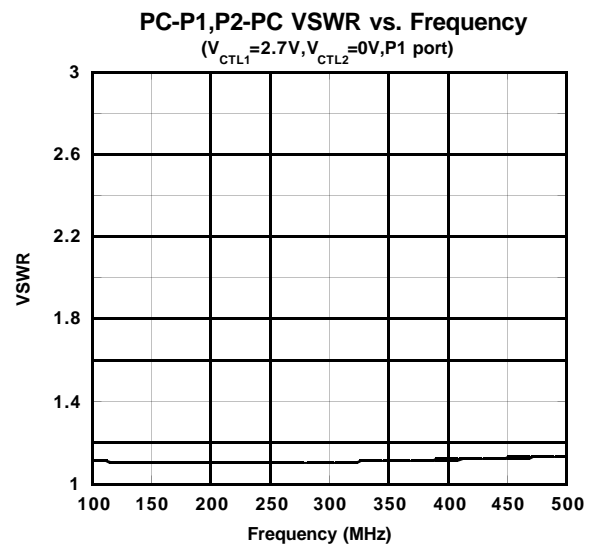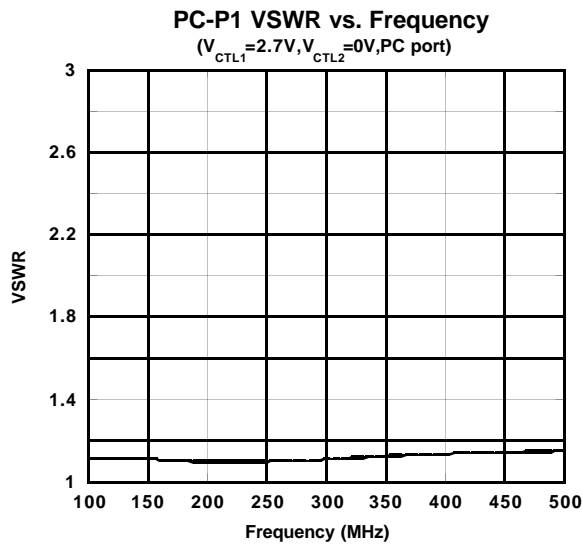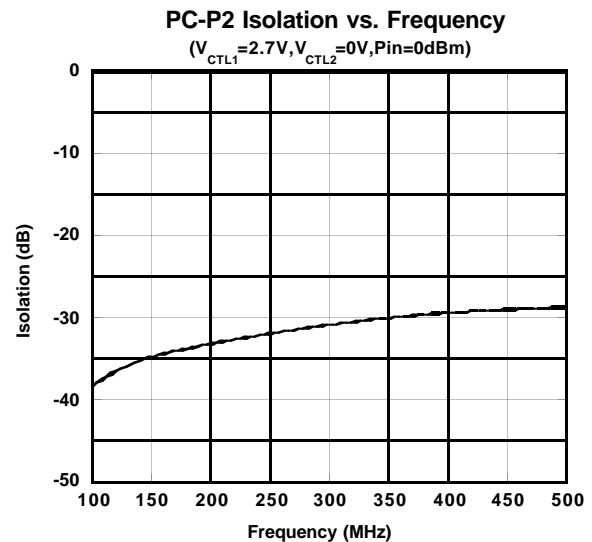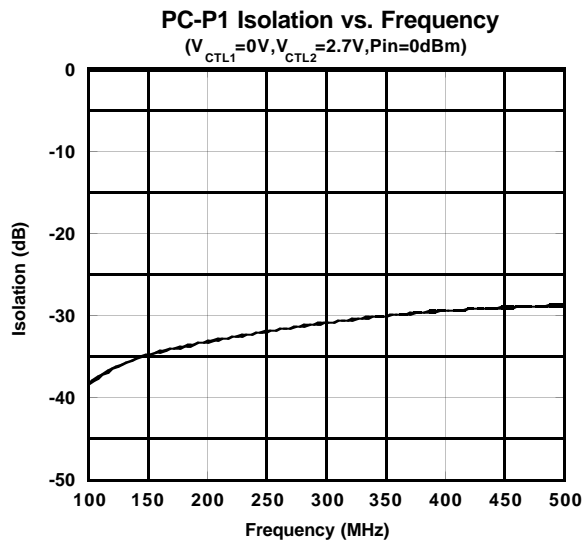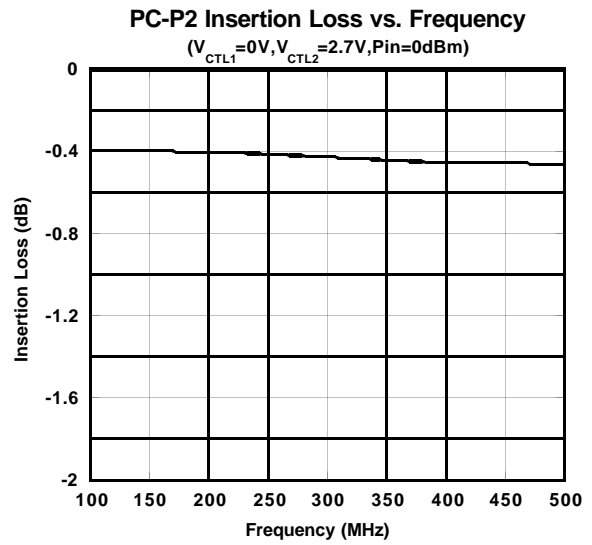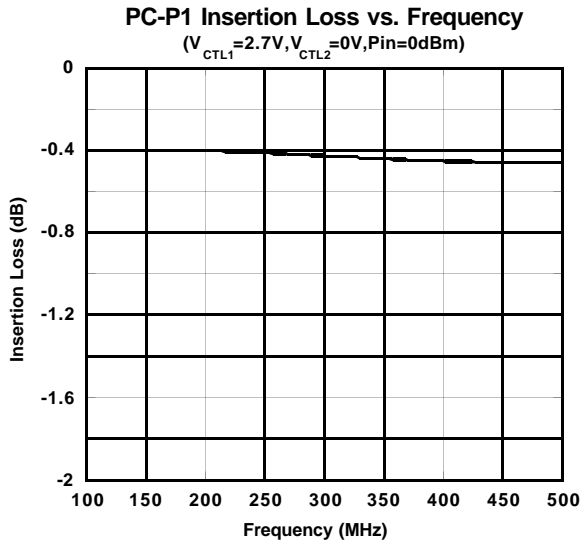

# NJG1522KB2

## ELECTRICAL CHARACTERISTICS




(f=0.1~3.0GHz, with Application circuit (Parts list 3), Losses of PCB, connector and DC blocking capacitor are included)

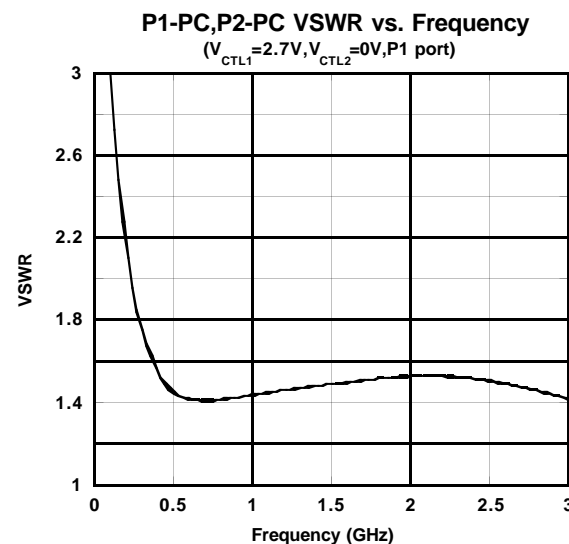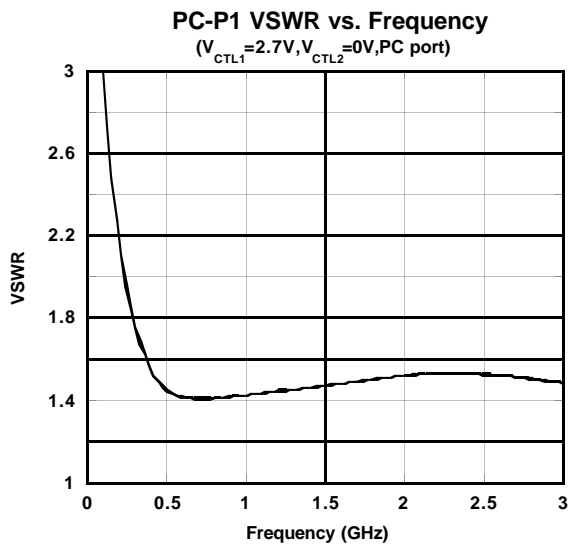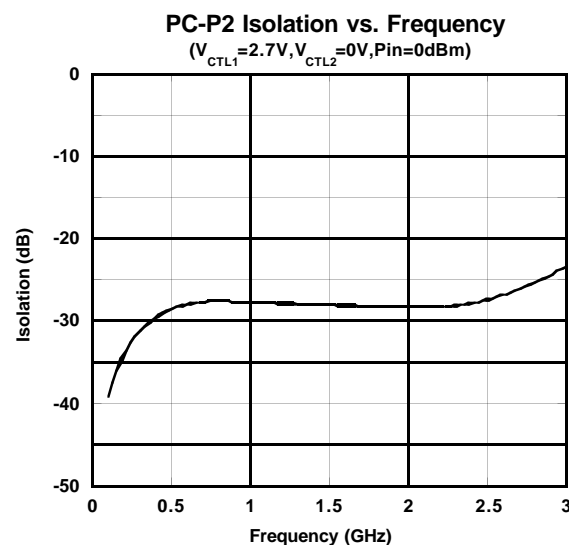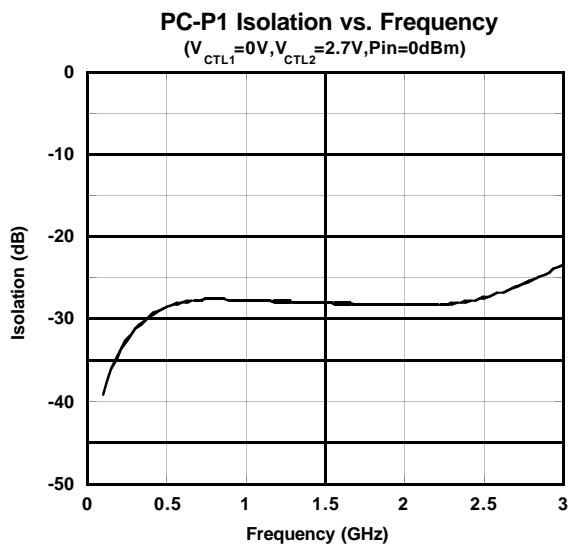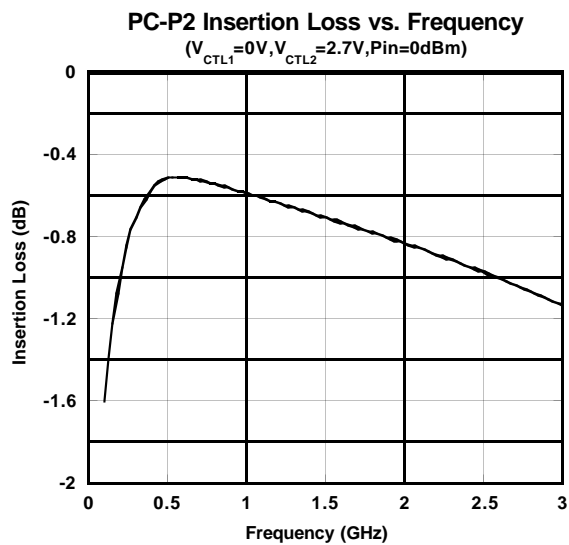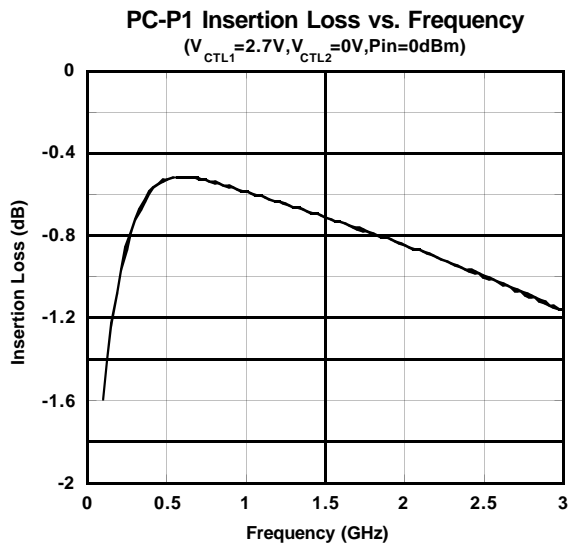




## ■ ELECTRICAL CHARACTERISTICS

(Losses of PCB, connector and DC blocking capacitor at each frequency.)

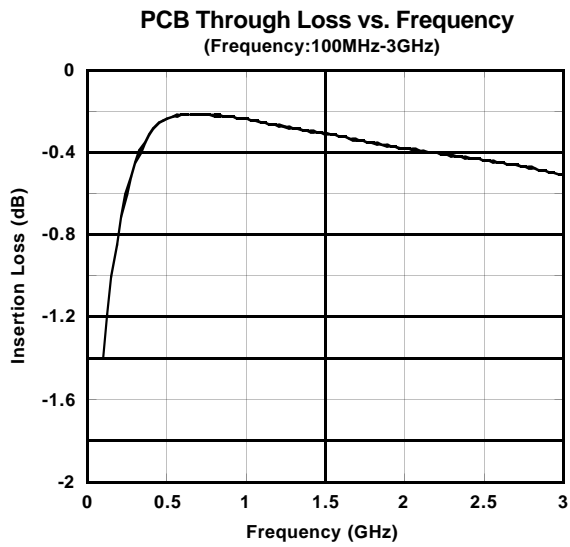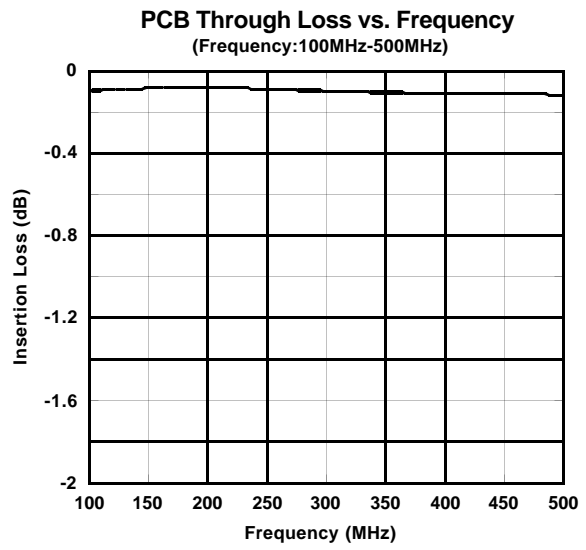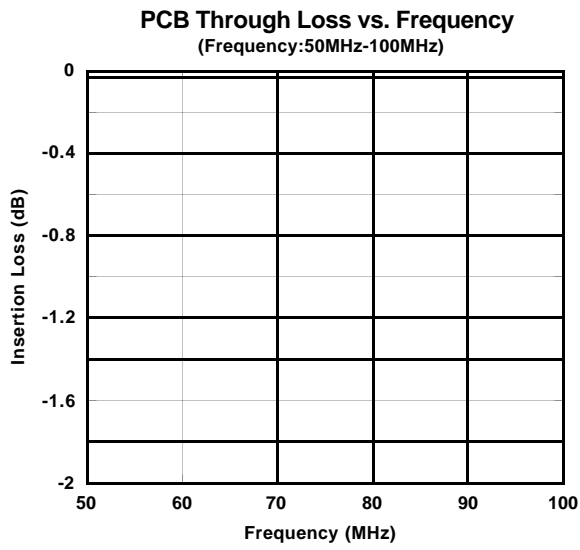

# NJG1522KB2


## APPLICATION CIRCUIT

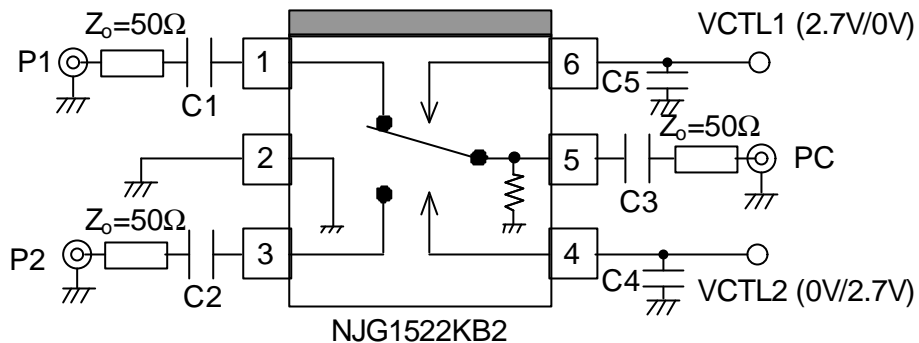

### Parts List

| Parts number | List 1    | List 2     | List 3     | Notes        |
|--------------|-----------|------------|------------|--------------|
|              | 50~100MHz | 0.1~0.5GHz | 0.5~2.5GHz |              |
| C1~C3        | 0.01uF    | 1000pF     | 56pF       | GRM36 MURATA |
| C4, C5       | 10pF      | 10pF       | 10pF       | GRM36 MURATA |

## RECOMMENDED PCB DESIGN

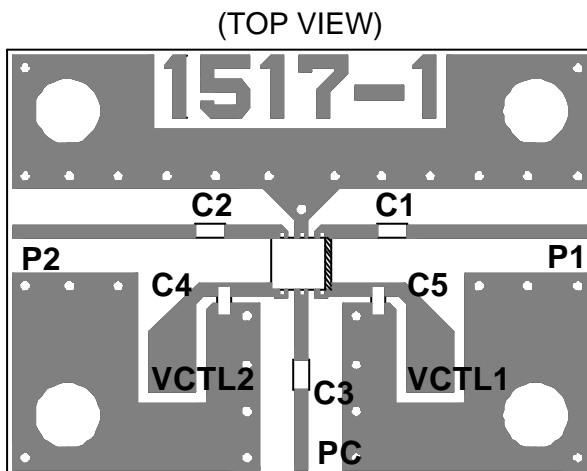


PCB SIZE=19.4x14.0mm  
 PCB: FR-4, t=0.2mm  
 CAPACITOR: size 1005  
 STRIPLINE WIDTH=0.4mm

## PRECAUTIONS

- [1]The DC blocking capacitors have to be placed at RF terminal of P1, P2 and PC. Please choose appropriate capacitance values to the application frequency.
- [2]To reduce stripline influence on RF characteristics, please locate bypass capacitors(C4, C5) close to each terminals.
- [3]For good isolation, the GND terminal (2<sup>nd</sup> pin) must be placed possibly close to ground plane of substrate, and through holes for GND should be placed near by the pin connection.

## PACKAGE OUTLINE

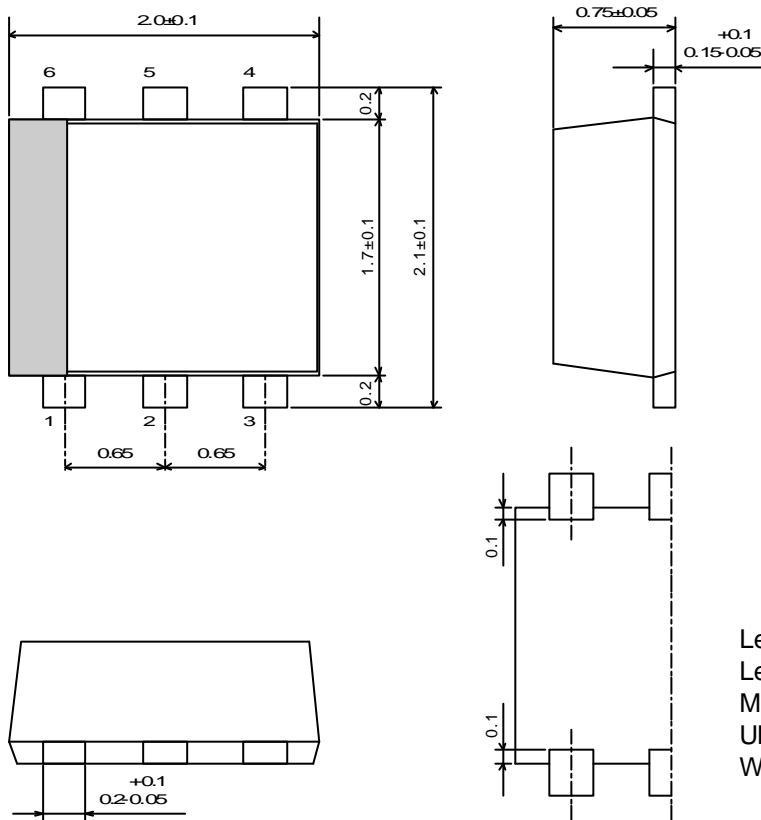

Lead material : Copper  
 Lead surface finish : Solder plating  
 Molding material : Epoxy resin  
 UNIT : mm  
 Weight : 6.5mg

### Cautions on using this product

This product contains Gallium-Arsenide (GaAs) which is a harmful material.

- Do NOT eat or put into mouth.
- Do NOT dispose in fire or break up this product.
- Do NOT chemically make gas or powder with this product.
- To waste this product, please obey the relating law of your country.

### [CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

This product may be damaged with electric static discharge (ESD) or spike voltage. Please handle with care to avoid these damages.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.