



# QPF4219

## Wi-Fi Front End Module


### Product Overview

The Qorvo® QPF4219 is an integrated front end module (FEM) designed for Wi-Fi 5 (802.11ac) systems. The compact form factor and integrated matching minimizes layout area in the application.

Performance is focused on optimizing the PA for a 5V supply voltage that conserves power consumption while maintaining the highest linear output power and leading edge throughput. Receive path matches the optimal technologies to maximize Rx sensitivity through noise figure performance that is consistent over a wider variety of conditions.

The receive path is pinned out so external filtering can be added in the optimal position. Integrated die level filtering for 2nd and 3rd harmonics as well as 5 GHz rejection for DBDC operation are included.

The QPF4219 integrates a 2.4 GHz power amplifier (PA), regulator, single pole two throw switch (SP2T), bypassable low noise amplifier (LNA) and DC power detector into a single device.




24 Pin 5x3 mm Laminate Package

### Key Features

- 2400-2500 MHz
- $P_{OUT} = +24.5$  dBm MCS8/9 VHT40 -35 dB Dynamic EVM
- $P_{OUT} = +25.5$  dBm MCS7 HT20/40 -30 dB Dynamic EVM
- $P_{OUT} = +26.5$  dBm MCS0 HT20 Spectral Mask Compliance
- $P_{OUT} = +28$  dBm 802.11b Spectral Mask Compliance
- Optimized for +5 V Operation
- 33 dB Tx Gain
- 1.9 dB Noise Figure
- 15.5 dB Rx Gain & 7 dB Bypass Loss
- 15 dB 5 GHz Rejection on Rx Path
- Integrated DC Power Detector

### Functional Block Diagram

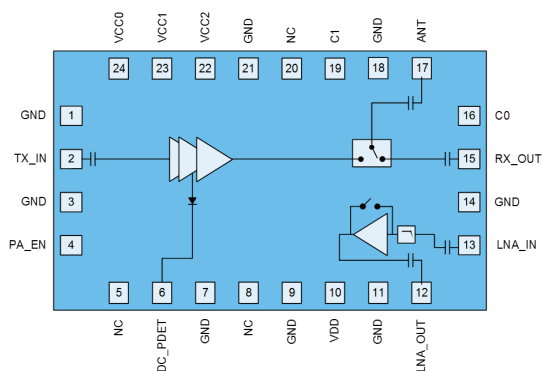

### Applications

- Access Points
- Wireless Routers
- Residential Gateways
- Customer Premise Equipment
- Internet of Things

### Ordering Information

| Part Number    | Description                |
|----------------|----------------------------|
| QPF4219SB      | Sample bag with 5 pieces   |
| QPF4219SQ      | Sample bag with 25 pieces  |
| QPF4219SR      | 7" reel with 100 pieces    |
| QPF4219TR13-5K | 13" reel with 5,000 pieces |
| QPF4219EVB-01  | Assembled Evaluation Board |



## Absolute Maximum Ratings

**QPF4219**

**Wi-Fi Front End Module**

| Parameter               | Conditions                                                          | Rating           |
|-------------------------|---------------------------------------------------------------------|------------------|
| DC Supply Voltage       |                                                                     | -0.5 to +6 V     |
| Control Voltage         |                                                                     | -0.5 to $V_{CC}$ |
| Storage Temperature     |                                                                     | -40 to 150 °C    |
| Junction Temperature    | MTTF > 30.30x10 <sup>6</sup> hours                                  | 190 °C           |
|                         | MTTF > 2.02x10 <sup>6</sup> hours                                   | 210 °C           |
|                         | MTTF > 1.03x10 <sup>6</sup> hours                                   | 218 °C           |
| RF Input Power at TX_IN | Into 50 $\Omega$ Load for 802.11b/g/n/ac (No Damage), Transmit Mode | +12 dBm          |
| RF Input Power at ANT   | (No Damage), Receive LNA On Mode                                    | +10 dBm          |
| RF Input Power at ANT   | (No Damage), Receive Bypass Mode                                    | +25 dBm          |

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability.

## Recommended Operating Conditions

| Parameter                               | Min.  | Typ. | Max.  | Units |
|-----------------------------------------|-------|------|-------|-------|
| Operating Frequency                     | 2412  |      | 2484  | MHz   |
| Extended Operating Frequency            | 2400  |      | 2500  | MHz   |
| Device Voltage ( $V_{CC}$ & $V_{DD}$ )  | +4.75 | +5   | +5.25 | V     |
| Extended Device Voltage                 | +3.15 |      | +5.25 | V     |
| Control Voltage – High (PA_EN, C0 & C1) | +1.6  | +1.8 | +3.6  | V     |
| Control Voltage – Low (PA_EN, C0 & C1)  | 0     |      | +0.4  | V     |
| T <sub>OPERATING</sub> *                | -40   |      | +85   | °C    |

Electrical specifications are measured at specified test conditions. Extended Parameters have degraded performance but operational. Specifications are not guaranteed over all recommended operating conditions. T<sub>OPERATING</sub>\* is temperature at the package ground.

## Electrical Specifications

| Parameter                        | Conditions                                                                                                         | Min.  | Typ. | Max.  | Units |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------|-------|------|-------|-------|
| <b>Transmit (TX_IN-ANT) Mode</b> | <b>Unless otherwise noted: <math>V_{CC/DD}=5V</math>, <math>T=+25^{\circ}C</math>, PA_EN=High, C0=Low, C1=High</b> |       |      |       |       |
| Wi-Fi 5 VHT40 Output Power       | MCS8/9 1024QAM 11ac                                                                                                |       | 22   |       | dBm   |
| Dynamic EVM                      |                                                                                                                    |       |      | -40   | dB    |
| Wi-Fi 5 VHT20/40 Output Power    | MCS8/9 256QAM 11ac                                                                                                 | 23    | 24.5 |       | dBm   |
| Dynamic EVM                      |                                                                                                                    |       |      | -35   | dB    |
| Wi-Fi 4 HT20/40 Output Power     | MCS7 64QAM 11n                                                                                                     | 24    | 25.5 |       | dBm   |
| Dynamic EVM                      |                                                                                                                    |       |      | -30   | dB    |
| Margin to HT20 Spectral Mask     | P <sub>OUT</sub> = +26.5 dBm, 11n MCS0                                                                             | 0     | 3    |       | dBc   |
| Margin to 11b Spectral Mask      | P <sub>OUT</sub> = +28 dBm, 11b 1Mbps DSSS                                                                         | 0     | 3    |       | dBc   |
| Gain                             |                                                                                                                    | 31    | 33   |       | dB    |
| Gain Flatness                    | Across any 40 MHz Channel                                                                                          | -0.25 |      | +0.25 | dB    |



| Parameter                                | Conditions                                                                                                                                 | Min.  | Typ.  | Max.  | Units   |
|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|-------|---------|
| TX_IN Port Return Loss                   |                                                                                                                                            | 10    | 14    |       | dB      |
| ANT Port Return Loss                     |                                                                                                                                            | 10    | 12    |       | dB      |
| Quiescent Current                        | RF Off                                                                                                                                     |       | 220   | 255   | mA      |
| Operating Current                        | P <sub>OUT</sub> = +24.5 dBm                                                                                                               |       | 360   | 390   | mA      |
|                                          | P <sub>OUT</sub> = +26.5 dBm                                                                                                               |       | 395   | 450   | mA      |
|                                          | P <sub>OUT</sub> = +28 dBm                                                                                                                 |       | 510   | 550   | mA      |
| 2 <sup>nd</sup> Harmonics                | P <sub>OUT</sub> = +28 dBm 802.11b 1 Mbps                                                                                                  |       | -35   | -30   | dBm/MHz |
| 3 <sup>rd</sup> Harmonics                | P <sub>OUT</sub> = +28 dBm 802.11b 1 Mbps                                                                                                  |       | -55   | -50   | dBm/MHz |
| ANT-LNA_OUT Isolation                    |                                                                                                                                            |       | 50    |       | dB      |
| DC Power Detect Voltage                  | RF Off                                                                                                                                     |       | 0.24  |       | V       |
|                                          | P <sub>OUT</sub> = +24.5 dBm                                                                                                               |       | 0.57  |       | V       |
|                                          | P <sub>OUT</sub> = +26.5 dBm                                                                                                               |       | 0.64  |       | V       |
|                                          | P <sub>OUT</sub> = +28 dBm                                                                                                                 |       | 0.79  |       | V       |
| <b>RECEIVE (ANT-LNA_OUT) LNA ON MODE</b> | <b>Unless otherwise noted: V<sub>CC/DD</sub>=5V, T=+25°C, PA_EN=Low, C0=High, C1=Low<br/>Only through path between RX_OUT and LNA_IN</b>   |       |       |       |         |
| Gain                                     |                                                                                                                                            |       | 15.5  |       | dB      |
| Gain Flatness                            | Across any 40 MHz Channel                                                                                                                  | -0.25 |       | +0.25 | dB      |
| Out of Band Gain                         | f = 5000-6000 MHz                                                                                                                          |       | -15   |       | dB      |
| Noise Figure                             |                                                                                                                                            |       | 1.9   | 2.1   | dB      |
| LNA_OUT Port Return Loss                 |                                                                                                                                            | 15    | 20    |       | dB      |
| ANT Port Return Loss                     |                                                                                                                                            | 10    | 12    |       | dB      |
| Input P <sub>1dB</sub>                   |                                                                                                                                            |       | -5    |       | dBm     |
| Input IP3                                |                                                                                                                                            |       | +10   |       | dBm     |
| Rx Operating Current                     |                                                                                                                                            |       | 18    | 26    | mA      |
| <b>RECEIVE (ANT-LNA_OUT) BYPASS MODE</b> | <b>Unless otherwise noted: V<sub>CC/DD</sub>=5V, T=+25°C, PA_EN=Low, C0=High, C1=High,<br/>Only through path between RX_OUT and LNA_IN</b> |       |       |       |         |
| Bypass Loss                              | Across any 40 MHz Channel                                                                                                                  |       | 7     |       | dB      |
| Loss Flatness                            |                                                                                                                                            | -0.25 |       | +0.25 | dB      |
| Out of Band Gain                         | f = 5000-6000 MHz                                                                                                                          |       | -22   |       | dB      |
| LNA_OUT Port Return Loss                 |                                                                                                                                            | 9     | 12    |       | dB      |
| ANT Port Return Loss                     |                                                                                                                                            | 9     | 12    |       | dB      |
| Input P <sub>1dB</sub>                   |                                                                                                                                            |       | +27   |       | dBm     |
| Input IP3                                |                                                                                                                                            |       | +41   |       | dBm     |
| <b>GENERAL SPECIFICATIONS</b>            | <b>Unless otherwise noted: V<sub>CC/DD</sub>=5V, T=+25°C,<br/>Switching Time Power Accuracy +/-1dB</b>                                     |       |       |       |         |
| Control Current - High                   |                                                                                                                                            |       |       | 1     | μA      |
| Control Current - Low                    |                                                                                                                                            |       |       | 100   | nA      |
| TX Output P <sub>1dB</sub>               | CW                                                                                                                                         |       | +32.5 |       | dBm     |
| Switching Time                           | Transmit to LNA On or Bypass Mode                                                                                                          |       |       | 400   | nS      |
|                                          | LNA On to Bypass Mode                                                                                                                      |       |       | 200   | nS      |
|                                          | Bypass to LNA On Mode                                                                                                                      |       |       | 200   | nS      |
|                                          | LNA On or Bypass to Transmit Mode                                                                                                          |       |       | 400   | nS      |
| PA Stability - Output VSWR               | CW No Spurious above -41.25dBm/MHz                                                                                                         |       | 4:1   |       |         |
| Output Power Range                       |                                                                                                                                            | 0     |       | 28    | dBm     |
| Thermal Resistance, θ <sub>Jc</sub>      | Junction to case                                                                                                                           |       | 31    |       | °C/W    |



Logic Truth Table

| Mode          | PA_EN            | C0   | C1   |
|---------------|------------------|------|------|
| Transmit      | High             | Low  | High |
| LNA On        | Low              | High | Low  |
| Bypass        | Low              | High | High |
| All Off       | Low              | Low  | Low  |
| Not Supported | All Other States |      |      |

## Evaluation Board Schematic and Layout

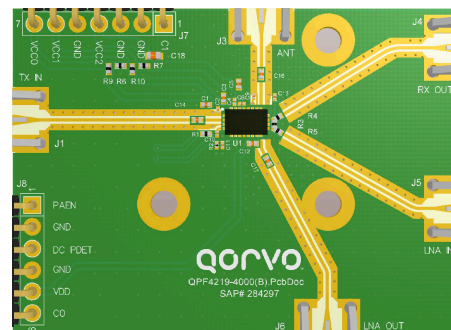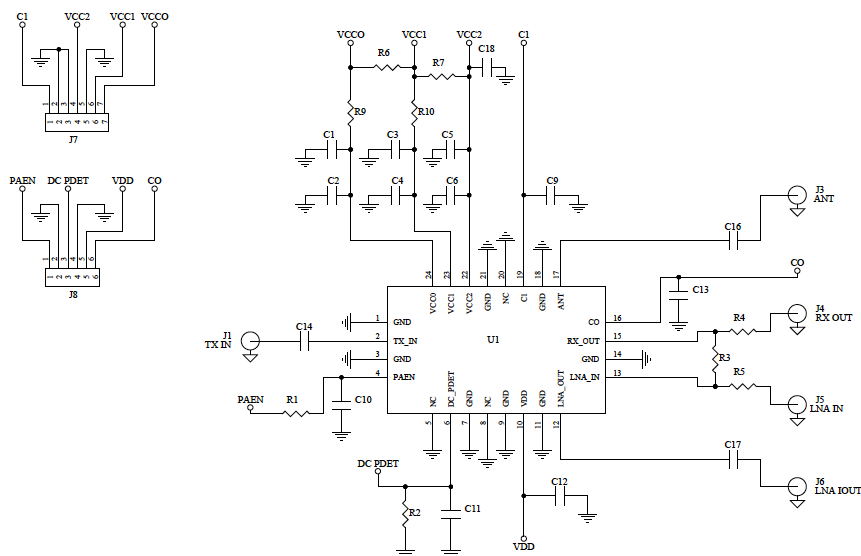


## Bill of Material

| Ref. Des.                | Value        | Description                           | Manuf.      | Part number         |
|--------------------------|--------------|---------------------------------------|-------------|---------------------|
| -                        | -            | Printed Circuit Board                 |             |                     |
| U1                       | -            | 2.4GHz Wi-Fi Front End Module         | Qorvo       | QPF4219             |
| C12                      | 0.1 $\mu$ F  | Capacitor, Chip, 10%, 10V, X5R, 0402  | Taiyo Yuden | RM LMK105 BJ104KV-F |
| C14, C16, C17            | 100 pF       | Capacitor, Chip, 5%, 50V, C0G, 0402   | Murata      | GRM1555C1H101JA01D  |
| C1, C3, C5               | 2.2 $\mu$ F  | Capacitor, Chip, 20%, 6.3V, X5R, 0402 | Murata      | GRM155R60J225ME15D  |
| C9, C10, C13             | 100 pF       | Capacitor, Chip, 5%, 25V, C0G, 0201   |             |                     |
| C2, C4, C6               | 0.1 $\mu$ F  | Capacitor, Chip, 10%, 16V, X5R, 0201  |             |                     |
| R1, R3, R9, R10          | 0 $\Omega$   | Resistor, Chip, 5%, 1/10W, 0402       | Kamaya      | RMC1/16SJPTH        |
| R2                       | 27K $\Omega$ | Resistor, Chip, 5%, 1/16W, 0201       | Kamaya      | RMC1/20-273JPA15    |
| C11, C18, R4, R5, R6, R7 | -            | Do Not Install                        |             |                     |

### Notes:

1. R6 and R7 are not installed on EVB so VCC0, VCC1 & VCC2 should be tied to a single supply.

## Pin Configuration and Description

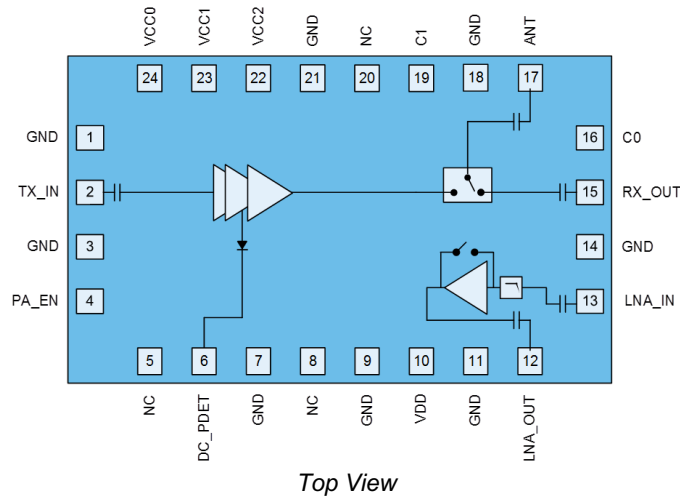


Top View

| Pin Number      | Label   | Description                                                                                                                                |
|-----------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------|
| 1               | GND     | No electrical connection. Recommend connect to ground.                                                                                     |
| 2               | TX_IN   | RF input. Internally matched to 50 $\Omega$ and DC blocked.                                                                                |
| 3               | GND     | No electrical connection. Recommend connect to ground.                                                                                     |
| 4               | PA_EN   | Control pin.                                                                                                                               |
| 5               | NC      | No electrical connection.                                                                                                                  |
| 6               | DC_PDET | DC power detector. Provides an output voltage proportional to the RF output power level                                                    |
| 7               | GND     | Ground connection.                                                                                                                         |
| 8               | NC      | No electrical connection. Recommend connect to ground.                                                                                     |
| 9               | GND     | No electrical connection. Recommend connect to ground.                                                                                     |
| 10              | VDD     | Supply voltage.                                                                                                                            |
| 11              | GND     | Ground connection.                                                                                                                         |
| 12              | LNA_OUT | RF output from the low noise amplifier. Internally matched to 50 $\Omega$ and DC blocked.                                                  |
| 13              | LNA_IN  | RF input to the low noise amplifier. Internally matched to 50 $\Omega$ and DC blocked.                                                     |
| 14              | GND     | No electrical connection. Recommended connect to Ground.                                                                                   |
| 15              | RX_OUT  | RF output from the RX branch of the T/R switch. Internally matched to 50 $\Omega$ and DC blocked.                                          |
| 16              | C0      | Control pin.                                                                                                                               |
| 17              | ANT     | RF bi-directional antenna port. Internally matched to 50 $\Omega$ and DC blocked.                                                          |
| 18              | GND     | No electrical connection. Recommended connect to Ground.                                                                                   |
| 19              | C1      | Control pin.                                                                                                                               |
| 20              | NC      | No electrical connection. Recommend connect to ground.                                                                                     |
| 21              | GND     | Ground connection.                                                                                                                         |
| 22              | VCC2    | Supply voltage                                                                                                                             |
| 23              | VCC1    | Supply voltage                                                                                                                             |
| 24              | VCC0    | Supply voltage                                                                                                                             |
| Backside Paddle | GND     | RF/DC ground. Use recommended via pattern to minimize inductance and thermal resistance. See PCB Mounting Pattern for suggested footprint. |

## Mechanical Information

### Dimensions and PCB Mounting Pattern

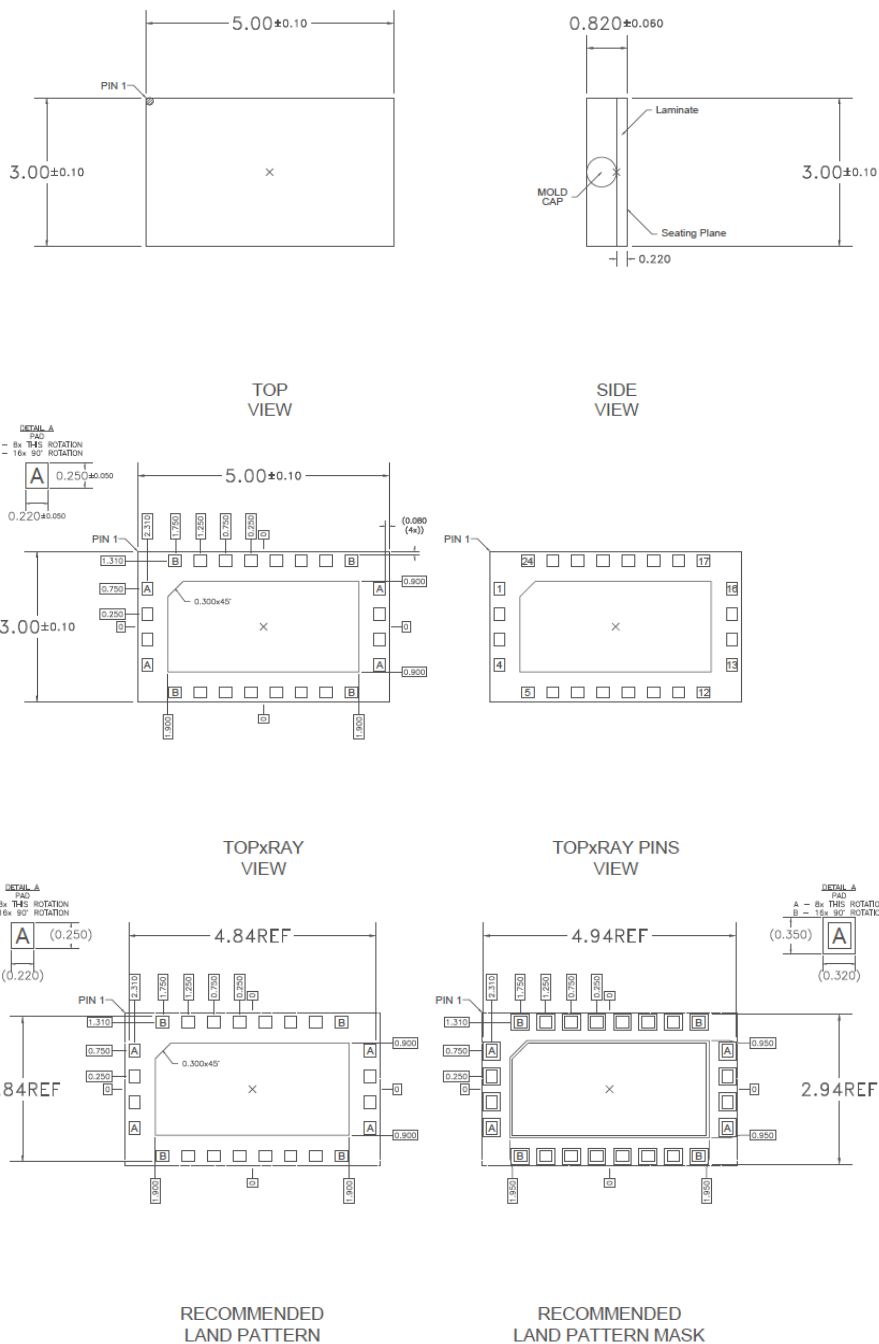

#### Notes:

2. All dimensions are in millimeters. Angles are in degrees.
3. Dimension and tolerance formats conform to ASME Y14.4M-1994.
4. The terminal #1 identifier and terminal numbering conform to JESD 95-1 SPP-012.

## Handling Precautions

| Parameter                        | Rating          | Standard              |
|----------------------------------|-----------------|-----------------------|
| ESD – Human Body Model (HBM)     | Class 1B (500V) | ANSI/ESD/JEDEC JS-001 |
| ESD – Charged Device Model (CDM) | Class C3 (1kV)  | ANSI/ESD/JEDEC JS-002 |
| MSL – Moisture Sensitivity Level | Level 3         | IPC/JEDEC J-STD-020   |



Caution!

ESD sensitive device

## Solderability

Compatible with both lead-free (260 °C max. reflow temperature) and tin/lead (245 °C max. reflow temperature) soldering processes.

Package lead plating: Electrolytic plated Au over Ni

## RoHS Compliance

This part is compliant with the 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment), as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C<sub>15</sub>H<sub>12</sub>Br<sub>4</sub>O<sub>2</sub>) Free
- SVHC Free



## Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

**Web:** [www.qorvo.com](http://www.qorvo.com)

**Tel:** 1-844-890-8163

**Email:** [customer.support@qorvo.com](mailto:customer.support@qorvo.com)

## Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2019 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.