

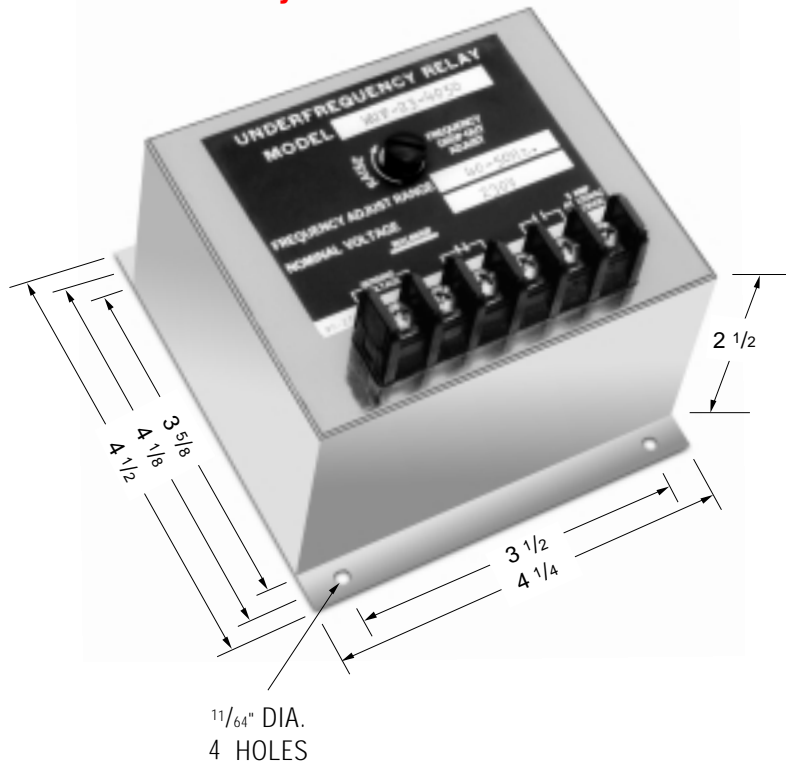


**WILMAR™ Protective Relays – WOF & WUF Series**

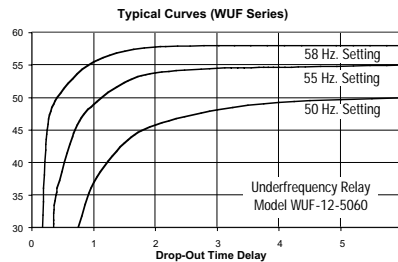

**Note:** Dimensions in inches. Multiply values by 25.4 for dimensions in mm.

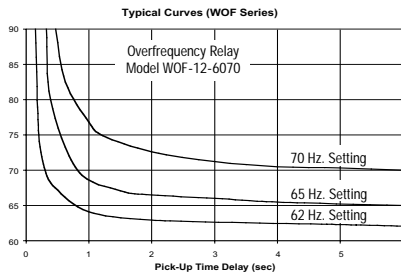

PRODUCT SPECIFICATIONS	
Part Number	WOF/WUF
Nominal Voltage (±20%) .....	120, 230, 380 and 460 volts
Nominal Frequencies .....	50, 60 and 400 Hz.
Trip Point .....	Screwdriver adjustable. Adjustment range in accordance with ordering information.
Operating Temperature .....	-20°C to +65°C
Differential .....	The frequency pitch-up to drop-out differential is .5% max
Voltage Drift .....	± .05% maximum frequency error for input voltage variation of ±10%
Time Delay .....	See Time versus Frequency curves
Surge Withstand Capability .....	In compliance with C37.90B ANSI/IEEE
Output Contacts .....	One set N.O., one set N.C.
Contact Ratings .....	5 amp resistive at 120 VAC or 28VDC

**Notes:**

1. Remove black screws for access to the frequency and the time adjustments.
2. Clockwise rotation of the frequency potentiometer will raise the frequency trip point.
3. Clockwise rotation of the time adjustment, option "T" will increase the time for overfrequency relays and dropout time for underfrequency relays..


**Function:** 81 O/U

- ANSI/IEEE C37.90-1978
- UL file No. E58048
- CSA file No. LR61158



**Application:**

The output contacts of frequency relays are energized when the frequency exceeds the adjustable set point. Overfrequency and underfrequency relays are available in 50, 60 and 400Hz. Combination over/underfrequency "band pass" relays are also available. These are energized at rated frequency and de-energized during overfrequency or underfrequency conditions. Frequency Differential relays are energized above the preset frequency. The pick-up and drop-out frequency settings are independently adjustable.

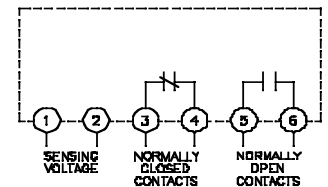

**Time Delay**

**Standard Time Delay**

A minimum, fixed inverse time delay is incorporated in all frequency relays to prevent nuisance tripping and is represented by the typical curves shown below.

**Adjustable Time Delay**

If additional time delay is required, a suffix "T" must be added to the part number. This allows the minimum fixed time delay to be field-adjustable up to 20 seconds

**PART NUMBER SELECTION**

Sample Part No. WUF-12-5060-T

Type: \_\_\_\_\_

WUF = Underfrequency  
WOF = Overfrequency

Input Voltage (VAC) \_\_\_\_\_

12 = 120  
23 = 230  
38 = 380  
46 = 460

Frequency Range \_\_\_\_\_

4050 = 40-50 HZ  
5060 = 50-60 HZ  
6070 = 60-70 HZ  
3540 = 350-400 HZ  
4045 = 400-450 HZ (overfrequency only)

Time Delay Options \_\_\_\_\_

blank = Per Time Curve  
T = Adjustable

Consult factory for additional models.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.