


Intellimod™ L-Series

Three Phase

IGBT Inverter + Brake

75 Amperes/600 Volts

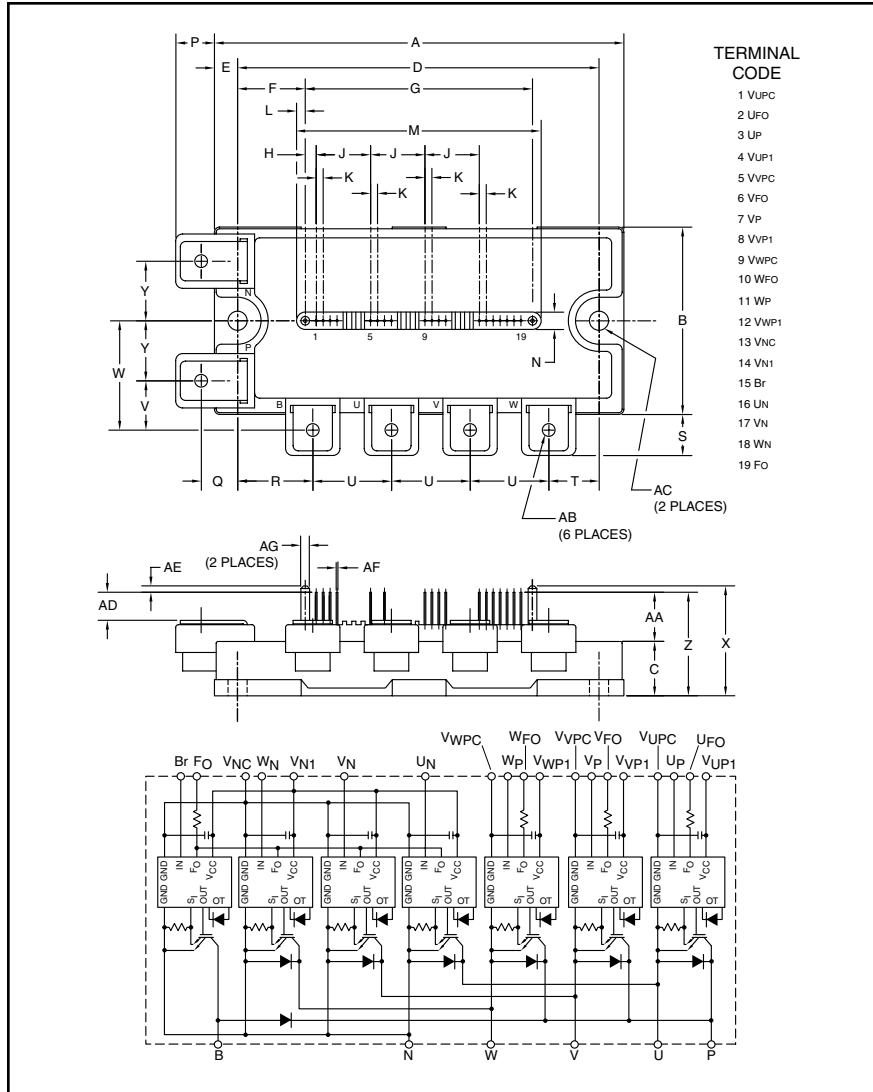

Description:

Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

Features:

- ☐ Complete Output Power Circuit
- ☐ Gate Drive Circuit
- ☐ Protection Logic
 - Short Circuit
 - Over Temperature
 - Using On-chip Temperature Sensing
 - Under Voltage
- ☐ Low Loss Using 5th Generation IGBT Chip

Applications:

- ☐ Inverters
- ☐ UPS
- ☐ Motion/Servo Control
- ☐ Power Supplies

Ordering Information:

Example: Select the complete part number from the table below -i.e. PM75RLA060 is a 600V, 75 Ampere Intellimod™ Intelligent Power Module.

Type	Current Rating Amperes	V _{CES} Volts (x 10)
PM	75	60

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	4.72	120.0
B	2.17	55.0
C	0.63	16.0
D	4.17	106.0
E	0.28	7.0
F	0.78	19.75
G	2.62	66.5
H	0.13	3.25
J	0.63	16.0
K	0.08	2.0
L	0.10	2.5
M	2.81	71.5
N	0.20	5.0
P	0.43	11.0
Q	0.42	10.75
R	0.87	22.0

Dimensions	Inches	Millimeters
S	0.46	11.75
T	0.59	15.0
U	0.91	23.0
V	0.57	14.5
W	1.26	32.0
X	1.22	31.0
Y	0.69	17.5
Z	1.14	29.0
AA	0.51	13.0
AB	M5 Metric	M5
AC	0.22 Dia.	Dia. 5.5
AD	0.28	7.0
AE	0.08	2.0
AF	0.02 Sq.	Sq. 0.5
AG	0.10 Dia.	Dia. 2.5

PM75RLA060

Intellimod™ L-Series

Three Phase IGBT Inverter + Brake

75 Amperes/600 Volts

Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	PM75RLA060	Units
Power Device Junction Temperature	T_j	-20 to 150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to 125	$^\circ\text{C}$
Mounting Torque, M5 Mounting Screws	—	31	in-lb
Mounting Torque, M5 Main Terminal Screws	—	31	in-lb
Module Weight (Typical)	—	380	Grams
Supply Voltage, Surge (Applied between P - N)	$V_{\text{CC(surge)}}$	550	Volts
Self-protection Supply Voltage Limit (Short Circuit protection Capability)*	$V_{\text{CC(prot.)}}$	400	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal	V_{ISO}	2500	Volts

*VD = 13.5 ~ 16.5V, Inverter Part, $T_j = 125^\circ\text{C}$

IGBT Inverter Sector

Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$)	V_{CES}	600	Volts
Collector Current ($T_C = 25^\circ\text{C}$)	$\pm I_C$	75	Amperes
Peak Collector Current ($T_C = 25^\circ\text{C}$)	$\pm I_{\text{CP}}$	150	Amperes
Collector Dissipation ($T_C = 25^\circ\text{C}$)	P_C	300	Watts


IGBT Brake Sector

Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$)	V_{CES}	600	Volts
Collector Current ($T_C = 25^\circ\text{C}$)	$\pm I_C$	50	Amperes
Peak Collector Current ($T_C = 25^\circ\text{C}$)	$\pm I_{\text{CP}}$	100	Amperes
Collector Dissipation ($T_C = 25^\circ\text{C}$)	P_C	228	Watts
Diode Rated DC Reverse Voltage ($T_C = 25^\circ\text{C}$)	$V_{\text{R(DC)}}$	600	Volts
Diode Forward Current	I_F	50	Amperes


Control Sector

Supply Voltage (Applied between $V_{\text{UP1}}-V_{\text{UPC}}$, $V_{\text{VP1}}-V_{\text{VPC}}$, $V_{\text{WP1}}-V_{\text{WPC}}$, $V_{\text{N1}}-V_{\text{NC}}$)	V_D	20	Volts
Input Voltage (Applied between U_P-V_{UPC} , V_P-V_{VPC} , W_P-V_{WPC} , U_N-V_N , W_N , $Br-V_{\text{NC}}$)	V_{CIN}	20	Volts
Fault Output Supply Voltage (Applied between $U_{\text{FO}}-V_{\text{UPC}}$, $V_{\text{FO}}-V_{\text{VPC}}$, $W_{\text{FO}}-V_{\text{WPC}}$, F_O-V_{NC})	V_{FO}	20	Volts
Fault Output Current (U_{FO} , V_{FO} , W_{FO} , F_O Terminals)	I_{FO}	20	mA

Note 1: T_C (Base Plate)
Measurement Point



Note 2: T_C (Under the Chip)
Measurement Point



Arm Axis	UP		VP		WP		UN		VN		WN		Br	
	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi
X	28.7	28.7	65.2	65.2	85.3	85.3	38.0	38.0	55.4	55.4	75.5	75.5	19.0	23.0
Y	-6.6	0.85	-6.6	2.5	-6.6	2.5	4.6	-4.5	4.6	-4.5	4.6	-4.5	-7.3	6.6

PM75RLA060
Intellimod™ L-Series
Three Phase IGBT Inverter + Brake
75 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
IGBT Inverter Sector						
Collector-Emitter Cutoff Current	I_{CES}	$V_{CE} = V_{CES}, V_D = 15V, T_j = 25^{\circ}C$	—	—	1.0	mA
		$V_{CE} = V_{CES}, V_D = 15V, T_j = 125^{\circ}C$	—	—	10	mA
Diode Forward Voltage	V_{EC}	$-I_C = 75A, V_{CIN} = 15V, V_D = 15V$	—	2.2	3.3	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_D = 15V, V_{CIN} = 0V, I_C = 75A,$ $T_j = 25^{\circ}C$	—	1.6	2.1	Volts
		$V_D = 15V, V_{CIN} = 0V, I_C = 75A,$ $T_j = 125^{\circ}C$	—	1.5	2.0	Volts
Inductive Load Switching Times	t_{on}	$V_D = 15V, V_{CIN} = 0 \Leftrightarrow 15V$	0.5	1.0	2.4	μs
	t_{rr}		—	0.2	0.4	μs
	$t_{C(on)}$	$V_{CC} = 300V, I_C = 75A$	—	0.4	1.0	μs
	t_{off}	$T_j = 125^{\circ}C$	—	1.2	2.5	μs
	$t_{C(off)}$		—	0.5	1.0	μs
IGBT Brake Sector						
Collector-Emitter Cutoff Current	I_{CES}	$V_{CE} = V_{CES}, V_D = 15V, T_j = 25^{\circ}C$	—	—	1.0	mA
		$V_{CE} = V_{CES}, V_D = 15V, T_j = 125^{\circ}C$	—	—	10	mA
Diode Forward Voltage	V_{FM}	$I_F = 50A$	—	2.2	3.3	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_D = 15V, V_{CIN} = 0V, I_C = 50A,$ $T_j = 25^{\circ}C$	—	1.6	2.1	Volts
		$V_D = 15V, V_{CIN} = 0V, I_C = 50A,$ $T_j = 125^{\circ}C$	—	1.5	2.0	Volts
Control Sector						
Short Circuit Trip Level ($-20^{\circ}C \leq T_j \leq 125^{\circ}C, V_D = 15V$)	SC	Inverter Part	150	—	—	Amperes
		Brake Part	100	—	—	Amperes
Short Circuit Current Delay Time	$t_{off(SC)}$	$V_D = 15V$	—	0.2	—	μs
Over Temperature Protection (Detect T_j of IGBT Chip)	OT	Trip Level	135	145	155	$^{\circ}C$
	OT_R	Reset Level	—	125	—	$^{\circ}C$
Supply Circuit Under-voltage Protection ($-20 \leq T_j \leq 125^{\circ}C$)	UV	Trip Level	11.5	12.0	12.5	Volts
	UV_R	Reset Level	—	12.5	—	Volts
Circuit Current	I_D	$V_D = 15V, V_{CIN} = 15V, V_{N1}-V_{NC}$	—	20	30	mA
		$V_D = 15V, V_{CIN} = 15V, V_{XP1}-V_{XPC}$	—	5	10	mA
Input ON Threshold Voltage	$V_{th(on)}$	Applied between $U_P-V_{UPC},$	1.2	1.5	1.8	Volts
Input OFF Threshold Voltage	$V_{th(off)}$	$V_P-V_{VPC}, W_P-V_{WPC}, U_N-V_N- W_N-Br-V_{NC}$	1.7	2.0	2.3	Volts
Fault Output Current*	$I_{FO(H)}$	$V_D = 15V, V_{CIN} = 15V$	—	—	0.01	mA
	$I_{FO(L)}$	$V_D = 15V, V_{CIN} = 15V$	—	10	15	mA
Fault Output Pulse Width*	t_{FO}	$V_D = 15V$	1.0	1.8	—	ms

*Fault output is given only when the internal SC, OT and UV protections schemes of either upper or lower device operate to protect it.

PM75RLA060
Intellimod™ L-Series
Three Phase IGBT Inverter + Brake
75 Amperes/600 Volts


Thermal Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	Inverter IGBT (Per 1/6 Module) (Note 1)	—	—	0.42	$^\circ\text{C/Watt}$
	$R_{th(j-c)D}$	Inverter FWDi (Per 1/6 Module) (Note 1)	—	—	0.69	$^\circ\text{C/Watt}$
	$R_{th(j-c)Q}$	Brake IGBT (Per 1/6 Module) (Note 1)	—	—	0.55	$^\circ\text{C/Watt}$
	$R_{th(j-c)D}$	Brake FWDi (Per 1/6 Module) (Note 1)	—	—	0.92	$^\circ\text{C/Watt}$
	$R_{th(j-c)Q}$	Inverter IGBT (Per 1/6 Module) (Note 2)	—	—	0.32	$^\circ\text{C/Watt}$
	$R_{th(j-c)D}$	Inverter FWDi (Per 1/6 Module) (Note 2)	—	—	0.53	$^\circ\text{C/Watt}$
	$R_{th(j-c)Q}$	Brake IGBT (Per 1/6 Module) (Note 2)	—	—	0.42	$^\circ\text{C/Watt}$
	$R_{th(j-c)D}$	Brake FWDi (Per 1/6 Module) (Note 2)	—	—	0.71	$^\circ\text{C/Watt}$
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin Per Module, Thermal Grease Applied (Note 1)	—	—	0.038	$^\circ\text{C/Watt}$

Recommended Conditions for Use

Characteristic	Symbol	Condition	Value	Units
Supply Voltage	V_{CC}	Applied across P-N Terminals	≤ 400	Volts
Control Supply Voltage*	V_D	Applied between V_{UP1} - V_{UPC} , V_{VP1} - V_{VPC} , V_{WP1} - V_{WPC} , V_{N1} - V_{NC}	15.0 ± 1.5	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between U_P - V_{UPC} ,	≤ 0.8	Volts
Input OFF Voltage	$V_{CIN(off)}$	V_P - V_{VPC} , W_P - V_{WPC} , U_N - V_{NC} , W_N - Br - V_{NC}	≥ 9.0	Volts
PWM Input Frequency	f_{PWM}	Using Application Circuit	≤ 20	kHz
Arm Shoot-through Blocking Time	t_{DEAD}	Input Signal	≥ 2.0	μs

* With ripple satisfying the following conditions: dv/dt swing $\leq \pm 5V/\mu\text{s}$, Variation $\leq 2V$ peak to peak.

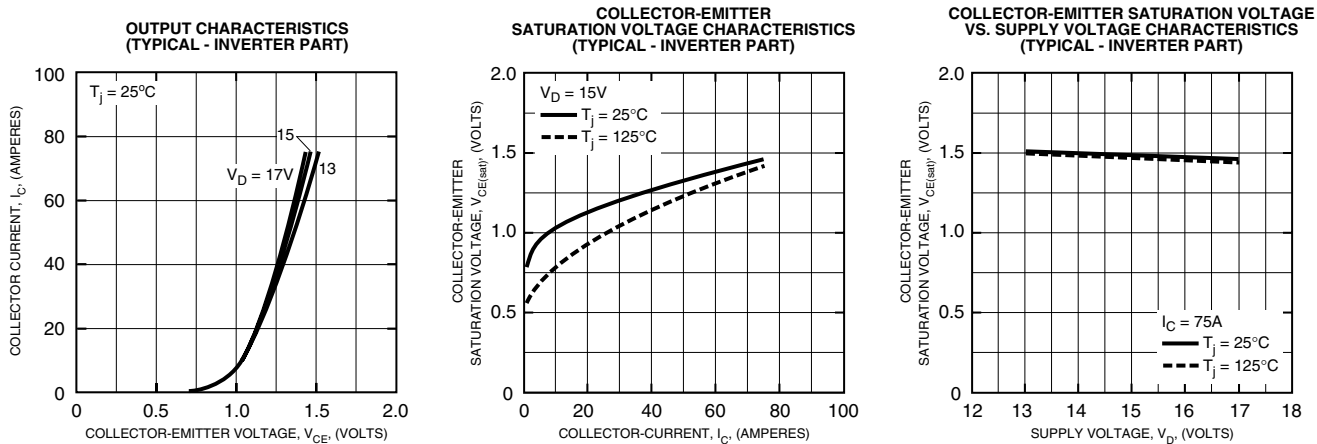


PM75RLA060

Intellimod™ L-Series


Three Phase IGBT Inverter + Brake

75 Amperes/600 Volts


FREE-WHEEL DIODE
FORWARD CHARACTERISTICS
(TYPICAL - INVERTER PART)

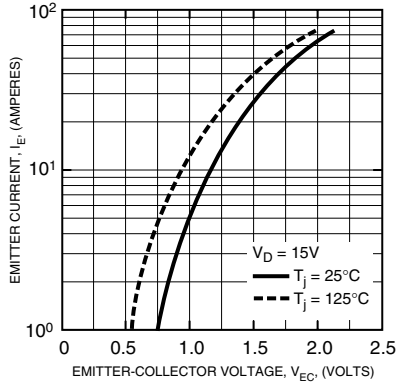


REVERSE RECOVERY CHARACTERISTICS
(TYPICAL - INVERTER PART)

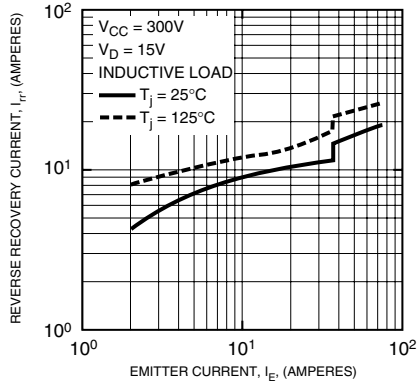


REVERSE RECOVERY CHARACTERISTICS
(TYPICAL - INVERTER PART)

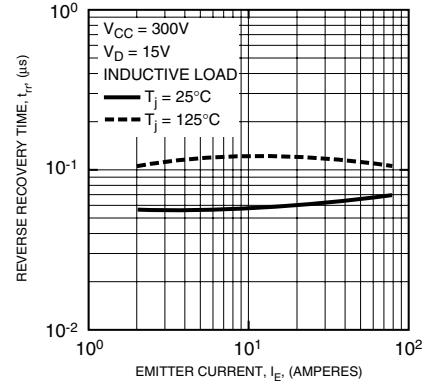


SWITCHING LOSS (ON) VS.
COLLECTOR CURRENT
(TYPICAL - INVERTER PART)

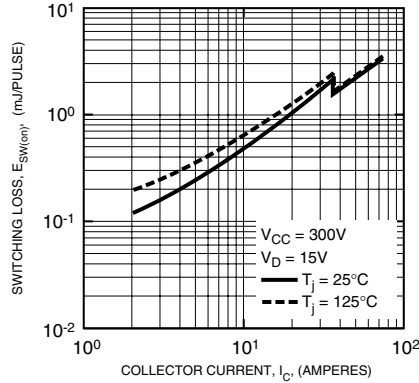


SWITCHING LOSS (OFF) VS.
COLLECTOR CURRENT
(TYPICAL - INVERTER PART)

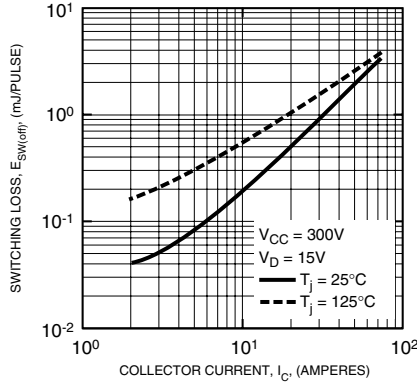


SWITCHING TIME VS.
COLLECTOR CURRENT
(TYPICAL - INVERTER PART)

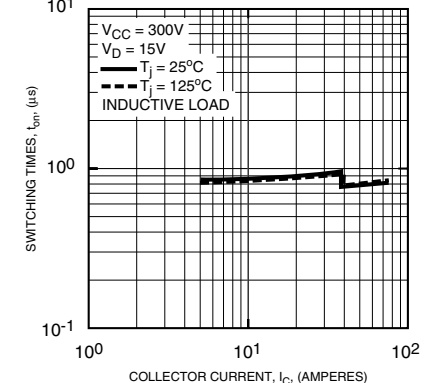


SWITCHING TIME VS.
COLLECTOR CURRENT
(TYPICAL - INVERTER PART)

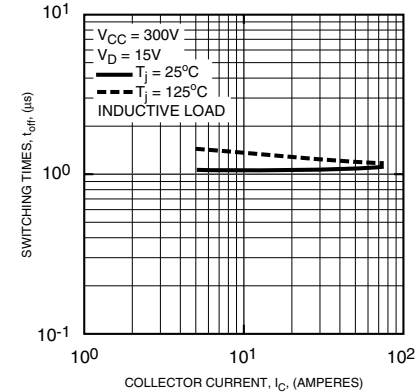










SWITCHING TIME VS.
COLLECTOR CURRENT
(TYPICAL - INVERTER PART)

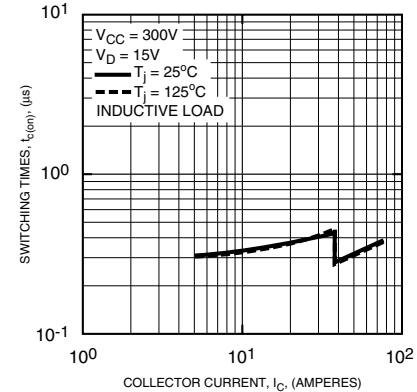

SWITCHING TIME VS.
COLLECTOR CURRENT
(TYPICAL - INVERTER PART)

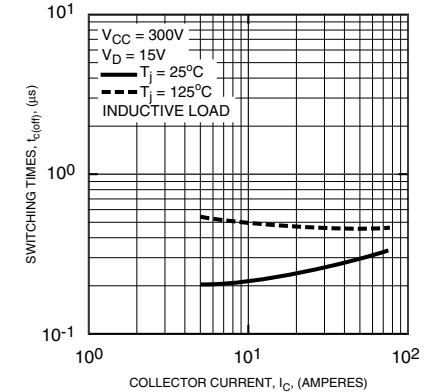

PM75RLA060
Intellimod™ L-Series
Three Phase IGBT Inverter + Brake
75 Amperes/600 Volts

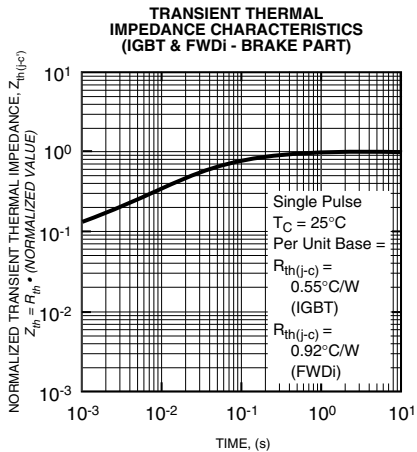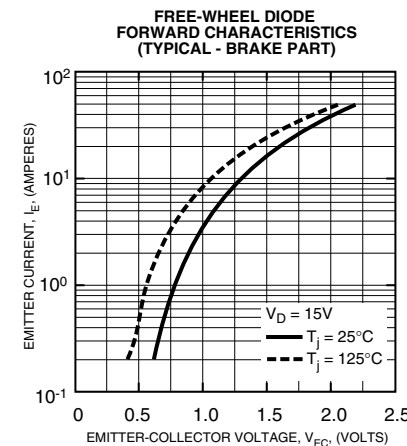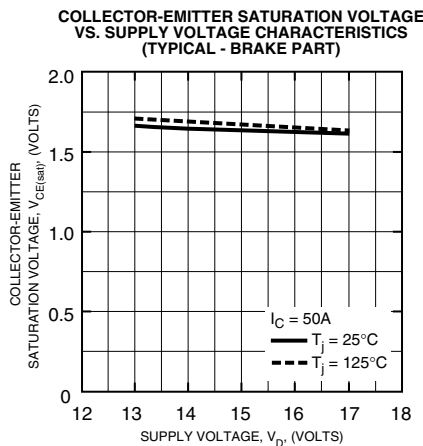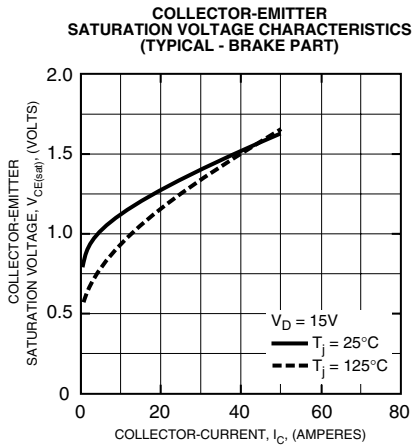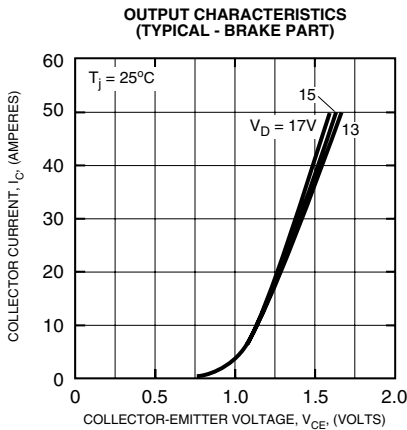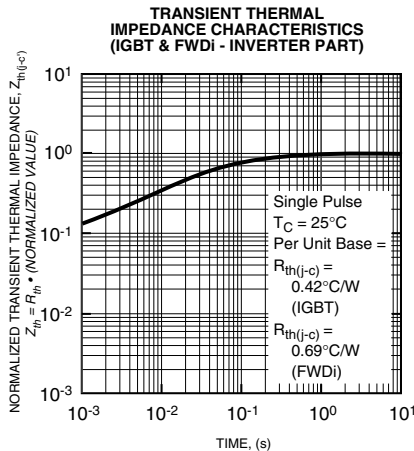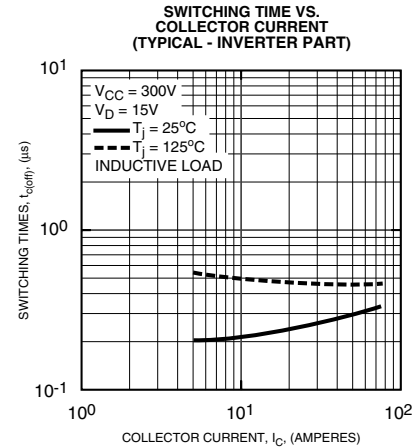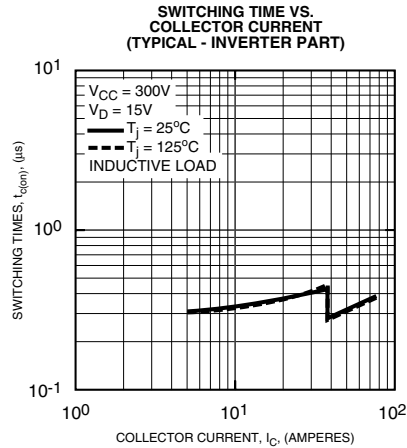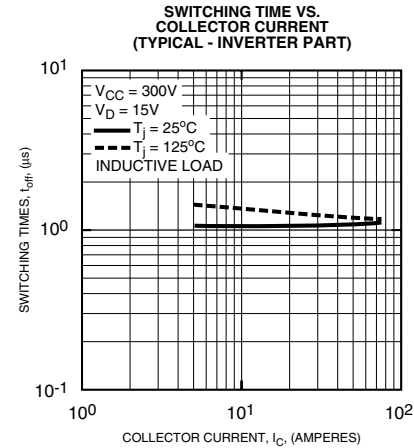



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.