

Ultra-Small, Low on Resistance Load Switch with Controlled Turn-on

Check for Samples: [TPS22929](#)

FEATURES

- Integrated Single Load Switch
- Small SOT23-6 package
- Input Voltage Range: 1.4-V to 5.5-V
- Low ON-Resistance
 - $r_{ON} = 115\text{-m}\Omega$ at $V_{IN} = 5\text{-V}$
 - $r_{ON} = 115\text{-m}\Omega$ at $V_{IN} = 3.3\text{-V}$
 - $r_{ON} = 118\text{-m}\Omega$ at $V_{IN} = 2.5\text{-V}$
 - $r_{ON} = 129\text{-m}\Omega$ at $V_{IN} = 1.5\text{-V}$
- 1.8-A Continuous Switch Current (25°C)
- Low Threshold Control Input
- Controlled Slew-rate Options
- Under-Voltage Lock Out
- Quick Output Discharge Transistor
- Reverse Current Protection

APPLICATIONS

- Portable Industrial Equipment
- Portable Medical Equipment
- Portable Media Players
- Point Of Sales Terminal
- GPS Devices
- Digital Cameras
- Portable Instrumentation
- Smartphones

DESCRIPTION

The TPS22929 is a small, low r_{ON} load switch with controlled turn on. The device contains a P-channel MOSFET that can operate over an input voltage range of 1.4 V to 5.5 V. The switch is controlled by an on/off input (ON), which is capable of interfacing directly with low-voltage control signals. The TPS22929 is active high enable.

The TPS22929 contains a 150- Ω on-chip load resistor for quick output discharge when the switch is turned off. The rise time of the device is internally controlled in order to avoid inrush current. The TPS22929 family has various slew rate options (see).

The TPS22929 device provides circuit breaker functionality by latching off the power-switch during reverse voltage situations. An internal reverse voltage comparator disables the power-switch when the output voltage (V_{OUT}) is driven higher than the input (V_{IN}) to quickly (10 μ s typ) stop the flow of current towards the input side of the switch. Reverse current is always active, even when the power-switch is disabled. Additionally, under-voltage lockout (UVLO) protection turns the switch off if the input voltage is too low.

The TPS22929 is available in an small, space-saving 6-pin SOT23-6 package and is characterized for operation over the free-air temperature range of -40°C to 85°C .

TYPICAL APPLICATION

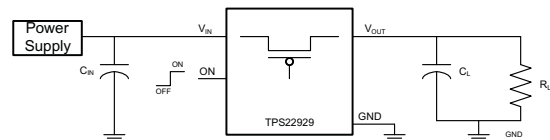


Table 1. Feature List

DEVICE	r_{ON} (typ) at 3.3 V	Rise Time at 3.3 V (typ)	QUICK OUTPUT DISCHARGE ⁽¹⁾	MAXIMUM OUTPUT CURRENT (3.3 V and 25°C) ⁽²⁾	ENABLE
TPS22929A ⁽³⁾	115-m Ω	0.5 μ s	Yes	1.8-A	Active High
TPS22929B ⁽³⁾	115-m Ω	100 μ s	Yes	1.8-A	Active High
TPS22929C ⁽³⁾	115-m Ω	1000 μ s	Yes	1.8-A	Active High
TPS22929D	115-m Ω	4500 μ s	Yes	1.8-A	Active High

(1) This feature discharges the output of the switch to ground through an 150- Ω resistor, preventing the output from floating.

(2) See "Thermal Considerations" section in Application Information to calculate maximum continuous current for a specific application.

(3) Contact local sales/distributor or factory for availability.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

TPS22929

SLVSB39 – DECEMBER 2011

www.ti.com



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.


ORDERING INFORMATION

T _A	PACKAGE ⁽¹⁾		ORDERABLE PART NUMBER	TOP-SIDE MARKING
–40°C to 85°C	DBV	Contact factory for availability ⁽²⁾	TPS22929ADBVT	Contact factory for availability ⁽²⁾
			TPS22929ADBVR	
			TPS22929BDBVT	
			TPS22929BDBVR	
			TPS22929CDBVT	
			TPS22929CDBVR	
		Tape of 3000	TPS22929DDBVT	_F4_
		Reel of 250	TPS22929DDBVR	

(1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

(2) Contact factory for details and availability for PREVIEW devices, minimum order quantities may apply.

DEVICE INFORMATION

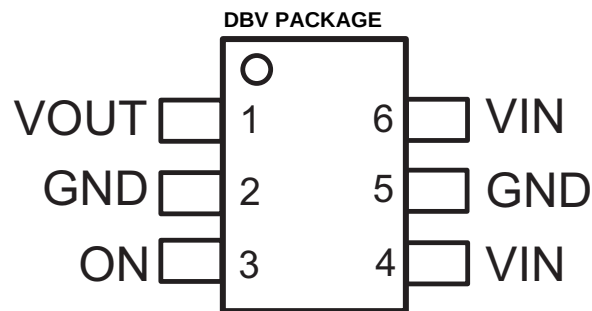

PIN FUNCTIONS

TPS22929	PIN NAME	DESCRIPTION
DBV		
2, 5	GND	Ground
3	ON	Switch control input, active high. Do not leave floating
1	VOUT	Switch output
4, 6	VIN	Switch input, bypass this input with a ceramic capacitor to ground

BLOCK DIAGRAM

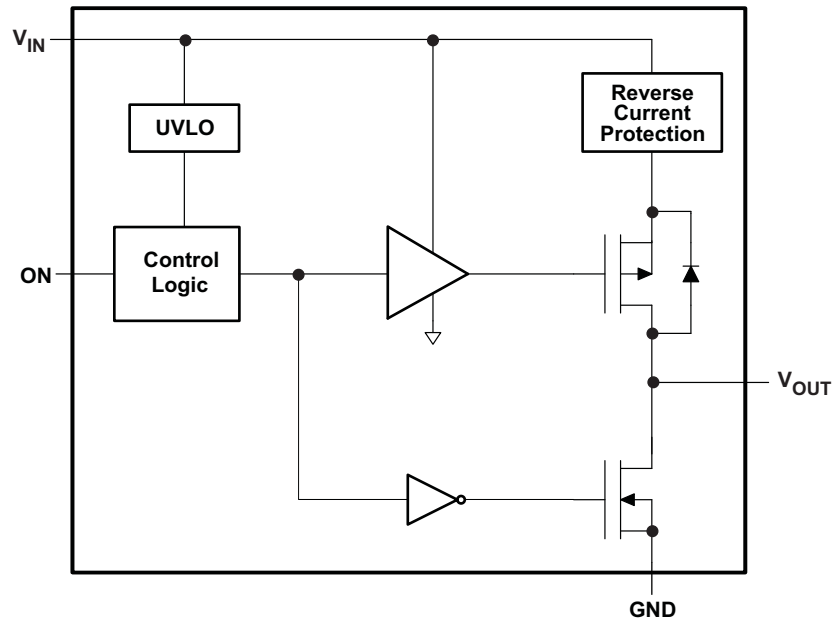


Table 2. FUNCTION TABLE

ON	VIN to VOUT	VOUT to GND ⁽¹⁾
L	OFF	ON
H	ON	OFF

(1) See Application section 'Output Pull-Down'

ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range (unless otherwise noted)

		VALUE	UNIT
V _{IN}	Input voltage range	–0.3 to 6	V
V _{OUT}	Output voltage range	V _{IN} + 0.3	V
V _{ON}	Input voltage range	–0.3 to 6	V
P _{MAX}	Maximum continuous power dissipation @ 25°C	463	mW
	Maximum continuous power dissipation @ 70°C	254	
	Maximum continuous power dissipation @ 85°C	185	
I _{MAX}	Maximum continuous operating current	2	A
T _A	Operating free-air temperature range	–40 to 85	°C
T _J	Maximum junction temperature	125	°C
T _{STG}	Storage temperature range	–65 to 150	°C
ESD	Electrostatic discharge protection	Human-Body Model (HBM) (VIN, VOUT, GND pins)	V
		Charged-Device Model (CDM) (VIN, VOUT, ON, GND pins)	

TPS22929

SLVSB39 – DECEMBER 2011

www.ti.com

THERMAL INFORMATION

THERMAL METRIC ⁽¹⁾		TPS22929	UNITS
		SOT23-6	
		(6) PINS	
θ_{JA}	Junction-to-ambient thermal resistance	216	°C/W
θ_{JCTop}	Junction-to-case (top) thermal resistance	209	
θ_{JB}	Junction-to-board thermal resistance	131	
ψ_{JT}	Junction-to-top characterization parameter	52	
ψ_{JB}	Junction-to-board characterization parameter	110	
θ_{JCbott}	Junction-to-case (bottom) thermal resistance	N/A	

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

RECOMMENDED OPERATING CONDITIONS

			MIN	MAX	UNIT
V_{IN}	Input voltage range		1.4	5.5	V
V_{ON}	ON voltage range		0	5.5	V
V_{OUT}	Output voltage range			V_{IN}	
V_{IH}	High-level input voltage, ON	$V_{IN} = 3.61 \text{ V to } 5.5 \text{ V}$	1.1	5.5	V
		$V_{IN} = 1.4 \text{ V to } 3.6 \text{ V}$	1.1	5.5	V
V_{IL}	Low-level input voltage, ON	$V_{IN} = 3.61 \text{ V to } 5.5 \text{ V}$		0.6	V
		$V_{IN} = 1.4 \text{ V to } 3.6 \text{ V}$		0.4	V
C_{IN}	Input Capacitor		1 ⁽¹⁾		μF

(1) Refer to the application section.


ELECTRICAL CHARACTERISTICS

V_{IN} = 1.4 V to 5.5 V, T_A = –40°C to 85°C (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T _A	MIN	TYP	MAX	UNIT
I _{IN} Quiescent current	I _{OUT} = 0, V _{IN} = V _{ON} = 5.25 V	Full		2.2	10	μA
	I _{OUT} = 0, V _{IN} = V _{ON} = 4.2 V			2.1	7.0	
	I _{OUT} = 0, V _{IN} = V _{ON} = 3.6 V			2.0	7.0	
	I _{OUT} = 0, V _{IN} = V _{ON} = 2.5 V			1.0	5.0	
	I _{OUT} = 0, V _{IN} = V _{ON} = 1.5 V			0.8	5.0	
I _{IN(off)} Off supply current	V _{ON} = GND, V _{OUT} = Open, V _{IN} = 5.25 V	Full		0.8	10	μA
	V _{ON} = GND, V _{OUT} = Open, V _{IN} = 4.2 V			0.3	7.0	
	V _{ON} = GND, V _{OUT} = Open, V _{IN} = 3.6 V			0.2	7.0	
	V _{ON} = GND, V _{OUT} = Open, V _{IN} = 2.5 V			0.2	5.0	
	V _{ON} = GND, V _{OUT} = Open, V _{IN} = 1.5 V			0.1	5.0	
I _{IN(Leakage)} Leakage current	V _{ON} = GND, V _{OUT} = 0, V _{IN} = 5.25 V	Full		0.8	10	μA
	V _{ON} = GND, V _{OUT} = 0, V _{IN} = 4.2 V			0.3	7.0	
	V _{ON} = GND, V _{OUT} = 0, V _{IN} = 3.6 V			0.2	7.0	
	V _{ON} = GND, V _{OUT} = 0, V _{IN} = 2.5 V			0.2	5.0	
	V _{ON} = GND, V _{OUT} = 0, V _{IN} = 1.5 V			0.1	5.0	
r _{ON} On-resistance	V _{IN} = 5.25 V, I _{OUT} = –200 mA	25°C		115	150	mΩ
		Full			175	
	V _{IN} = 5.0 V, I _{OUT} = –200 mA	25°C		115	150	
		Full			175	
	V _{IN} = 4.2 V, I _{OUT} = –200 mA	25°C		115	150	
		Full			175	
	V _{IN} = 3.3 V, I _{OUT} = –200 mA	25°C		115	150	
		Full			175	
	V _{IN} = 2.5 V, I _{OUT} = –200 mA	25°C		118	155	
		Full			180	
	V _{IN} = 1.5 V, I _{OUT} = –200 mA	25°C		129	170	
		Full			200	
RPD Output pull down resistance	V _{IN} = 3.3 V, V _{ON} = 0, I _{OUT} = 30 mA	25°C		150	200	Ω
UVLO Under voltage lockout	V _{IN} increasing, V _{ON} = 3.6 V, I _{OUT} = –100 mA	Full			1.4	V
	V _{IN} decreasing, V _{ON} 3.6 V, R _L = 10 Ω		0.50			
I _{ON} ON input leakage current	V _{ON} = 1.4 V to 5.25 V or GND	Full			1	μA
V _{RVP} Reverse Current Voltage Threshold				77		mV
t _{DELAY} Reverse Current Response Delay	V _{IN} = 5V			10		μs

SWITCHING CHARACTERISTICS

PARAMETER		TEST CONDITION	TPS22929D	UNIT
			TYP	
VIN = 5 V, TA = 25°C (unless otherwise noted)				
tON	Turn-ON time	RL = 10 Ω, CL = 0.1 μF	3315	μs
tOFF	Turn-OFF time	RL = 10 Ω, CL = 0.1 μF	7.4	
tR	VOUT rise time	RL = 10 Ω, CL = 0.1 μF	3660	
tF	VOUT fall time	RL = 10 Ω, CL = 0.1 μF	6.1	
VIN = 3.3 V, TA = 25°C (unless otherwise noted)				
tON	Turn-ON time	RL = 10 Ω, CL = 0.1 μF	4655	μs
tOFF	Turn-OFF time	RL = 10 Ω, CL = 0.1 μF	9.5	
tR	VOUT rise time	RL = 10 Ω, CL = 0.1 μF	4150	
tF	VOUT fall time	RL = 10 Ω, CL = 0.1 μF	3.0	
VIN = 1.5 V, TA = 25°C (unless otherwise noted)				
tON	Turn-ON time	RL = 10 Ω, CL = 0.1 μF	10175	μs
tOFF	Turn-OFF time	RL = 10 Ω, CL = 0.1 μF	18.3	
tR	VOUT rise time	RL = 10 Ω, CL = 0.1 μF	7812	
tF	VOUT fall time	RL = 10 Ω, CL = 0.1 μF	3.0	

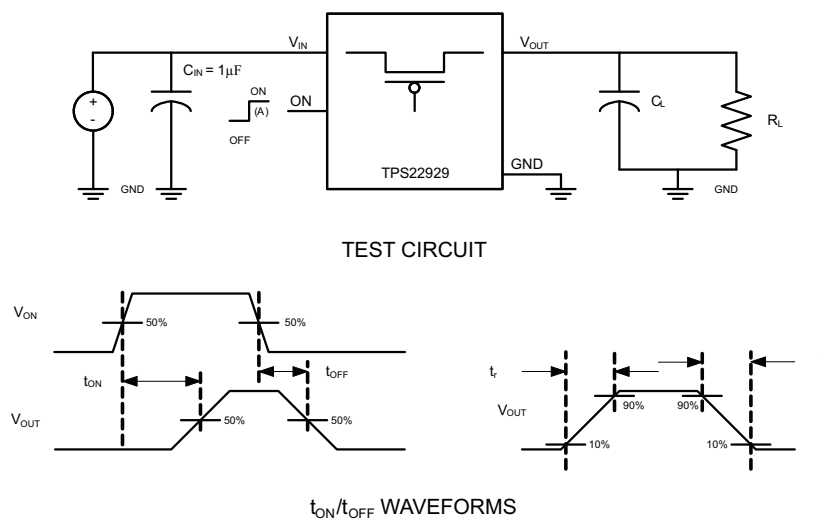PARAMETRIC MEASUREMENT INFORMATION


- A. Rise and fall times of the control signal is 100 ns.

Figure 1. Test Circuit and t_{ON}/t_{OFF} Waveforms

TYPICAL CHARACTERISTICS

**ON-STATE RESISTANCE
vs
INPUT VOLTAGE**

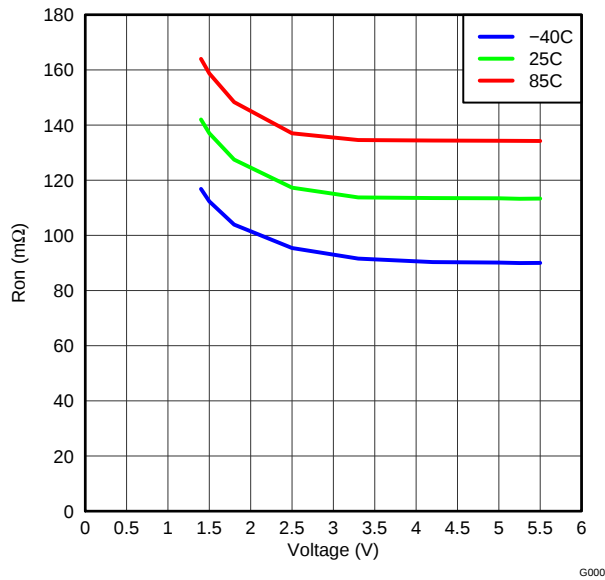


Figure 2.

ON INPUT THRESHOLD

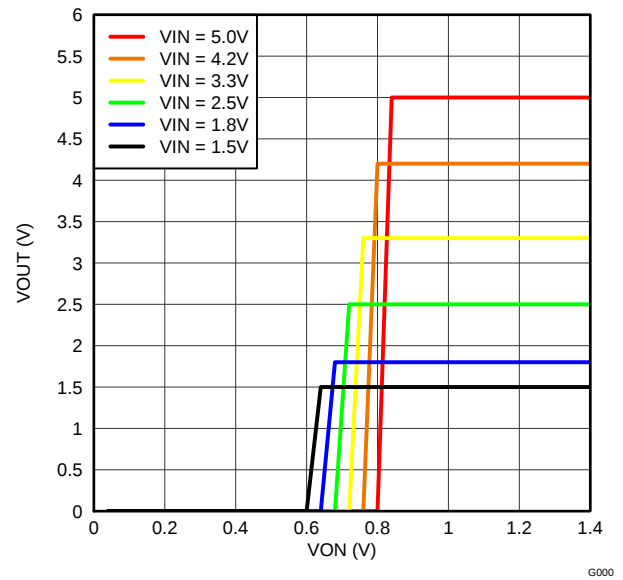


Figure 3.

**INPUT CURRENT, QUIESCENT
vs
INPUT VOLTAGE**

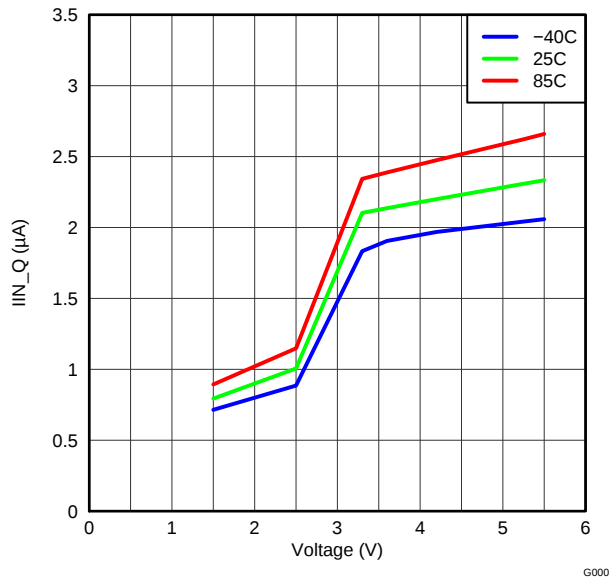


Figure 4.

**INPUT CURRENT, LEAK
vs
INPUT VOLTAGE**

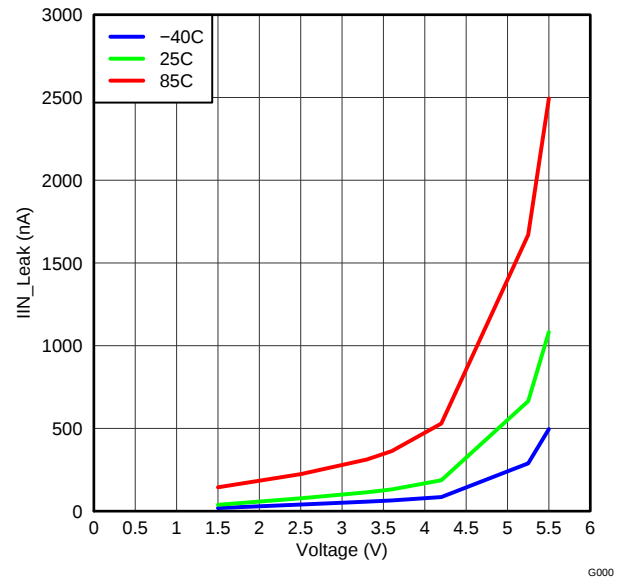


Figure 5.

TYPICAL CHARACTERISTICS (continued)

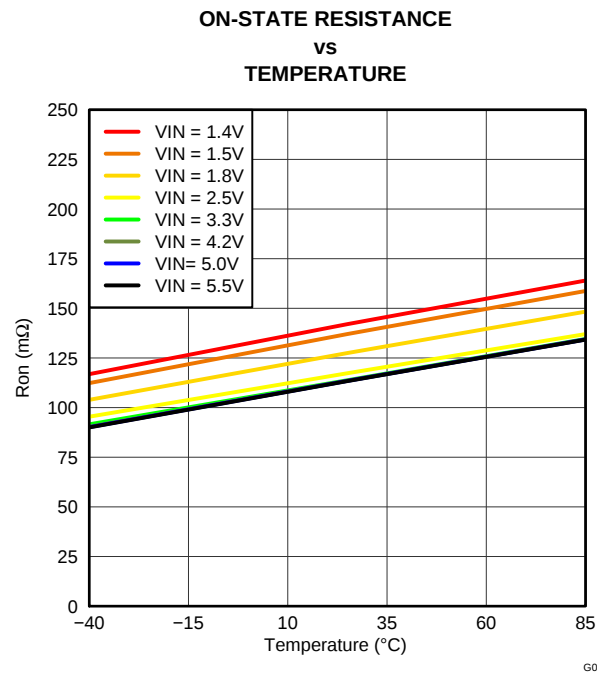


Figure 6.

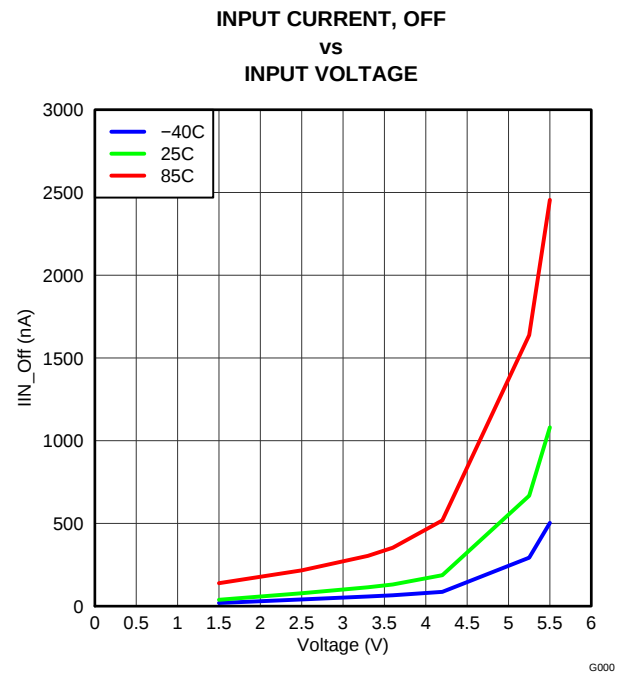


Figure 7.

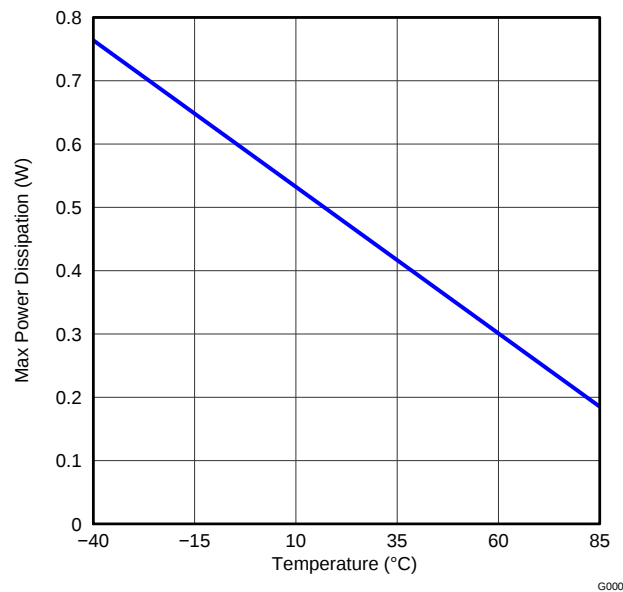


Figure 8. Allowable Power Dissipation

TYPICAL CHARACTERISTICS (continued)

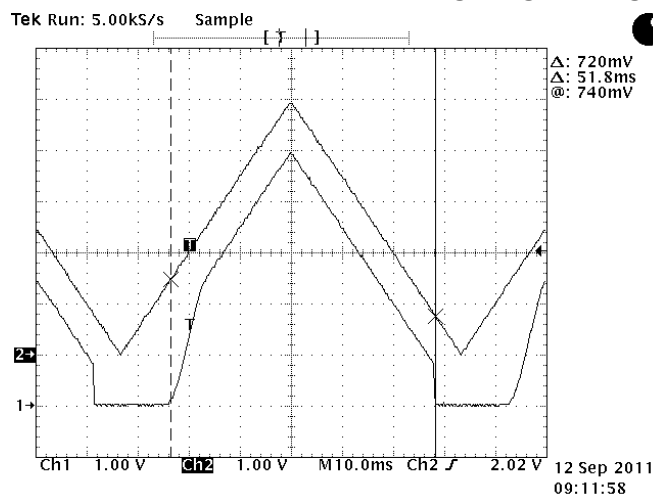


Figure 9. ULVO Response $I_{OUT} = -100mA$

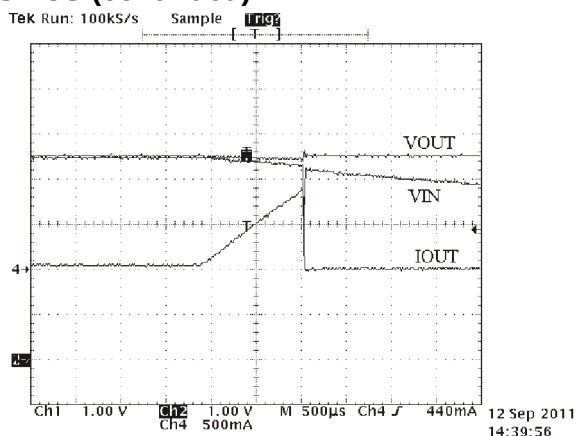


Figure 10. Reverse Current Protection $V_{OUT} = 3.3V$, $V_{IN} = 3.3V$ Decreasing to 0V

TYPICAL AC CHARACTERISTICS FOR tps22929B

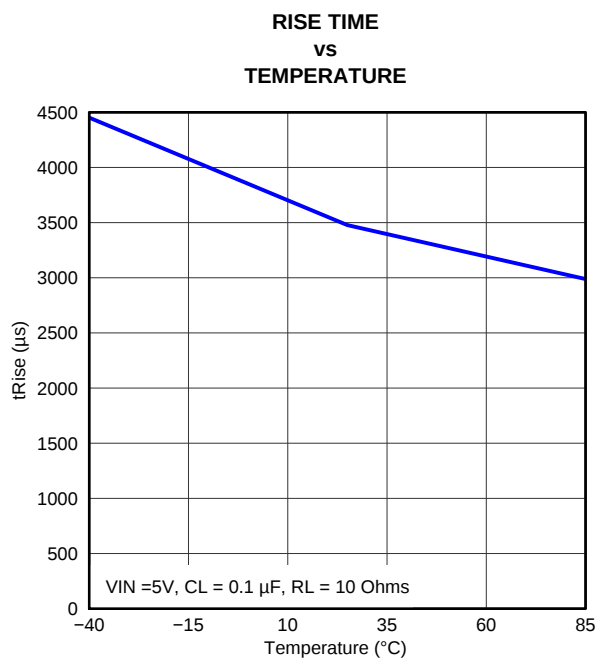


Figure 11.

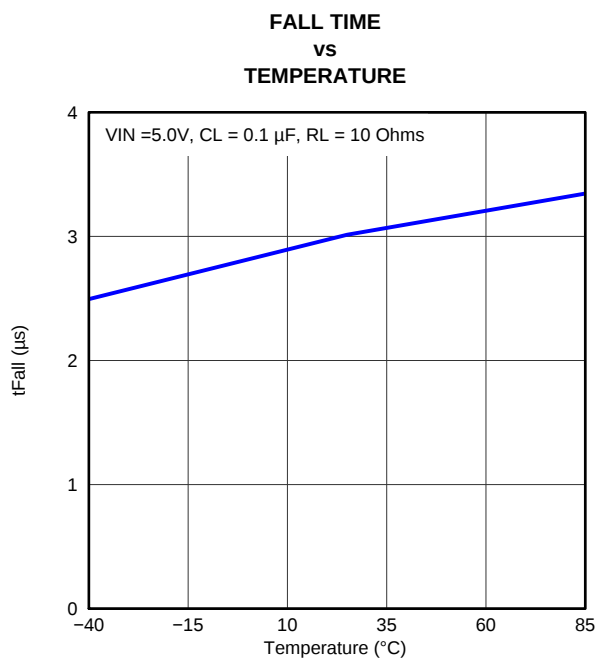
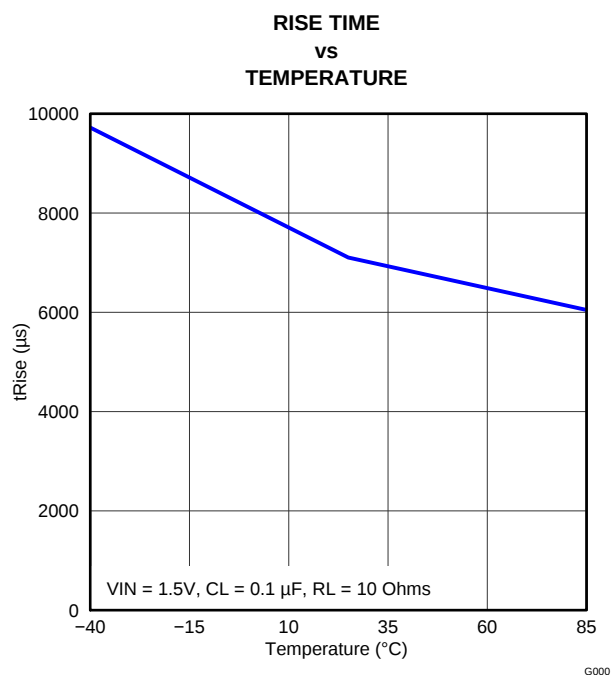
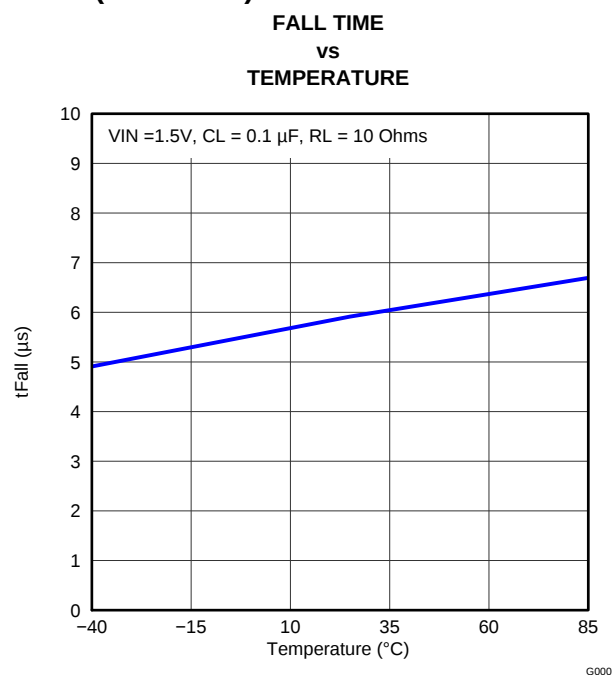
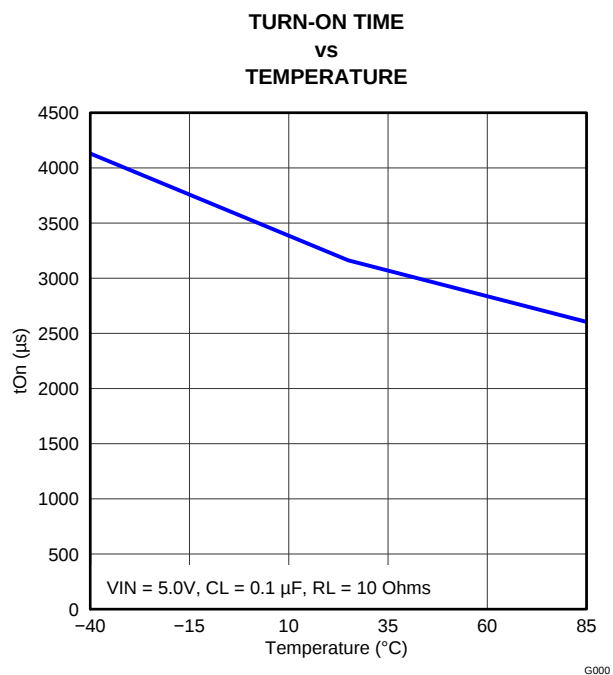
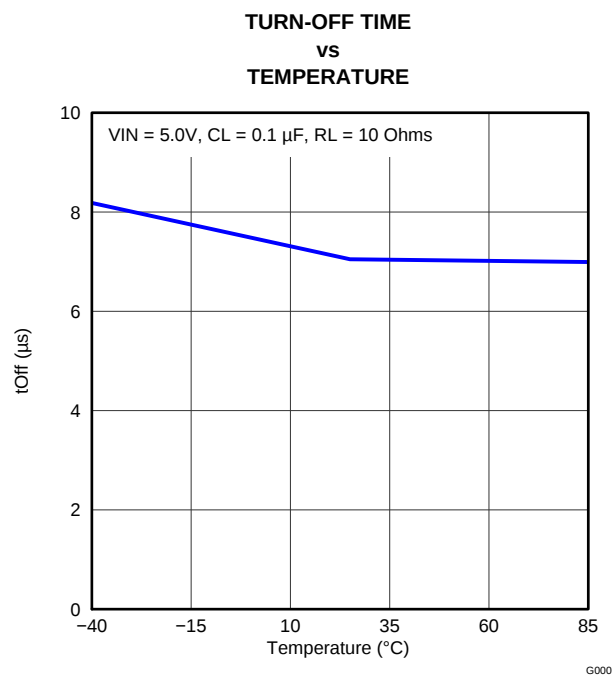


Figure 12.

TYPICAL CHARACTERISTICS (continued)

Figure 13.

Figure 14.

Figure 15.

Figure 16.

TYPICAL CHARACTERISTICS (continued)

**TURN-ON TIME
vs
TEMPERATURE**

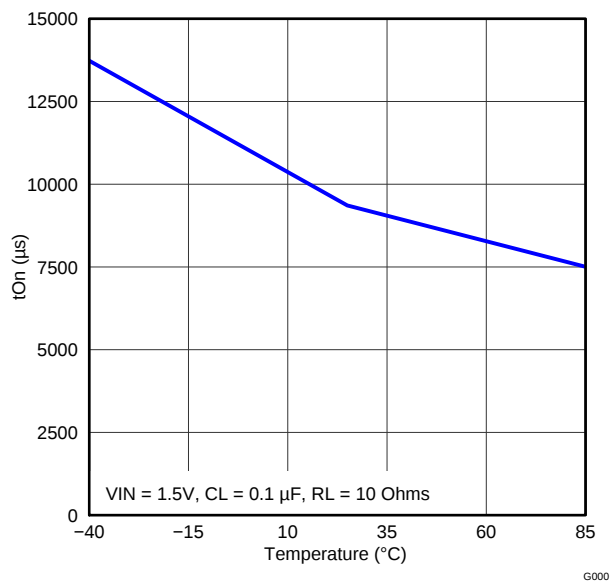


Figure 17.

**TURN-OFF TIME
vs
TEMPERATURE**

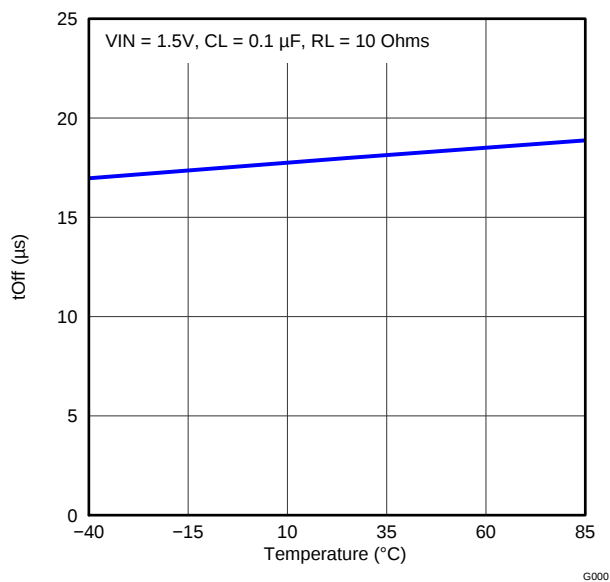


Figure 18.

**RISE TIME
vs
INPUT VOLTAGE**

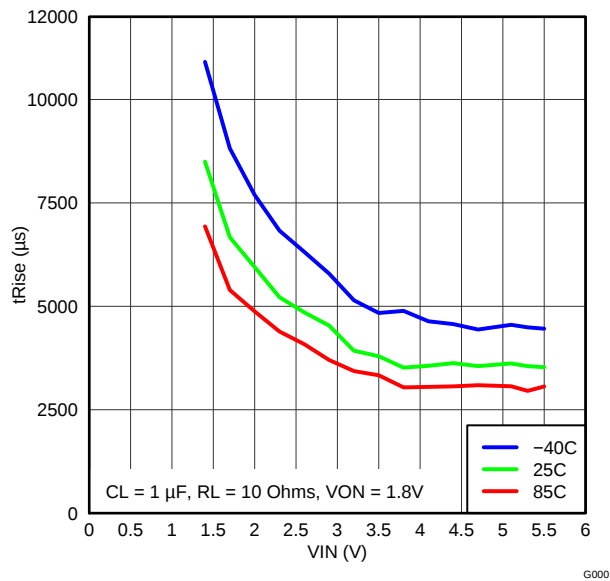


Figure 19.

**RISE TIME
vs
INPUT VOLTAGE**

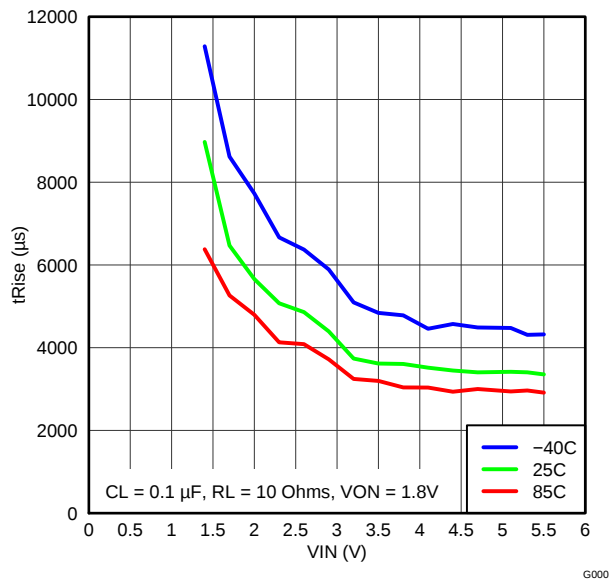


Figure 20.

TYPICAL CHARACTERISTICS (continued)

TURN-ON RESPONSE

$V_{IN} = 5V$, $T_A = 25^\circ C$, $C_{IN} = 10\mu F$, $C_L = 1\mu F$, $R_L = 10\Omega$

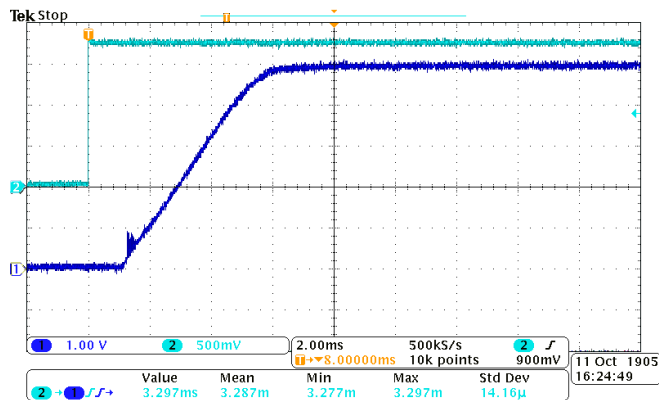


Figure 21.

TURN-OFF RESPONSE

$V_{IN} = 5V$, $T_A = 25^\circ C$, $C_{IN} = 10\mu F$, $C_L = 1\mu F$, $R_L = 10\Omega$

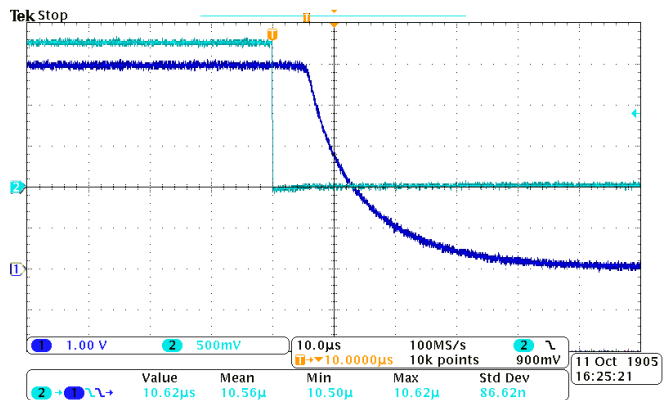


Figure 22.

TURN-ON RESPONSE TIME

$V_{IN} = 5V$, $T_A = 25^\circ C$, $C_{IN} = 1\mu F$, $C_L = 0.1\mu F$, $R_L = 10\Omega$

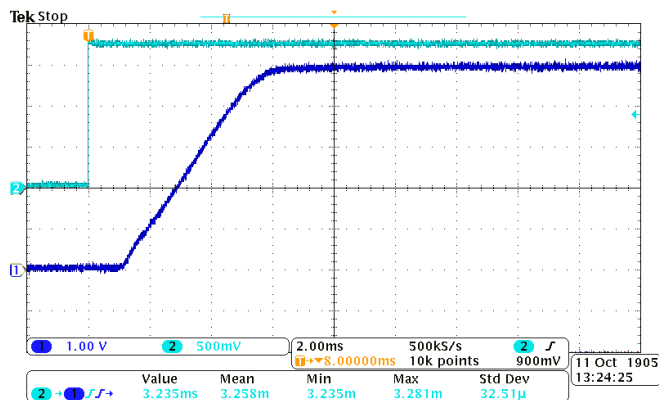


Figure 23.

TURN-OFF RESPONSE TIME

$V_{IN} = 5V$, $T_A = 25^\circ C$, $C_{IN} = 1\mu F$, $C_L = 0.1\mu F$, $R_L = 10\Omega$

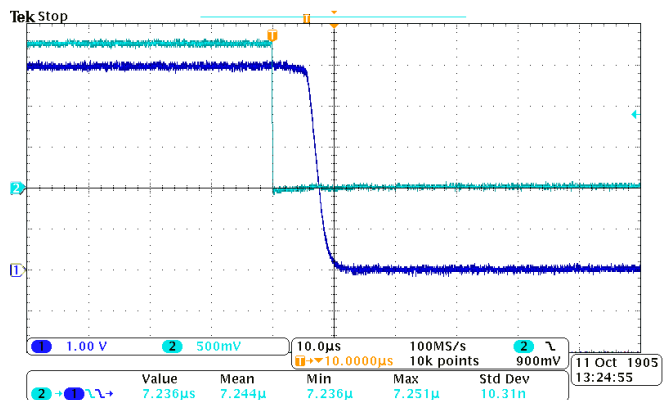


Figure 24.

TURN-ON RESPONSE TIME

$V_{IN} = 1.5V$, $T_A = 25^\circ C$, $C_{IN} = 10\mu F$, $C_L = 1\mu F$, $R_L = 10\Omega$

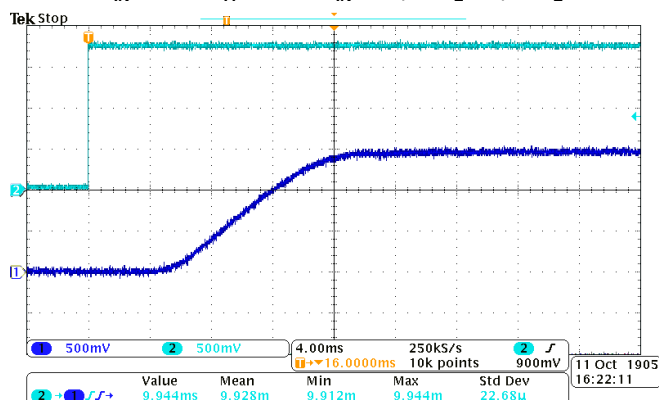


Figure 25.

TURN-OFF RESPONSE TIME

$V_{IN} = 1.5V$, $T_A = 25^\circ C$, $C_{IN} = 10\mu F$, $C_L = 1\mu F$, $R_L = 10\Omega$

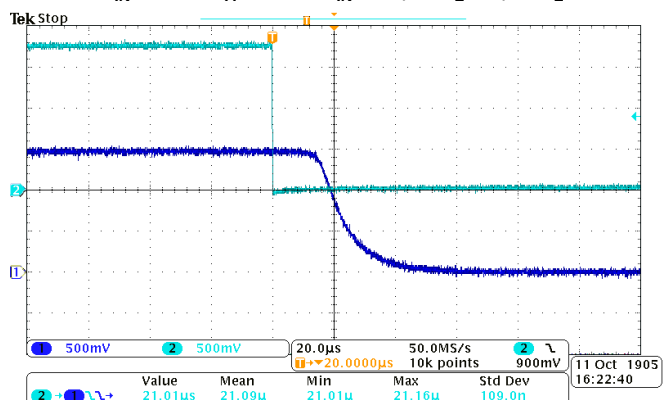


Figure 26.

TYPICAL CHARACTERISTICS (continued)

TURN-ON RESPONSE TIME

$V_{IN} = 1.5V$, $T_A = 25^\circ C$, $C_{IN} = 1\mu F$, $C_L = 0.1\mu F$, $R_L = 10\Omega$

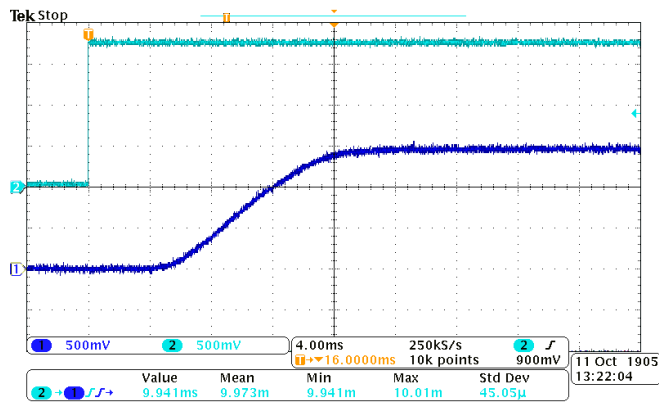


Figure 27.

TURN-OFF RESPONSE TIME

$V_{IN} = 1.5V$, $T_A = 25^\circ C$, $C_{IN} = 1\mu F$, $C_L = 0.1\mu F$, $R_L = 10\Omega$

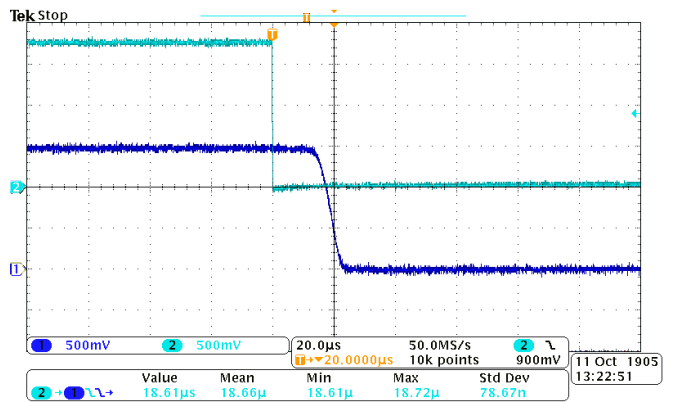


Figure 28.

APPLICATION INFORMATION

On/Off Control

The ON pin controls the state of the switch. Asserting ON high enables the switch. ON is active high and has a low threshold, making it capable of interfacing with low-voltage signals. The ON pin is compatible with standard GPIO logic threshold. It can be used with any microcontroller with 1.2-V, 1.8-V, 2.5-V or 3.3-V GPIOs.

Input Capacitor

To limit the voltage drop on the input supply caused by transient inrush currents, when the switch turns on into a discharged load capacitor or short-circuit, a capacitor needs to be placed between VIN and GND. A 1-μF ceramic capacitor, CIN, placed close to the pins is usually sufficient. Higher values of CIN can be used to further reduce the voltage drop.

Output Capacitor

A CIN to CL ratio of 10 to 1 is recommended for minimizing VIN dip caused by inrush currents during startup.

Output Pull-Down

The output pulldown is active when the user is turning off the main pass FET. The pulldown discharges the output rail to approximately 10% of the rail, and then the output pulldown is automatically disconnected to optimize the shutdown current.

Under-Voltage Lockout

The under-voltage lockout turns-off the switch if the input voltage drops below the under-voltage lockout threshold. During under-voltage lockout (UVLO), if the voltage level at VOUT exceeds the voltage level at VIN by the Reverse Current Voltage Threshold (VRVP), the body diode will be disengaged to prevent any current flow to VIN. With the ON pin active the input voltage rising above the under-voltage lockout threshold will cause a controlled turn-on of the switch which limits current over-shoots.

Reverse Current Protection

In a scenario where VOUT is greater than VIN, there is potential for reverse current through the pass FET or the body diode. The TPS22929 monitors VIN and VOUT voltage levels. When the reverse current voltage threshold (VRVP) is exceeded, the switch is disabled (within 10μs typ). Additionally, the body diode is disengaged so as to prevent any reverse current flow to VIN. The FET, and the output (VOUT), will resume normal operation when the reverse current scenario is no longer present.

Use the following formula to calculate the amount of reverse current for a particular application:

$$I_{RC} = \frac{0.077V}{R_{ON(VIN)}}$$

Where,

IRC is the amount of reverse current,

RON(VIN) is the on-resistance at the VIN of the reverse current condition.

Board Layout

For best performance, all traces should be as short as possible. To be most effective, the input and output capacitors should be placed close to the device to minimize the effects that parasitic trace inductances may have on normal operation. Using wide traces for VIN, VOUT, and GND helps minimize the parasitic electrical effects along with minimizing the case to ambient thermal impedance.

Thermal Considerations

For best device performance, be sure to follow the thermal guidelines in the Thermal Information table on page 4. To calculate max allowable continuous current for your application for a specific V_{IN} and ambient temperature, use the following formula:

$$I_{MAX} = \sqrt{\frac{T_J - T_A}{\frac{\theta_{JA}}{R_{ON}}}}$$

Where:

I_{MAX} = Max allowable continuous current

T_J = Max thermal junction temperature (125°C)

T_A = Ambient temperature of the application

θ_{JA} = Junction-to-air thermal impedance (216°C/W)

R_{ON} = R_{ON} at a specified input voltage V_{IN} (see Electrical Characteristics table on page 5)

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/ Ball Finish	MSL Peak Temp ⁽³⁾	Samples (Requires Login)
TPS22929DDBVR	ACTIVE	SOT-23	DBV	6	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
TPS22929DDBVT	ACTIVE	SOT-23	DBV	6	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION
REEL DIMENSIONS

TAPE DIMENSIONS


A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

TAPE AND REEL INFORMATION

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS22929DDBVR	SOT-23	DBV	6	3000	178.0	9.0	3.23	3.17	1.37	4.0	8.0	Q3
TPS22929DDBVT	SOT-23	DBV	6	250	178.0	9.0	3.23	3.17	1.37	4.0	8.0	Q3

TAPE AND REEL BOX DIMENSIONS




*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS22929DDBVR	SOT-23	DBV	6	3000	180.0	180.0	18.0
TPS22929DDBVT	SOT-23	DBV	6	250	180.0	180.0	18.0

DBV (R-PDSO-G6)


PLASTIC SMALL-OUTLINE PACKAGE

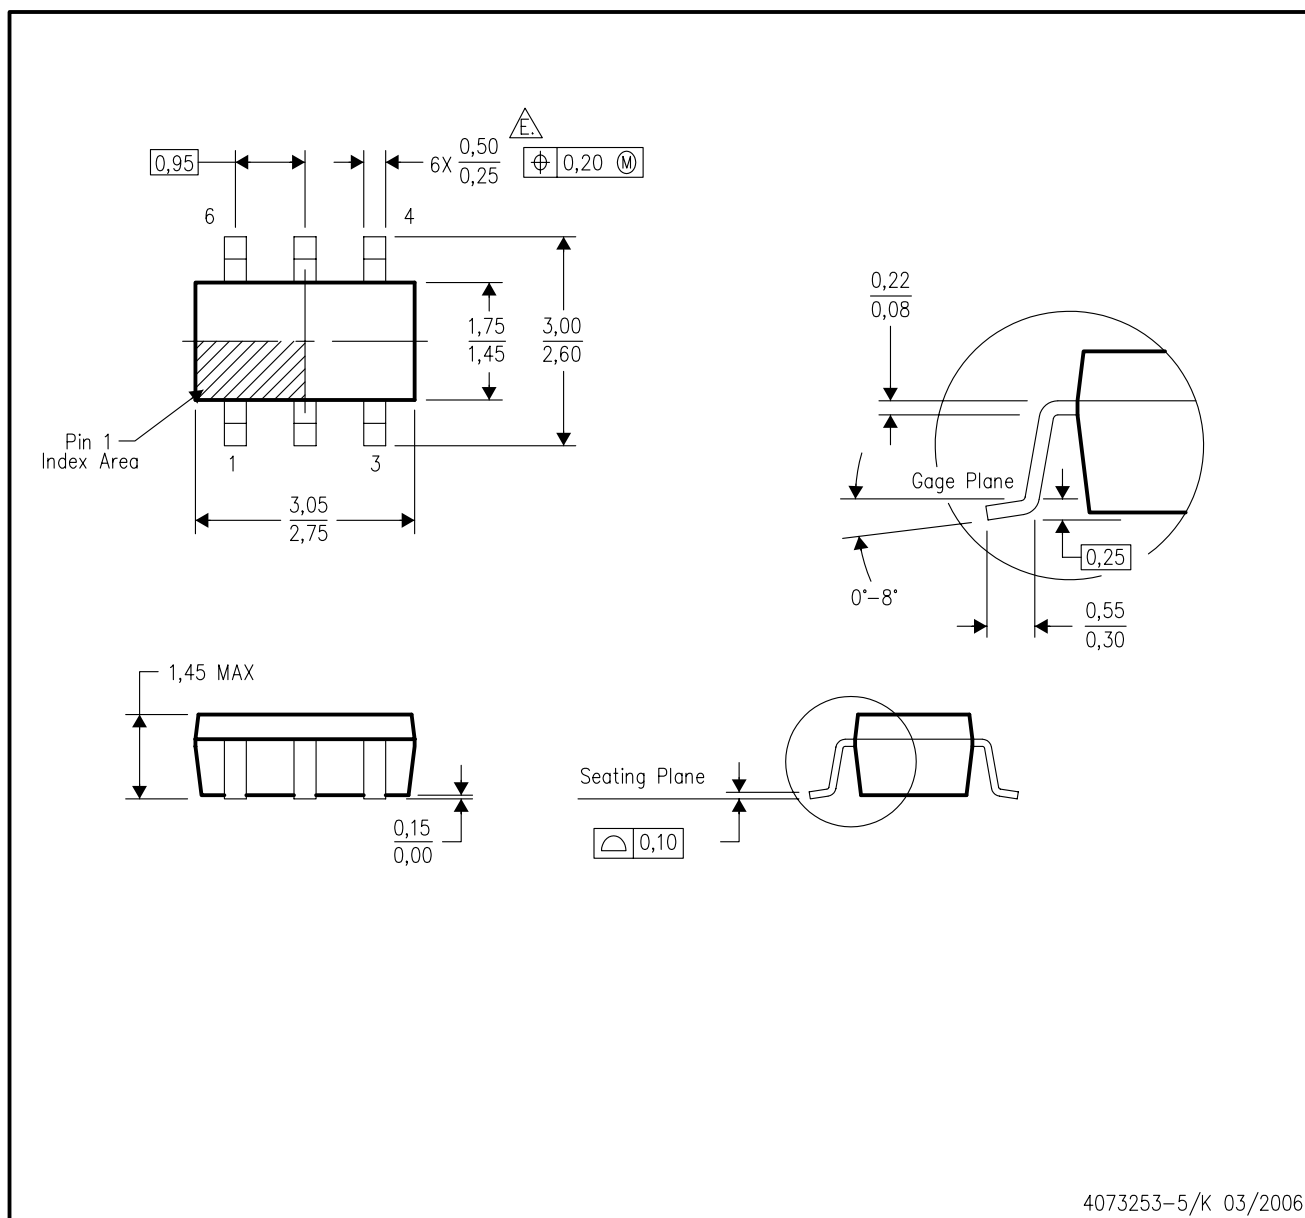

- NOTES:
- A. All linear dimensions are in millimeters.
 - B. This drawing is subject to change without notice.
 - C. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
 - D. Leads 1,2,3 may be wider than leads 4,5,6 for package orientation.
- $\triangle$ Falls within JEDEC MO-178 Variation AB, except minimum lead width.

DBV (R-PDSO-G6)

PLASTIC SMALL OUTLINE

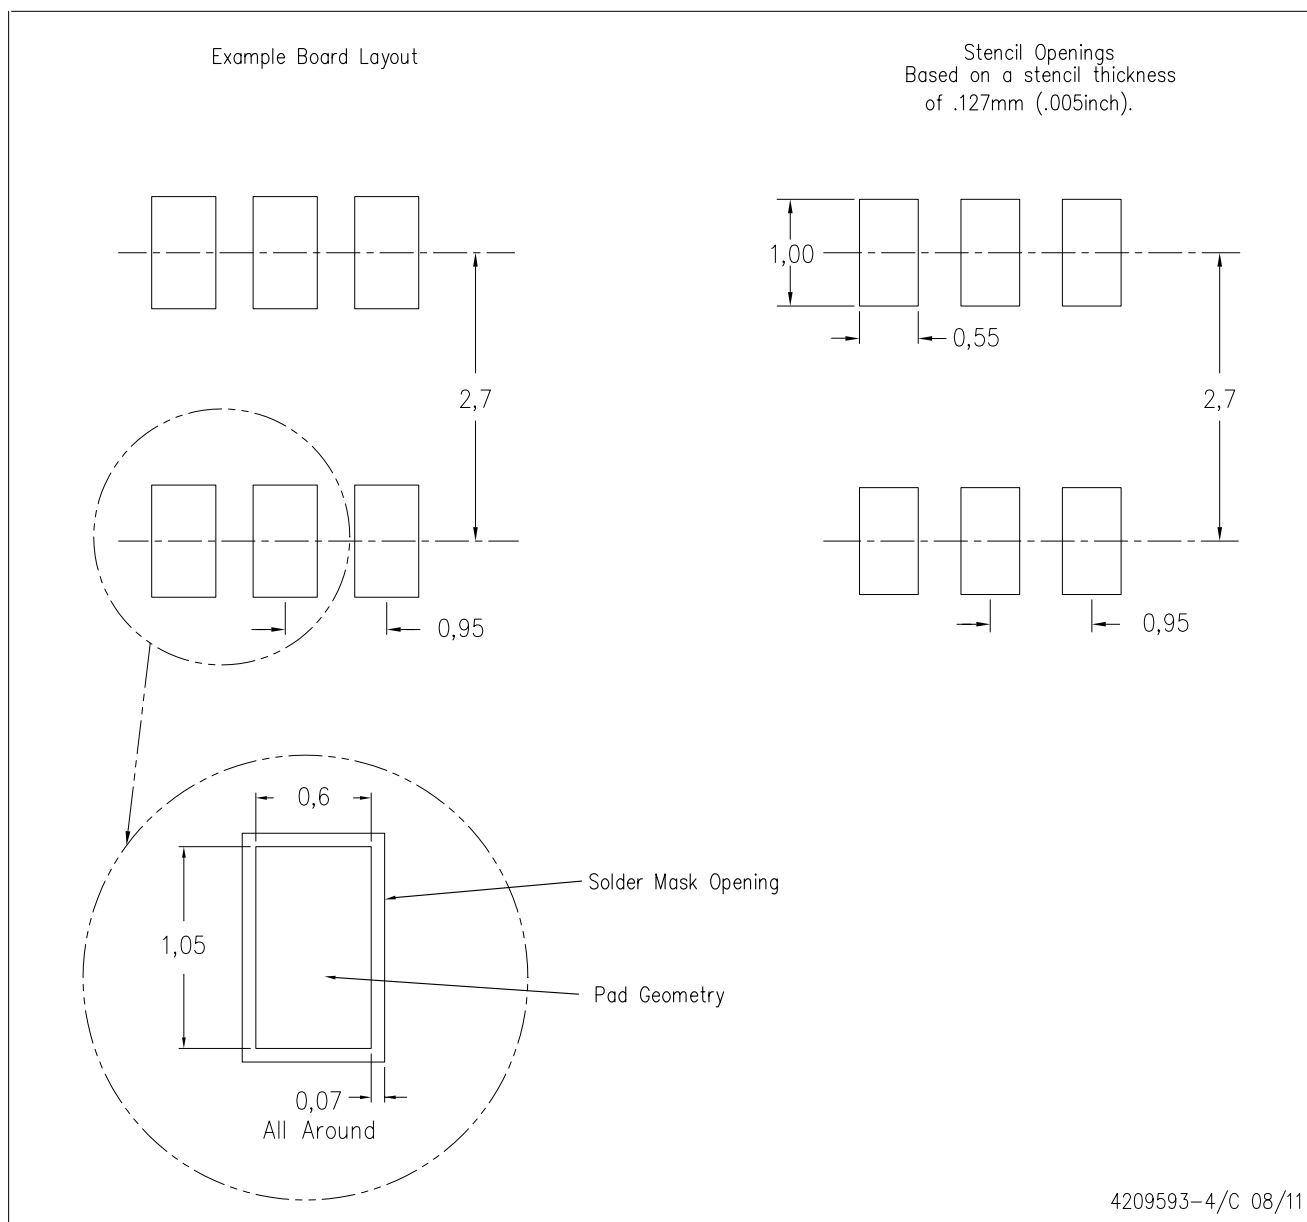

- NOTES:
- A. All linear dimensions are in millimeters.
 - B. This drawing is subject to change without notice.
 - C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
 - D. Publication IPC-7351 is recommended for alternate designs.
 - E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC-7525 for other stencil recommendations.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Transportation and Automotive	www.ti.com/automotive
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.