

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

COPYRIGHT BY TYCO ELECTRONICS CORPORATION.



ALL RIGHTS RESERVED.

LOC
DWDIST
P

LTR

REVISIONS

REV	DESCRIPTION	DATE	DWN	APVD
A4	REVISED (ECR-15-011716) RE-ACTIVE 1-1734083-2	06AUG2015	J.Z	J.L

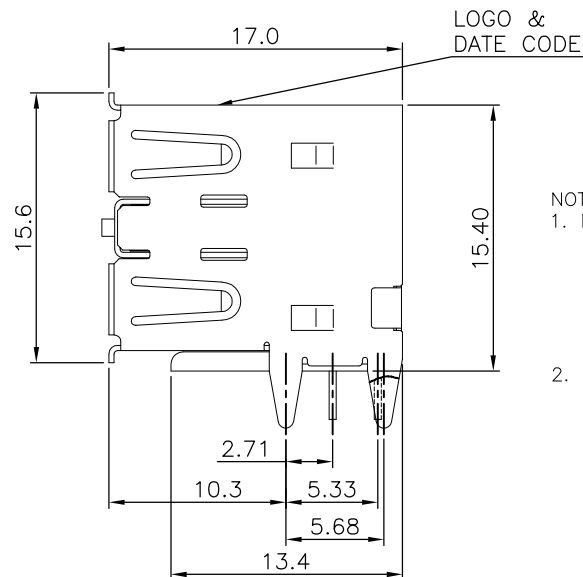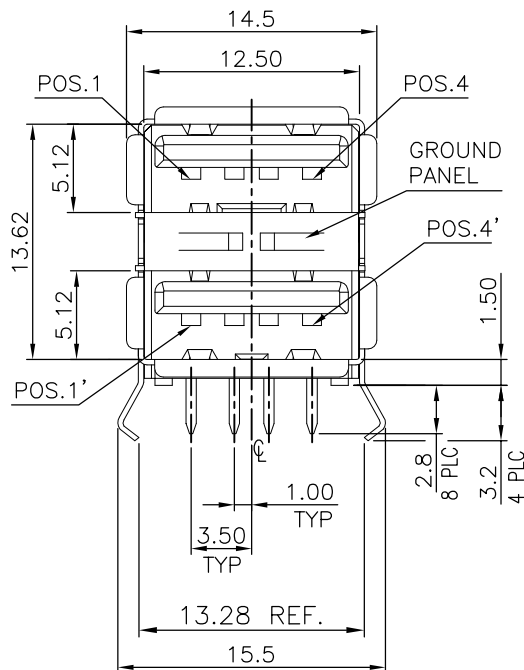

NOTES:

1. MATERIAL:

HOUSING: (SEE TABLE) THERMOPLASTIC, WITH 30% GF,
UL 94V-0 RATED, BLACK COLOR.

CONTACT: PHOSPHOR BRONZE.

FRONT SHIELD: BRASS.

REAR SHIELD: SPCC.

GROUNDING STRIP: BRASS.

2. FINISH:

CONTACT: 0.762μm [30μ"] MIN. GOLD PLATED ON CONTACT AREA.

3.81μm [150μ"] MIN. (SEE TABLE) ON SOLDER TAIL, WITH
ENTIRE CONTACT UNDERPLATED 1.27μm [50μ"] MIN. NICKEL.

FRONT SHELL: 3.048μm [120μ"] MIN. NICKEL PLATED

1.27μm [50μ"] MIN. Cu UNDERPLATING OVERALL.

REAR SHELL: 3.048μm [120μ"] MIN. NICKEL PLATED

1.27μm [50μ"] MIN. Cu UNDERPLATING OVERALL.

GROUNDING STRIP: 0.762μm [30μ"] MIN. TIN PLATED

0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.

⚠ WAVE SOLDER CAPABLE TO 265°C PER TE SPEC 109-202,
CONDITION B.


⚠ REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201,
CONDITION B.

⚠ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D RENAUD/D.SINISI

⚠ LOW HALOGEN SPECIFICATION:

CHLORINE(Cl): 900ppm MAX.

BROMINE(Br): 900ppm MAX.

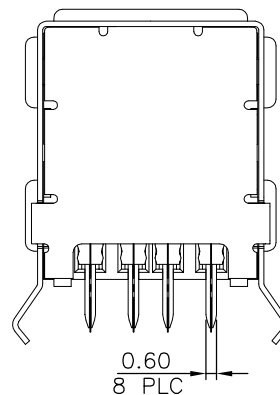


⚠ OBSOLETE
OBSOLETE

4.66 gram	TRAY	BRIGHT-TIN	⚠ HTN	WITH	⚠ 1-1734083-2
4.12 gram			⚠ PBT		1-1734083-1
			⚠ PA46		0-1734083-2
			⚠ PBT		0-1734083-4
WEIGHT	PACKAGE	SOLDER TAIL	HSG. MATERIAL	GROUND PANEL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM



MATERIAL
SEE NOTE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	± 0.35
2 PLC	± 0.25
3 PLC	±
4 PLC	±
4 PLC ANGLES	± 3°

FINISH
SEE NOTE

DWN 04OCT2005

CHK 04OCT2005

S. HOU

APVD 04OCT2005

W.J. KE

PRODUCT SPEC

108-57549

APPLICATION SPEC

WEIGHT SEE TABLE

CUSTOMER DRAWING

04OCT2005

04OCT2005

04OCT2005

W.J. KE

PRODUCT SPEC

108-57549

APPLICATION SPEC

WEIGHT SEE TABLE

CUSTOMER DRAWING





TE Connectivity

NAME
USB CONNECTOR, A SERIES,
STACKED

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C=1734083	

SCALE SHEET 1 OF 5 REV A4

RECOMMEND P.C.B LAYOUT (THICKNESS=1.6mm)
(COMPONENT SIDE) TOLERANCE±0.05mm



4



3

2



1

THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION
BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

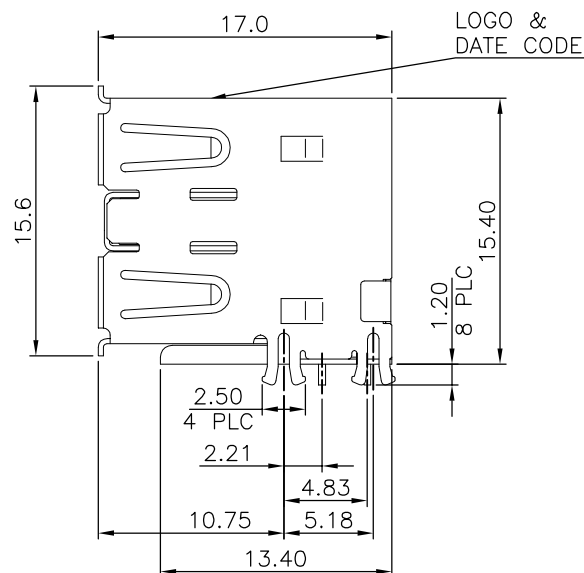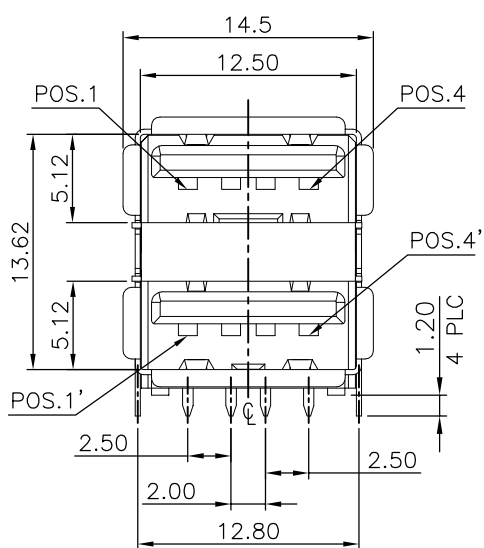



- NOTES:
- MATERIAL:
HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
FRONT SHIELD: BRASS.
REAR SHIELD: SPCC.
GROUNDING STRIP: BRASS.
 - FINISH:
CONTACT: 0.762μm [30μ"] MIN. GOLD PLATED ON CONTACT AREA.
3.81μm [150μ"] MIN. BRIGHT-TIN ON SOLDER TAIL, WITH
ENTIRE CONTACT UNDERPLATED 1.27μm [50μ"] MIN. NICKEL.
FRONT SHELL: 3.048μm [120μ"] MIN. NICKEL PLATED
0.762μm [50μ"] MIN. Cu UNDERPLATING OVERALL.
REAR SHELL: 3.048μm [120μ"] MIN. NICKEL PLATED
0.762μm [50μ"] MIN. Cu UNDERPLATING OVERALL.
GROUNDING STRIP: 0.762μm [30μ"] MIN. TIN PLATED
0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.
 - REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201,
CONDITION B.
- ⚠️ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D RENAUD/D.SINISI

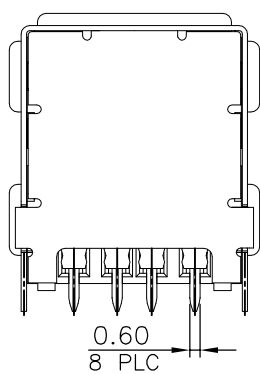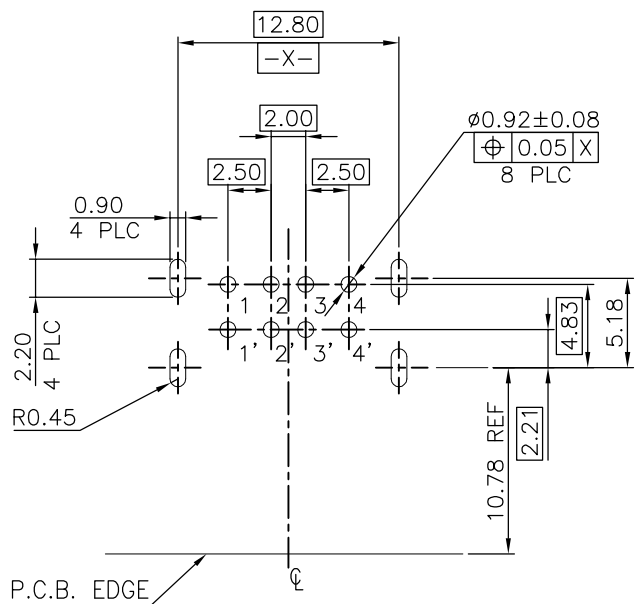

⚠️ OBSOLETE	-TRAY	2-1734083-4
PACKAGE	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity		
		CHK			
		APVD			
		PRODUCT SPEC			
DIMENSIONS: MM		NAME		USB CONNECTOR, A SERIES, STACKED	
		APPLICATION SPEC		RESTRICTED TO	
		WEIGHT 4.12 GRAM		A3 00779 C=1734083	
MATERIAL SEE NOTE		FINISH SEE NOTE		CUSTOMER DRAWING	
		SCALE		SHEET 2 OF 5	REV A4

RECOMMEND P.C.B LAYOUT (THICKNESS=1.6mm)
(COMPONENT SIDE) TOLERANCE±0.05mm



4


3

2


1

THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION
BY TYCO ELECTRONICS CORPORATION.
ALL RIGHTS RESERVED.




LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
DW		SEE SHEET 1.			

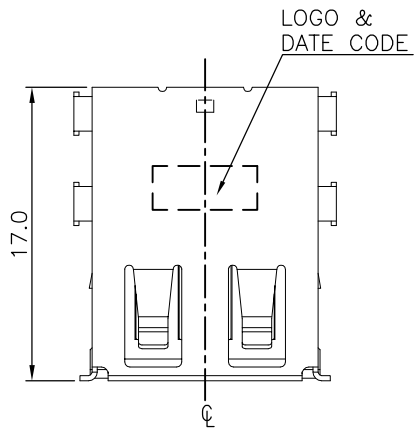

- NOTES:
- MATERIAL:
HOUSING: PA46 WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
FRONT SHIELD: BRASS.
REAR SHIELD: SPCC.
GROUNDING STRIP: BRASS.
 - FINISH:
CONTACT: $0.762\mu\text{m}$ [30μ] MIN. GOLD PLATED ON CONTACT AREA.
 $3.81\mu\text{m}$ [150μ] MIN. BRIGHT-TIN ON SOLDER TAIL, WITH ENTIRE CONTACT UNDERPLATED $1.27\mu\text{m}$ [50μ] MIN. NICKEL.
FRONT SHELL: $1.016\mu\text{m}$ [40μ] MIN. NICKEL PLATED
 $1.016\mu\text{m}$ [40μ] MIN. Cu UNDERPLATING OVERALL.
REAR SHELL: $3.048\mu\text{m}$ [120μ] MIN. NICKEL PLATED
 $1.27\mu\text{m}$ [50μ] MIN. Cu UNDERPLATING OVERALL.
GROUNDING STRIP: $0.762\mu\text{m}$ [30μ] MIN. TIN PLATED
 $0.762\mu\text{m}$ [30μ] MIN. Cu UNDERPLATING OVERALL.
 - REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.


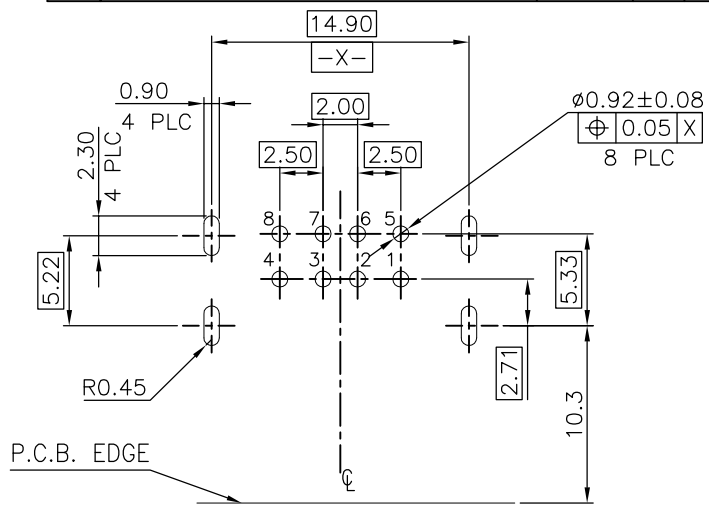


RECOMMEND P.C.B LAYOUT (THICKNESS=1.0mm)
(COMPONENT SIDE) TOLERANCE $\pm 0.05\text{mm}$





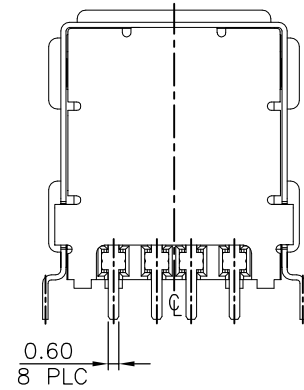
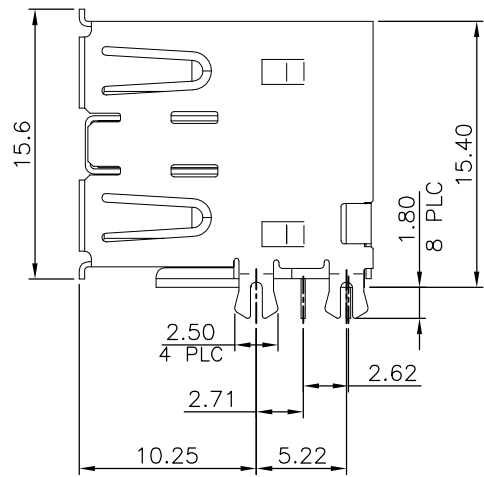
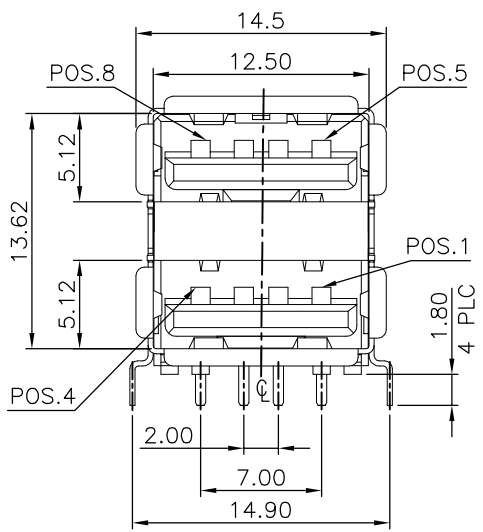


OBSOLETE	-REEL	3-1734083-4
	PACKAGE	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity	
		CHK		
		APVD		
		PRODUCT SPEC		
NAME		USB CONNECTOR, A SERIES, STACKED		
APPLICATION SPEC		RESTRICTED TO		
SIZE		CAGE CODE	DRAWING NO	
WEIGHT		A3 00779 C=1734083		
CUSTOMER DRAWING		SCALE	SHEET	REV
			3 OF 5	A4







LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
		SEE SHEET 1.					

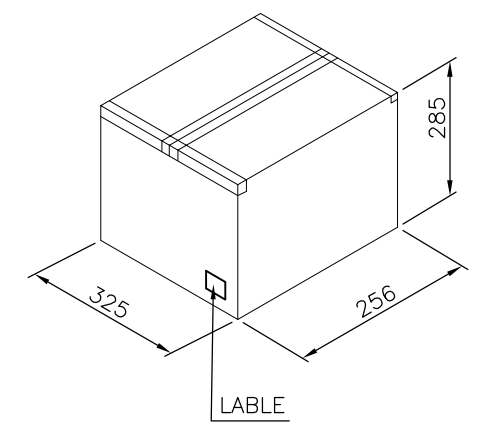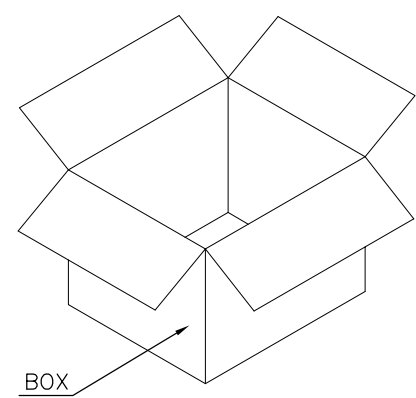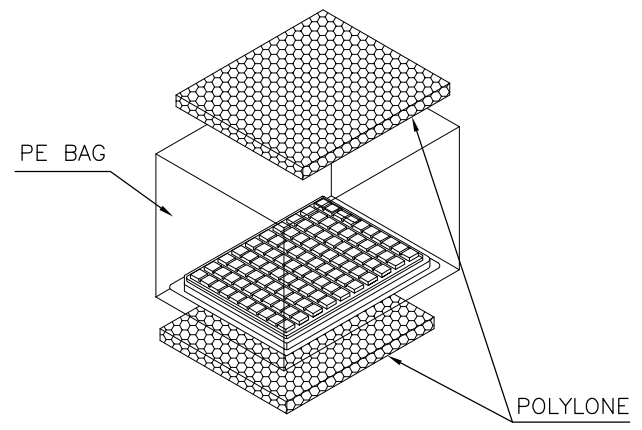
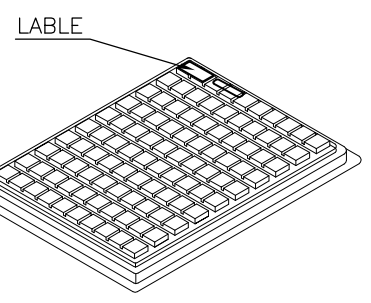
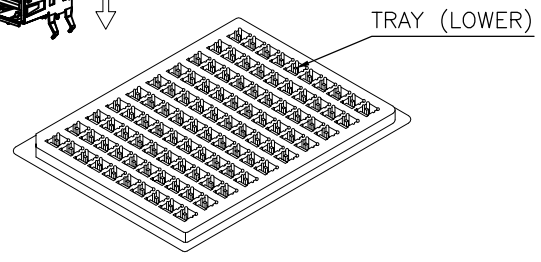

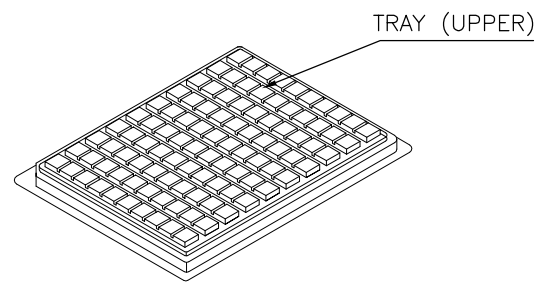


OBSOLETE	100	10	1000	5.97	4.66	2=1734083-1
OBSOLETE						1-1734083-2
OBSOLETE						1-1734083-1
OBSOLETE				5.43	4.12	0=1734083-2
OBSOLETE						0=1734083-1
	PCS/ TRAY	TRAY/ BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	 TE Connectivity				
DIMENSIONS: MM		CHK					
		APVD	NAME				
		PRODUCT SPEC					
MATERIAL		APPLICATION SPEC	SIZE				
		WEIGHT					
FINISH		CUSTOMER DRAWING		SCALE		SHEET 4 OF 5	REV A4
				A3 00779 C=1734083		RESTRICTED TO	

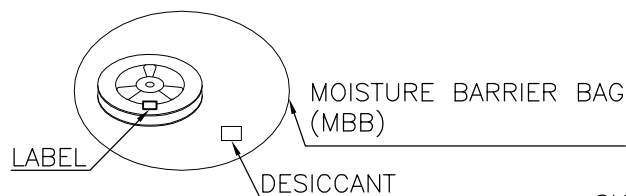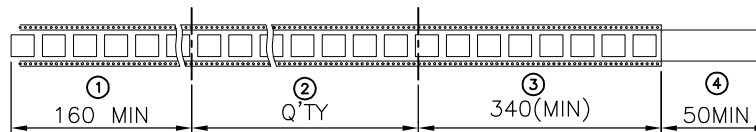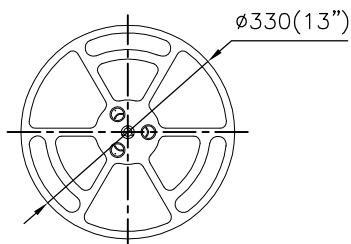


DRY PACK

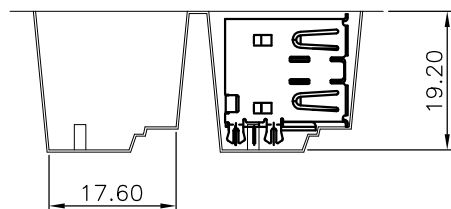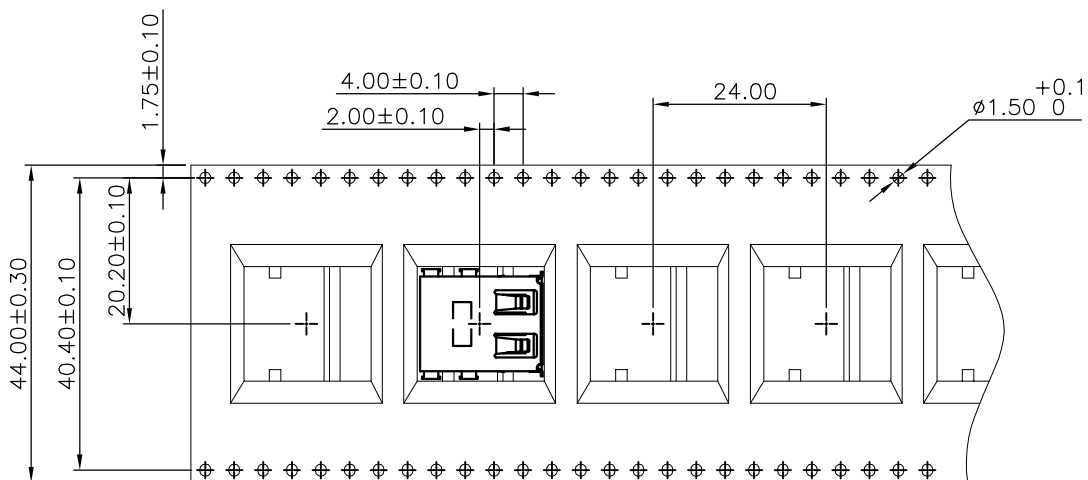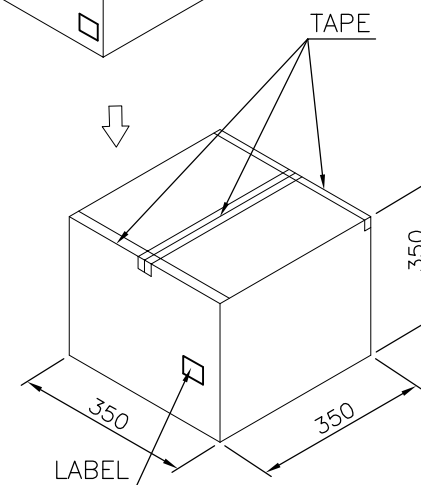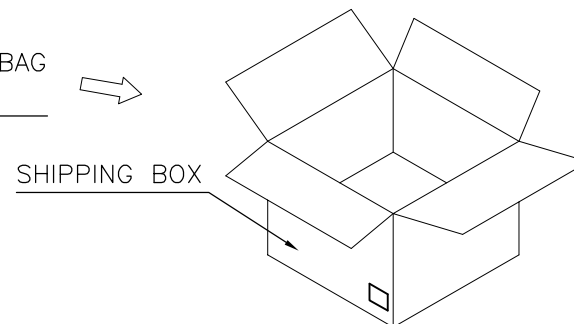

OBSOLETE	140	7	980	11.7	4.75	3-1734083-1
	PCS/ REEL	REELS/ BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM



TOLERANCES UNLESS OTHERWISE SPECIFIED:		
0 PLC	±	—
1 PLC	±	—
2 PLC	±	—
3 PLC	±	—
4 PLC	±	—
ANGLES		± —
FINISH		

[illegible]

FINISH

DWN	
CHK	
APVD	
PRODUCT SPEC	—
APPLICATION SPEC	—
WEIGHT	—
CUSTOMER DRAWING	



TE Connectivity

NAME	USB CONNECTOR, A SERIES, STACKED
------	-------------------------------------

SIZE	CAGE CODE	DRAWING NO	RESTRICTED
A3	00779	C-1734083	

CUSTOMER DRAWING

SCALE

SHEET

5 OF 5

REV	△ 4
-----	-----



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.