

# MOSFET

Metal Oxide Semiconductor Field Effect Transistor

## CoolMOS™ C7

650V CoolMOS™ C7 Power Transistor  
IPA65R065C7

## Data Sheet

Rev. 2.0  
Final

## 1 Description

CoolMOS™ is a revolutionary technology for high voltage power MOSFETs, designed according to the superjunction (SJ) principle and pioneered by Infineon Technologies.

CoolMOS™ C7 series combines the experience of the leading SJ MOSFET supplier with high class innovation. The product portfolio provides all benefits of fast switching superjunction MOSFETs offering better efficiency, reduced gate charge, easy implementation and outstanding reliability.



## Features

- Increased MOSFET dv/dt ruggedness
- Better efficiency due to best in class FOM  $R_{DS(on)} \cdot E_{oss}$  and  $R_{DS(on)} \cdot Q_g$
- Best in class  $R_{DS(on)}$  /package
- Easy to use/drive
- Pb-free plating, halogen free mold compound
- Qualified for industrial grade applications according to JEDEC (J-STD20 and JESD22)


## Benefits

- Enabling higher system efficiency
- Enabling higher frequency / increased power density solutions
- System cost / size savings due to reduced cooling requirements
- Higher system reliability due to lower operating temperatures

## Applications

PFC stages and hard switching PWM stages for e.g. Computing, Server, Telecom, UPS and Solar.

*Please note: For MOSFET paralleling the use of ferrite beads on the gate or separate totem poles is generally recommended.*



**Table 1 Key Performance Parameters**

| Parameter            | Value | Unit |
|----------------------|-------|------|
| $V_{DS} @ T_{j,max}$ | 700   | V    |
| $R_{DS(on),max}$     | 65    | mΩ   |
| $Q_{g,typ}$          | 64    | nC   |
| $I_{D,pulse}$        | 145   | A    |
| $E_{oss@400V}$       | 8     | μJ   |
| Body diode di/dt     | 60    | A/μs |

| Type / Ordering Code | Package           | Marking | Related Links  |
|----------------------|-------------------|---------|----------------|
| IPA65R065C7          | PG-TO 220 FullPAK | 65C7065 | see Appendix A |

## Table of Contents

|                                           |    |
|-------------------------------------------|----|
| Description .....                         | 2  |
| Maximum ratings .....                     | 4  |
| Thermal characteristics .....             | 5  |
| Electrical characteristics .....          | 6  |
| Electrical characteristics diagrams ..... | 8  |
| Test Circuits .....                       | 12 |
| Package Outlines .....                    | 13 |
| Appendix A .....                          | 14 |
| Revision History .....                    | 15 |
| Disclaimer .....                          | 15 |

## 2 Maximum ratings

at  $T_j = 25^\circ\text{C}$ , unless otherwise specified

**Table 2 Maximum ratings**

| Parameter                              | Symbol        | Values |      |         | Unit             | Note / Test Condition                                                                 |
|----------------------------------------|---------------|--------|------|---------|------------------|---------------------------------------------------------------------------------------|
|                                        |               | Min.   | Typ. | Max.    |                  |                                                                                       |
| Continuous drain current <sup>1)</sup> | $I_D$         | -      | -    | 15<br>9 | A                | $T_C=25^\circ\text{C}$<br>$T_C=100^\circ\text{C}$                                     |
| Pulsed drain current <sup>2)</sup>     | $I_{D,pulse}$ | -      | -    | 145     | A                | $T_C=25^\circ\text{C}$                                                                |
| Avalanche energy, single pulse         | $E_{AS}$      | -      | -    | 171     | mJ               | $I_D=10.2\text{A}$ ; $V_{DD}=50\text{V}$ ; see table 10                               |
| Avalanche energy, repetitive           | $E_{AR}$      | -      | -    | 0.85    | mJ               | $I_D=10.2\text{A}$ ; $V_{DD}=50\text{V}$ ; see table 10                               |
| Avalanche current, single pulse        | $I_{AS}$      | -      | -    | 10.2    | A                | -                                                                                     |
| MOSFET dv/dt ruggedness                | dv/dt         | -      | -    | 100     | V/ns             | $V_{DS}=0\dots400\text{V}$                                                            |
| Gate source voltage (static)           | $V_{GS}$      | -20    | -    | 20      | V                | static;                                                                               |
| Gate source voltage (dynamic)          | $V_{GS}$      | -30    | -    | 30      | V                | AC (f>1 Hz)                                                                           |
| Power dissipation                      | $P_{tot}$     | -      | -    | 34      | W                | $T_C=25^\circ\text{C}$                                                                |
| Storage temperature                    | $T_{stg}$     | -55    | -    | 150     | $^\circ\text{C}$ | -                                                                                     |
| Operating junction temperature         | $T_j$         | -55    | -    | 150     | $^\circ\text{C}$ | -                                                                                     |
| Mounting torque                        | -             | -      | -    | 50      | Ncm              | M2.5 screws                                                                           |
| Continuous diode forward current       | $I_S$         | -      | -    | 15      | A                | $T_C=25^\circ\text{C}$                                                                |
| Diode pulse current <sup>2)</sup>      | $I_{S,pulse}$ | -      | -    | 145     | A                | $T_C=25^\circ\text{C}$                                                                |
| Reverse diode dv/dt <sup>3)</sup>      | dv/dt         | -      | -    | 1.5     | V/ns             | $V_{DS}=0\dots400\text{V}$ , $I_{SD}\leq I_S$ , $T_j=25^\circ\text{C}$<br>see table 8 |
| Maximum diode commutation speed        | di/dt         | -      | -    | 60      | A/ $\mu\text{s}$ | $V_{DS}=0\dots400\text{V}$ , $I_{SD}\leq I_S$ , $T_j=25^\circ\text{C}$<br>see table 8 |
| Insulation withstand voltage           | $V_{ISO}$     | -      | -    | 2500    | V                | $V_{rms}$ , $T_C=25^\circ\text{C}$ , $t=1\text{min}$                                  |

<sup>1)</sup> Limited by  $T_{j,max}$ .

<sup>2)</sup> Pulse width  $t_p$  limited by  $T_{j,max}$ .

<sup>3)</sup> Identical low side and high side switch with identical  $R_G$ .

### 3 Thermal characteristics

**Table 3 Thermal characteristics**

| Parameter                                                  | Symbol     | Values |      |      | Unit | Note / Test Condition               |
|------------------------------------------------------------|------------|--------|------|------|------|-------------------------------------|
|                                                            |            | Min.   | Typ. | Max. |      |                                     |
| Thermal resistance, junction - case                        | $R_{thJC}$ | -      | -    | 3.68 | °C/W | -                                   |
| Thermal resistance, junction - ambient                     | $R_{thJA}$ | -      | -    | 80   | °C/W | leaded                              |
| Thermal resistance, junction - ambient for SMD version     | $R_{thJA}$ | -      | -    | -    | °C/W | n.a.                                |
| Soldering temperature, wavesoldering only allowed at leads | $T_{sold}$ | -      | -    | 260  | °C   | 1.6mm (0.063 in.) from case for 10s |

## 4 Electrical characteristics

at  $T_j=25^\circ\text{C}$ , unless otherwise specified

**Table 4 Static characteristics**

| Parameter                        | Symbol        | Values |                |            | Unit     | Note / Test Condition                                                                                       |
|----------------------------------|---------------|--------|----------------|------------|----------|-------------------------------------------------------------------------------------------------------------|
|                                  |               | Min.   | Typ.           | Max.       |          |                                                                                                             |
| Drain-source breakdown voltage   | $V_{(BR)DSS}$ | 650    | -              | -          | V        | $V_{GS}=0V$ , $I_D=1mA$                                                                                     |
| Gate threshold voltage           | $V_{(GS)th}$  | 3      | 3.5            | 4          | V        | $V_{DS}=V_{GS}$ , $I_D=0.85mA$                                                                              |
| Zero gate voltage drain current  | $I_{DSS}$     | -      | -              | 1          | $\mu A$  | $V_{DS}=650$ , $V_{GS}=0V$ , $T_j=25^\circ\text{C}$<br>$V_{DS}=650$ , $V_{GS}=0V$ , $T_j=150^\circ\text{C}$ |
| Gate-source leakage current      | $I_{GSS}$     | -      | -              | 100        | nA       | $V_{GS}=20V$ , $V_{DS}=0V$                                                                                  |
| Drain-source on-state resistance | $R_{DS(on)}$  | -      | 0.058<br>0.138 | 0.065<br>- | $\Omega$ | $V_{GS}=10V$ , $I_D=17.1A$ , $T_j=25^\circ\text{C}$<br>$V_{GS}=10V$ , $I_D=17.1A$ , $T_j=150^\circ\text{C}$ |
| Gate resistance                  | $R_G$         | -      | 0.85           | -          | $\Omega$ | $f=1MHz$ , open drain                                                                                       |

**Table 5 Dynamic characteristics**

| Parameter                                                  | Symbol       | Values |      |      | Unit | Note / Test Condition                                                         |
|------------------------------------------------------------|--------------|--------|------|------|------|-------------------------------------------------------------------------------|
|                                                            |              | Min.   | Typ. | Max. |      |                                                                               |
| Input capacitance                                          | $C_{iss}$    | -      | 3020 | -    | pF   | $V_{GS}=0V$ , $V_{DS}=400V$ , $f=250kHz$                                      |
| Output capacitance                                         | $C_{oss}$    | -      | 48   | -    | pF   | $V_{GS}=0V$ , $V_{DS}=400V$ , $f=250kHz$                                      |
| Effective output capacitance, energy related <sup>1)</sup> | $C_{o(er)}$  | -      | 100  | -    | pF   | $V_{GS}=0V$ , $V_{DS}=0...400V$                                               |
| Effective output capacitance, time related <sup>2)</sup>   | $C_{o(tr)}$  | -      | 1110 | -    | pF   | $I_D=\text{constant}$ , $V_{GS}=0V$ , $V_{DS}=0...400V$                       |
| Turn-on delay time                                         | $t_{d(on)}$  | -      | 17   | -    | ns   | $V_{DD}=400V$ , $V_{GS}=13V$ , $I_D=17.1A$ ,<br>$R_G=5.3\Omega$ ; see table 9 |
| Rise time                                                  | $t_r$        | -      | 14   | -    | ns   | $V_{DD}=400V$ , $V_{GS}=13V$ , $I_D=17.1A$ ,<br>$R_G=5.3\Omega$ ; see table 9 |
| Turn-off delay time                                        | $t_{d(off)}$ | -      | 72   | -    | ns   | $V_{DD}=400V$ , $V_{GS}=13V$ , $I_D=17.1A$ ,<br>$R_G=5.3\Omega$ ; see table 9 |
| Fall time                                                  | $t_f$        | -      | 7    | -    | ns   | $V_{DD}=400V$ , $V_{GS}=13V$ , $I_D=17.1A$ ,<br>$R_G=5.3\Omega$ ; see table 9 |

**Table 6 Gate charge characteristics**

| Parameter             | Symbol        | Values |      |      | Unit | Note / Test Condition                             |
|-----------------------|---------------|--------|------|------|------|---------------------------------------------------|
|                       |               | Min.   | Typ. | Max. |      |                                                   |
| Gate to source charge | $Q_{gs}$      | -      | 16   | -    | nC   | $V_{DD}=400V$ , $I_D=17.1A$ , $V_{GS}=0$ to $10V$ |
| Gate to drain charge  | $Q_{gd}$      | -      | 21   | -    | nC   | $V_{DD}=400V$ , $I_D=17.1A$ , $V_{GS}=0$ to $10V$ |
| Gate charge total     | $Q_g$         | -      | 64   | -    | nC   | $V_{DD}=400V$ , $I_D=17.1A$ , $V_{GS}=0$ to $10V$ |
| Gate plateau voltage  | $V_{plateau}$ | -      | 5.4  | -    | V    | $V_{DD}=400V$ , $I_D=17.1A$ , $V_{GS}=0$ to $10V$ |

<sup>1)</sup>  $C_{o(er)}$  is a fixed capacitance that gives the same stored energy as  $C_{oss}$  while  $V_{DS}$  is rising from 0 to 400V

<sup>2)</sup>  $C_{o(tr)}$  is a fixed capacitance that gives the same charging time as  $C_{oss}$  while  $V_{DS}$  is rising from 0 to 400V

**Table 7 Reverse diode characteristics**

| Parameter                     | Symbol    | Values |      |      | Unit    | Note / Test Condition                                      |
|-------------------------------|-----------|--------|------|------|---------|------------------------------------------------------------|
|                               |           | Min.   | Typ. | Max. |         |                                                            |
| Diode forward voltage         | $V_{SD}$  | -      | 0.9  | -    | V       | $V_{GS}=0V$ , $I_F=17.1A$ , $T_j=25^{\circ}C$              |
| Reverse recovery time         | $t_{rr}$  | -      | 800  | -    | ns      | $V_R=400V$ , $I_F=15A$ , $di_F/dt=60A/\mu s$ ; see table 8 |
| Reverse recovery charge       | $Q_{rr}$  | -      | 10   | -    | $\mu C$ | $V_R=400V$ , $I_F=15A$ , $di_F/dt=60A/\mu s$ ; see table 8 |
| Peak reverse recovery current | $I_{rrm}$ | -      | 30   | -    | A       | $V_R=400V$ , $I_F=15A$ , $di_F/dt=60A/\mu s$ ; see table 8 |

## 5 Electrical characteristics diagrams

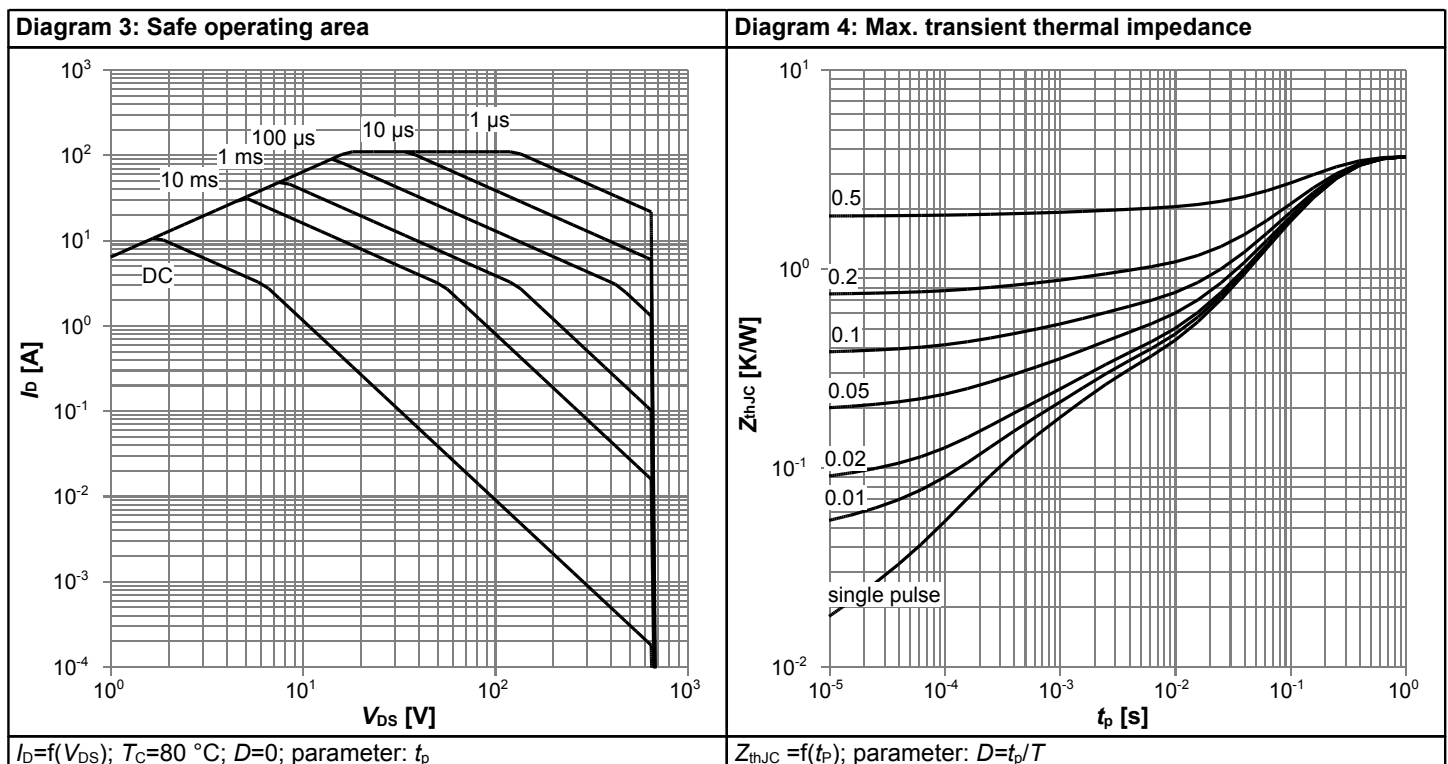
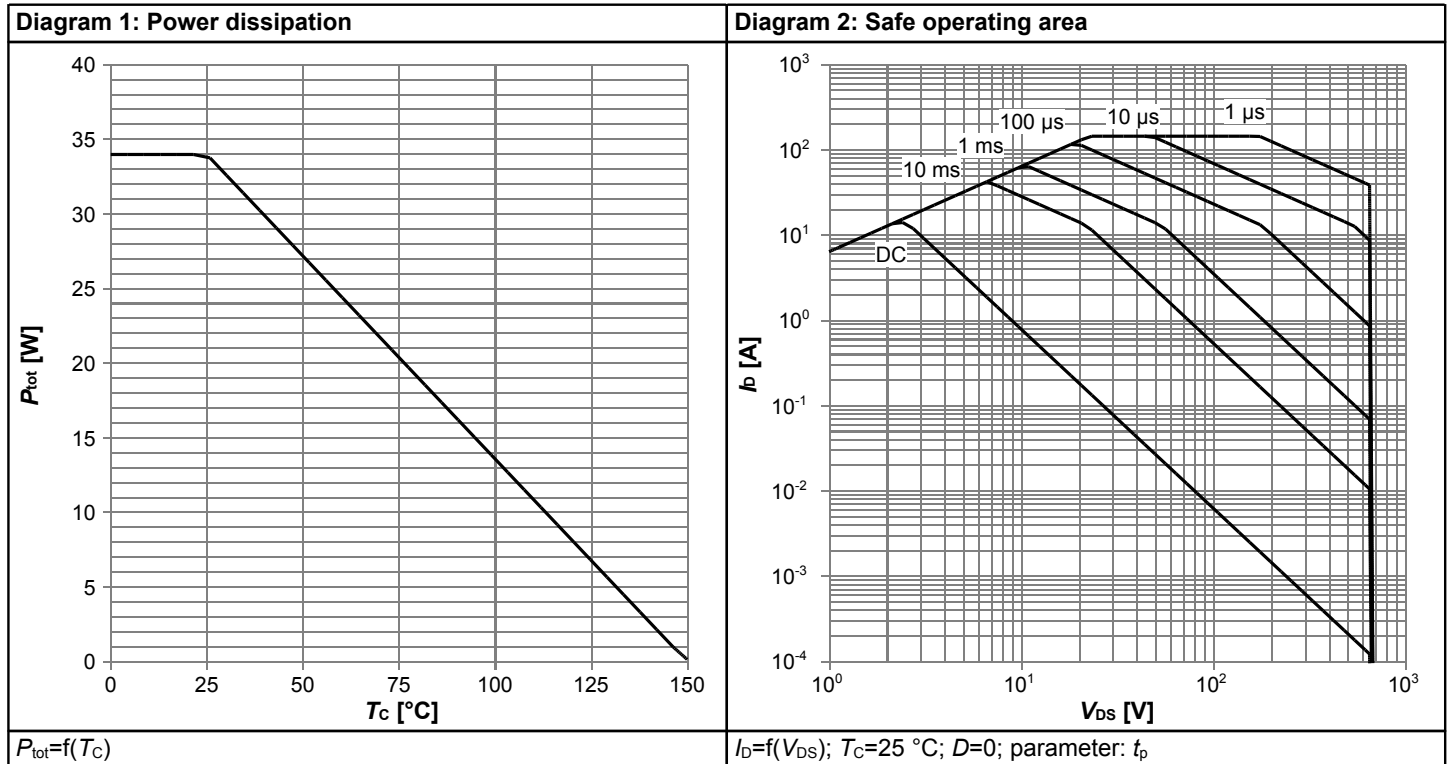


Diagram 5: Typ. output characteristics

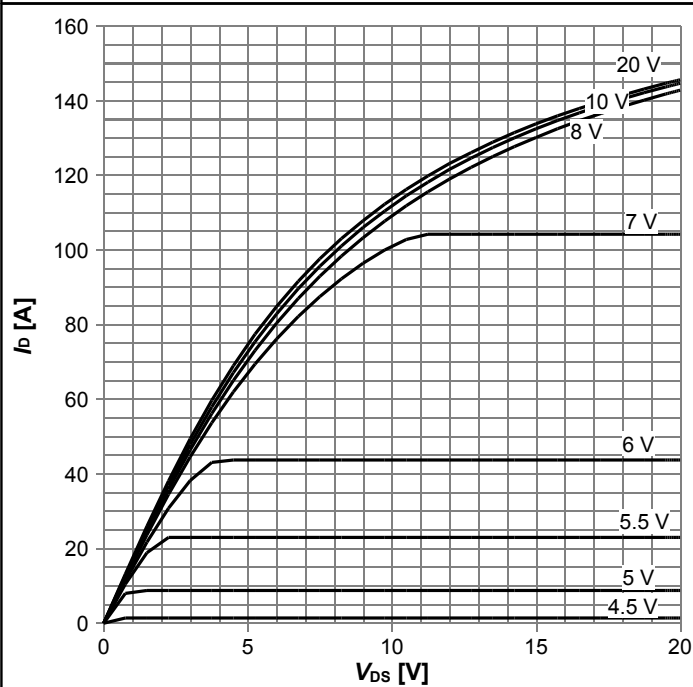

 $I_D = f(V_{DS}); T_J = 25^\circ\text{C}; \text{parameter: } V_{GS}$ 

Diagram 6: Typ. output characteristics

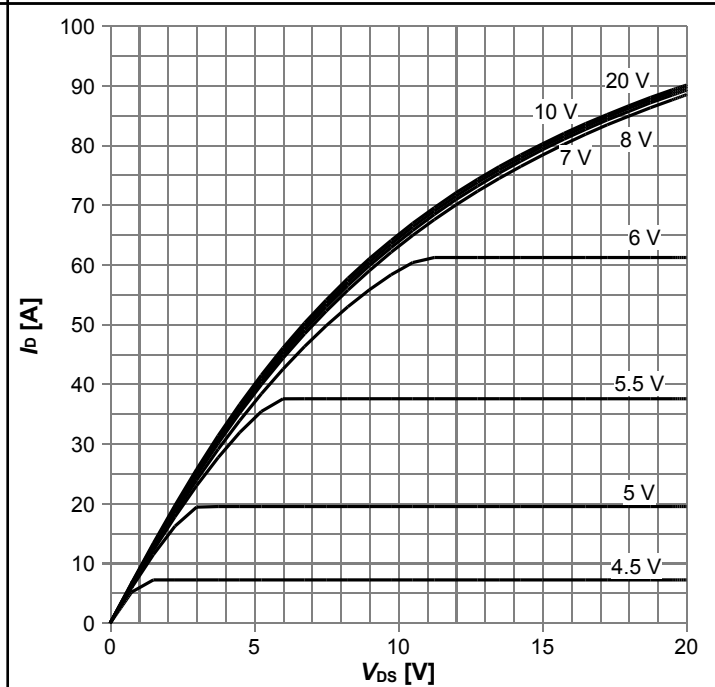

 $I_D = f(V_{DS}); T_J = 125^\circ\text{C}; \text{parameter: } V_{GS}$ 

Diagram 7: Typ. drain-source on-state resistance

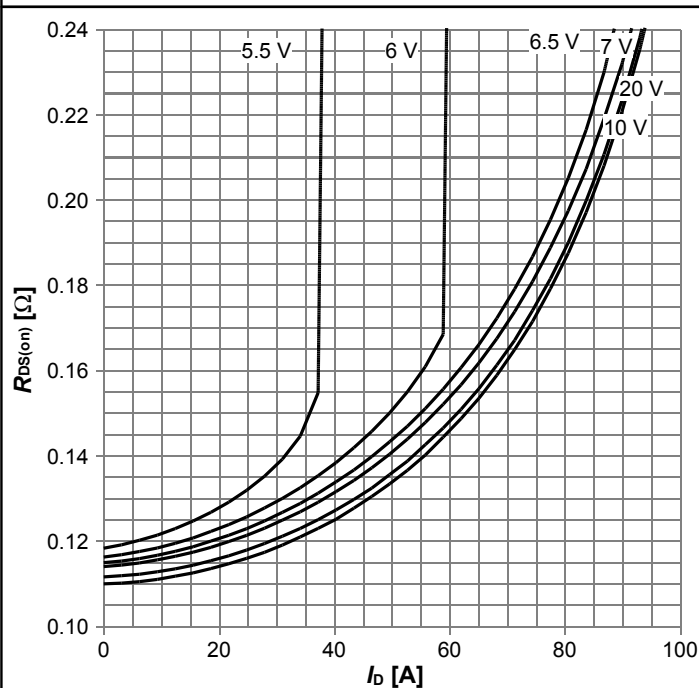

 $R_{DS(on)} = f(I_D); T_J = 125^\circ\text{C}; \text{parameter: } V_{GS}$ 

Diagram 8: Drain-source on-state resistance

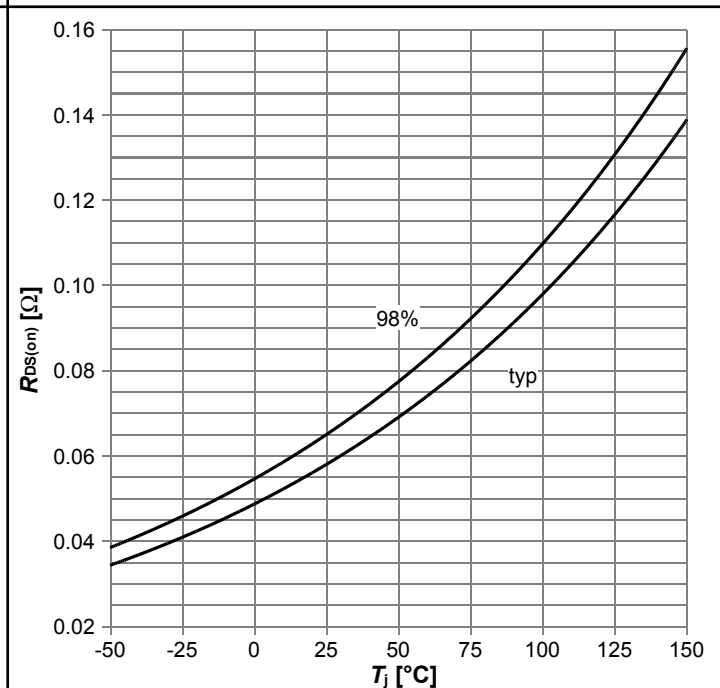

 $R_{DS(on)} = f(T_J); I_D = 17.1\text{ A}; V_{GS} = 10\text{ V}$

Diagram 9: Typ. transfer characteristics

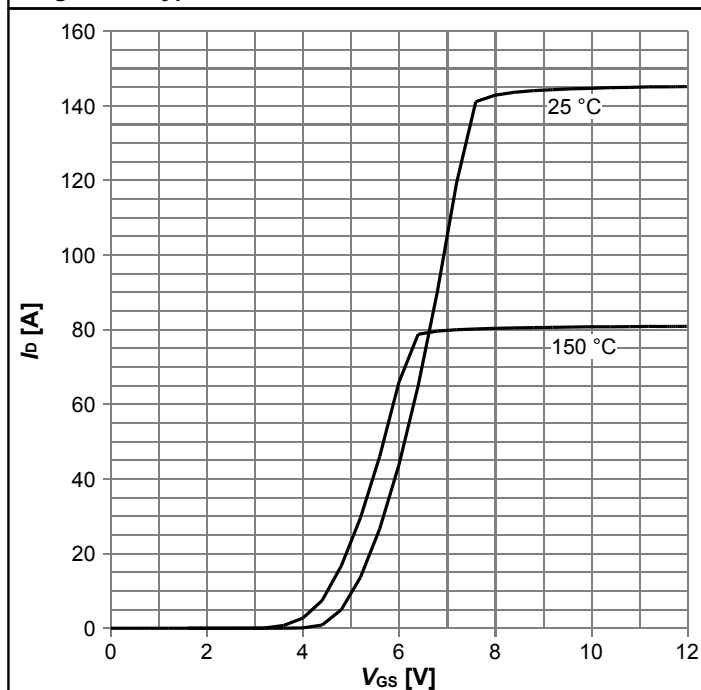

 $I_D=f(V_{GS}); V_{DS}=20V$ ; parameter:  $T_j$ 

Diagram 10: Typ. gate charge

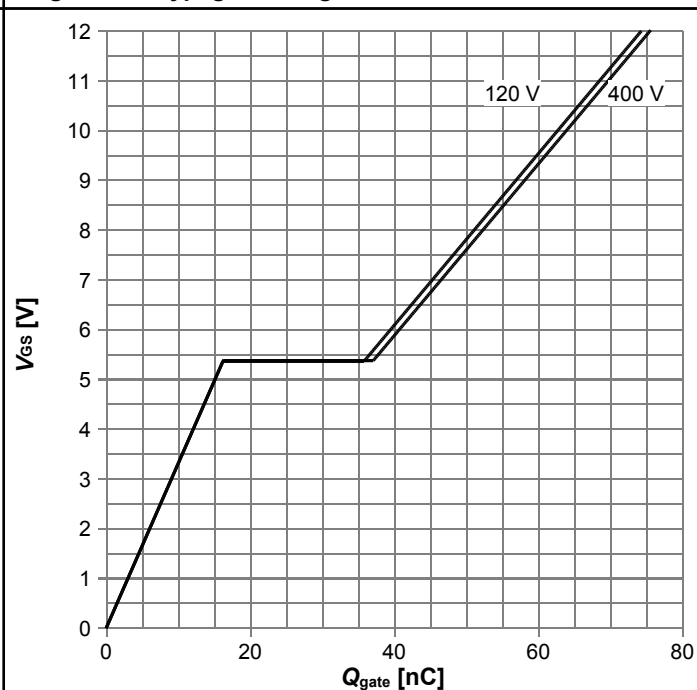

 $V_{GS}=f(Q_{gate}); I_D=17.1\text{ A}$  pulsed; parameter:  $V_{DD}$ 

Diagram 11: Forward characteristics of reverse diode

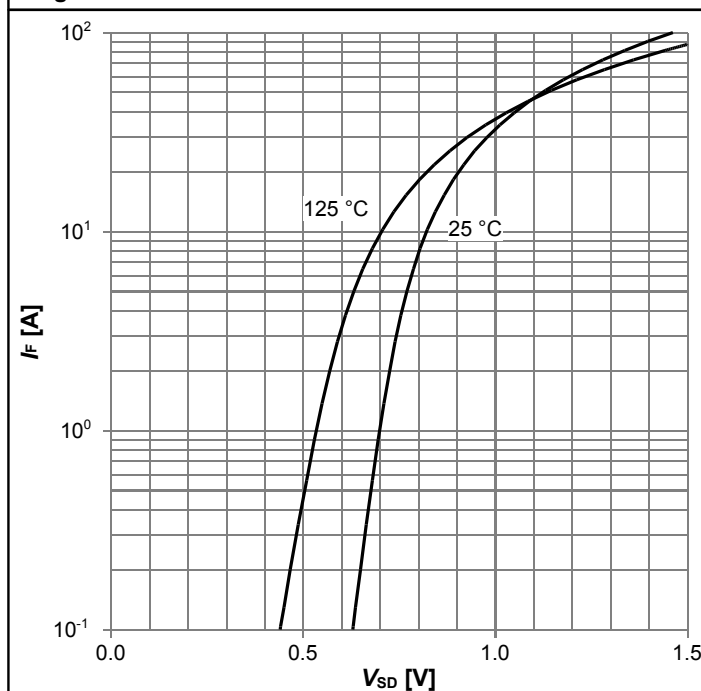

 $I_F=f(V_{SD})$ ; parameter:  $T_j$ 

Diagram 12: Avalanche energy

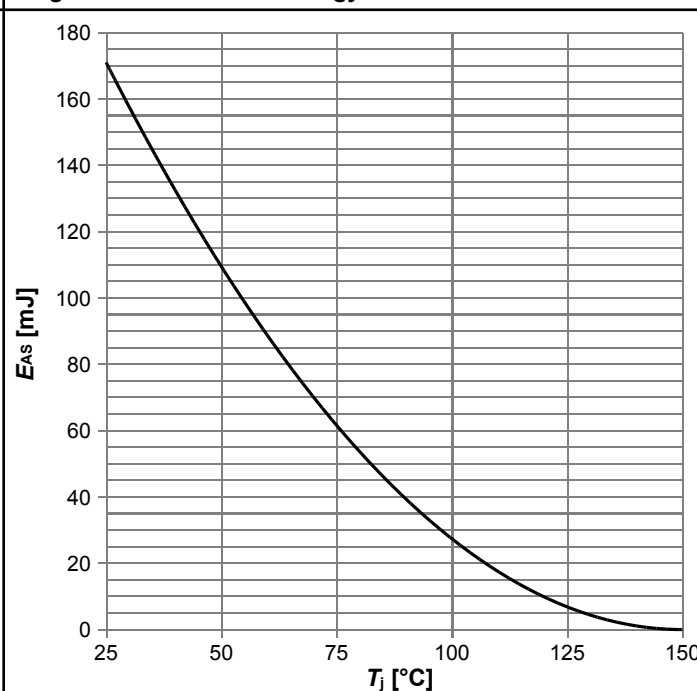
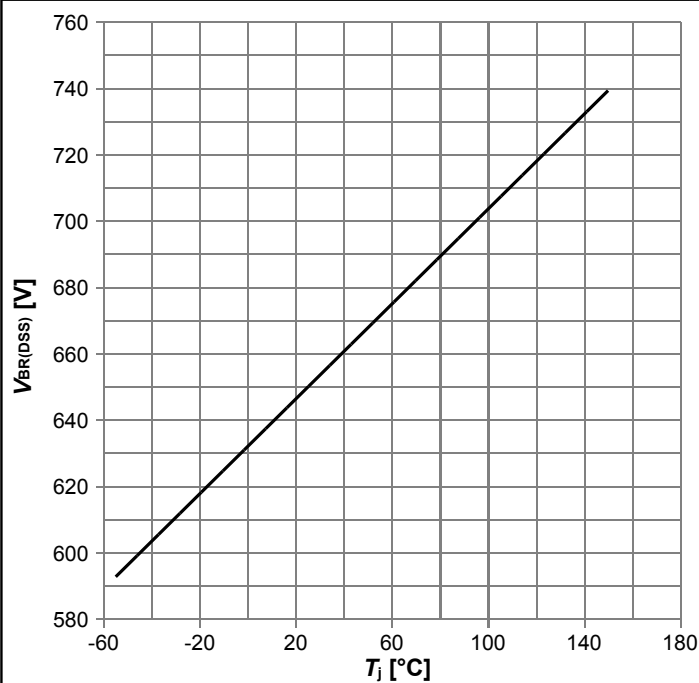
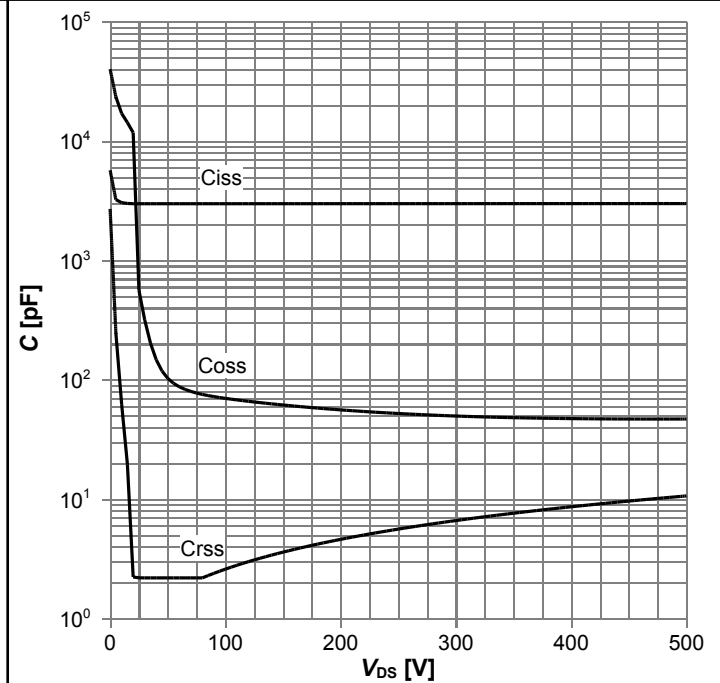

 $E_{AS}=f(T_j); I_D=10.2\text{ A}; V_{DD}=50\text{ V}$

Diagram 13: Drain-source breakdown voltage



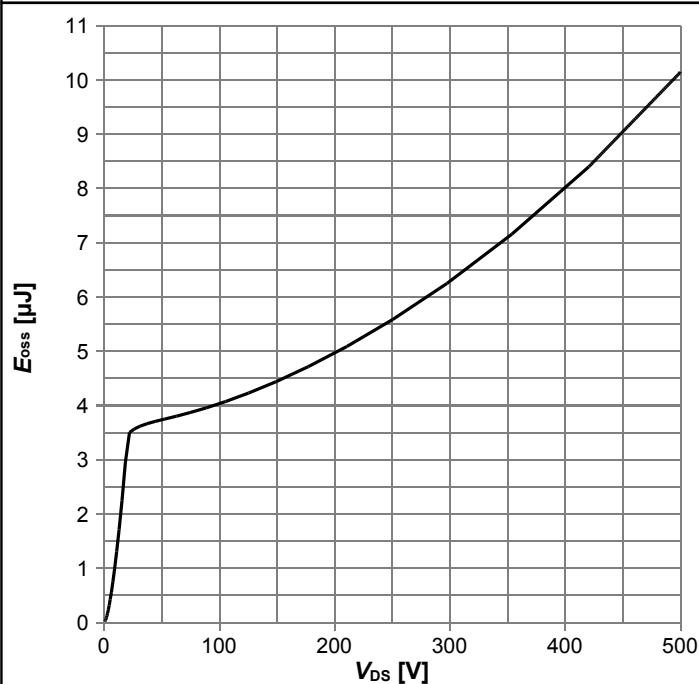
$$V_{BR(DSS)} = f(T_j); I_D = 1 \text{ mA}$$

Diagram 14: Typ. capacitances



$$C = f(V_{DS}); V_{GS} = 0 \text{ V}; f = 250 \text{ kHz}$$

Diagram 15: Typ. Coss stored energy



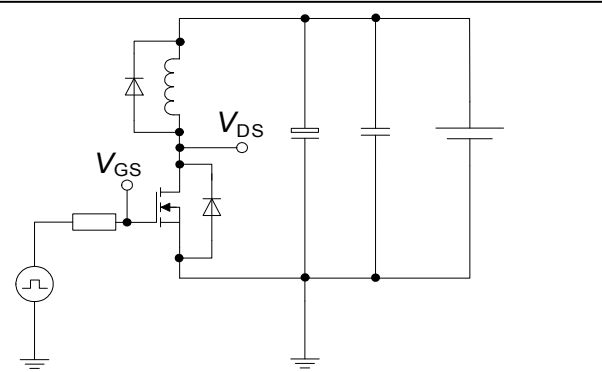
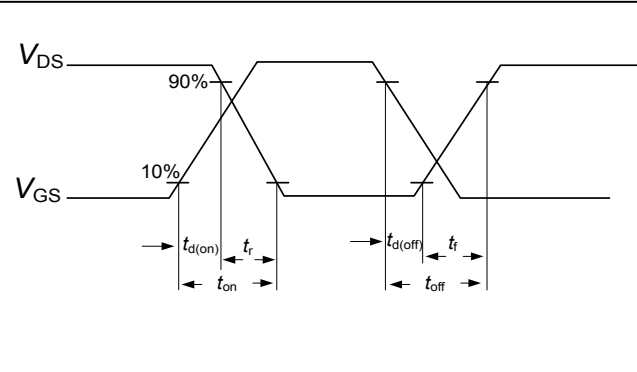
$$E_{oss} = f(V_{DS})$$

## 6 Test Circuits

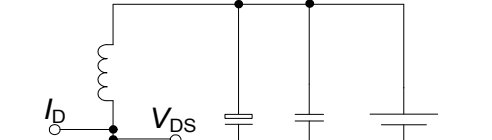
### Table 8 Diode characteristics

|                                                                                   |                                                                                                            |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| <p>Test circuit for diode characteristics</p> <p><math>R_{g1} = R_{g2}</math></p> | <p>Diode recovery waveform</p> <p><math>t_{rr} = t_F + t_S</math><br/> <math>Q_{rr} = Q_F + Q_S</math></p> |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|

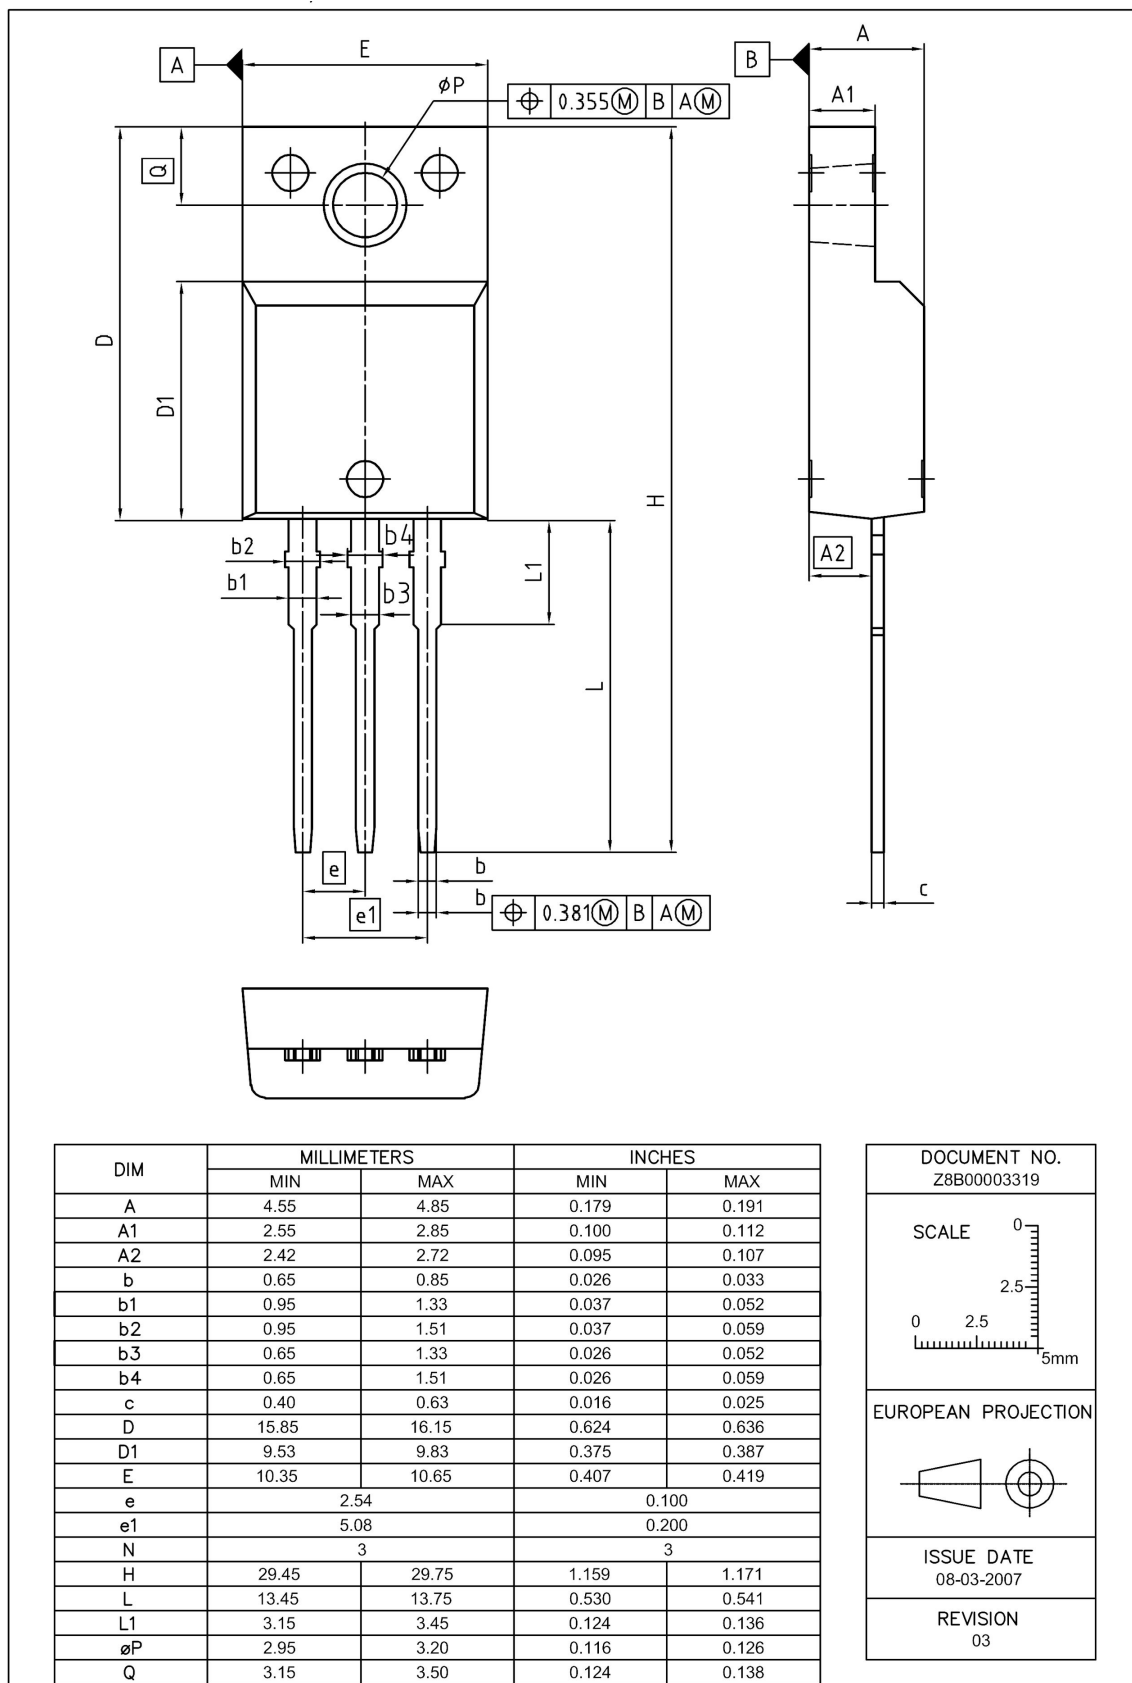
### Table 9 Switching times

| Switching times test circuit for inductive load                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Switching times waveform                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>The diagram shows a MOSFET switching circuit. A pulse generator is connected to the gate of a MOSFET through a resistor. The MOSFET's drain is connected to an inductive load (represented by an inductor and a diode in parallel) which is connected to a DC voltage source. The source of the MOSFET is connected to ground. The drain-source voltage is labeled <math>V_{DS}</math> and the gate-source voltage is labeled <math>V_{GS}</math>.</p> |  <p>The diagram illustrates the switching waveforms for <math>V_{DS}</math> (drain-source voltage) and <math>V_{GS}</math> (gate-source voltage). The <math>V_{GS}</math> waveform is a square wave that transitions between a low level and a high level (labeled 10%). The <math>V_{DS}</math> waveform shows the voltage across the load during these transitions. Key time intervals are marked: <math>t_{d(on)}</math> (delay time to turn on), <math>t_r</math> (rise time), <math>t_{on}</math> (total turn-on time), <math>t_{d(off)}</math> (delay time to turn off), <math>t_f</math> (fall time), and <math>t_{off}</math> (total turn-off time). The <math>V_{DS}</math> waveform shows a 90% voltage level during the on-state and a 10% voltage level during the off-state.</p> |

### Table 10 Unclamped inductive load

| Unclamped inductive load test circuit                                               | Unclamped inductive waveform                                                         |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |

## 7 Package Outlines



**Figure 1 Outline PG-TO 220 FullPAK, dimensions in mm/inches**

## 8 Appendix A

### Table 11 Related Links

- IFX CoolMOS™ C7 Webpage: [www.infineon.com](http://www.infineon.com)
- IFX CoolMOS™ C7 application note: [www.infineon.com](http://www.infineon.com)
- IFX CoolMOS™ C7 simulation model: [www.infineon.com](http://www.infineon.com)
- IFX Design tools: [www.infineon.com](http://www.infineon.com)

## Revision History

IPA65R065C7

**Revision: 2013-10-11, Rev. 2.0**

Previous Revision

| Revision | Date       | Subjects (major changes since last revision) |
|----------|------------|----------------------------------------------|
| 2.0      | 2013-10-11 | Release of final version                     |

### We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all? Your feedback will help us to continuously improve the quality of this document. Please send your proposal (including a reference to this document) to:

**erratum@infineon.com**

**Edition 2011-08-01****Published by****Infineon Technologies AG****81726 München, Germany****© 2011 Infineon Technologies AG****All Rights Reserved.**

### Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

### Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (**[www.infineon.com](http://www.infineon.com)**).

### Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

The Infineon Technologies component described in this Data Sheet may be used in life-support devices or systems and/or automotive, aviation and aerospace applications or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support, automotive, aviation and aerospace device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.