

High Frequency Wire Wound Transformers




EFD15 Platforms - SMT






- Power Range:** Up to 40W
- Height:** 8.4mm Max
- Footprint:** 22.2mm x 17.2mm Max
- Topology:** Forward and Flyback

Electrical Specifications @ 25°C — Operating Temperature -40°C to 130°C⁵

Part Number	Parameter	Value	Notes
PA0476NL	Pri. Inductance	(1,2-3,4)	9.85μH ±10%
	Lk. Inductance	(1,2-3,4) with (5,6,7,8,9,10,11,12) shorted	0.15μH MAX
	DCR	(1-3)	47mΩ MAX
		(2-4)	47mΩ MAX
		(5-6)	87mΩ MAX
		(12,11,10-7,8,9)	8mΩ MAX
Hi-Pot	Pri-Sec	1500Vrms	
K1 Factor	820.8		
PA0691NL	Pri. Inductance	(3-5)	170.3μH ±12%
	Lk. Inductance	(3-5) with (7,8,9,10,11,12) shorted	2.4μH MAX
	DCR	(3-5)	600mΩ MAX
		(2-1)	2000mΩ MAX
		(12,11-10,9)	20mΩ MAX
		(8-7)	720mΩ MAX
Hi-Pot	Pri-Sec	1500Vrms	
K1 Factor	2183.3		
PA1039NL	Pri. Inductance	(3-5)	157.5μH ±10%
	Lk. Inductance	(3-5) with (7,8,9,10,11,12) shorted	2μH MAX
	DCR	(3-5)	500mΩ MAX
		(2-1)	1300mΩ MAX
		(12,11-10,9)	25mΩ MAX
		(8-7)	760mΩ MAX
Hi-Pot	Pri-Sec	1500Vrms	
K1 Factor	2100.0		
PA1067NL	Pri. Inductance	(3-4)	113μH ±30%
	Lk. Inductance	(3-4) with (12,11,10,9,8,7) shorted	1μH MAX
	DCR	(1-2)	70mΩ MAX
		(3-4)	70mΩ MAX
		(5-6)	70mΩ MAX
		(12,11,10-9,8,7)	6mΩ MAX
Hi-Pot	Pri-Sec	500Vrms	
K1 Factor	55.6		
PA1169NL	Pri. Inductance	(2-5)	38.2μH ±30%
	Lk. Inductance	(2-5) with (11,9,7) shorted	0.5μH MAX
	DCR	(2-5)	27mΩ MAX
		(11-7)	850mΩ MAX
	Hi-Pot	Pri-Sec	1500Vrms
K1 Factor	95.2		
PA1275NL	Pri. Inductance	(3-5)	100.7μH ±10%
	Lk. Inductance	(3-5) with (7,8,9,10,11,12) shorted	2μH MAX
	DCR	(3-5)	485mΩ MAX
		(2-1)	1500mΩ MAX
		(12,11-10,9)	16mΩ MAX
		(8-7)	575mΩ MAX
Hi-Pot	Pri-Sec	1800Vdc	
K1 Factor	1678.3		

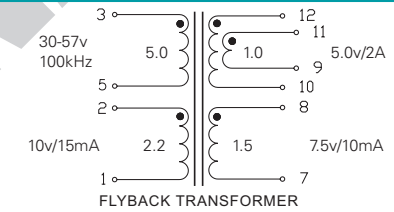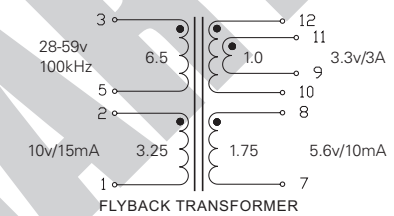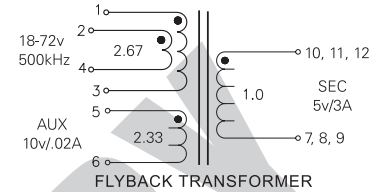

(Note: Height of PA1039NL is 8.9mm Max)

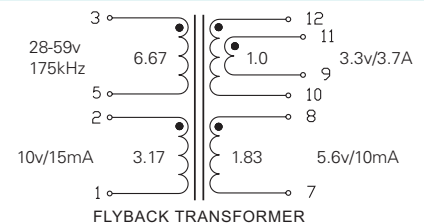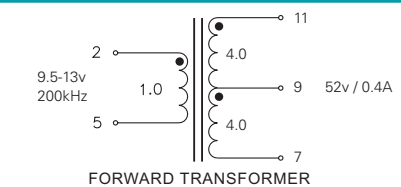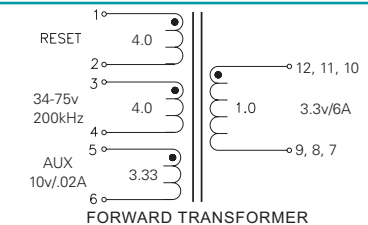

High Frequency Wire Wound Transformers

EFD15 Platforms - SMT



Electrical Specifications @ 25°C — Operating Temperature -40°C to 130°C⁵

PA1424NL	Pri. Inductance	(3-4)	62µH ±12%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (10,9,8,7) shorted	1µH MAX	
	DCR	(3-4)	250mΩ MAX	
		(10-9)	30mΩ MAX	
		(7-8)	20mΩ MAX	
		(2-1)	400mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
K1 Factor	1878.8			
PA1627NL	Pri. Inductance	(3-5)	100.7µH ±12%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-5) with (7,8,9,10,11,12) shorted	3µH MAX	
	DCR	(3-5)	485mΩ MAX	
		(2-1)	1850mΩ MAX	
		(12,11-10,9)	16mΩ MAX	
	Hi-Pot	Pri-Sec	2150Vdc	
K1 Factor	1678.3			
PA1646NL	Pri. Inductance	(3-5)	100.7µH ±5%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-5) with (7,8,9,10,11,12) shorted	3µH MAX	
	DCR	(3-5)	485mΩ MAX	
		(2-1)	1150mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
K1 Factor	1678.3			
PA1706NL	Pri. Inductance	(3-5)	170.1µH ±12%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-5) with (12,11,10,9,8,7) shorted	3.5µH MAX	
	DCR	(3-5)	643mΩ MAX	
		(12,11-10,9)	6mΩ MAX	
		(8-7)	60mΩ MAX	
	(2-1)	123mΩ MAX		
Hi-Pot	Pri-Sec	1500Vrms		
K1 Factor	2520.0			
PA1741NL	Pri. Inductance	(1-3)	144µH ±10%	<p>FORWARD TRANSFORMER</p>
	Lk. Inductance	(1-3) with (12,11,10,9,8,7) shorted	1µH MAX	
	DCR	(1-3)	150mΩ MAX	
		(12,11-10,9)	18mΩ MAX	
	(8-7)	60mΩ MAX		
Hi-Pot	Pri-Sec	1800Vrms		
K1 Factor	27.8			
PA1745NL	Pri. Inductance	(2-5)	37.1µH ±10%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(2-5) with (8,9,10,11) shorted	1µH MAX	
	DCR	(2-5)	78mΩ MAX	
		(11-10)	34mΩ MAX	
	(8-7)	38mΩ MAX		
Hi-Pot	Pri-Sec	600Vrms		
K1 Factor	1177.8			

High Frequency Wire Wound Transformers

EFD15 Platforms - SMT






Electrical Specifications @ 25°C — Operating Temperature -40°C to 130°C⁵

Part Number	Parameter	Value	Diagram	
PA1994NL	Pri. Inductance	(3-5)		
	Lk. Inductance	(3-5) with (7,8,9,10,11,12) shorted		
	DCR	(3-5)		170.1µH ±12%
		(2-1)		3.5µH MAX
		(12,11-10,9)		850mΩ MAX
		(8-7)		145mΩ MAX
	Hi-Pot	Pri-Sec		75mΩ MAX
		55mΩ MAX		
		1500Vrms		
K1 Factor	2520.0			
PA1995NL	Pri. Inductance	(3-5)		
	Lk. Inductance	(3-5) with (7,8,9,10,11,12) shorted		
	DCR	(3-5)		170.1µH ±12%
		(2-1)		3.5µH MAX
		(12,11-10,9)		850mΩ MAX
		(8-7)		145mΩ MAX
	Hi-Pot	Pri-Sec		70mΩ MAX
		55mΩ MAX		
		1500Vrms		
K1 Factor	2520.0			
PA1996NL	Pri. Inductance	(3-5)		
	Lk. Inductance	(3-5) with (7,8,9,10,11,12) shorted		
	DCR	(3-5)		170.1µH ±12%
		(2-1)		3.5µH MAX
		(12,11-10,9)		850mΩ MAX
		(8-7)		145mΩ MAX
	Hi-Pot	Pri-Sec		37mΩ MAX
		55mΩ MAX		
		1500Vrms		
K1 Factor	2520.0			
PA1997NL	Pri. Inductance	(3-5)		
	Lk. Inductance	(3-5) with (7,8,9,10,11,12) shorted		
	DCR	(3-5)		170.1µH ±12%
		(2-1)		3.5µH MAX
		(12,11-10,9)		850mΩ MAX
		(8-7)		150mΩ MAX
	Hi-Pot	Pri-Sec		15mΩ MAX
		65mΩ MAX		
		1500Vrms		
K1 Factor	2520.0			
PA2026NL	Pri. Inductance	(3-5)		
	Lk. Inductance	(3-5) with (7,9,10,12) shorted		
	DCR	(3-5)		25.2µH ±12%
		(12-10)		1µH MAX
		(9-7)		150mΩ MAX
		(2-1)		26mΩ MAX
	Hi-Pot	Pri-Sec		28mΩ MAX
		245mΩ MAX		
		1500Vrms		
K1 Factor	840.0			

High Frequency Wire Wound Transf


EFD15 Platforms - SMT

Electrical Specifications @ 25°C — Operating Temperature -40°C to 130°C⁵

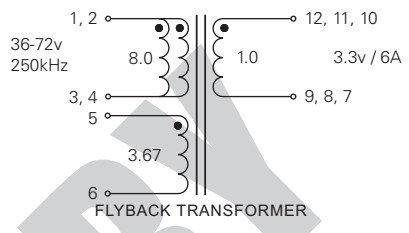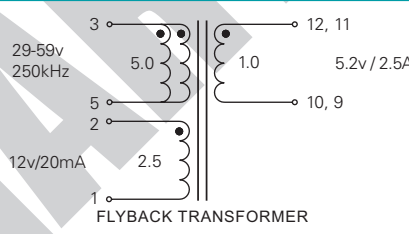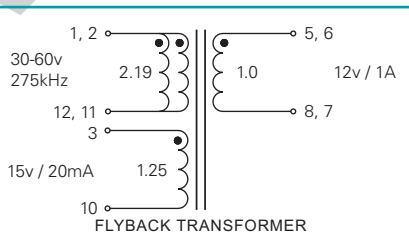PA2069NL	Pri. Inductance	(1,2-3,4)	40 μ H \pm 13%	 <p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(1,2-3,4) with (5,6,7,8,9,10,11,12) shorted	0.825 μ H MAX	
	DCR	(1,2-3,4)	130m Ω MAX	
		(5-6)	315m Ω MAX	
		(12,11,10-9,8,7)	3.5m Ω MAX	
	Hi-Pot	Pri-Sec	1650Vrms	
K1 Factor	1111.1			
PA2196NL	Pri. Inductance	(3-5)	70 μ H \pm 10%	 <p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-5) with (7,8,9,10,11,12) shorted	1.2 μ H MAX	
	DCR	(3-5)	183m Ω MAX	
		(2-1)	1100m Ω MAX	
		(12,11-10,9)	14m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
K1 Factor	1555.6			
PA2265NL	Pri. Inductance	(1,2-12,11)	122.5 μ H \pm 10%	 <p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(1,2-12,11) with (5,6,8,7,3,10) shorted	2 μ H MAX	
	DCR	(1,2-12,11)	270m Ω MAX	
		(7,8,9-10,11,12)	63m Ω MAX	
		(5,6-8,7)	310m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
K1 Factor	2333.3			

High Frequency Wire Wound Transformers

EFD15 Platforms - SMT

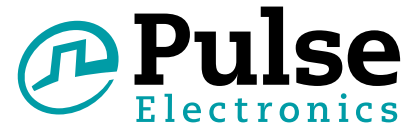


Notes

- The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
- The above transformers and inductors have been tested and approved by Pulse's power IC partners and are sited in the appropriate datasheet or evaluation board documentation at these companies. To determine which IC and IC partners are matched with the above Pulse part numbers please consult the IC Cross Reference on the Pulse website.
- For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700Gauss. To calculate the peak flux density use the following formula:

$$Bpk \text{ (Gauss)} = K1_Factor * Ip(A)$$
- In high volt- μ sec applications, it is important to calculate the core loss of the transformer. Approximate transformer core loss can be calculated as:

$$CoreLoss (W) = 4.6E-14 * (Freq_kHz)^{1.63} * (\Delta B_Gauss)^{2.63}$$
 where ΔB can be calculated as:
 For Flyback Topology: $\Delta B = K1_Factor * \Delta(A)$
 For Forward Topology: $\Delta B = K1_Factor * Volt-\mu sec$
- Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA0476NL becomes PA0476NLT). Pulse complies with industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=44mm), pitch (Po=32mm) and depth (Ko=11.78mm).
- The "NL" suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" suffix, but an RoHS compliant version is required, please contact Pulse for availability.

Mechanical

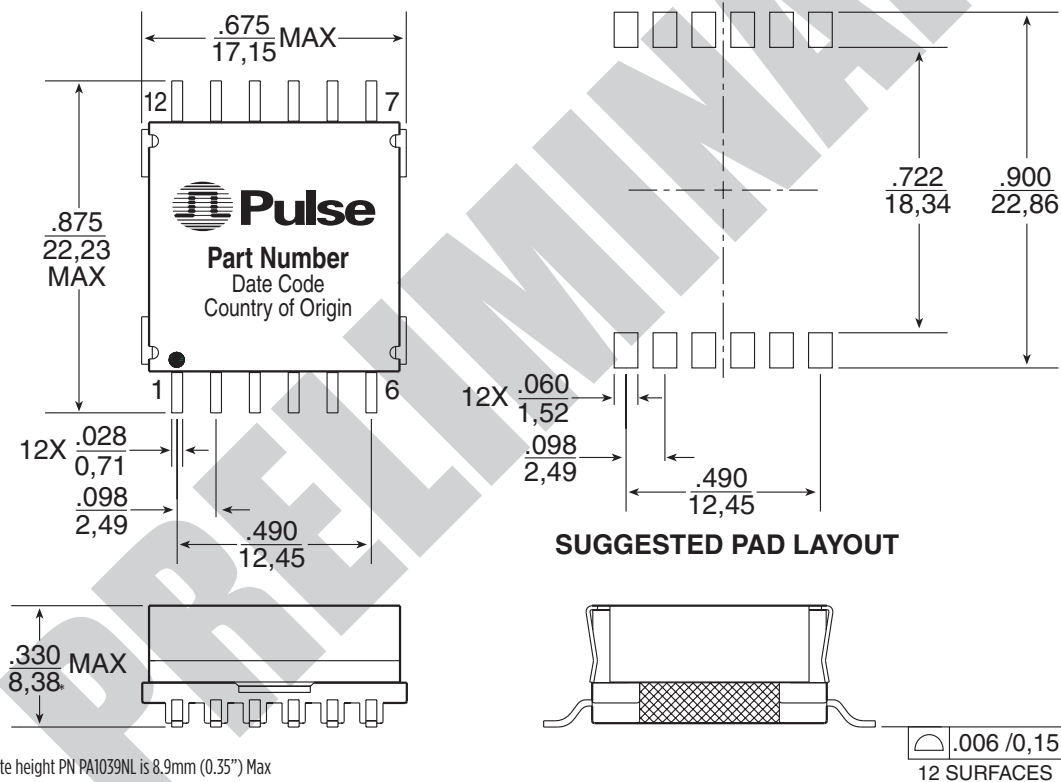

For More Information

Pulse Worldwide Headquarters

12220 World Trade Drive
San Diego, CA 92128
U.S.A.

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe

Zeppelinstrasse 15
71083 Herrenberg
Germany

Tel: 49 7032 7806 0
Fax: 49 7032 7806 12

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzhen, PR China 518057

Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China

Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia

135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia

3F No. 198, Zhongyuan Road
Zhongli City
Taoyuan County (32068)
Taiwan

Tel: 886 3 4356768
Fax: 886 3 4356823

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2013. Pulse Electronics, Inc. All rights reserved.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.