

### Product Overview

Qorvo's QPA3055P is a packaged, high-power S-band amplifier fabricated on Qorvo's production 0.25  $\mu\text{m}$  GaN on SiC process (QGaN25). Covering 2.9–3.5 GHz, the QPA3055P provides 100 W of saturated output power and 25 dB of large-signal gain while achieving 53% power-added efficiency.



The QPA3055P is packaged in a 10-lead 15.2 x 15.2 mm bolt-down package with a Cu base for superior thermal management. It can support a variety of operating conditions to best support system requirements. With good thermal properties, it can support a range of bias voltages and will perform well under both short and long pulse operations.

The QPA3055P MMIC has DC blocking capacitors on both RF ports, which are matched to 50 ohms. The QPA3055P is ideal for both commercial and military radar systems.

Lead-free and RoHS compliant.

Evaluation board available on request.

### Functional Block Diagram

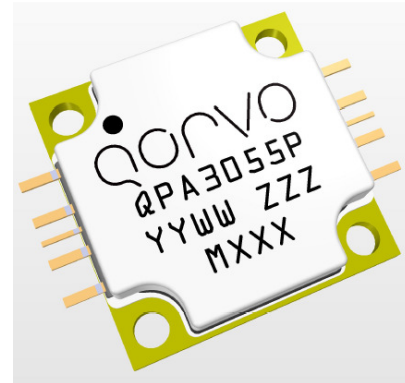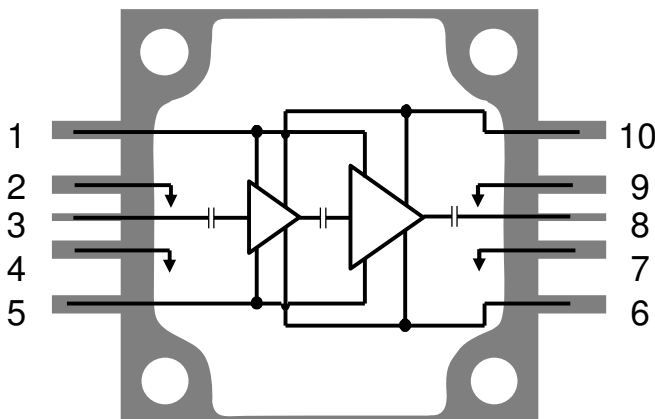

### Key Features

- Frequency Range: 2.9–3.5 GHz
- $P_{SAT}$  ( $P_{IN}=25$  dBm): 50 dBm
- PAE ( $P_{IN}=25$  dBm): > 53 %
- Power Gain ( $P_{IN}=25$  dBm): 25 dB
- Bias:  $V_D = 30$  V,  $I_{DQ} = 300$  mA,  $P_{IN} = 25$  dBm
- Alt. Bias:  $V_D = 30$  V,  $I_{DQ} = 1500$  mA,  $P_{IN} = 22$  dBm
- Characterized at  $PW = 15$  ms,  $DC = 30\%$ , and  $PW = 100$   $\mu\text{s}$ ,  $DC = 10\%$
- Package Dimensions: 15.2 x 15.2 x 3.5 mm

*Performance is typical across frequency. Please reference electrical specification table and data plots for more details.*

### Applications

- Radar

### Ordering Information

Part No.	Description
QPA3055P	100 W S-Band GaN Power Amplifier (10 Pcs.)
QPA3055PS2	Samples (2 pcs.)
QPA3055PEVB1	Evaluation Board for QPA3055P

### Absolute Maximum Ratings

Parameter	Value / Rang
Drain Voltage ( $V_D$ )	40 V
Gate Voltage Range ( $V_G$ )	-8 to +1 V
Peak Drain Current ( $I_D$ )	11.7 A
Average Drain Current ( $I_D$ )	5.7 A
Duty Cycle	50%
Gate Current ( $I_G$ )	300 mA
Power Dissipation ( $P_{DISS}$ ), 85 °C	150 W
Input Power ( $P_{IN}$ ), Pulsed (15 ms, 30%), 50 $\Omega$ , $V_D=28$ V, $I_{DQ}=300$ mA, 85 °C	31 dBm
Input Power ( $P_{IN}$ ), Pulsed (15 ms, 30%), 3:1 VSWR, $V_D=28$ V, $I_{DQ}=300$ mA, 85 °C	31 dBm
Channel Temperature ( $T_{CH}$ )	275 °C
Soldering Temperature (30 seconds)	260 °C
Storage Temperature	-65 to 150 °C

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied.

### Electrical Specifications

Parameter		Min	Typ	Max	Units
Operational Frequency Range		2.9		3.6	GHz
Output Power ( $P_{IN} = 25$ dBm)	2.9 GHz		50		dBm
	3.2 GHz		50		dBm
	3.5 GHz		50		dBm
Power Added Efficiency ( $P_{IN} = 25$ dBm)	2.9 GHz		53.5		%
	3.2 GHz		57.5		%
	3.5 GHz		56.5		%
Small Signal Gain (CW)	2.9 GHz		30.0		dB
	3.2 GHz		32.0		dB
	3.5 GHz		29.5		dB
Input Return Loss (CW)	2.9 GHz		19		dB
	3.2 GHz		17		dB
	3.5 GHz		22		dB
Output Return Loss (CW)	2.9 GHz		7		dB
	3.2 GHz		6		dB
	3.5 GHz		14		dB
$P_{OUT}$ Temp. Coeff. (85 – 25 °C, $P_{IN} = 25$ dBm))			0.001		dB/°C
Sm. Sig. Gain Temp. Coefficient (85 to –40 °C, CW)			-0.059		dB/°C

Test conditions, unless otherwise noted:  $T = 25$  °C,  $V_D = 28$  V,  $I_{DQ} = 300$  mA,  $V_G = -2.5$  V Typical,  $PW = 15$  ms, Duty Cycle = 30%




### Recommended Operating Conditions

Parameter	Value / Range
Drain Voltage ( $V_D$ )	30 V
Drain Current ( $I_{DQ}$ )	300 mA
Gate Voltage ( $V_G$ ), Typical	-2.5 V
Operating Temperature	-40 to +85 °C

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.







## Performance Plots – Large Signal ( $I_{DQ}=300\text{ mA}$ , $PW=15\text{ ms}$ , $DC=30\%$ )

Test conditions unless otherwise noted:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 300\text{ mA}$ ,  $T = +25\text{ }^\circ\text{C}$

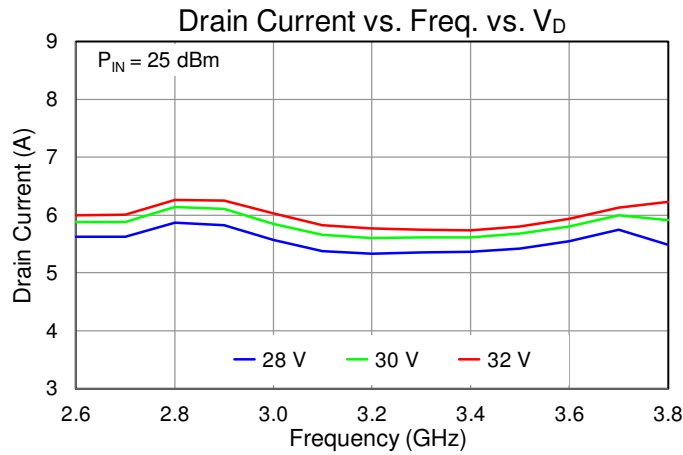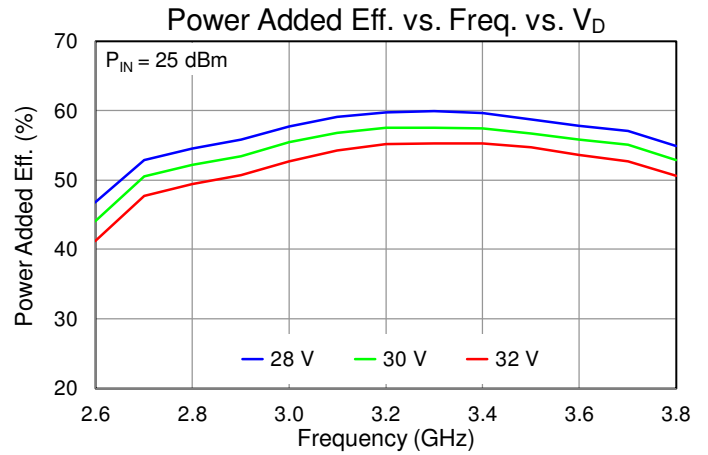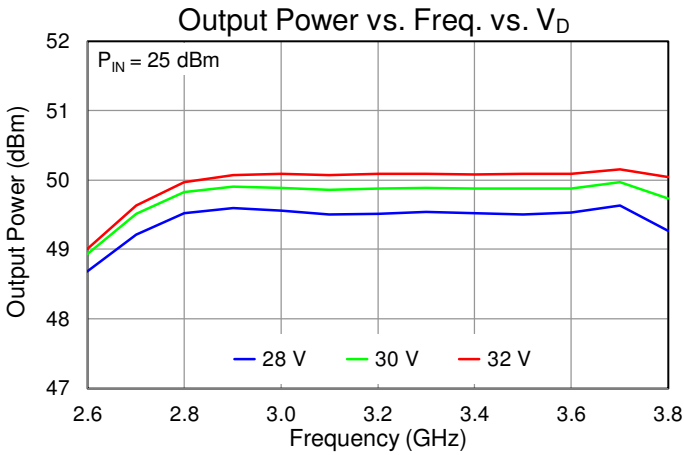





**Performance Plots – Large Signal ( $I_{DQ}=300\text{ mA}$ ,  $PW=15\text{ ms}$ ,  $DC=30\%$ )**

Test conditions unless otherwise noted:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 300\text{ mA}$ ,  $T = +25\text{ }^\circ\text{C}$

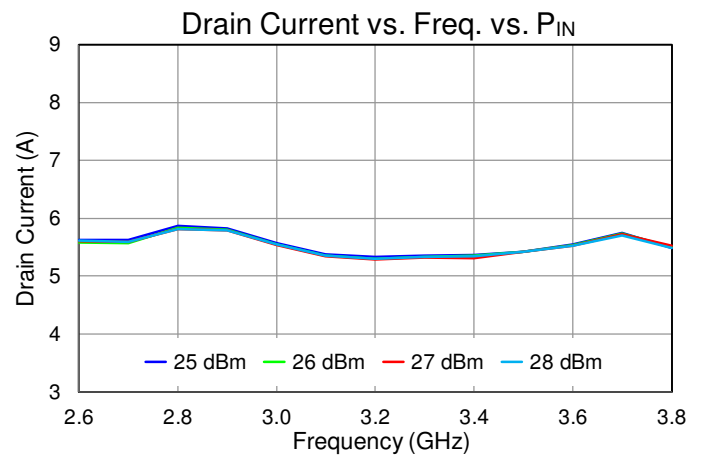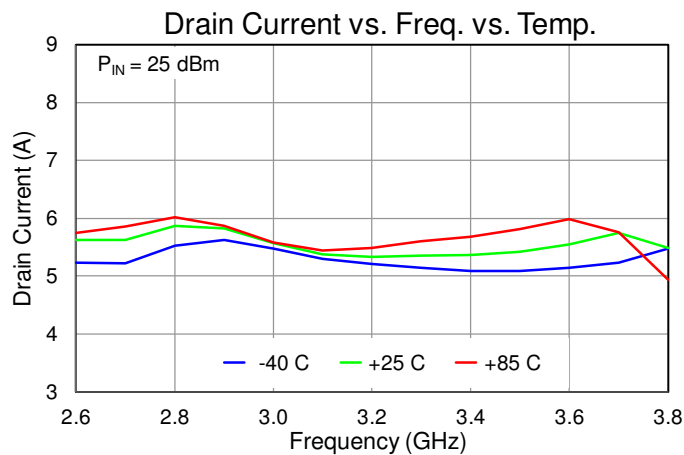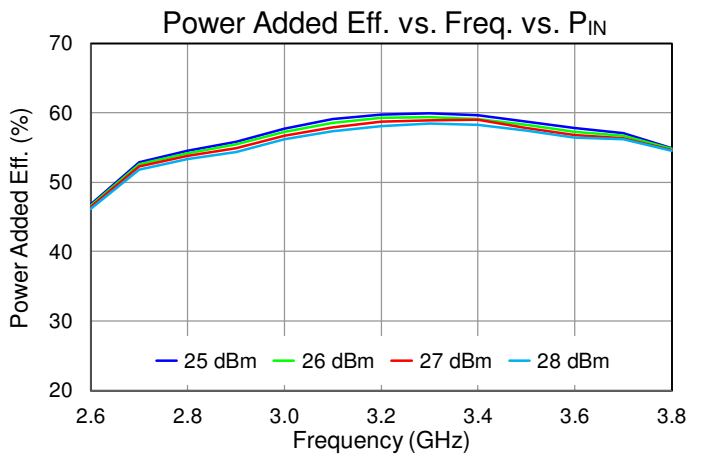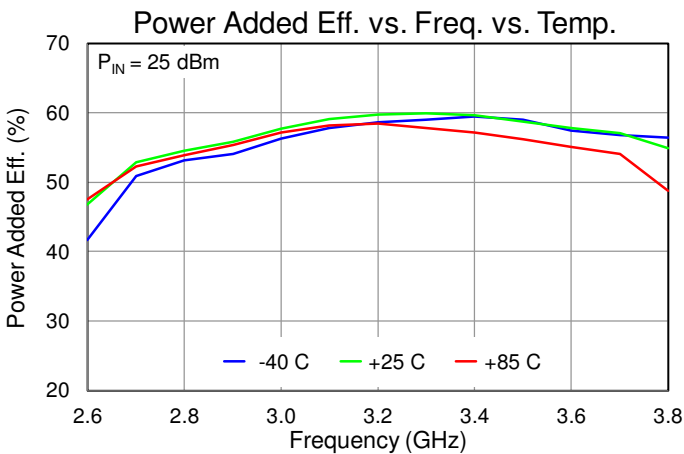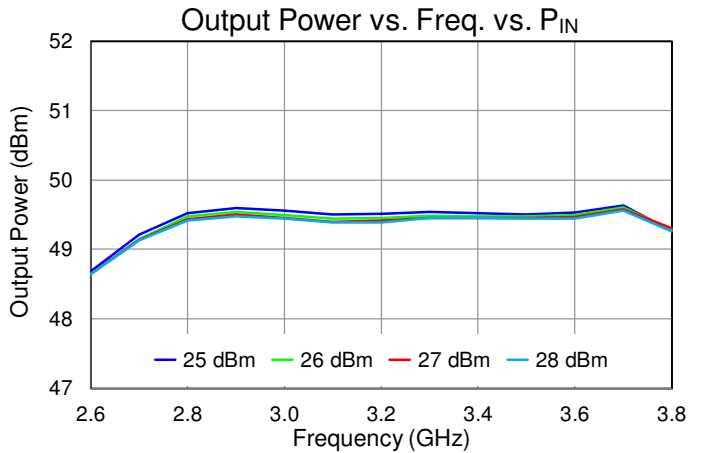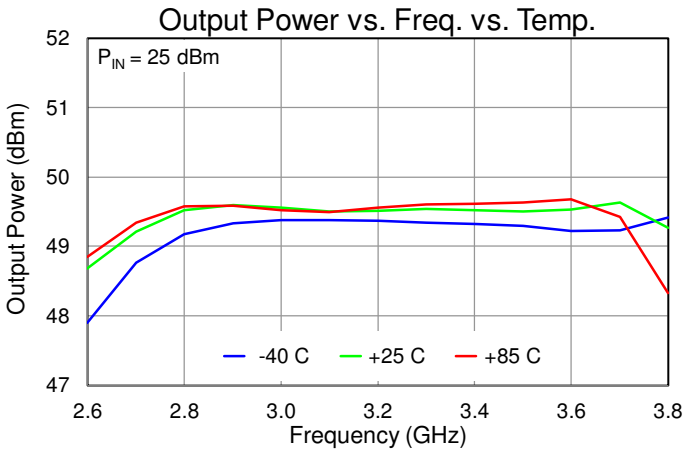







**Performance Plots – Large Signal ( $I_{DQ}=300\text{ mA}$ ,  $PW=15\text{ ms}$ ,  $DC=30\%$ )**

Test conditions unless otherwise noted:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 300\text{ mA}$ ,  $T = +25\text{ }^\circ\text{C}$

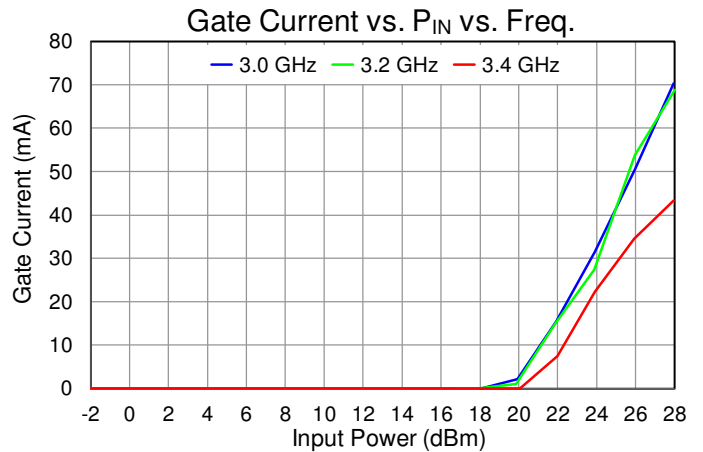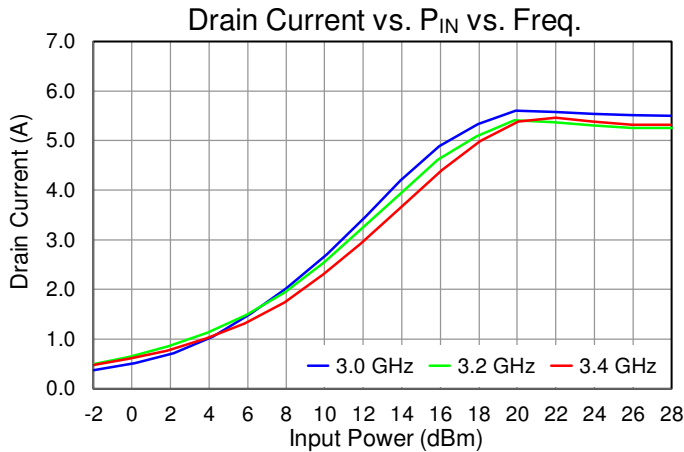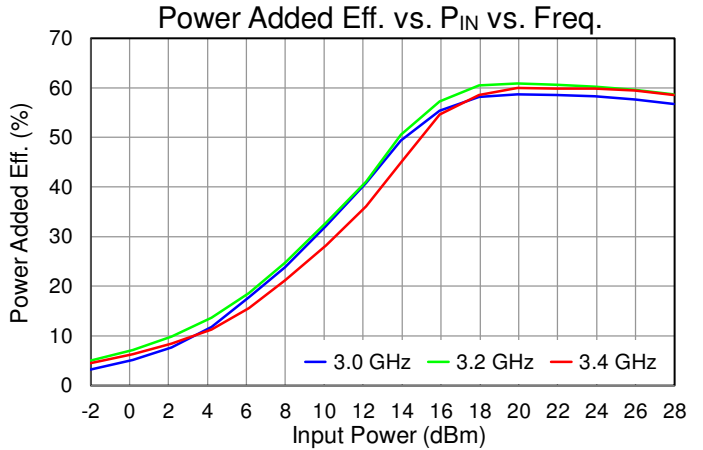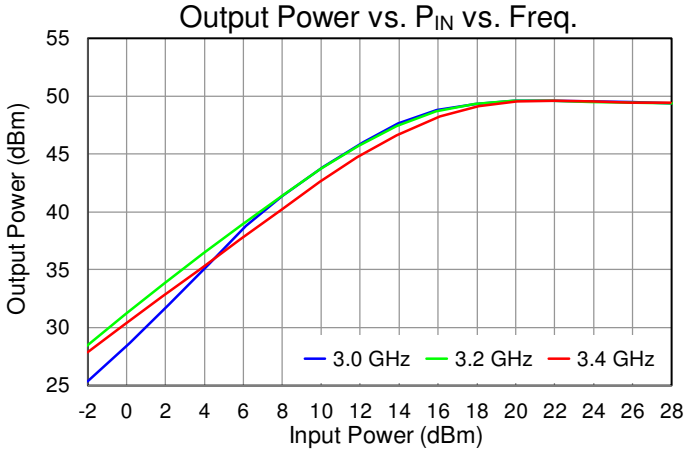




**Performance Plots – Large Signal, Harmonics ( $I_{DQ}=300\text{ mA}$ ,  $PW=15\text{ ms}$ ,  $DC=30\%$ )**

Test conditions unless otherwise noted:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 300\text{ mA}$ ,  $T = +25\text{ }^\circ\text{C}$

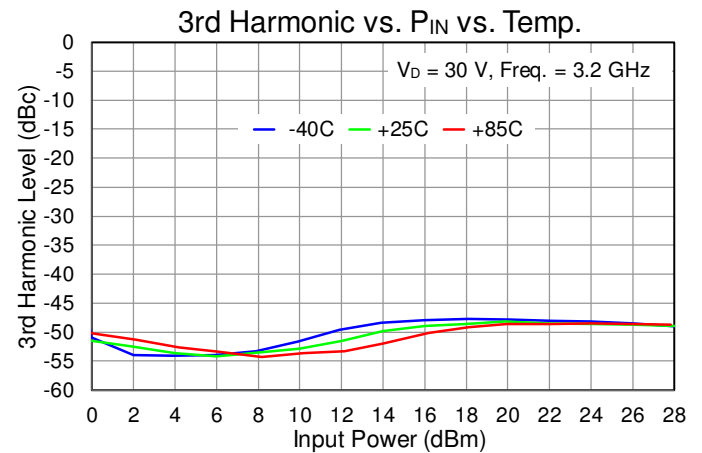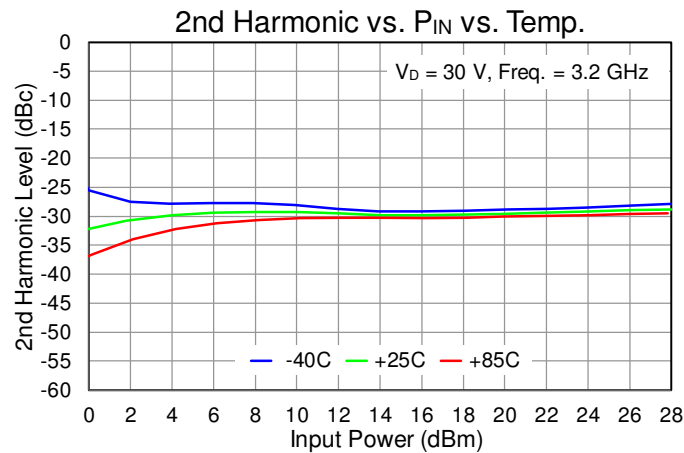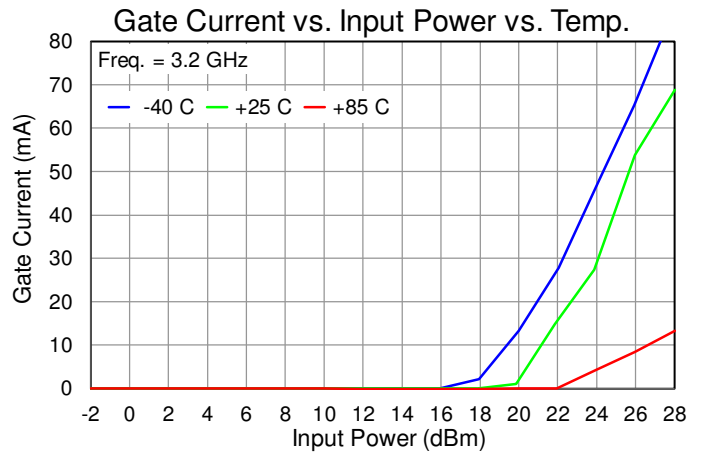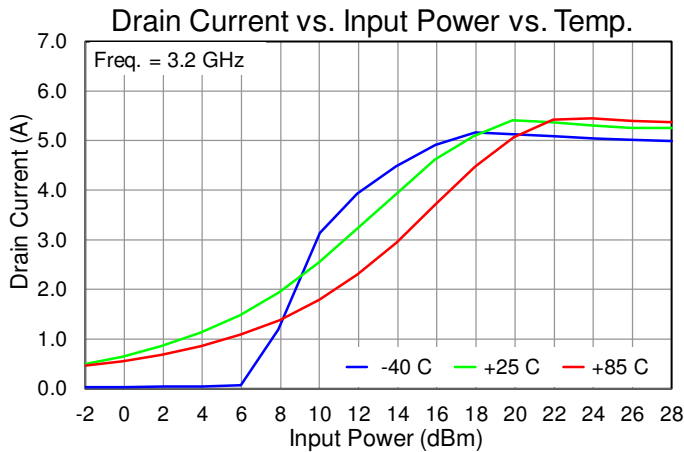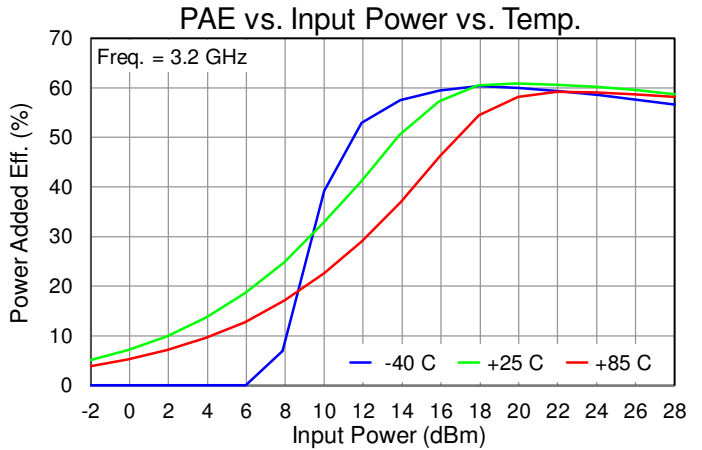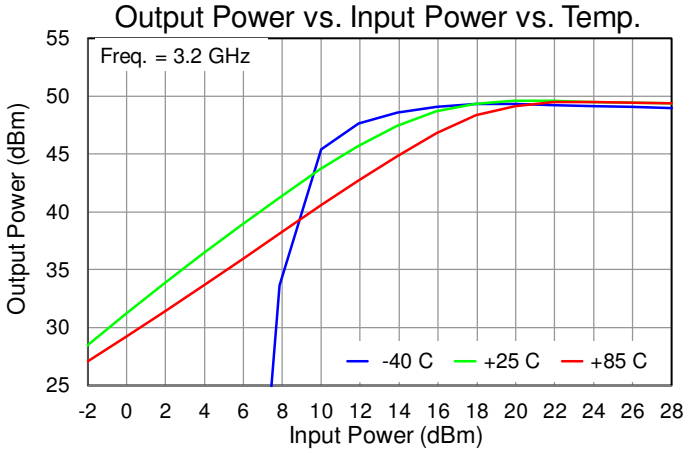







**Performance Plots – Large Signal ( $I_{DQ}=1.5$  A,  $PW=15$  ms,  $DC=30\%$ )**

Test conditions unless otherwise noted:  $V_D = 28$  V,  $I_{DQ} = 1.5$  A,  $T = +25$  °C

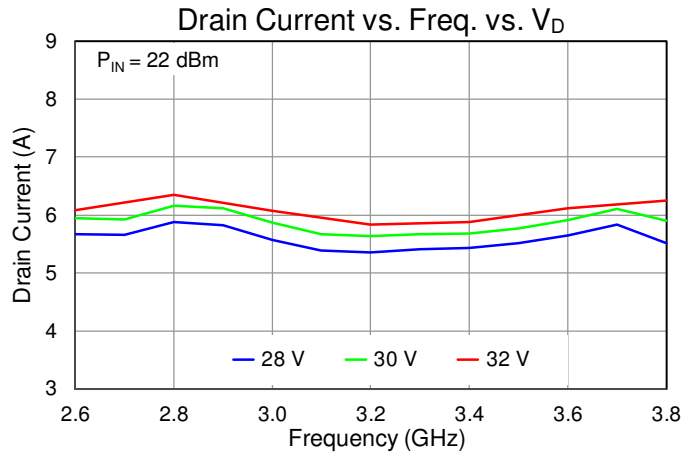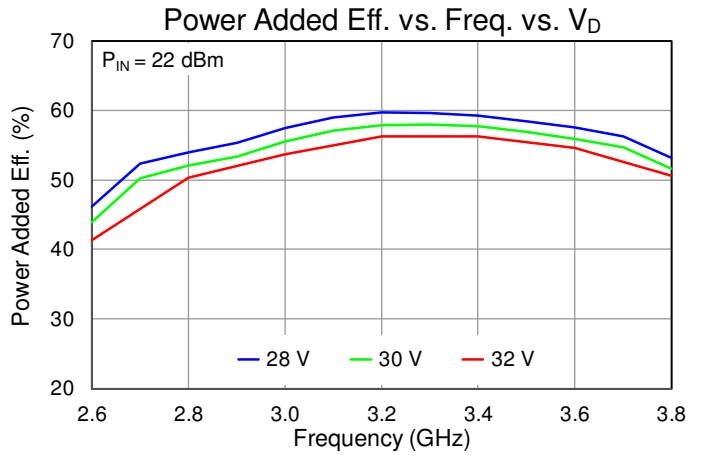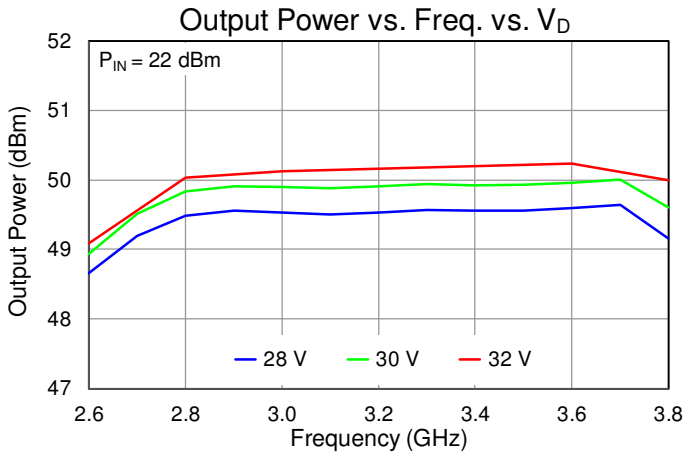

## Performance Plots – Large Signal ( $I_{DQ}=1.5\text{ A}$ , $PW=15\text{ ms}$ , $DC=30\%$ )





Test conditions unless otherwise noted:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 1.5\text{ A}$ ,  $T = +25\text{ }^\circ\text{C}$

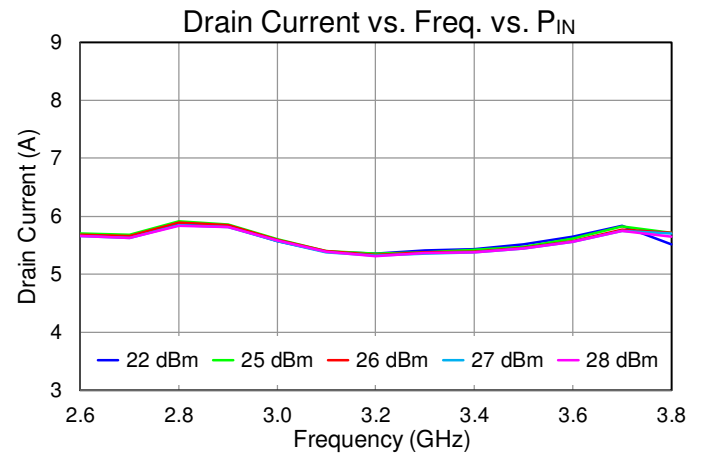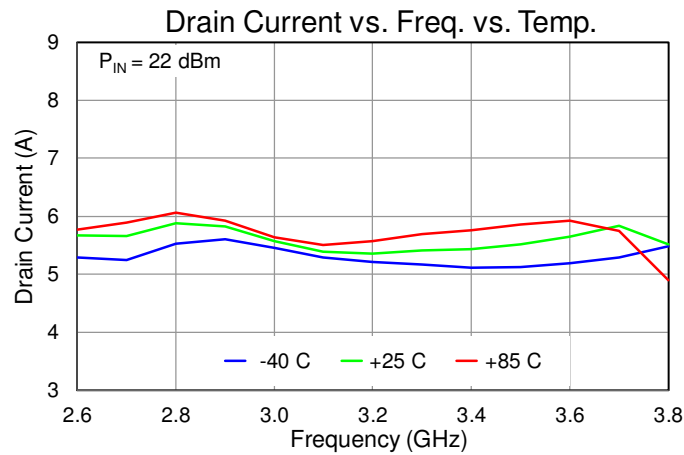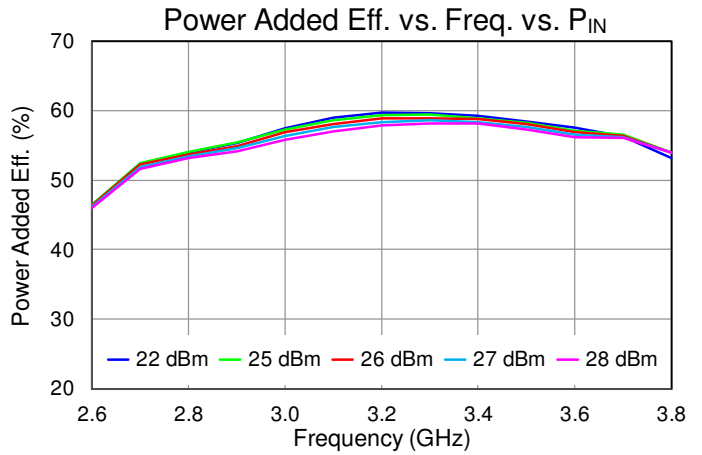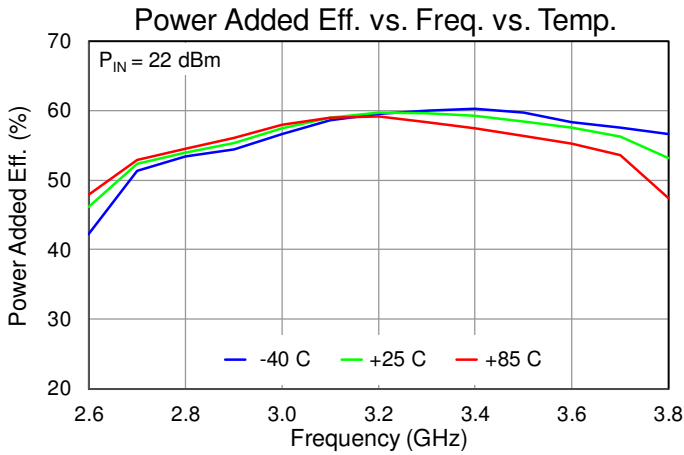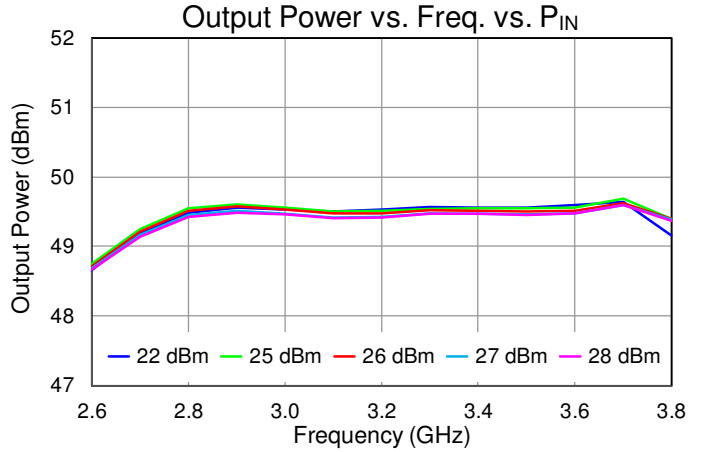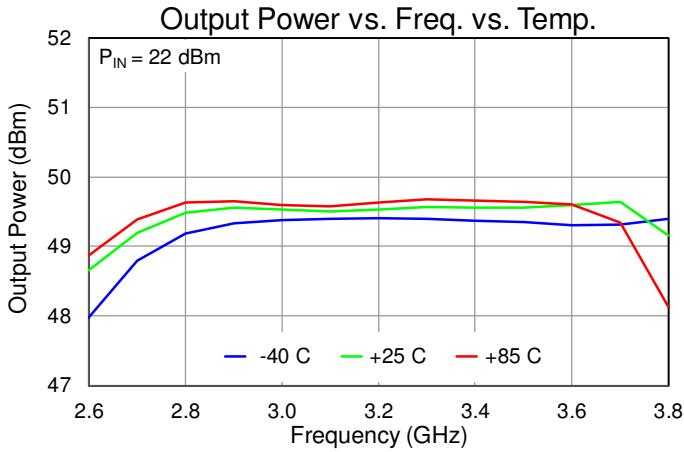









**Performance Plots – Large Signal ( $I_{DQ}=1.5\text{ A}$ ,  $PW=15\text{ ms}$ ,  $DC=30\%$ )**

Test conditions unless otherwise noted:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 1.5\text{ A}$ ,  $T = +25\text{ }^\circ\text{C}$

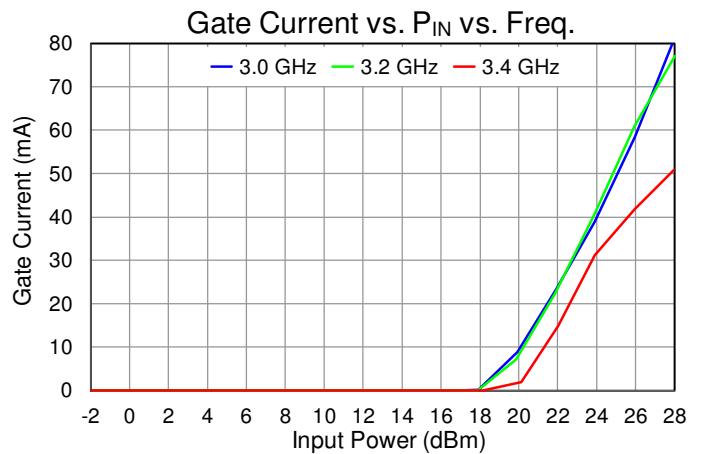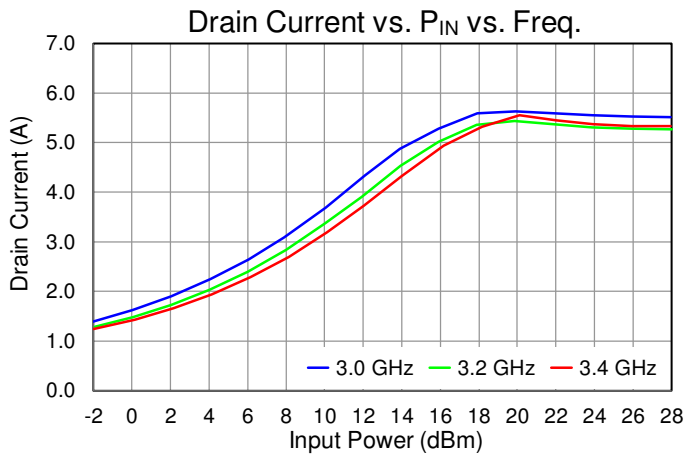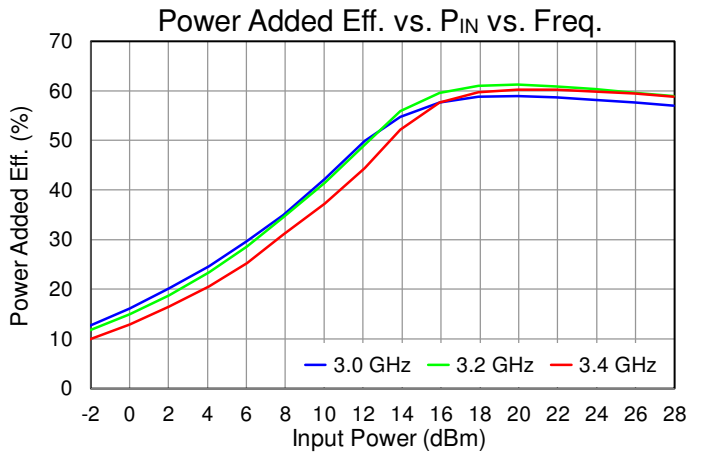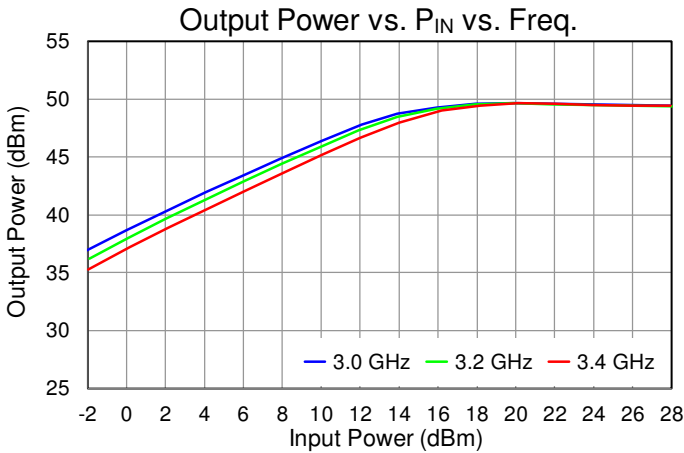




**Performance Plots – Large Signal, Harmonics ( $I_{DQ}=1.5$  A,  $PW=15$  ms,  $DC=30\%$ )**

Test conditions unless otherwise noted:  $V_D = 28$  V,  $I_{DQ} = 1.5$  A,  $T = +25$  °C

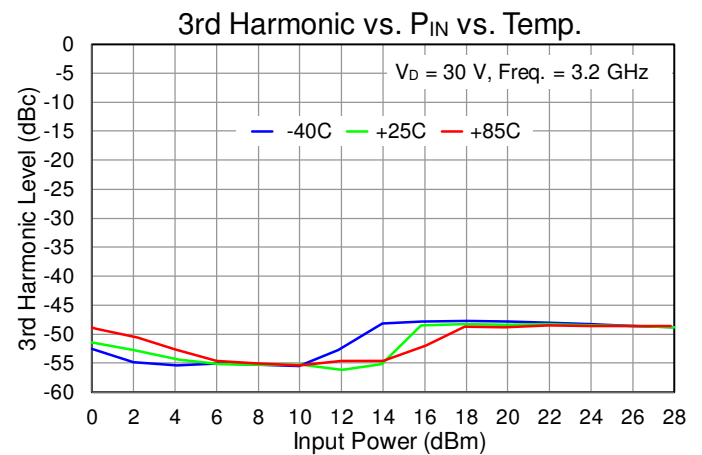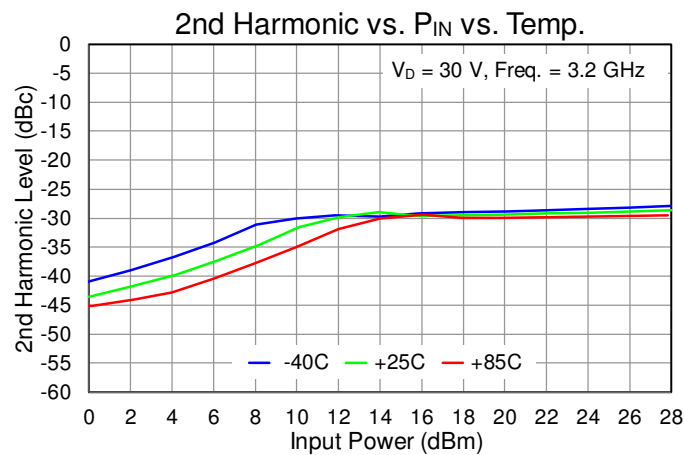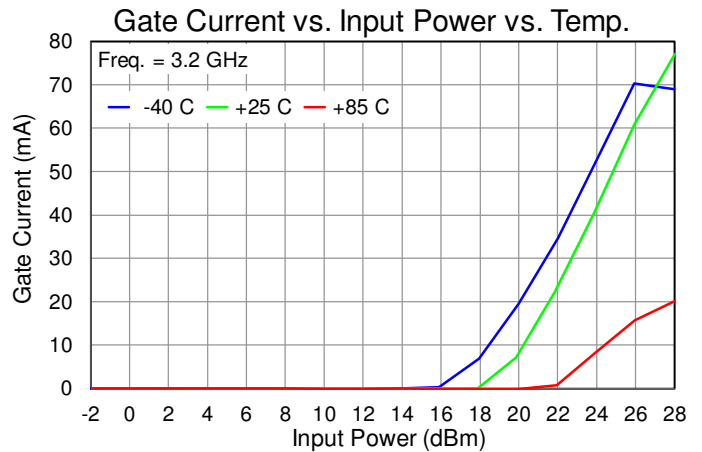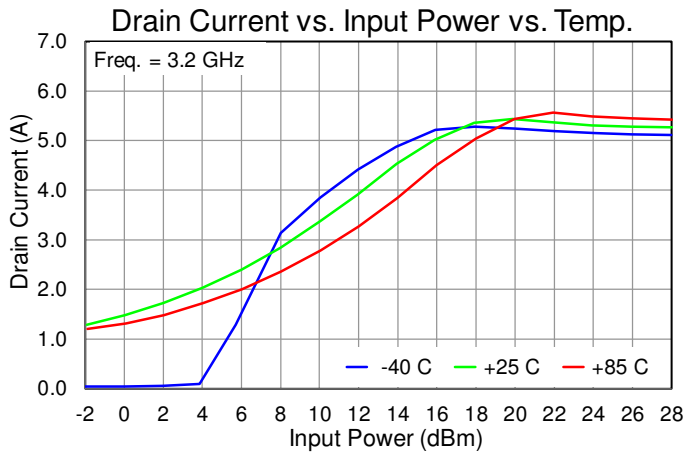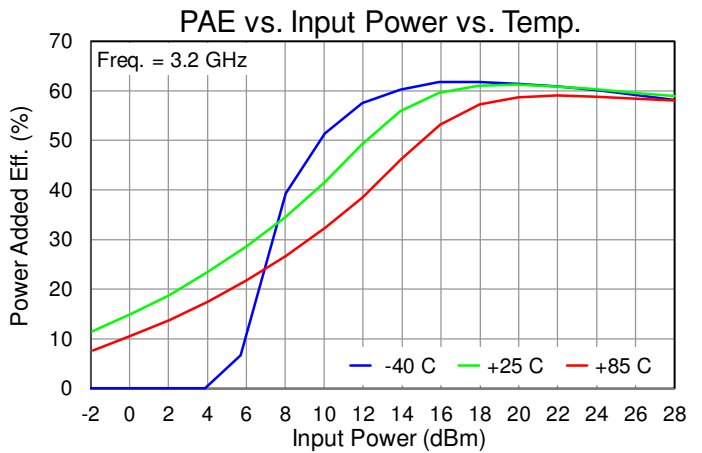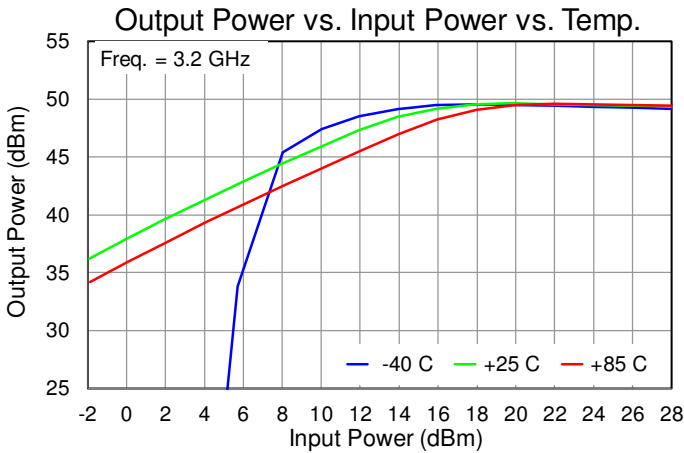







**Performance Plots – Large Signal ( $I_{DQ}=300\text{ mA}$ ,  $PW=100\text{ us}$ ,  $DC=10\%$ )**

Test conditions unless otherwise noted:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 300\text{ mA}$ ,  $T = +25\text{ }^\circ\text{C}$

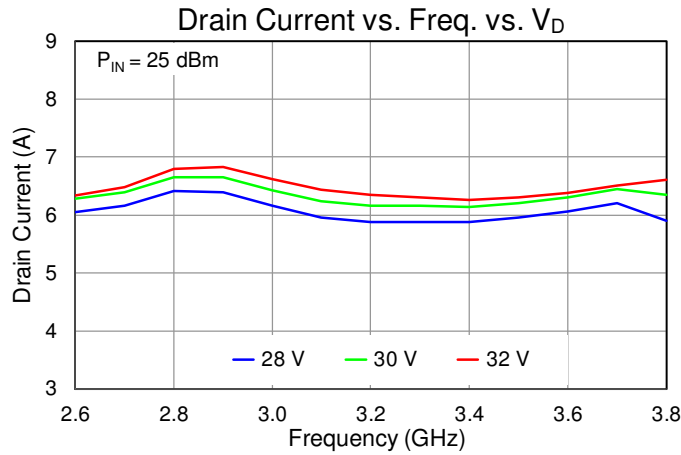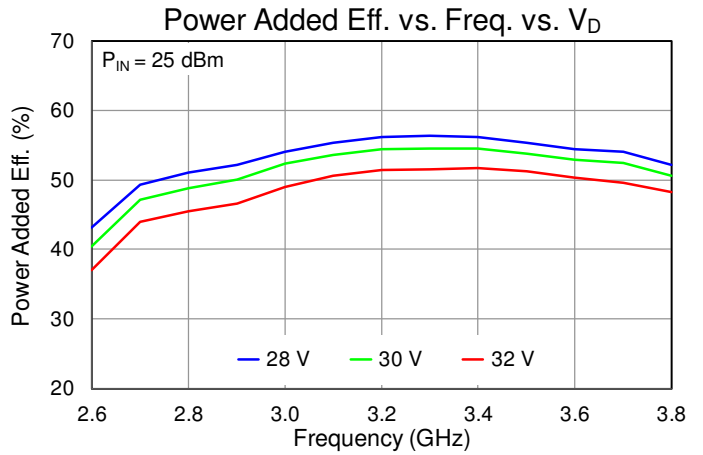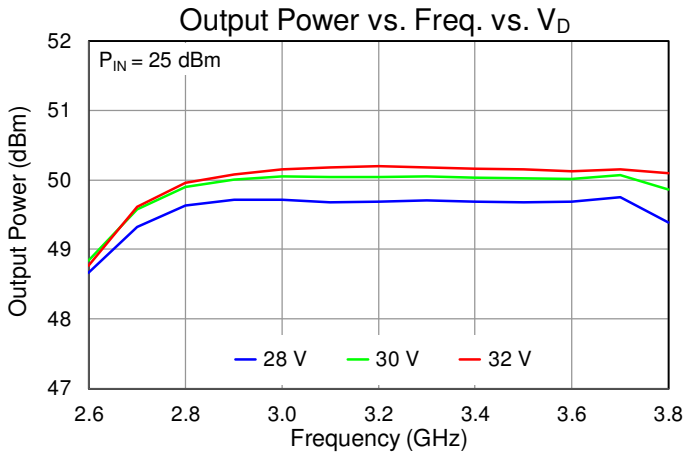





**Performance Plots – Large Signal ( $I_{DQ}=300\text{ mA}$ ,  $PW=100\text{ us}$ ,  $DC=10\%$ )**

Test conditions unless otherwise noted:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 300\text{ mA}$ ,  $T = +25\text{ }^\circ\text{C}$

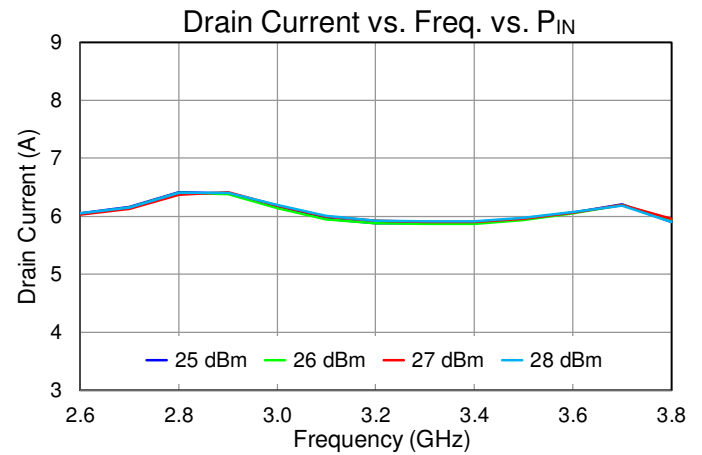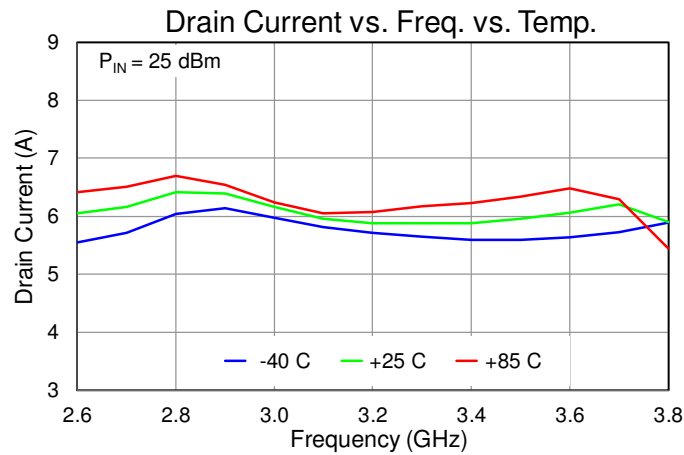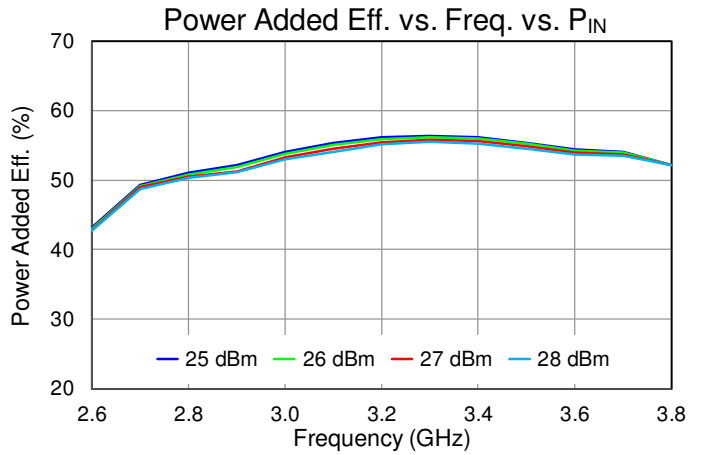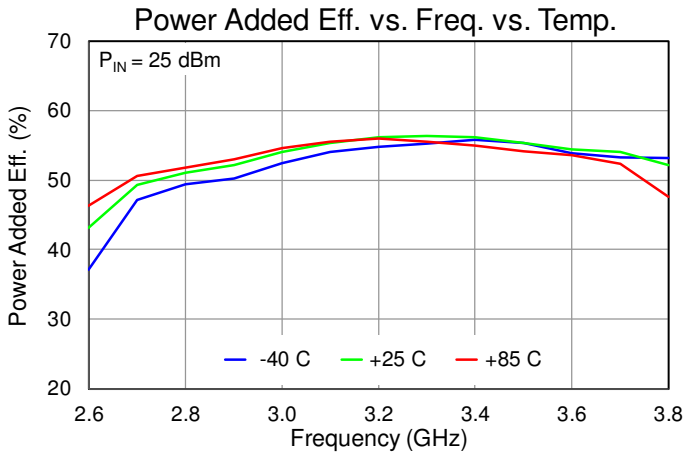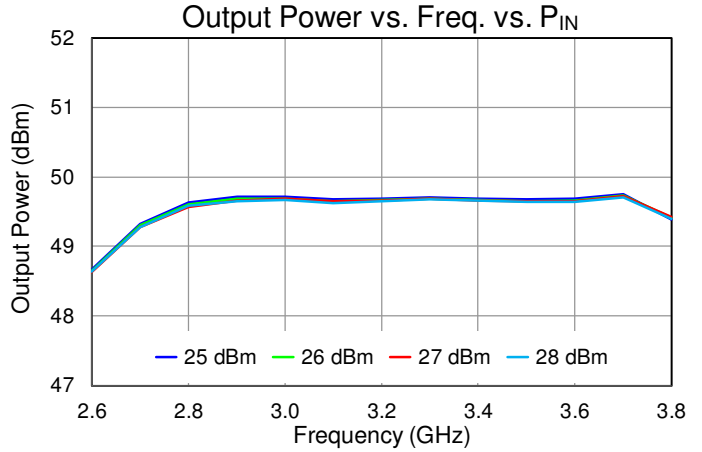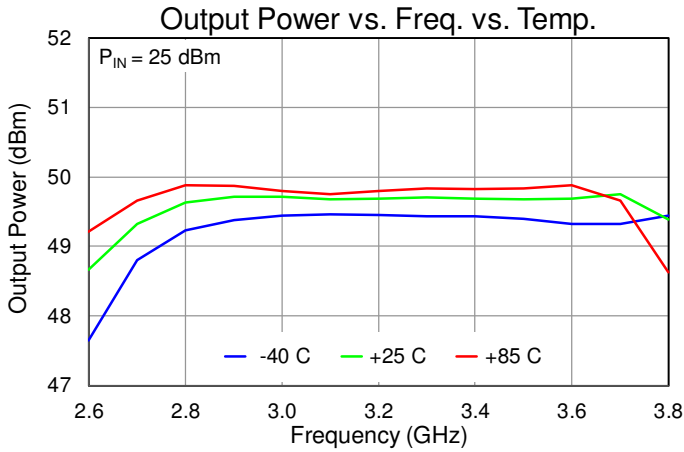





**Performance Plots – Large Signal ( $I_{DQ}=300\text{ mA}$ ,  $PW=100\text{ }\mu\text{s}$ ,  $DC=10\%$ )**

Test conditions unless otherwise noted:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 300\text{ mA}$ ,  $T = +25\text{ }^\circ\text{C}$

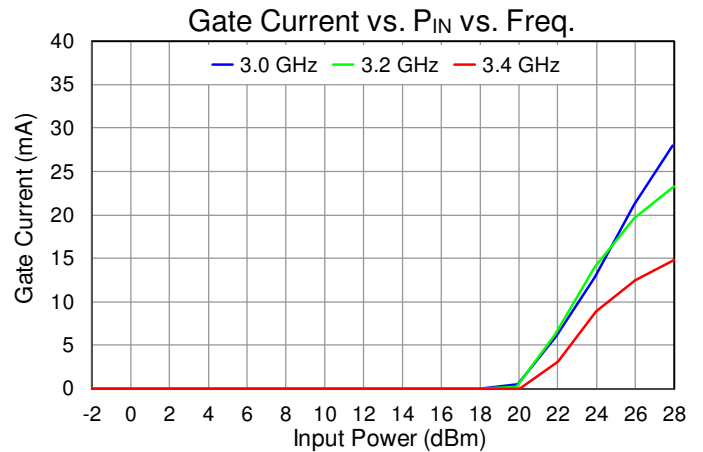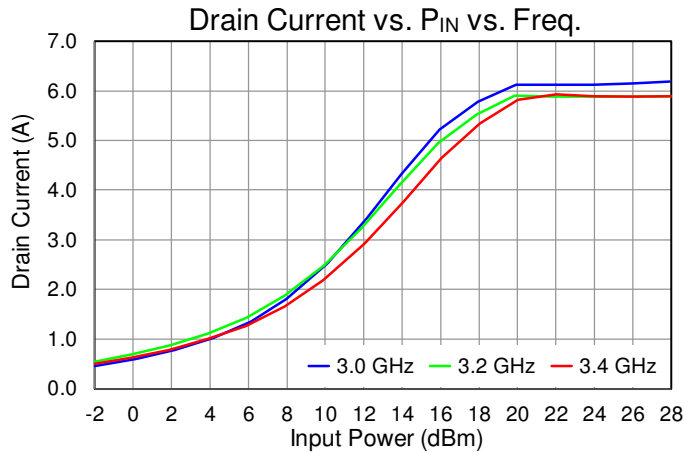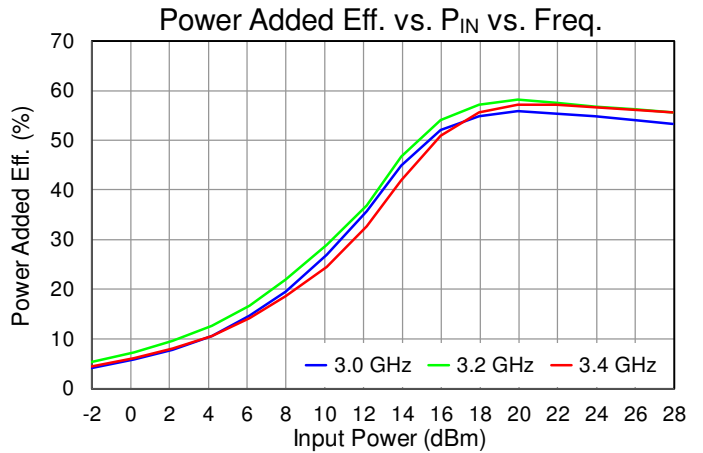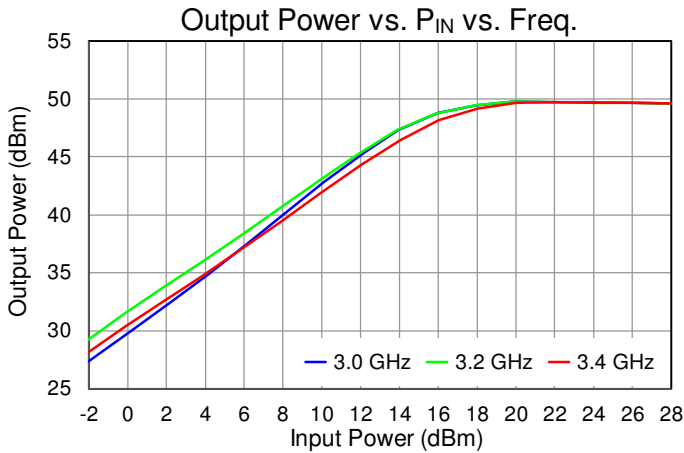




**Performance Plots – Large Signal ( $I_{DQ}=300\text{ mA}$ ,  $PW=100\text{ us}$ ,  $DC=10\%$ )**

Test conditions unless otherwise noted:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 300\text{ mA}$ ,  $T = +25\text{ }^\circ\text{C}$

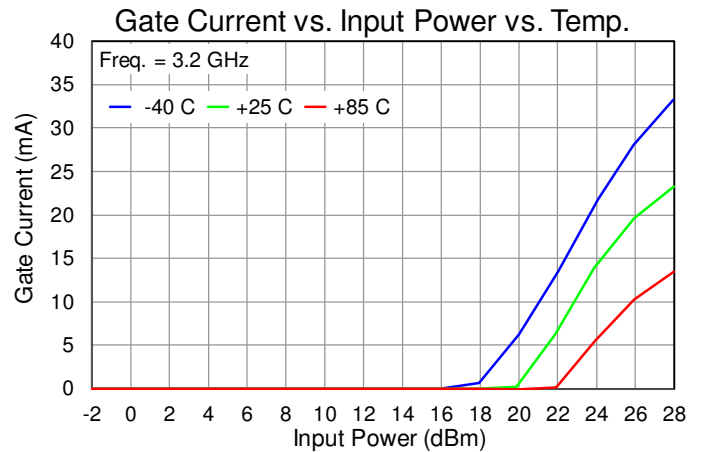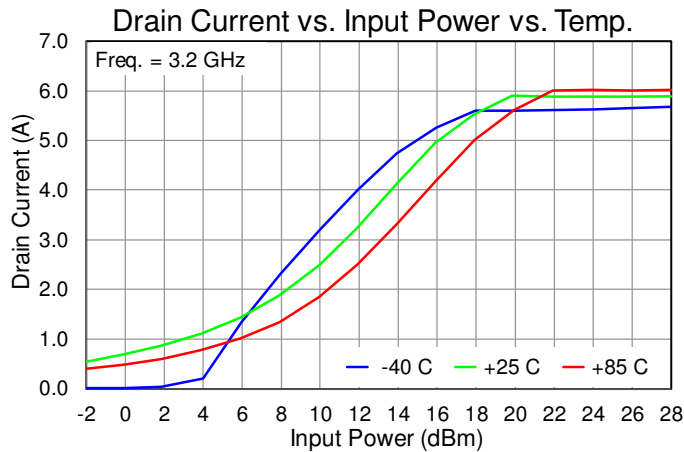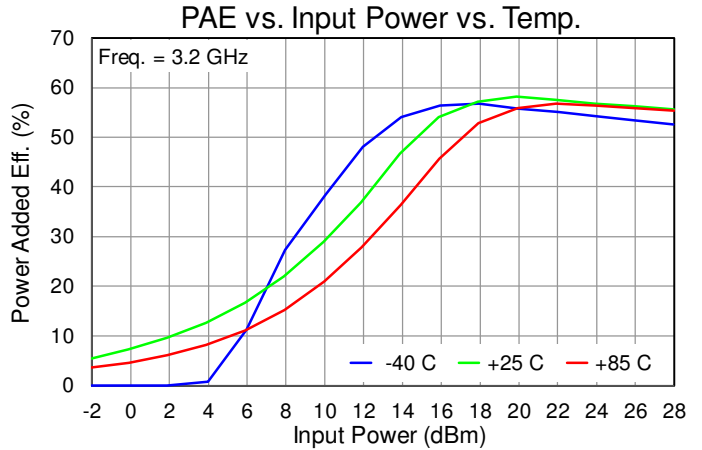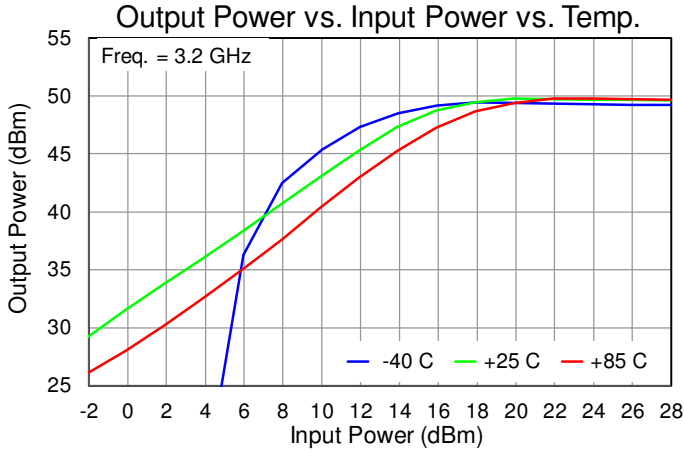







**Performance Plots – Large Signal ( $I_{DQ}=1.5\text{ A}$ ,  $PW=100\text{ us}$ ,  $DC=10\%$ )**

Test conditions unless otherwise noted:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 1.5\text{ A}$ ,  $T = +25\text{ }^\circ\text{C}$

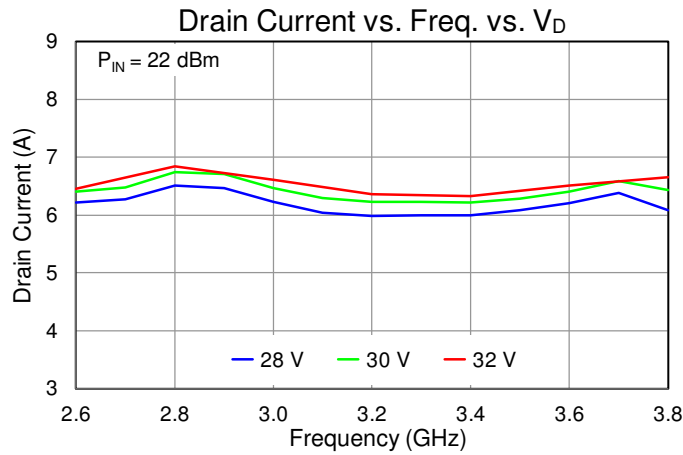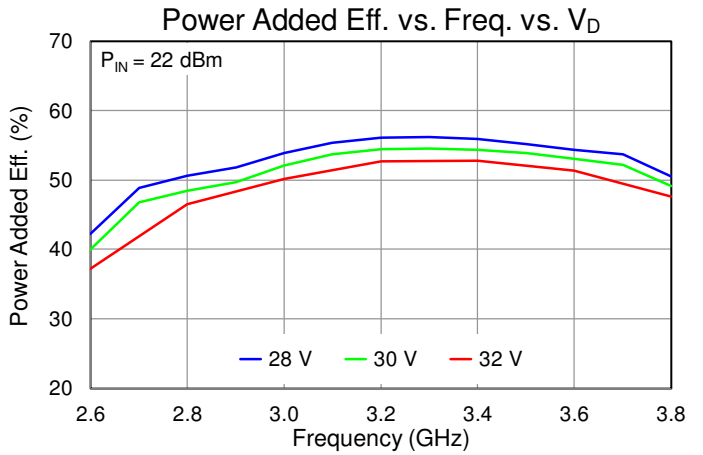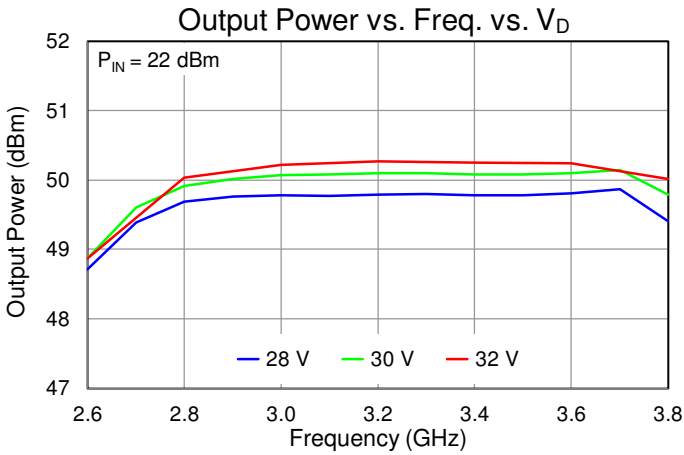

**Performance Plots – Large Signal ( $I_{DQ}=1.5$  A,  $PW=100$  us,  $DC=10\%$ )**





Test conditions unless otherwise noted:  $V_D = 28$  V,  $I_{DQ} = 1.5$  A,  $T = +25$  °C

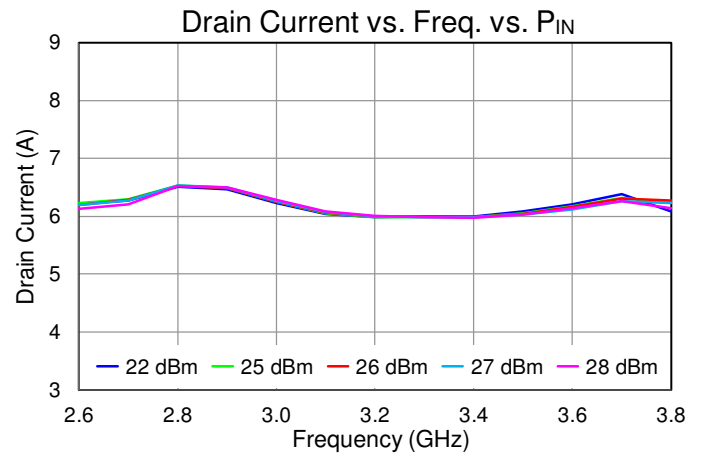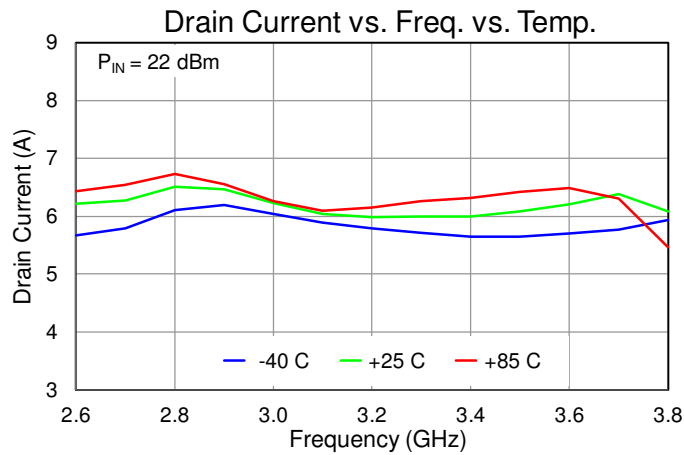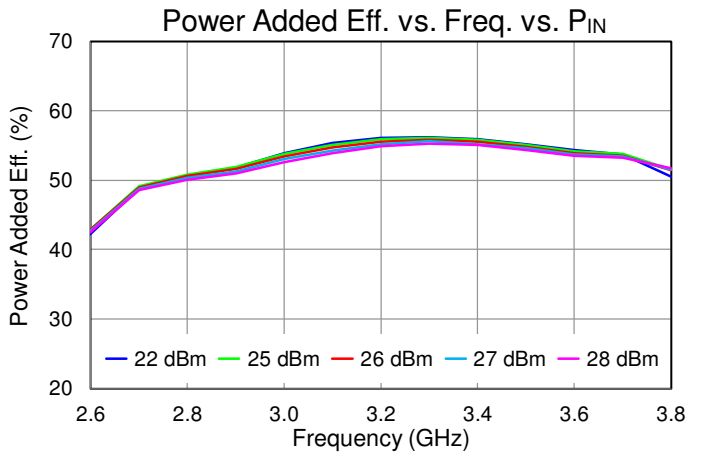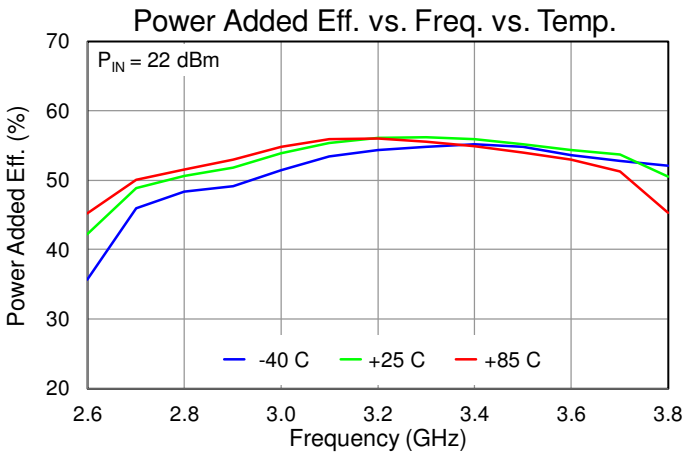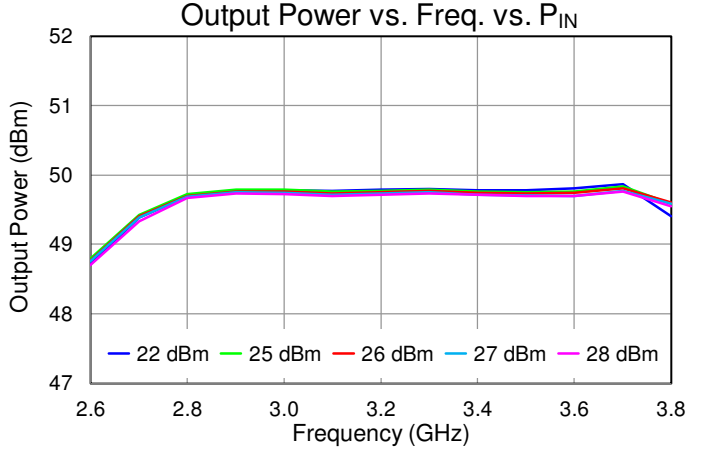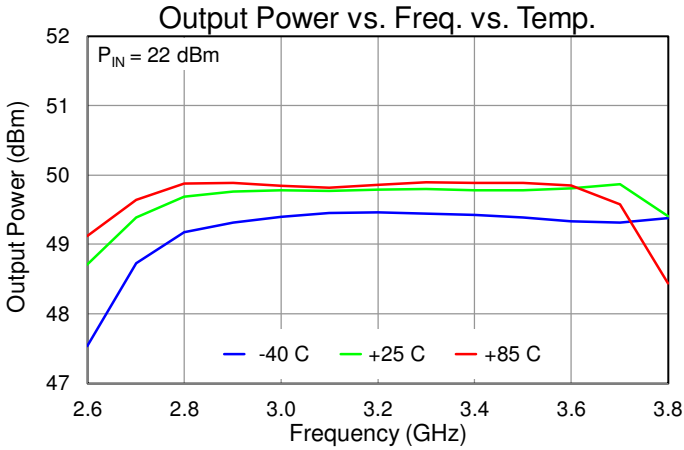







**Performance Plots – Large Signal ( $I_{DQ}=1.5\text{ A}$ ,  $PW=100\text{ }\mu\text{s}$ ,  $DC=10\%$ )**

Test conditions unless otherwise noted:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 1.5\text{ A}$ ,  $T = +25\text{ }^\circ\text{C}$

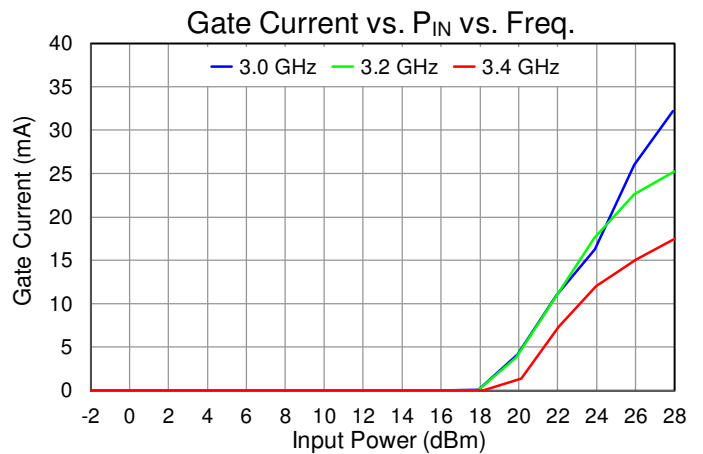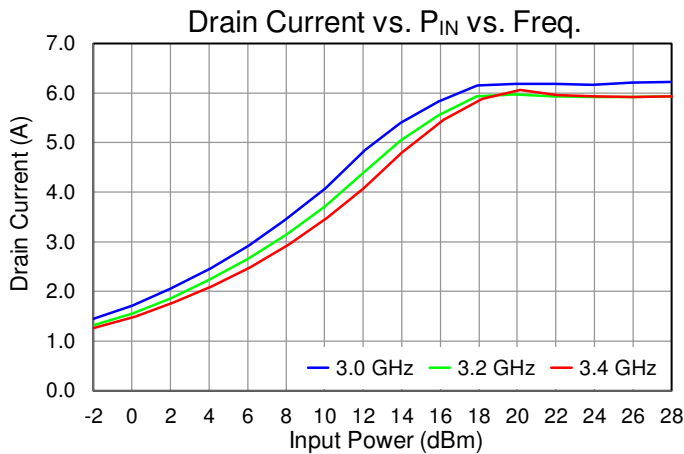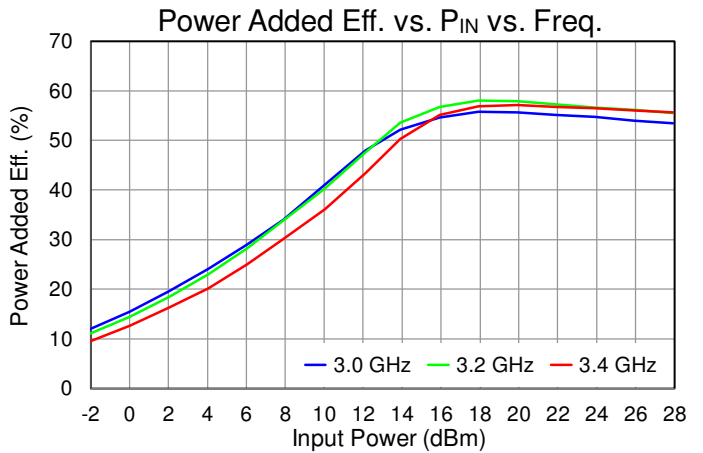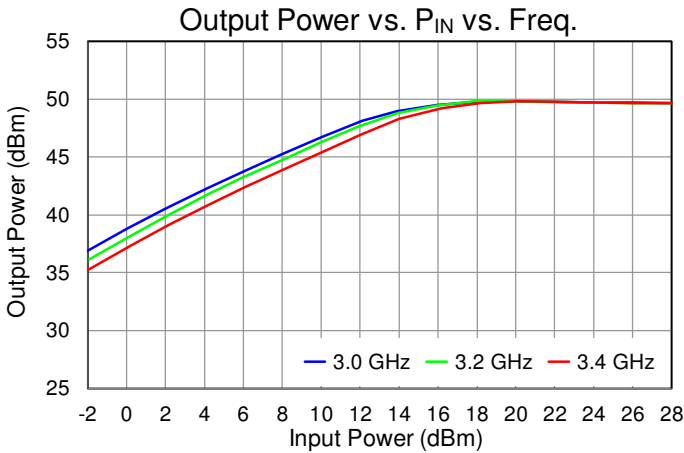







## Performance Plots – Large Signal ( $I_{DQ}=1.5\text{ A}$ , $PW=100\text{ us}$ , $DC=10\%$ )

Test conditions unless otherwise noted:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 1.5\text{ A}$ ,  $T = +25\text{ }^\circ\text{C}$

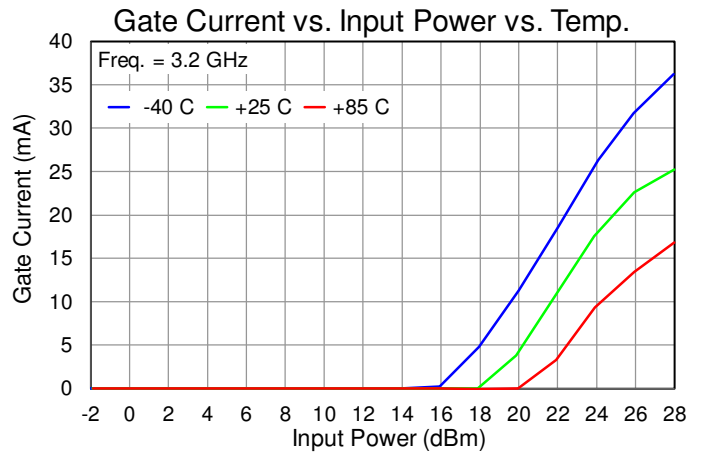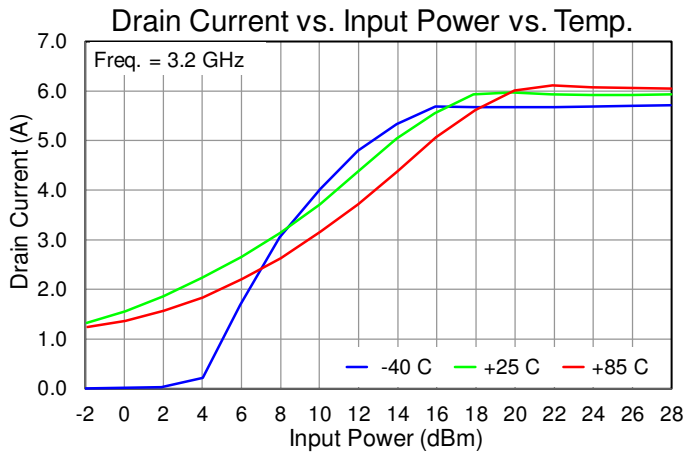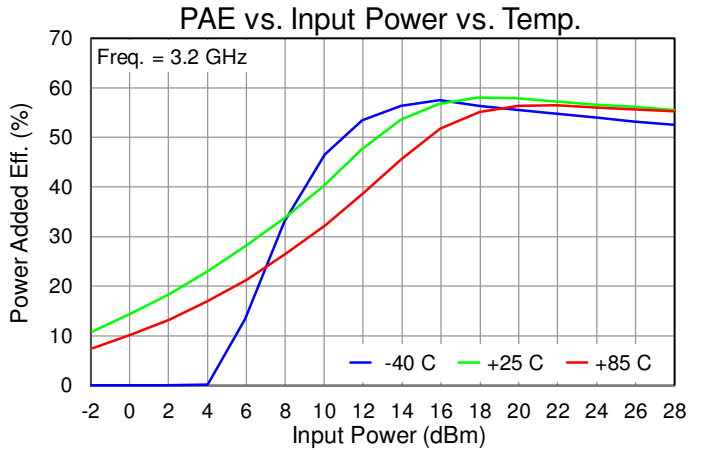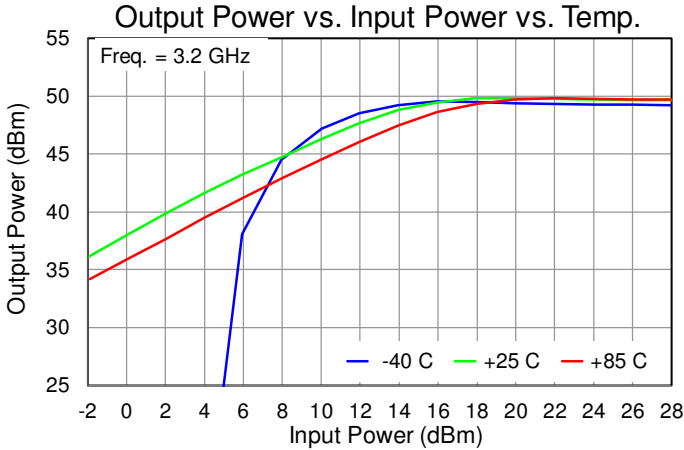







**Performance Plots – Small Signal (CW)**

Test conditions unless otherwise noted:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 300\text{ mA}$ , CW input power,  $T = +25\text{ }^\circ\text{C}$

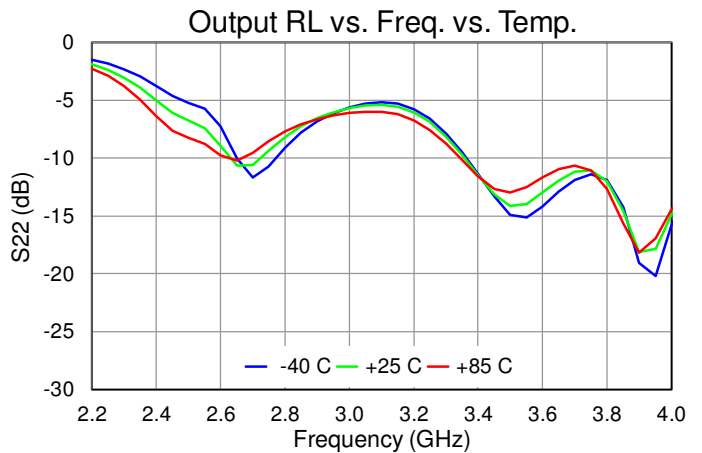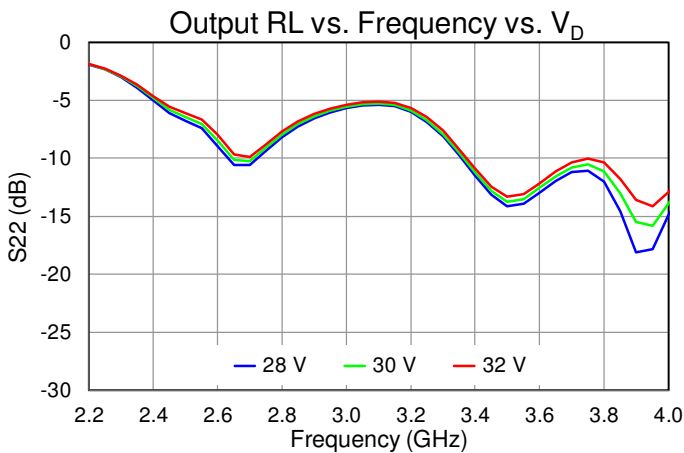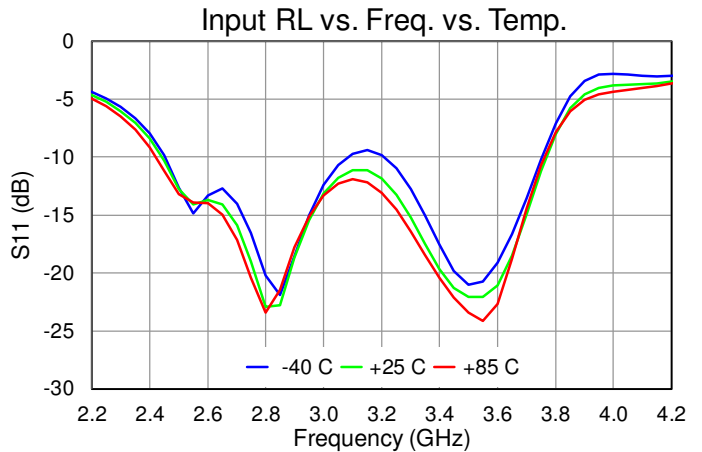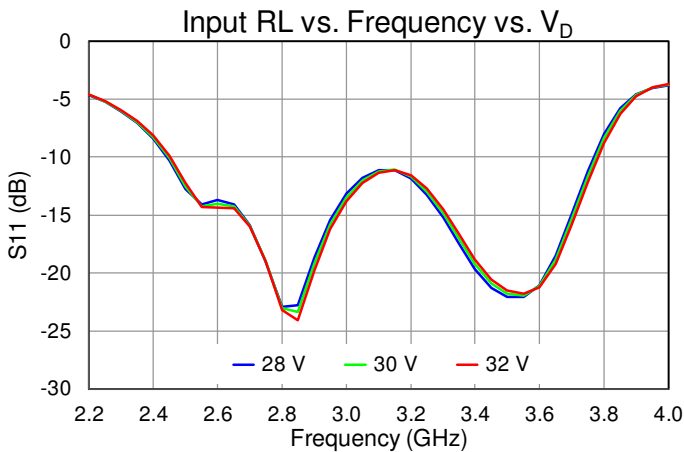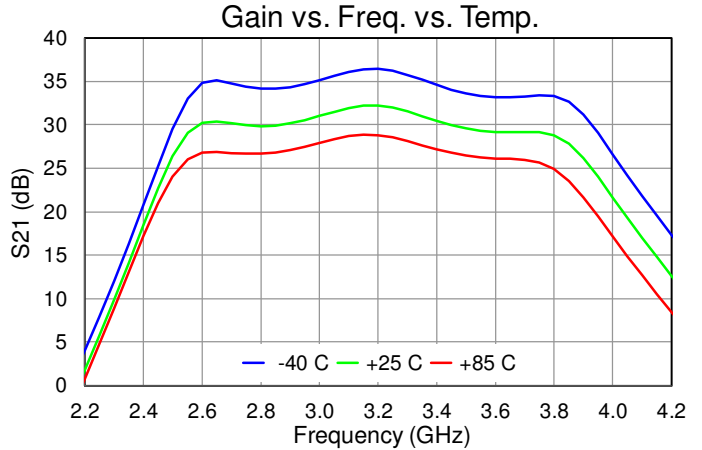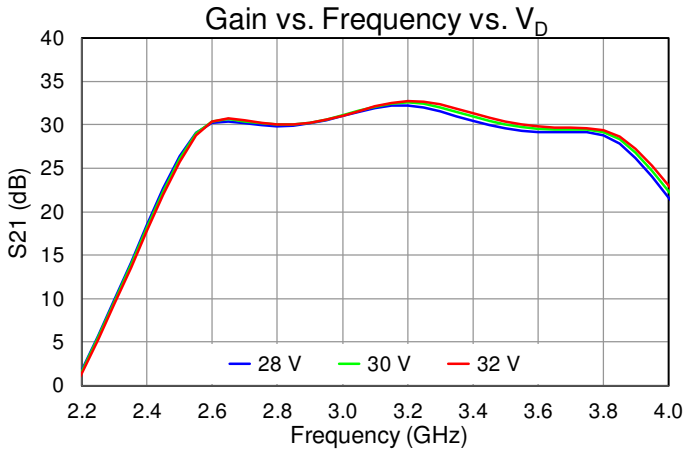

**Performance Plots – Small Signal (CW)**

Test conditions unless otherwise noted:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 1.5\text{ A}$ , CW input power,  $T = +25\text{ }^\circ\text{C}$

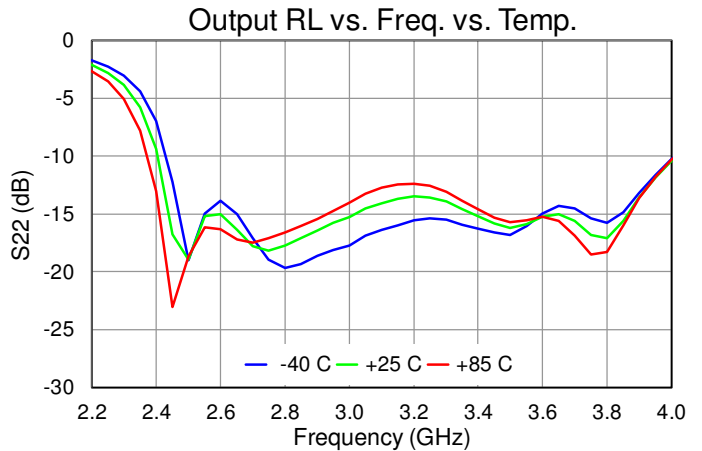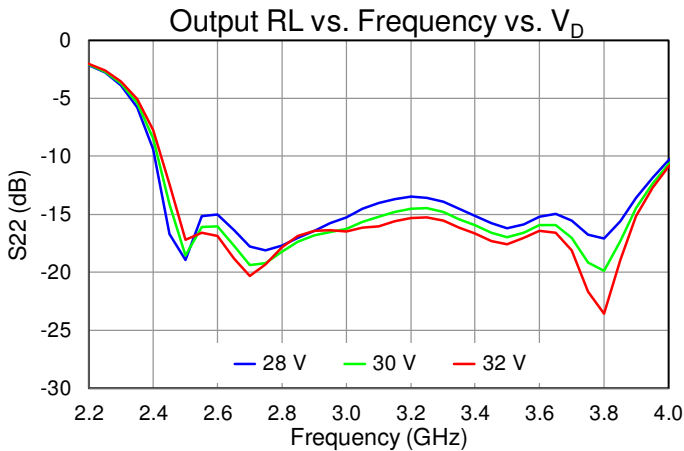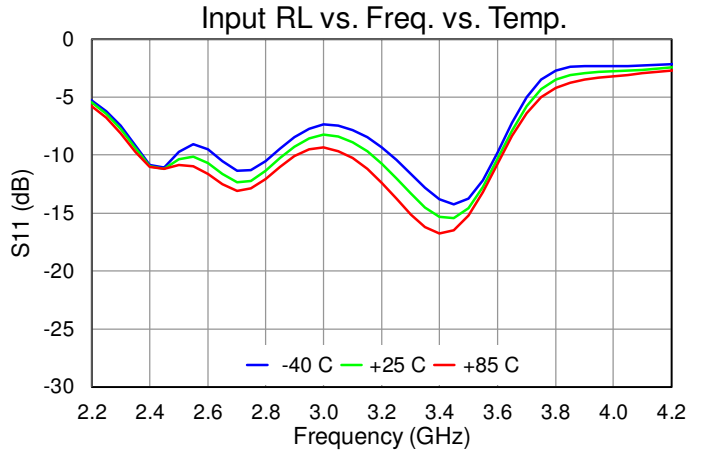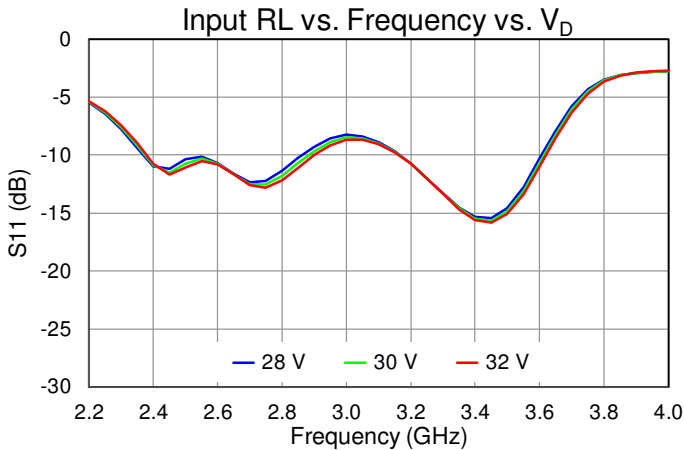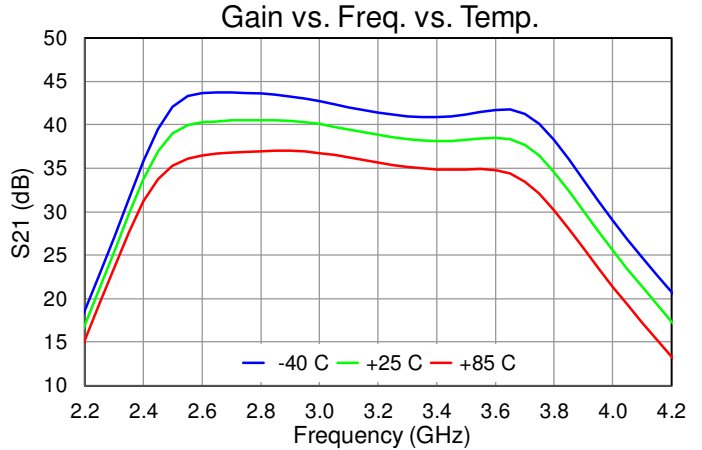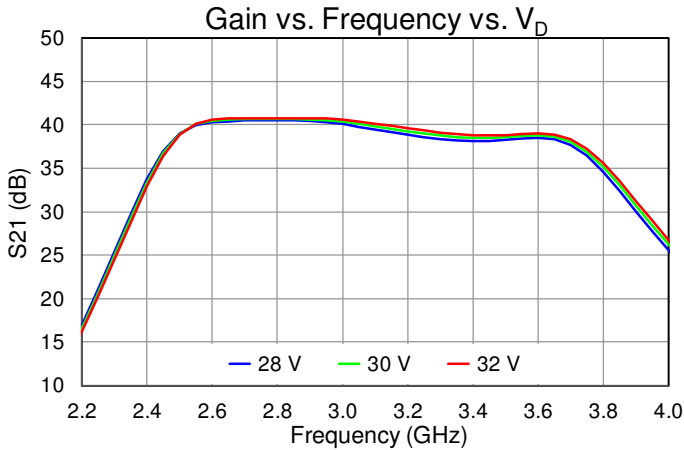


## Thermal and Reliability Information

Parameter	Test Conditions	Value	Units
Thermal Resistance ( $\theta_{JC}$ ) <sup>(1)</sup>	$T_{base} = 85\text{ }^{\circ}\text{C}$ , $V_D = 30\text{ V}$ , $I_{DQ} = 300\text{ mA}$ , $Freq = 2.9\text{ GHz}$ ,	0.36	$^{\circ}\text{C/W}$
Channel Temperature, $T_{CH}$ (Under RF) <sup>(2)</sup>	$I_{D\_Drive} = 6.9\text{ A}$ , $P_{IN} = 25\text{ dBm}$ , $P_{OUT} = 50.2\text{ dBm}$ ,	122	$^{\circ}\text{C}$
Median Lifetime ( $T_M$ )	$P_{DISS} = 101.0\text{ W}$ , $PW = 100\text{ us}$ , $DC = 10\%$	6.39E+09	Hrs
Thermal Resistance ( $\theta_{JC}$ ) <sup>(1)</sup>	$T_{base} = 85\text{ }^{\circ}\text{C}$ , $V_D = 30\text{ V}$ , $I_{DQ} = 1.5\text{ A}$ , $Freq = 2.9\text{ GHz}$ ,	0.74	$^{\circ}\text{C/W}$
Channel Temperature, $T_{CH}$ (Under RF) <sup>(2)</sup>	$I_{D\_Drive} = 6.3\text{ A}$ , $P_{IN} = 25\text{ dBm}$ , $P_{OUT} = 50.0\text{ dBm}$ ,	151	$^{\circ}\text{C}$
Median Lifetime ( $T_M$ )	$P_{DISS} = 90.1\text{ W}$ , $PW = 15\text{ ms}$ , $DC = 30\%$	2.66E+09	Hrs
Thermal Resistance ( $\theta_{JC}$ ) <sup>(1)</sup>	$T_{base} = 85\text{ }^{\circ}\text{C}$ , $V_D = 32\text{ V}$ , $I_{DQ} = 300\text{ mA}$ , $Freq = 2.9\text{ GHz}$ ,	0.36	$^{\circ}\text{C/W}$
Channel Temperature, $T_{CH}$ (Under RF) <sup>(2)</sup>	$I_{D\_Drive} = 7.2\text{ A}$ , $P_{IN} = 25\text{ dBm}$ , $P_{OUT} = 50.6\text{ dBm}$ ,	127	$^{\circ}\text{C}$
Median Lifetime ( $T_M$ )	$P_{DISS} = 115.6\text{ W}$ , $PW = 100\text{ us}$ , $DC = 10\%$	4.72E+07	Hrs
Thermal Resistance ( $\theta_{JC}$ ) <sup>(1)</sup>	$T_{base} = 85\text{ }^{\circ}\text{C}$ , $V_D = 32\text{ V}$ , $I_{DQ} = 1.5\text{ A}$ , $Freq = 2.9\text{ GHz}$ ,	0.83	$^{\circ}\text{C/W}$
Channel Temperature, $T_{CH}$ (Under RF) <sup>(2)</sup>	$I_{D\_Drive} = 6.5\text{ A}$ , $P_{IN} = 25\text{ dBm}$ , $P_{OUT} = 50.4\text{ dBm}$ ,	168	$^{\circ}\text{C}$
Median Lifetime ( $T_M$ )	$P_{DISS} = 100.1\text{ W}$ , $PW = 15\text{ ms}$ , $DC = 30\%$	4.55E+06	Hrs


Notes:

- Thermal resistance determined to the back of package (85 °C)
- Channel temperature indicated is an IR scan equivalent temperature. Thermal resistance is calculated using this value. Additional information can be found in the Qorvo Applications Note "GaN Device TCHMAX Theta-JC and Reliability Estimates," located here <https://www.qorvo.com/products/d/da006480>

## Dissipated Power

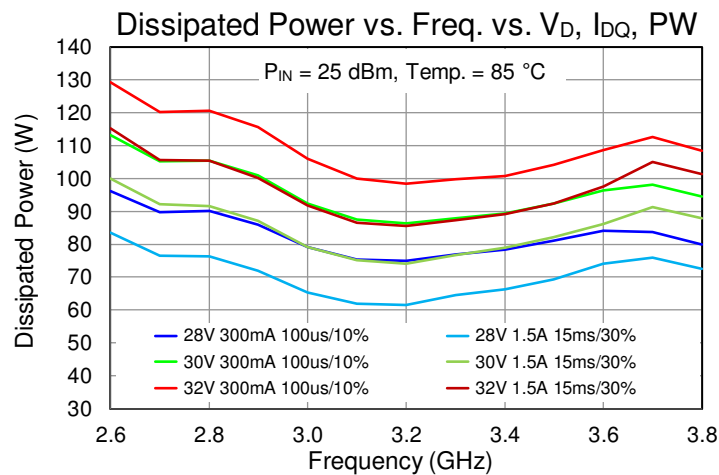

Applications Information

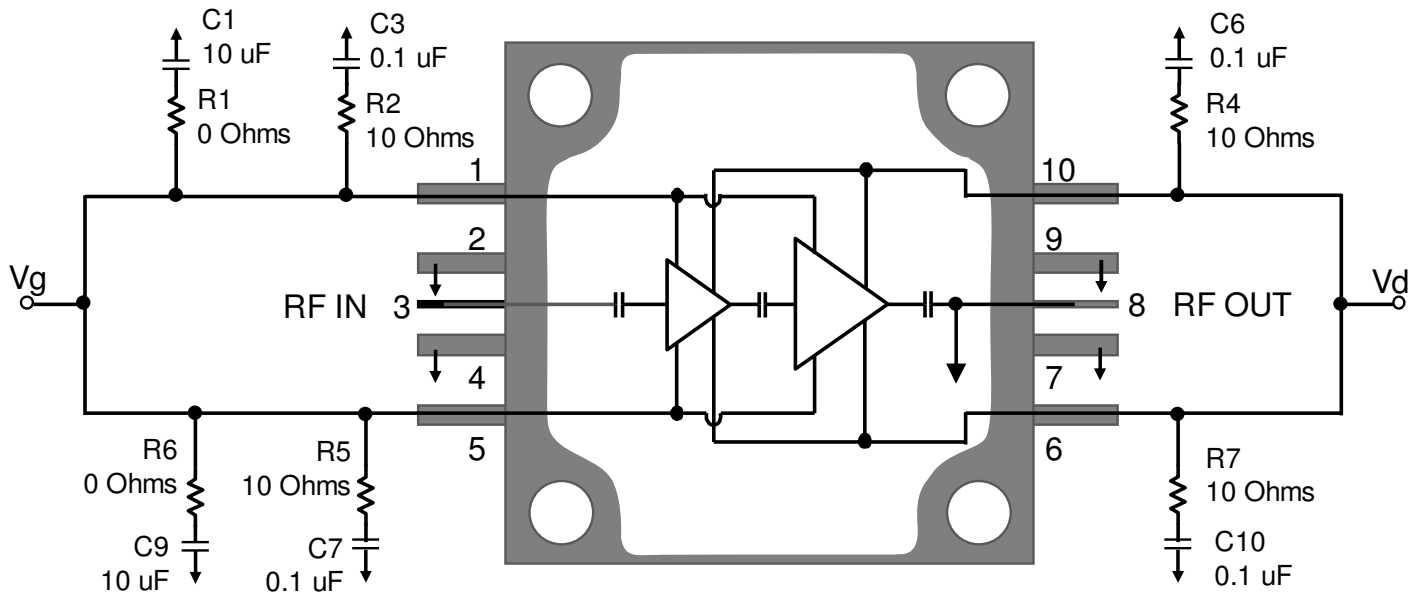

Notes:

1.  $V_G$  &  $V_D$  need to be biased from both sides.


Bias-Up Procedure

1. Set  $I_D$  limit (CW) to 7000 mA,  $I_G$  limit to 60 mA
2. Set  $V_G$  to  $-5.0$  V
3. Set  $V_D$  +30 V
4. Adjust  $V_G$  more positive until  $I_{DQ} \approx 300$  mA, peak ( $V_G \sim -2.5$  V, typical)
5. Apply RF signal

Bias-Down Procedure

1. Turn off RF signal
2. Reduce  $V_G$  to  $-5.0$  V. Ensure  $I_{DQ} \sim 0$  mA
4. Set  $V_D$  to 0 V
5. Turn off  $V_D$  supply
6. Turn off  $V_G$  supply


**Evaluation Board (EVB) Layout Assembly**

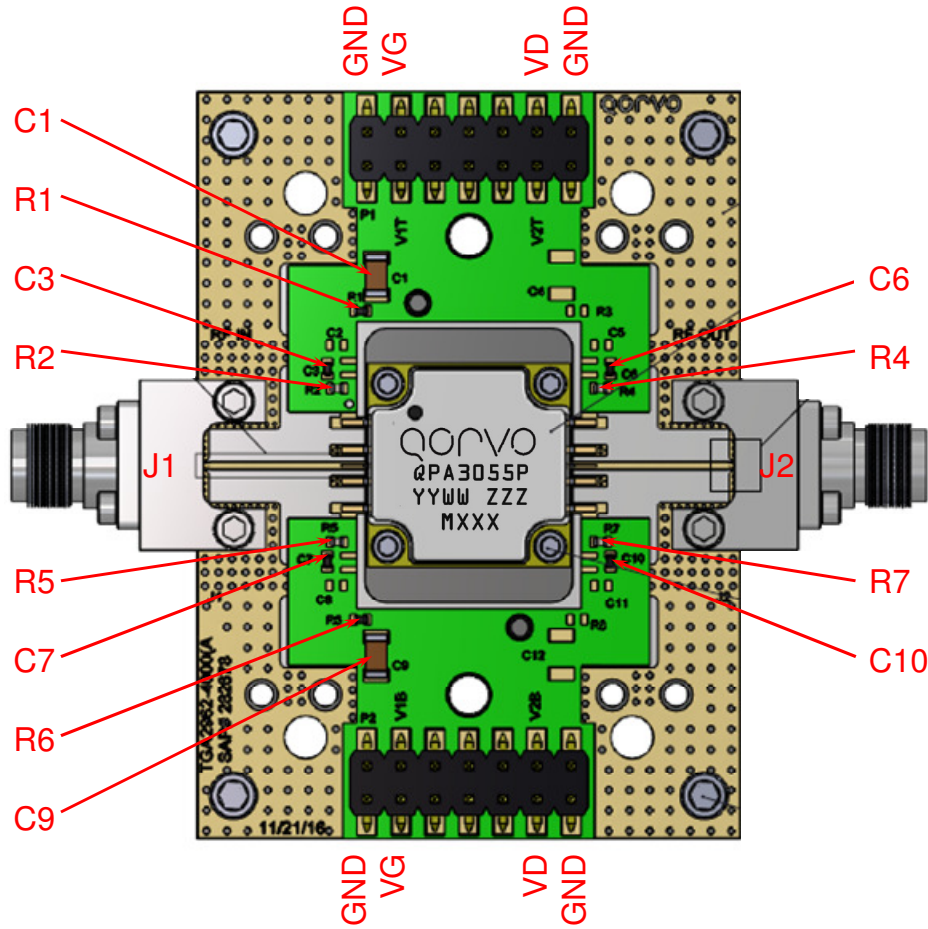

**Bill of Materials**


Reference Des.	Value	Description	Manuf.	Part Number
C1, C9	10 uF	CAP, CER, 10 uF, 50 V, 20%, X5R, 1206	Various	
C3, C6, C7, C10	0.1 uF	CAP, 0.1 uF, 10%, 50 V, X7R, 0402	Various	
R2, R4, R5, R7	10 Ohm	RESISTOR, 10 OHM, 5%, 0.1 W, 0402	Various	
R1, R6	0 Ohm	RES, 0 OHM, JMPR, 0402	Various	
J1, J2	2.92 mm	Female End Launch Connector	Southwest Microwave	1092-02A-5
PCB	----	Rogers 6035HTC, 10 mil dielectric, 0.5 oz. copper (gold plated)	Rogers Corp.	

## Mechanical Information and Bond Pad Description

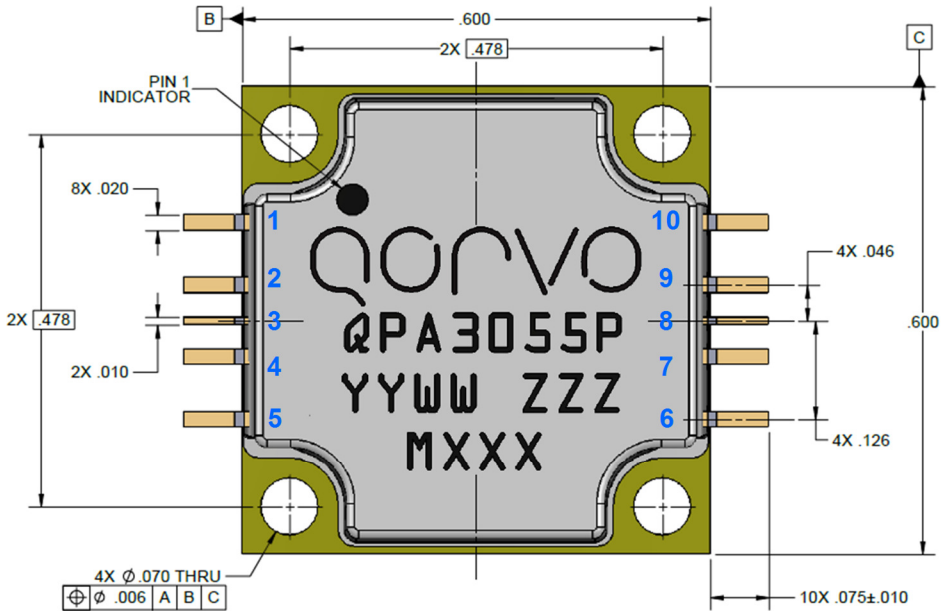

**NOTES:**

1. MATERIALS:  
 PACKAGE BASE: COPPER  
 FINISH: GOLD  
 LEADS: ALLOY 194  
 FINISH: GOLD  
 LID: LCP (LIQUID CRYSTAL POLYMER)
2. PART IS EPOXY SEALED.

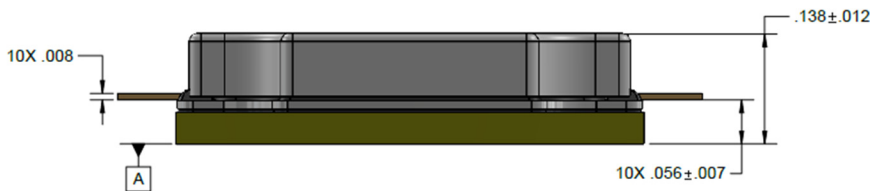

## Bond Pad Description


Pad No.	Symbol	Description
1, 5	V <sub>G</sub>	Gate voltage. Bias network is required; see Application Circuit on page 21 as an example. Gate must be biased from both sides.
2, 4, 7, 9	Ground	Must be grounded to PCB
3	RF Input	RF Input; matched to 50 Ω, DC blocked
6, 10	V <sub>D</sub>	Drain voltage. Bias network is required; see Application Circuit on page 21 as an example.
8	RF Output	RF Output; matched to 50 Ω, DC blocked, DC grounded



**Assembly Notes**

---

1. Carefully clean the PC board and package leads with alcohol. Allow it to dry fully.
2. To improve the thermal and RF performance, Qorvo recommends attaching a heat sink to the bottom of the PCB and apply thermal compound (Arctic Silver 5 recommended) or 4 mil indium shim between the heat sink and the package.
3. (The following is for *information only*. There are many variables in a second level assembly that Qorvo does not control, so Qorvo does not recommend an absolute torque value.) Use screws to attach the component to the heat sink. A suggested torque value is 16 in-oz. for a 0-80 screw. Start with screws finger tight, then torque to 8 in-oz., then torque to final value. Use the following tightening pattern:



4. Apply no-flux solder to each pin of the QPA3055P. The component leads should be manually soldered, and the package should not be subjected to conventional reflow processes. The use of no-clean solder to avoid washing after soldering is recommended.

## Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	Class 1B	ANSI/ESDA/JEDEC JS-001



Caution!  
ESD-Sensitive Device

## Solderability

The component leads should be manually soldered, and the package should not be subjected to conventional reflow processes. Soldering of the component leads is compatible with the latest version of J-STD-020, lead-free solder, 260 °C. The use of no-clean solder to avoid washing after soldering is recommended.

## RoHS Compliance

This part is compliant with 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C<sub>15</sub>H<sub>12</sub>Br<sub>4</sub>O<sub>2</sub>) Free
- PFOS Free
- SVHC Free

## Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

**Web:** [www.qorvo.com](http://www.qorvo.com)

**Tel:** 1-844-890-8163

**Email:** [customer.support@qorvo.com](mailto:customer.support@qorvo.com)

## Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2018 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.