


# SN75179B DIFFERENTIAL DRIVER AND RECEIVER PAIR

SLLS003E – OCTOBER 1985 – REVISED JUNE 1998

- Meets or Exceeds the Requirements of TIA/EIA-422-B, TIA/EIA-485-A, and ITU Recommendation V.11
- Bus Voltage Range . . . -7 V to 12 V
- Positive- and Negative-Current Limiting
- Driver Output Capability . . . 60 mA Max
- Driver Thermal-Shutdown Protection
- Receiver Input Impedance . . . 12 k $\Omega$  Min
- Receiver Input Sensitivity . . .  $\pm 200$  mV
- Receiver Input Hysteresis . . . 50 mV Typ
- Operates From Single 5-V Supply
- Low Power Requirements

D OR P PACKAGE  
(TOP VIEW)



## description

The SN75179B is a differential driver and receiver pair designed for balanced transmission-line applications and meets TIA/EIA-422-B, TIA/EIA-485-A, and ITU Recommendation V.11. It is designed to improve the performance of full-duplex data communications over long bus lines.

The SN75179B driver output provides limiting for both positive and negative currents. The receiver features high input impedance, input hysteresis for increased noise immunity, and input sensitivity of  $\pm 200$  mV over a common-mode input voltage range of -7 V to 12 V. The driver provides thermal shutdown for protection from line fault conditions. Thermal shutdown is designed to occur at a junction temperature of approximately 150°C. The SN75179B is designed to drive current loads of up to 60 mA maximum.

The SN75179B is characterized for operation from 0°C to 70°C.

## Function Tables

### DRIVER

| INPUT<br>D | OUTPUTS |   |
|------------|---------|---|
|            | Y       | Z |
| H          | H       | L |
| L          | L       | H |

### RECEIVER

| DIFFERENTIAL INPUTS<br>A - B | OUTPUT<br>R |
|------------------------------|-------------|
| $V_{ID} \geq 0.2$ V          | H           |
| $-0.2$ V $< V_{ID} < 0.2$ V  | ?           |
| $V_{ID} \leq -0.2$ V         | L           |
| Open                         | ?           |

H = high level, L = low level, ? = indeterminate



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

 **TEXAS  
INSTRUMENTS**


POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1998, Texas Instruments Incorporated

# SN75179B DIFFERENTIAL DRIVER AND RECEIVER PAIR


SLLS003E – OCTOBER 1985 – REVISED JUNE 1998

## logic symbol†

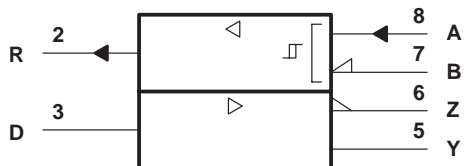


† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

## logic diagram (positive logic)



## schematics of inputs and outputs

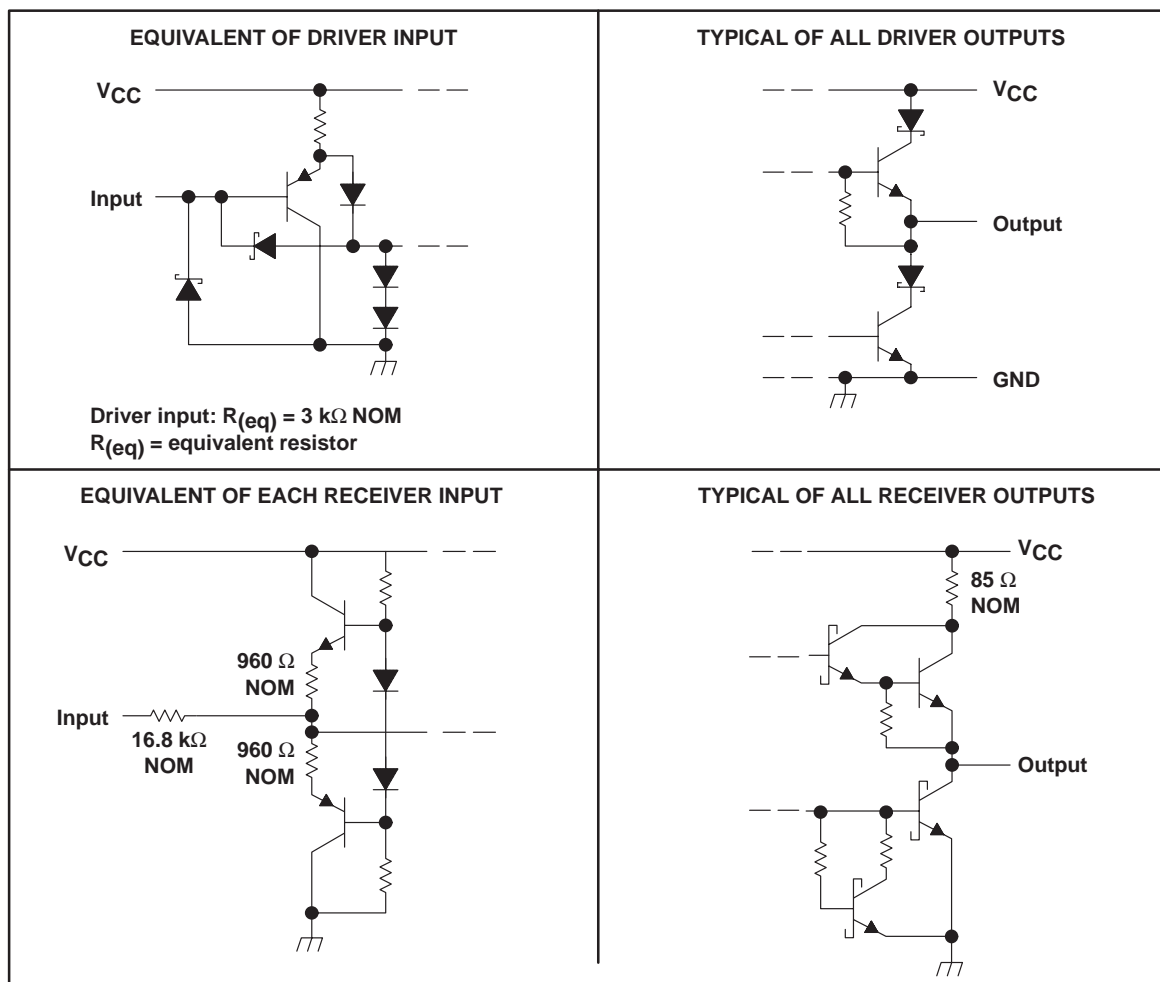

# SN75179B DIFFERENTIAL DRIVER AND RECEIVER PAIR

SLLS003E – OCTOBER 1985 – REVISED JUNE 1998

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

|  |                 |         |
|--|-----------------|---------|
| Supply voltage, $V_{CC}$ (see Note 1) .....                        | 7 V             |         |
| Voltage range at any bus terminal .....                            | –10 V to 15 V   |         |
| Differential input voltage, $V_{ID}$ (see Note 2) .....            | ±25 V           |         |
| Package thermal impedance, $\theta_{JA}$ (see Note 3):             | D package ..... | 197°C/W |
|  | P package ..... | 104°C/W |
| Storage temperature range, $T_{stg}$ .....                         | –65°C to 150°C  |         |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds ..... | 260°C           |         |

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES:
1. All voltage values, except differential input voltage, are with respect to network ground terminal.
  2. Differential input voltage is measured at the noninverting input with respect to the corresponding inverting input.
  3. The package thermal impedance is calculated in accordance with JESD 51, except for through-hole packages, which use a trace length of zero.

## recommended operating conditions

|                                       |          | MIN  | NOM | MAX  | UNIT |
|---------------------------------------|----------|------|-----|------|------|
| Supply voltage, $V_{CC}$              |          | 4.75 | 5   | 5.25 | V    |
| High-level input voltage, $V_{IH}$    | Driver   | 2    |     |      | V    |
| Low-level input voltage, $V_{IL}$     | Driver   |      |     | 0.8  | V    |
| Common-mode input voltage, $V_{IC}$   |          | –7‡  |     | 12   | V    |
| Differential input voltage, $V_{ID}$  |          |      |     | ±12  | V    |
| High-level output current, $I_{OH}$   | Driver   |      |     | –60  | mA   |
|                                       | Receiver |      |     | –400 | µA   |
| Low-level output current, $I_{OL}$    | Driver   |      |     | 60   | mA   |
|                                       | Receiver |      |     | 8    |      |
| Operating free-air temperature, $T_A$ |          | 0    |     | 70   | °C   |

‡ The algebraic convention, where the less positive (more negative) limit is designated minimum, is used in this data sheet for common-mode input voltage and threshold voltage.



# SN75179B

## DIFFERENTIAL DRIVER AND RECEIVER PAIR

SLLS003E – OCTOBER 1985 – REVISED JUNE 1998

### DRIVER SECTION

electrical characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted)

| PARAMETER   | TEST CONDITIONS                                      | MIN                          | TYP† | MAX                                   | UNIT          |
|---|--|------------------------------|------|---------------------------------------|---------------|
| $V_{IK}$ Input clamp voltage  | $I_I = -18 \text{ mA}$                               |                              |      | -1.5                                  | V             |
| $V_O$ Output voltage  | $I_O = 0$  | 0                            |      | 6                                     | V             |
| $ V_{OD1} $ Differential output voltage                             | $I_O = 0$  | 1.5                          |      | 6                                     | V             |
| $ V_{OD2} $ Differential output voltage                             | $R_L = 100 \Omega$ , See Figure 1                    | $1/2 V_{OD1}$ or $2\ddagger$ |      |                                       | V             |
|   | $R_L = 54 \Omega$ , See Figure 1                     | 1.5                          | 2.5  | 5                                     | V             |
| $ V_{OD3} $ Differential output voltage                             | See Note 4   | 1.5                          |      | 5                                     | V             |
| $\Delta V_{OD} $ Change in magnitude of common-mode output voltage§ |  |                              |      | $\pm 0.2$                             | V             |
| $V_{OC}$ Common-mode output voltage                                 | $R_L = 54 \Omega$ or $100 \Omega$ , See Figure 1     |                              |      | $\begin{matrix} 3 \\ -1 \end{matrix}$ | V             |
| $\Delta V_{OC} $ Change in magnitude of common-mode output voltage§ |  |                              |      | $\pm 0.2$                             | V             |
| $I_O$ Output current  | $V_{CC} = 0$ , $V_O = -7 \text{ V to } 12 \text{ V}$ |                              |      | $\pm 100$                             | $\mu\text{A}$ |
| $I_{IH}$ High-level input current                                   | $V_I = 2.4 \text{ V}$                                |                              |      | 20                                    | $\mu\text{A}$ |
| $I_{IL}$ Low-level input current                                    | $V_I = 0.4 \text{ V}$                                |                              |      | -200                                  | $\mu\text{A}$ |
| $I_{OS}$ Short-circuit output current                               | $V_O = -7 \text{ V}$                                 |                              |      | -250                                  | mA            |
|   | $V_O = V_{CC}$ or $12 \text{ V}$                     |                              |      | 250                                   |               |
| $I_{CC}$ Supply current (total package)                             | No load  |                              | 57   | 70                                    | mA            |

† All typical values are at  $V_{CC} = 5 \text{ V}$  and  $T_A = 25^\circ\text{C}$ .

‡ The minimum  $V_{OD2}$  with  $100\text{-}\Omega$  load is either  $1/2 V_{OD2}$  or  $2 \text{ V}$ , whichever is greater.

§  $\Delta|V_{OD}|$  and  $\Delta|V_{OC}|$  are the changes in magnitude of  $V_{OD}$  and  $V_{OC}$ , respectively, that occur when the input changes from a high level to a low level.

NOTE 4: See TIA/EIA-485-A, Figure 3.5, Test Termination Measurement 2.

### switching characteristics, $V_{CC} = 5 \text{ V}$ , $T_A = 25^\circ\text{C}$

| PARAMETER                                       | TEST CONDITIONS                  | MIN | TYP | MAX | UNIT |
|---|----------------------------------|-----|-----|-----|------|
| $t_{d(OD)}$ Differential output delay time      | $R_L = 54 \Omega$ , See Figure 3 |     | 15  | 22  | ns   |
| $t_{t(OD)}$ Differential output transition time |                                  |     | 20  | 30  | ns   |

### Symbol Equivalents

| DATA-SHEET PARAMETER | TIA/EIA-422-B             | TIA/EIA-485-A                          |
|----------------------|---------------------------|--|
| $V_O$                | $V_{Oa}, V_{Ob}$          | $V_{Oa}, V_{Ob}$                       |
| $ V_{OD1} $          | $V_o$                     | $V_o$                                  |
| $ V_{OD2} $          | $V_t (R_L = 100 \Omega)$  | $V_t (R_L = 54 \Omega)$                |
| $ V_{OD3} $          |                           | $V_t$ (Test Termination Measurement 2) |
| $\Delta V_{OD} $     | $  V_t  -  \bar{V}_t  $   | $  V_t  -  \bar{V}_t  $                |
| $V_{OC}$             | $ V_{os} $                | $ V_{os} $                             |
| $\Delta V_{OC} $     | $ V_{os} - \bar{V}_{os} $ | $ V_{os} - \bar{V}_{os} $              |
| $I_{OS}$             | $ I_{sa} ,  I_{sb} $      |  |
| $I_O$                | $ I_{xa} ,  I_{xb} $      | $I_{ia}, I_{ib}$                       |



## RECEIVER SECTION

**electrical characteristics over recommended ranges of common-mode input voltage, supply voltage, and operating free-air temperature (unless otherwise noted)**

| PARAMETER  | TEST CONDITIONS  | MIN   | TYP† | MAX  | UNIT       |
|--|--|-------|------|------|------------|
| $V_{IT+}$ Positive-going input threshold voltage     | $V_O = 2.7\text{ V}$ , $I_O = -0.4\text{ mA}$                                |       |      | 0.2  | V          |
| $V_{IT-}$ Negative-going input threshold voltage     | $V_O = 0.5\text{ V}$ , $I_O = 8\text{ mA}$                                   | -0.2‡ |      |      | V          |
| $V_{hys}$ Hysteresis voltage ( $V_{IT+} - V_{IT-}$ ) |  |       | 50   |      | mV         |
| $V_{OH}$ High-level output voltage                   | $V_{ID} = 200\text{ mV}$ , $I_{OH} = -400\text{ }\mu\text{A}$ , See Figure 2 |       | 2.7  |      | V          |
| $V_{OL}$ Low-level output voltage                    | $V_{ID} = -200\text{ mV}$ , $I_{OL} = 8\text{ mA}$ , See Figure 2            |       |      | 0.45 | V          |
| $I_I$ Line input current                             | Other input at 0 V, See Note 5   |       |      |      | mA         |
|  | $V_I = 12\text{ V}$  |       |      | 1    |            |
|  | $V_I = -7\text{ V}$  |       |      | -0.8 |            |
| $r_i$ Input resistance                               |  |       | 12   |      | k $\Omega$ |
| $I_{OS}$ Short-circuit output current                |  | -15   |      | -85  | mA         |
| $I_{CC}$ Supply current (total package)              | No load  |       | 57   | 70   | mA         |

† All typical values are at  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$ .

‡ The algebraic convention, where the less positive (more negative) limit is designated minimum, is used in this data sheet for common-mode input voltage and threshold voltage levels only.

NOTE 5: Refer to TIA/EIA-422-B for exact conditions.

**switching characteristics,  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER   | TEST CONDITIONS   | MIN | TYP | MAX | UNIT |
|---|---|-----|-----|-----|------|
| $t_{PLH}$ Propagation delay time, low- to high-level output | $V_{ID} = -1.5\text{ V}$ to $1.5\text{ V}$ ,<br>$C_L = 15\text{ pF}$ , See Figure 4 |     | 19  | 35  | ns   |
| $t_{PHL}$ Propagation delay time, high- to low-level output |   |     | 30  | 40  | ns   |

## PARAMETER MEASUREMENT INFORMATION

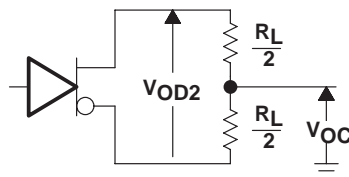


Figure 1. Driver  $V_{DD}$  and  $V_{OC}$


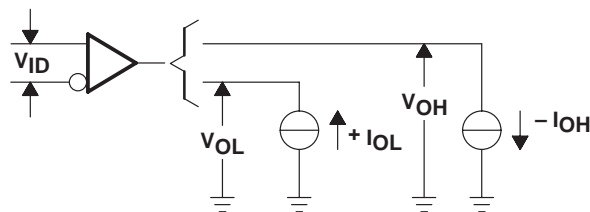


Figure 2. Receiver  $V_{OH}$  and  $V_{OL}$


# SN75179B DIFFERENTIAL DRIVER AND RECEIVER PAIR

SLLS003E – OCTOBER 1985 – REVISED JUNE 1998

## PARAMETER MEASUREMENT INFORMATION (CONTINUED)

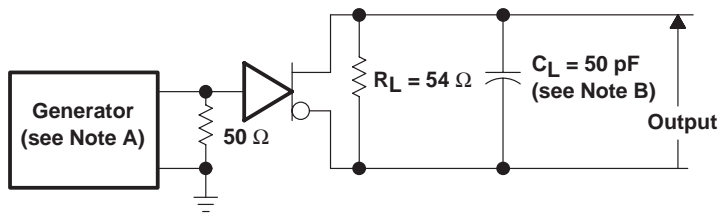


TEST CIRCUIT

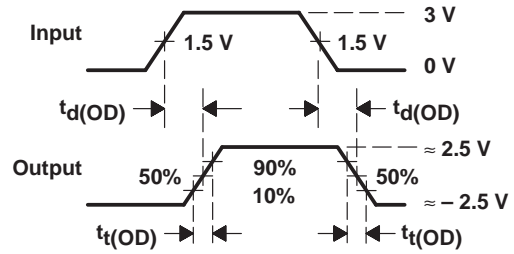


VOLTAGE WAVEFORMS

- NOTES: A. The input pulse is supplied by a generator having the following characteristics:  $\text{PRR} \leq 1 \text{ MHz}$ , 50% duty cycle,  $t_r \leq 6 \text{ ns}$ ,  $t_f \leq 6 \text{ ns}$ ,  $Z_O = 50 \Omega$ .  
B.  $C_L$  includes probe and jig capacitance.

Figure 3. Driver Test Circuit and Voltage Waveforms

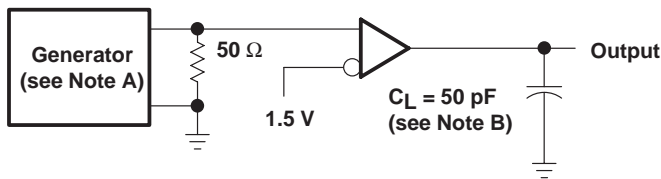

TEST CIRCUIT




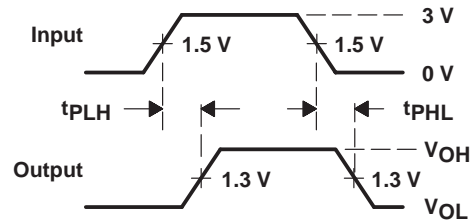


VOLTAGE WAVEFORMS

- NOTES: A. The input pulse is supplied by a generator having the following characteristics:  $\text{PRR} \leq 1 \text{ MHz}$ , 50% duty cycle,  $t_r \leq 6 \text{ ns}$ ,  $t_f \leq 6 \text{ ns}$ ,  $Z_O = 50 \Omega$ .  
B.  $C_L$  includes probe and jig capacitance.

Figure 4. Receiver Test Circuit and Voltage Waveforms

TYPICAL CHARACTERISTICS

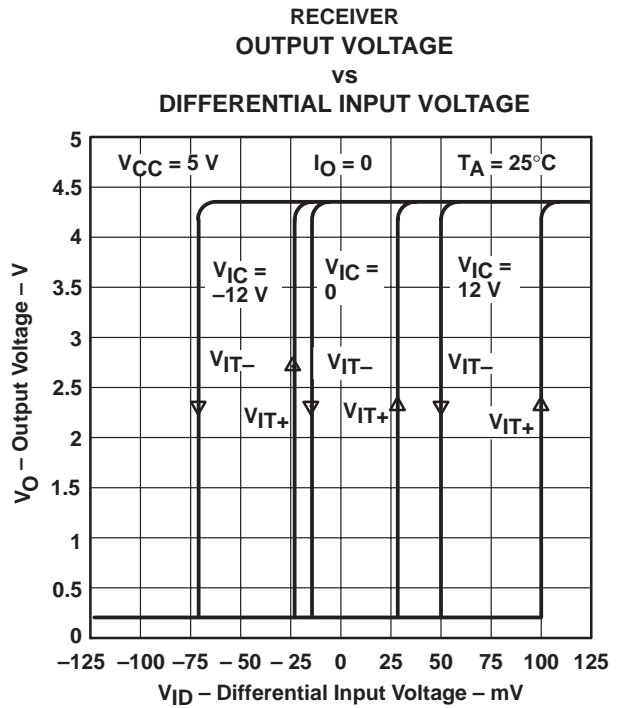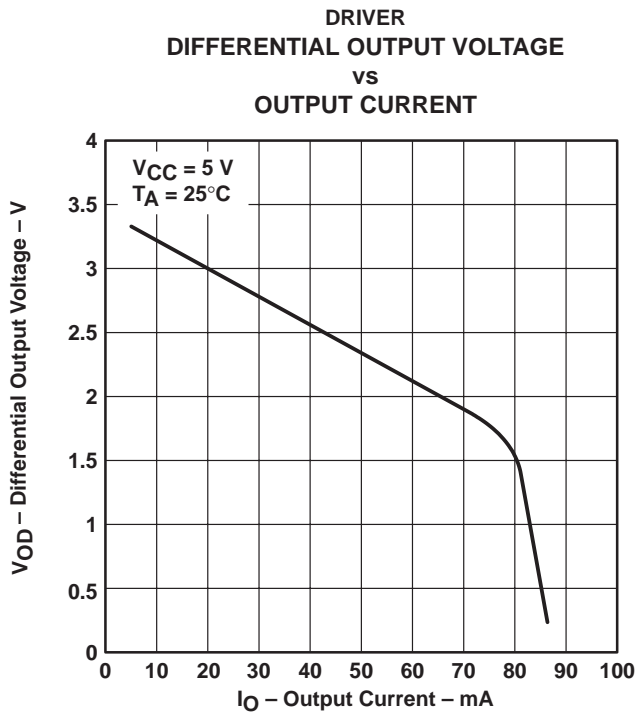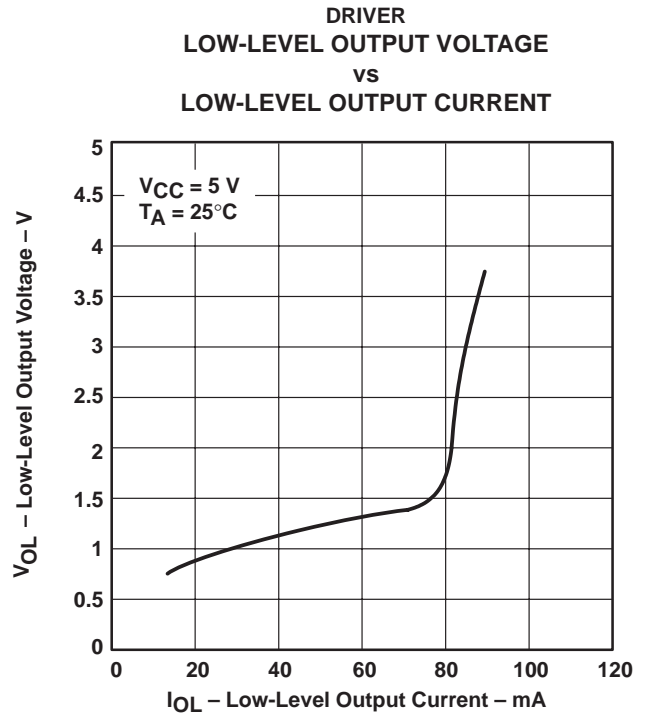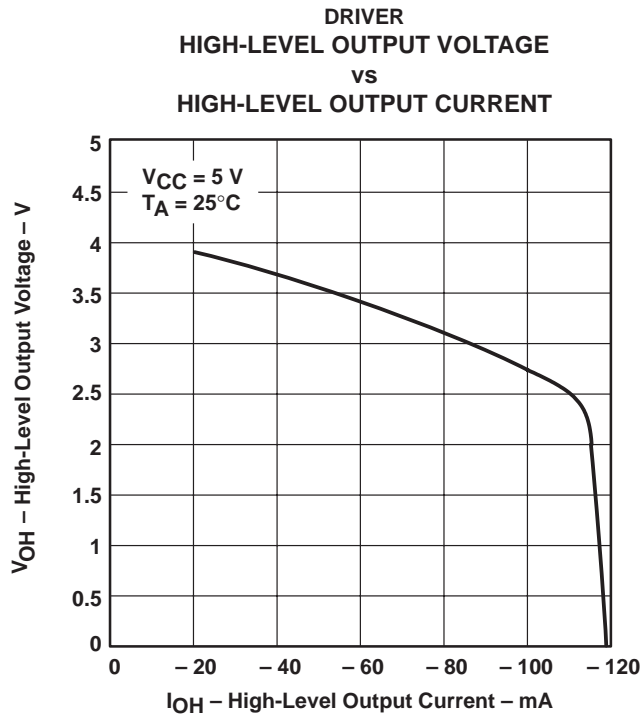

# SN75179B DIFFERENTIAL DRIVER AND RECEIVER PAIR

SLLS003E – OCTOBER 1985 – REVISED JUNE 1998

## TYPICAL CHARACTERISTICS

HIGH-LEVEL OUTPUT VOLTAGE  
vs  
HIGH-LEVEL OUTPUT CURRENT

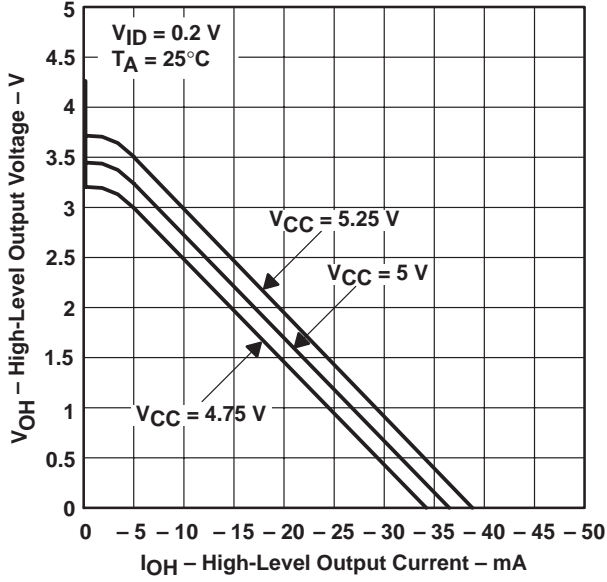


Figure 9

HIGH-LEVEL OUTPUT VOLTAGE  
vs  
FREE-AIR TEMPERATURE

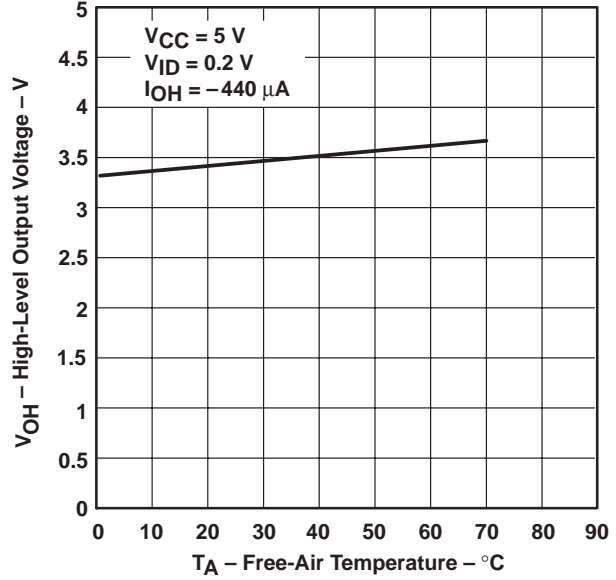


Figure 10

RECEIVER  
LOW-LEVEL OUTPUT VOLTAGE  
vs  
LOW-LEVEL OUTPUT CURRENT

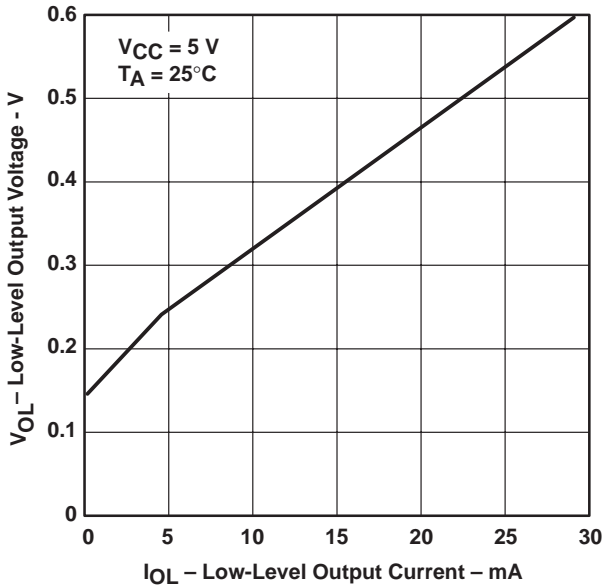


Figure 11

RECEIVER  
LOW-LEVEL OUTPUT VOLTAGE  
vs  
FREE-AIR TEMPERATURE

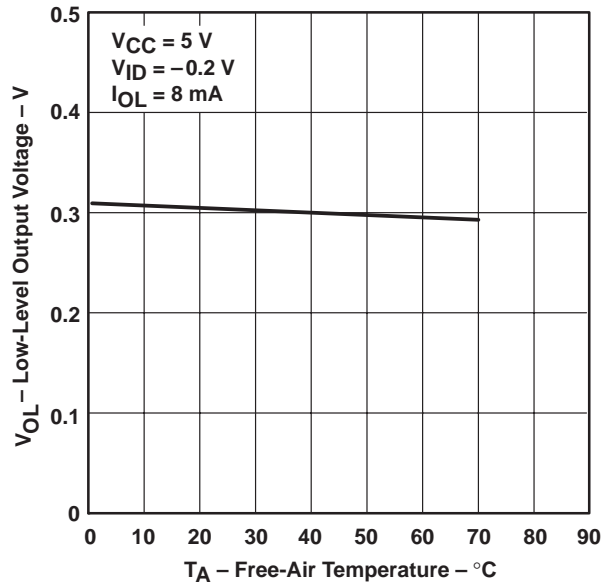


Figure 12



**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan<br>(2)         | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|-----------------|------|-------------|-------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| SN75179BD        | ACTIVE        | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | NIPDAU                  | Level-1-260C-UNLIM   | 0 to 70      | 75179B                  | <a href="#">Samples</a> |
| SN75179BDE4      | ACTIVE        | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | NIPDAU                  | Level-1-260C-UNLIM   | 0 to 70      | 75179B                  | <a href="#">Samples</a> |
| SN75179BDR       | ACTIVE        | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | NIPDAU                  | Level-1-260C-UNLIM   | 0 to 70      | 75179B                  | <a href="#">Samples</a> |
| SN75179BDRG4     | ACTIVE        | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | NIPDAU                  | Level-1-260C-UNLIM   | 0 to 70      | 75179B                  | <a href="#">Samples</a> |
| SN75179BP        | ACTIVE        | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | NIPDAU                  | N / A for Pkg Type   | 0 to 70      | SN75179BP               | <a href="#">Samples</a> |
| SN75179BPE4      | ACTIVE        | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | NIPDAU                  | N / A for Pkg Type   | 0 to 70      | SN75179BP               | <a href="#">Samples</a> |
| SN75179BPSR      | ACTIVE        | SO           | PS              | 8    | 2000        | Green (RoHS & no Sb/Br) | NIPDAU                  | Level-1-260C-UNLIM   | 0 to 70      | A179B                   | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSELETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=100ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION



### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



\*All dimensions are nominal

| Device     | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN75179BDR | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |

TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device     | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN75179BDR | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |



D0008A

# PACKAGE OUTLINE

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



4214825/C 02/2019

### NOTES:

- Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
- This drawing is subject to change without notice.
- This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed  $.006$  [0.15] per side.
- This dimension does not include interlead flash.
- Reference JEDEC registration MS-012, variation AA.

# EXAMPLE BOARD LAYOUT

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



LAND PATTERN EXAMPLE  
 EXPOSED METAL SHOWN  
 SCALE:8X



SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.125 MM] THICK STENCIL  
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

# MECHANICAL DATA

PS (R-PDSO-G8)

PLASTIC SMALL-OUTLINE PACKAGE



- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



P (R-PDIP-T8)

PLASTIC DUAL-IN-LINE PACKAGE



- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Falls within JEDEC MS-001 variation BA.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale ([www.ti.com/legal/termsofsale.html](http://www.ti.com/legal/termsofsale.html)) or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2020, Texas Instruments Incorporated



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.