

# 59022 Firecracker Reed Sensor + 57022 Actuator



## Description

The 59022 Firecracker Reed Sensor is a small cylindrical reed sensor, 25.4mm (L) x 5.80mm (Dia.) (1.00" x 0.228"), with a choice of normally open, normally closed or change-over contacts. It is capable of switching up to 200Vdc at 10W.

The 59022 Firecracker Reed Sensor is available with a range of sensitivity and cable length options. It functions best with the 57022 actuator.

**Note: The 57022 Actuator is sold separately.**

## Features

- Magnetically-operated proximity sensor
- Hermetically sealed contacts
- Operates through non-ferrous materials such as wood, plastic or aluminum
- Options of normally open, normally closed or single-pole-double-throw
- Customer-defined sensitivity option
- Custom cable length and connector options available

## Agency Approvals

| Agency | Agency File Number |
|--------|--------------------|
|        | E61760             |

Note: Contact Littelfuse for specific agency approval ratings.

## Dimensions

Dimensions in mm (inch)



|                       | A<br>Nom.   | B<br>Nom.     | C<br>Nom.   |
|-----------------------|-------------|---------------|-------------|
| <b>57022 Actuator</b> | 5.80 (.228) | 25.40 (1.000) | —           |
| <b>59022 Sensor</b>   | 5.80 (.228) | 25.40 (1.000) | 300 (11.81) |

## Benefits

- Fits nicely into small confined spaces
- Quick and easy to install
- Well suited for usage in high-moisture and contaminated environments
- Non-contact solution, aesthetically more appealing than push-button or lever mechanical-type switches
- Ideal for battery-powered applications as the contacts do not draw power when in the non-activated state
- Reed contacts last for millions of operating cycles under micro-controller logic level loads

## Applications

- Position and limit sensing
- Security
- Level sensing
- Linear actuators

# 59022 Firecracker Reed Sensor + 57022 Actuator

## Electrical Ratings

| Contact Type                |                             |                      | Normally Open           | Change Over            | Normally Closed        |
|-----------------------------|-----------------------------|----------------------|-------------------------|------------------------|------------------------|
| Switch Type                 |                             |                      | 1                       | 3                      | 4                      |
| Contact Rating <sup>1</sup> |                             | VA/Watt - max.       | 10                      | 5                      | 5                      |
| Voltage <sup>4</sup>        | Switching <sup>2</sup>      | Vdc - max.           | 200                     | 175                    | 175                    |
|                             | Breakdown <sup>3</sup>      | Vac - max.           | 140                     | 120                    | 120                    |
|                             |                             | Vdc - min.           | 250                     | 200                    | 200                    |
| Current <sup>4</sup>        | Switching <sup>2</sup>      | Adc - max.           | 0.5                     | 0.25                   | 0.25                   |
|                             | Carry                       | Aac - max.           | 0.35                    | 0.18                   | 0.18                   |
|                             |                             | Adc - max.           | 1.2                     | 1.5                    | 1.5                    |
| Resistance <sup>5</sup>     | Contact, Initial Insulation | Ω - max.<br>Ω - min. | 0.2<br>10 <sup>10</sup> | 0.2<br>10 <sup>9</sup> | 0.2<br>10 <sup>9</sup> |
| Capacitance                 | Contact                     | pF - typ.            | 0.3                     | 0.3                    | 0.3                    |
| Temperature                 | Operating                   | °C                   | -40 to +105             | -40 to +105            | -40 to +105            |

## Product Characteristics

|                           |             |           |     |     |     |
|---------------------------|-------------|-----------|-----|-----|-----|
| Operate Time <sup>6</sup> |             | ms - max. | 1.0 | 3.0 | 3.0 |
| Release Time <sup>6</sup> |             | ms - max. | 1.0 | 3.0 | 3.0 |
| Shock <sup>7</sup>        | 11ms ½ sine | G - max.  | 100 | 50  | 50  |
| Vibration <sup>7</sup>    | 50-2000 Hz  | G - max.  | 30  | 30  | 30  |

Notes:


- Contact rating - Product of the switching voltage and current should never exceed the wattage rating. Contact Littelfuse for additional load/life information.
- When switching inductive and/or capacitive loads, the effects of transient voltages and/or currents should be considered. Refer to Application Notes AN108A and AN107 for details.
- Breakdown Voltage - per MIL-STD-202, Method 301. Leakage current is less than 0.1mA for 60 seconds.
- Electrical Load Life Expectancy - Contact Littelfuse with voltage, current values along with type of load.
- This resistance value is for 11.81mm wire length. Resistance changes when wire lengthens.
- Operate (including bounce)/Release Time - per EIA/NARM RS-421-A, diode suppressed coil (Coil II).
- Shock and Vibration - per EIA/NARM RS-421-A and MIL-STD-202.
- For custom modifications to the wire length or size, or adding a special connector, please contact Littelfuse.
- Custom sensitivities and a high voltage switch are options




## Sensitivity Options (Using 57022 Actuator)

| Select Option |                  | S                                   |                  | T                                   |                  | U                                   |            |
|---------------|------------------|-------------------------------------|------------------|-------------------------------------|------------------|-------------------------------------|------------|
| Switch Type   | Pull-In AT Range | Activate Distance mm (inch) Average | Pull-In AT Range | Activate Distance mm (inch) Average | Pull-In AT Range | Activate Distance mm (inch) Average |            |
| 1             | Normally Open    | 12-18                               | 9.6 (.377)       | 17-23                               | 7.0 (.275)       | 22-28                               | 5.0 (.197) |
| 3             | Change Over      | 15-20                               | 9.3 (.367)       | 20-25                               | 7.5 (.295)       | 25-30                               | 6.5 (.256) |
| 4             | Normally Closed  | 15-20                               | 9.3 (.367)       | 20-25                               | 7.5 (.295)       | 25-30                               | 6.5 (.256) |

Note:

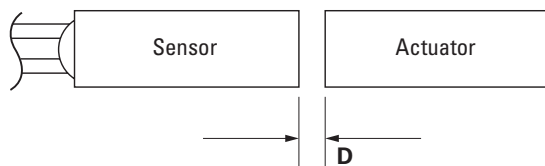- Pull-In AT Range: These AT values are the bare reed switch AT before modification.
- The activation distance is average value on the final sensor assembly



| Schematics   | Switch Type |
|--|-------------|
|  | 1           |
|  | 3           |
|  | 4           |

# 59022 Firecracker Reed Sensor + 57022 Actuator

## Cable Length Specification

| Cable Type: 24 AWG 7/32 PVC 105°C UL1430/UL1569 |                           |
|---|---------------------------|
| Select Option                                   | Cable Length<br>mm (inch) |
| 02  | 300 (11.81)               |

## Termination Specification

| Termination Options |  |   |
|---------------------|--|---|
| Select Option       | Description<br>(Two-wire versions illustrated) |   |
| A                   | Tinned leads (6.4±0.76)mm                      |  |
| F                   | Untinned leads (6.4±0.76)mm                    |  |
| E                   | JST type XHP 2.5mm pitch                       |  |

## Part Numbering System



Note: The 57022 Actuator is sold separately.

## Packaging

| Packaging Option | Packaging Specification | Quantity | Quantity & Packaging Code | Taping Width |
|------------------|-------------------------|----------|---------------------------|--------------|
| Bulk             | Bulk                    | 500      | N/A                       | N/A          |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.