

## Full-Swing Input and Output type Quad Operational Amplifier

### ■ GENERAL DESCRIPTION

**NJM2734** is single supply quad operational amplifier with full swing input and output, operates from 1.8V.


Input and Output Full Swing provides wide dynamic range, is from ground to power supply level. In addition to ground sensing applications, **NJM2734** enable to be applied to Hi-side sensing applications.

The features are low noise and low operating voltage for battery management, portable audio applications, and others.


### ■ FEATURES

- Operating Voltage : 1.8 to 6.0V
- Input Full-Swing :  $V_{ICM} = 0$  to 5.0V, at  $V^+ = 5V$
- Output Full-Swing :  $V_{OH} \geq 4.9V / V_{OL} \leq 0.1V$ , at  $V^+ = 5V, R_L = 20k\Omega$
- Load Drivability :  $V_{OH} \geq 4.75V / V_{OL} \leq 0.25V$ , at  $V^+ = 5V, R_L = 2k\Omega$
- Offset Voltage : 5mV max.
- Slew Rate : 0.4V/ $\mu$ s typ.
- Low Input Voltage Noise : 10nV/ $\sqrt{Hz}$  typ.
- Adequate phase margin :  $\Phi_M = 75$ deg. typ., at  $R_L = 2k\Omega$
- Bipolar Technology
- Package Outline : DIP14, DMP14, EMP14, SSOP14


### ■ PACKAGE OUTLINE



**NJM2734D**



**NJM2734M**




**NJM2734E**



**NJM2734V**

### ■ PIN CONFIGURATION

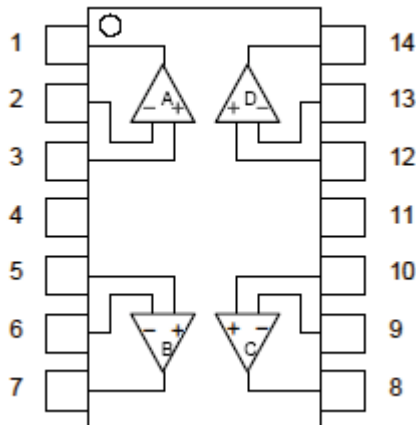

#### PIN FUNCTION

1. A OUTPUT	8. C OUTPUT
2. A -INPUT	9. C -INPUT
3. A +INPUT	10. A +INPUT
4. $V^+$	11. GND
5. B +INPUT	12. D +INPUT
6. B -INPUT	13. D -INPUT
7. B OUTPUT	14. D OUTPUT

**NJM2734D**  
**NJM2734M**  
**NJM2734E**  
**NJM2734V**

# NJM2734

## ■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sup>+</sup>	7.0	V
Differential Input Voltage Range	V <sub>ID</sub>	±1.0 (Note1)	V
Common Mode Input Voltage Range	V <sub>IC</sub>	0 ~ 7.0 (Note1)	V
Power Dissipation	P <sub>D</sub>	(DIP14) 700 (DMP14) 520 (Note2) (EMP14) 720 (Note2) (SSOP14) 450 (Note2)	mW
Operating Temperature Range	T <sub>opr</sub>	-40~+85	°C
Storage Temperature Range	T <sub>stg</sub>	-40~+125	°C

(Note1) For supply voltage less than 7V, the absolute maximum input voltage is equal to the supply voltage.

(Note2) On the PCB “EIA/JEDEC (76.2×114.3×1.6mm, two layers, FR-4) “

## ■ RECOMMENDED OPERATING CONDITION

(Ta=25°C)

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V <sup>+</sup>	1.8 to 6.0	V

## ■ ELECTRICAL CHARACTERISTICS (V<sup>+</sup>=5V, Ta=25°C)

### ●DC CHARACTERISTICS

(V<sup>+</sup>=5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	I <sub>CC</sub>	No signal applied	-	1.2	1.8	mA
Input Offset Voltage	V <sub>IO</sub>		-	1	5	mV
Input Bias Current	I <sub>B</sub>		-	50	250	nA
Input Offset Current	I <sub>IO</sub>		-	5	100	nA
Large Signal Voltage Gain	A <sub>V</sub>	R <sub>L</sub> =2kΩ to 2.5V	60	85	-	dB
Common Mode Rejection Ratio	CMR	CMR+: 2.5V ≤ V <sub>CM</sub> ≤ 5V (Note3) CMR -: 0V ≤ V <sub>CM</sub> ≤ 2.5V (Note3)	55	70	-	dB
Supply Voltage Rejection Ratio	SVR	V <sup>+</sup> N=±2.0V ~ ±3.0V	70	85	-	dB
Maximum Output Voltage 1	V <sub>OH1</sub>	R <sub>L</sub> =20kΩ to 2.5V	4.9	4.95	-	V
	V <sub>OL1</sub>	R <sub>L</sub> =20kΩ to 2.5V	-	0.05	0.1	V
Maximum Output Voltage 2	V <sub>OH2</sub>	R <sub>L</sub> =2kΩ to 2.5V	4.75	4.85	-	V
	V <sub>OL2</sub>	R <sub>L</sub> =2kΩ to 2.5V	-	0.15	0.25	V
Input Common Mode Voltage Range	V <sub>ICM</sub>	CMR ≥ 55dB	0	-	5	V

(Note3) CMR is represented by either CMR+ or CMR- has lower value.

CMR+ is measured with 2.5V ≤ V<sub>CM</sub> ≤ 5.0 and CMR- is measured with 0V ≤ V<sub>CM</sub> ≤ 2.5V.

### ●AC CHARACTERISTICS

(V<sup>+</sup>=5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Unity Gain Bandwidth	GB	R <sub>L</sub> =2kΩ to 2.5V	-	1	-	MHz
Phase Margin	Φ <sub>M</sub>	R <sub>L</sub> =2kΩ to 2.5V	-	75	-	Deg
Equivalent Input Noise Voltage	V <sub>NI</sub>	f=1kHz	-	10	-	nV/√Hz
Amp to Amp Separation	CS	f=1kHz R <sub>L</sub> =2kΩ to 2.5V, V <sub>O</sub> =1.2Vrms	-	133	-	dB

### ●TRANSIENT CHARACTERISTICS

(V<sup>+</sup>=5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	R <sub>L</sub> =2kΩ to 2.5V	-	0.4	-	V/μs

## ■ ELECTRICAL CHARACTERISTICS ( $V^+=3V, T_a=25^\circ C$ )

### ●DC CHARACTERISTICS

( $V^+=3V, T_a=25^\circ C$ )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	$I_{CC}$	No signal applied	-	1	1.8	mA
Input Offset Voltage	$V_{IO}$		-	1	5	mV
Input Bias Current	$I_B$		-	50	250	nA
Input Offset Current	$I_{IO}$		-	5	100	nA
Large Signal Voltage Gain	$A_V$	$R_L=2k\Omega$ to 1.5V	60	84	-	dB
Common Mode Rejection Ratio	CMR	CMR+: $1.5V \leq V_{CM} \leq 3V$ (Note4) CMR -: $0V \leq V_{CM} \leq 1.5V$ (Note4)	48	63	-	dB
Supply Voltage Rejection Ratio	SVR	$V^+V^- = \pm 1.2V \sim \pm 2.0V$	68	83	-	dB
Maximum Output Voltage 1	$V_{OH1}$	$R_L=20k\Omega$ to 1.5V	2.9	2.95	-	V
	$V_{OL1}$	$R_L=20k\Omega$ to 1.5V	-	0.05	0.1	V
Maximum Output Voltage 2	$V_{OH2}$	$R_L=2k\Omega$ to 1.5V	2.75	2.85	-	V
	$V_{OL2}$	$R_L=2k\Omega$ to 1.5V	-	0.15	0.25	V
Input Common Mode Voltage Range	$V_{ICM}$	CMR $\geq$ 48dB	0	-	3	V

(Note4) CMR is represented by either CMR+ or CMR- has lower value.

CMR+ is measured with  $1.5V \leq V_{CM} \leq 3.0$  and CMR- is measured with  $0V \leq V_{CM} \leq 1.5V$ .

### ●AC CHARACTERISTICS

( $V^+=3V, T_a=25^\circ C$ )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Unity Gain Bandwidth	GB	$R_L=2k\Omega$ to 1.5V	-	1	-	MHz
Phase Margin	$\Phi_M$	$R_L=2k\Omega$ to 1.5V	-	75	-	Deg
Equivalent Input Noise Voltage	$V_{NI}$	$f=1kHz$	-	10	-	$nV/\sqrt{Hz}$
Amp to Amp Separation	CS	$f=1kHz$ $R_L=2k\Omega$ to 1.5V, $V_o=0.7V_{rms}$	-	130	-	dB

### ●TRANSIENT CHARACTERISTICS

( $V^+=3V, T_a=25^\circ C$ )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	$R_L=2k\Omega$ to 1.5V	-	0.35	-	V/ $\mu s$

# NJM2734

## ■ ELECTRICAL CHARACTERISTICS ( $V^+=1.8V$ , $T_a=25^\circ C$ )

### ●DC CHARACTERISTICS

( $V^+=1.8V$ ,  $T_a=25^\circ C$ )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	$I_{CC}$	No signal applied	-	0.9	1.6	mA
Input Offset Voltage	$V_{IO}$		-	1	5	mV
Input Bias Current	$I_B$		-	50	250	nA
Input Offset Current	$I_{IO}$		-	5	100	nA
Large Signal Voltage Gain	$A_V$	$R_L=2k\Omega$ to 0.9V	60	83	-	dB
Common Mode Rejection Ratio	CMR	CMR+: $0.9 \leq V_{CM} \leq 1.8V$ (Note5) CMR-: $0V \leq V_{CM} \leq 0.9V$ (Note5)	40	55	-	dB
Supply Voltage Rejection Ratio	SVR	$V^+V^- = \pm 0.9V \sim \pm 1.2V$	65	80	-	dB
Maximum Output Voltage 1	$V_{OH1}$	$R_L=20k\Omega$ to 0.9V	1.7	1.75	-	V
	$V_{OL1}$	$R_L=20k\Omega$ to 0.9V	-	0.05	0.1	V
Maximum Output Voltage 2	$V_{OH2}$	$R_L=2k\Omega$ to 0.9V	1.55	1.65	-	V
	$V_{OL2}$	$R_L=2k\Omega$ to 0.9V	-	0.15	0.25	V
Input Common Mode Voltage Range	$V_{ICM}$	CMR $\geq$ 40dB	0	-	1.8	V

(Note5) CMR is represented by either CMR+ or CMR- has lower value.

CMR+ is measured with  $0.9V \leq V_{CM} \leq 1.8$  and CMR- is measured with  $0V \leq V_{CM} \leq 0.9V$ .

### ●AC CHARACTERISTICS

( $V^+=1.8V$ ,  $T_a=25^\circ C$ )







PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Unity Gain Bandwidth	GB	$R_L=2k\Omega$ to 0.9V	-	1	-	MHz
Phase Margin	$\Phi_M$	$R_L=2k\Omega$ to 0.9V	-	75	-	Deg
Equivalent Input Noise Voltage	$V_{NI}$	$f=1kHz$	-	10	-	$nV/\sqrt{Hz}$
Amp to Amp Separation	CS	$f=1kHz$ $R_L=2k\Omega$ to 0.9V, $V_o=0.4V_{rms}$	-	125	-	dB

### ●TRANSIENT CHARACTERISTICS







( $V^+=1.8V$ ,  $T_a=25^\circ C$ )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	$R_L=2k\Omega$ to 0.9V	-	0.3	-	V/ $\mu s$





## Typical Characteristics

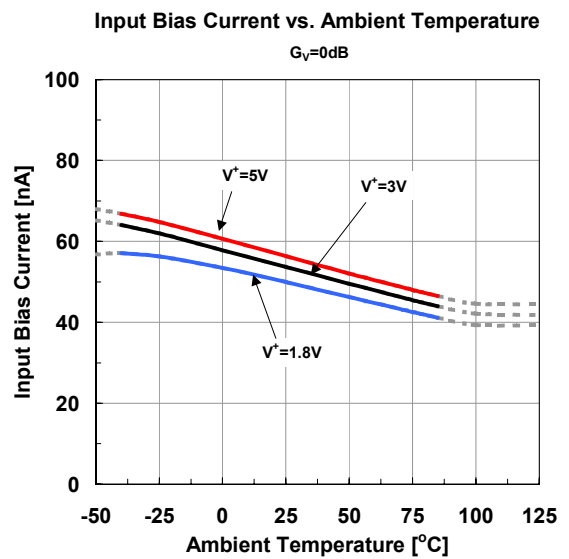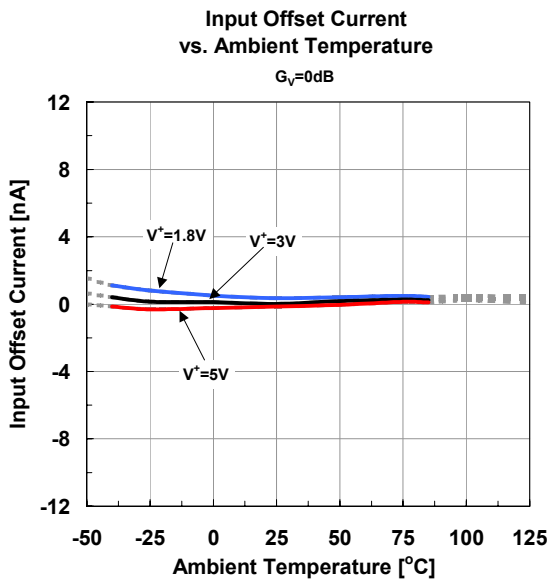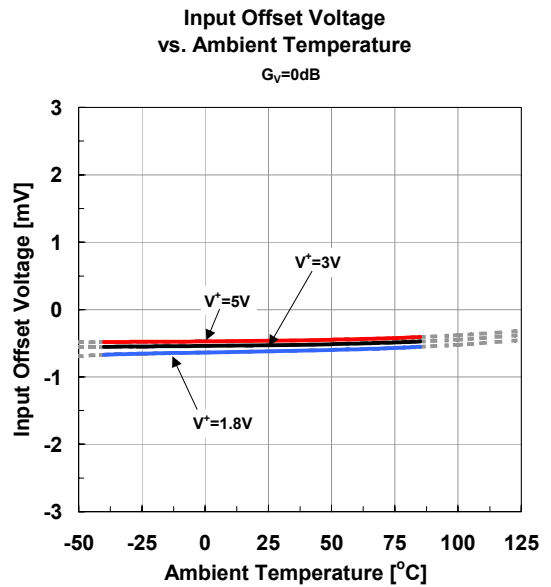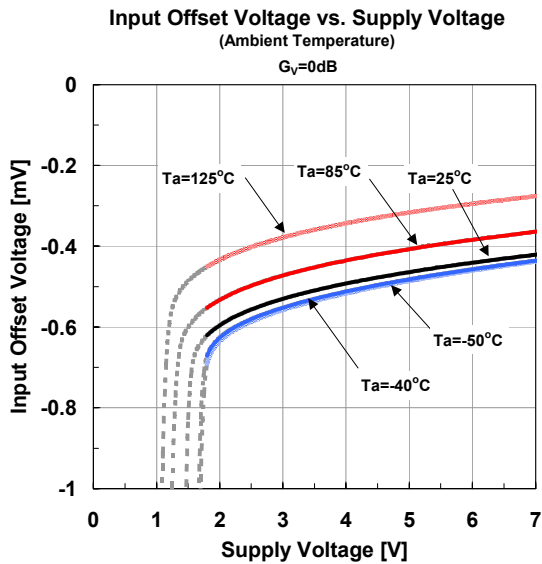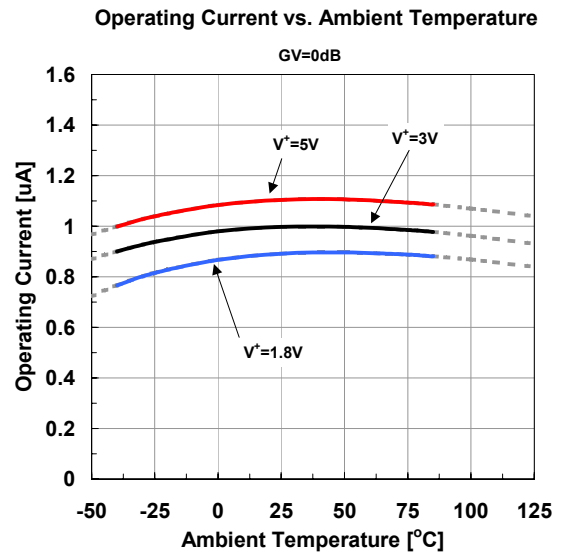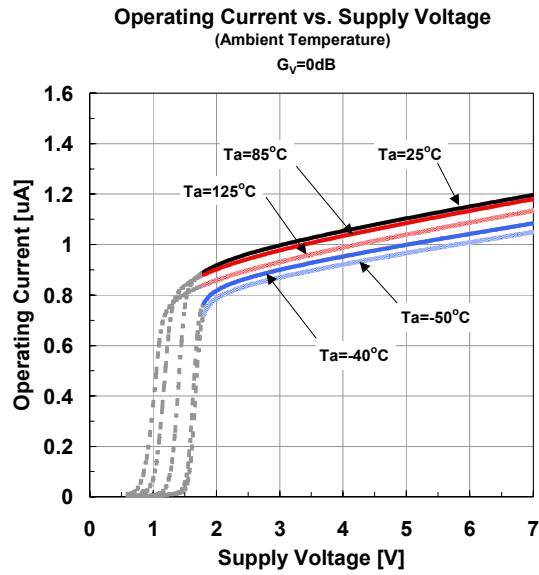







## Typical Characteristics

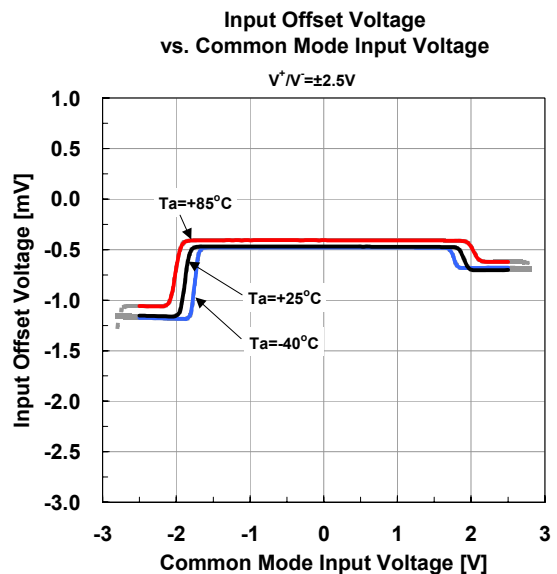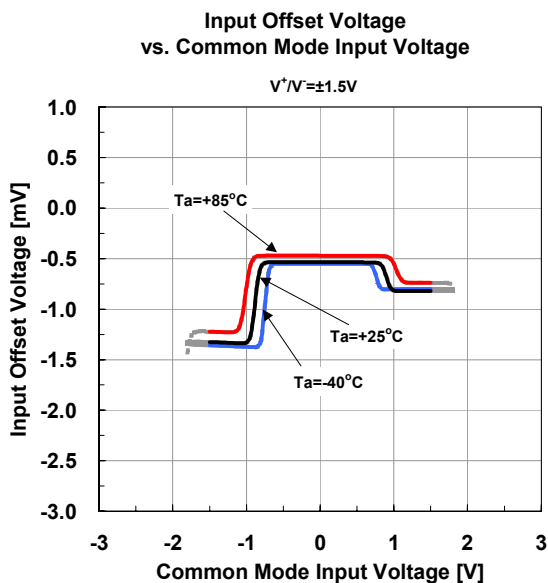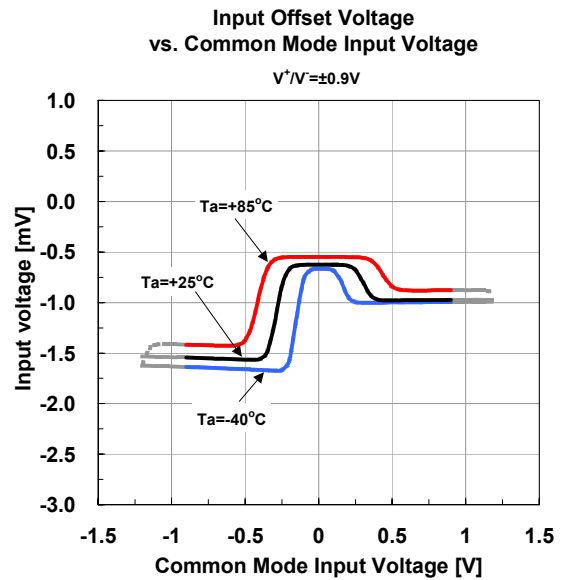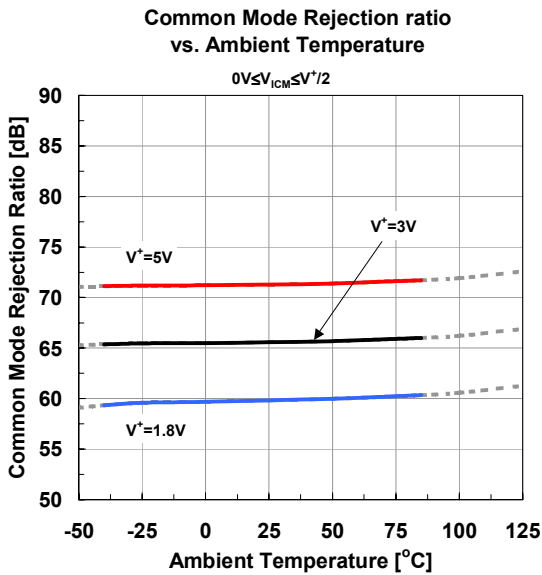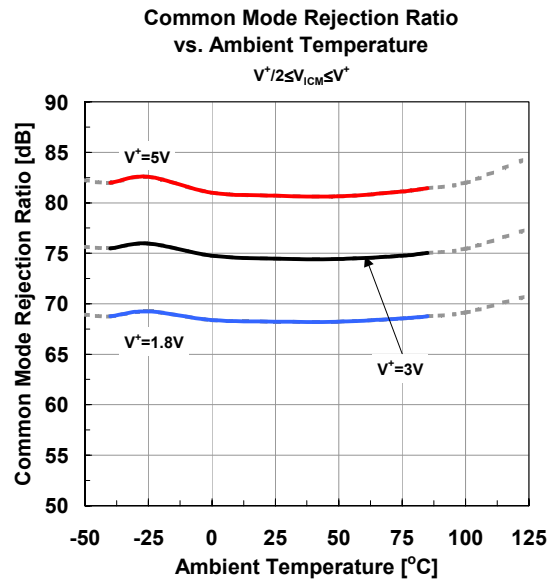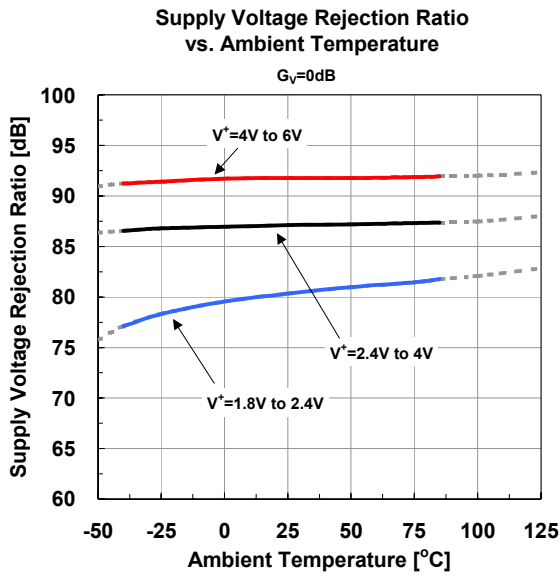

## ■ Typical Characteristics



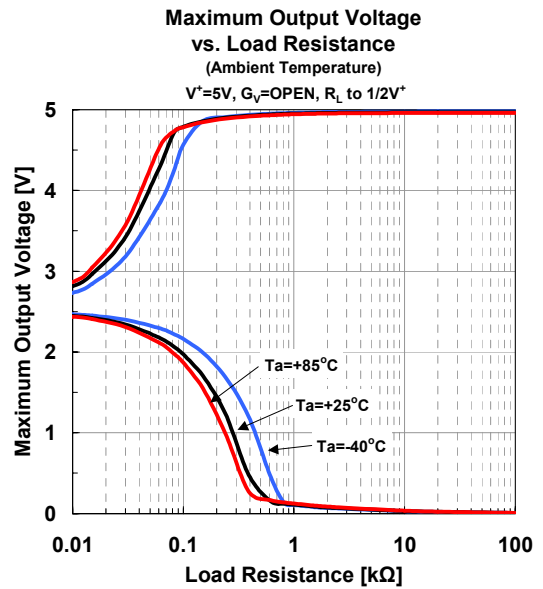
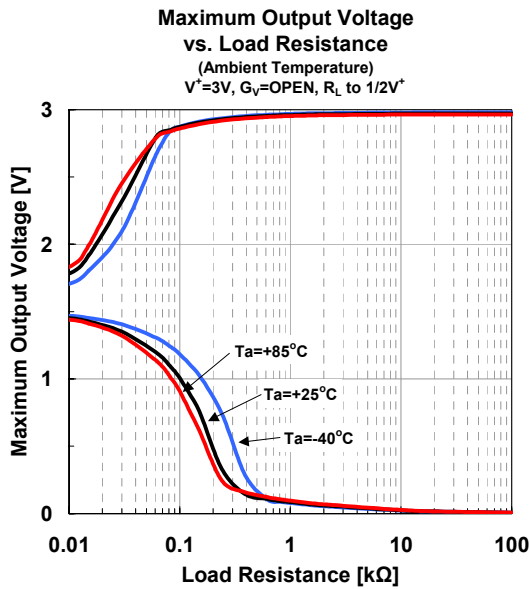
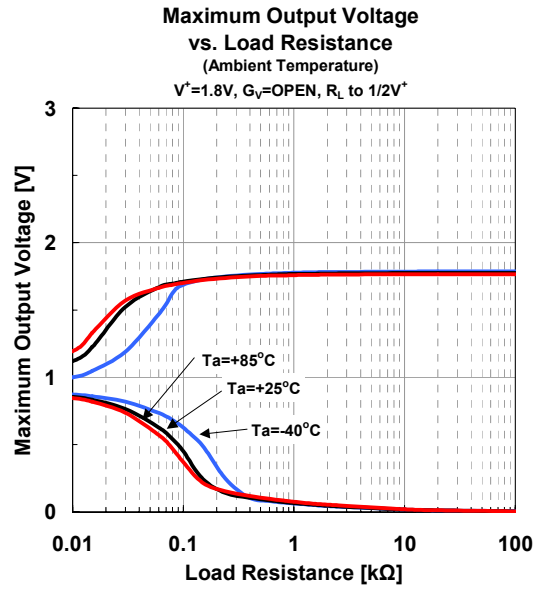
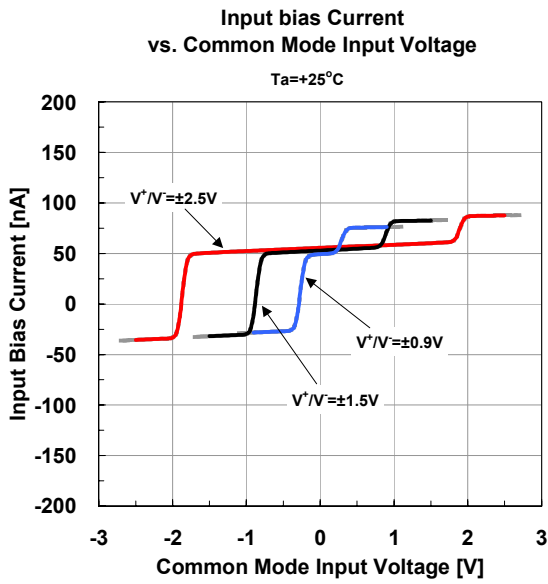


## ■ Typical Characteristics

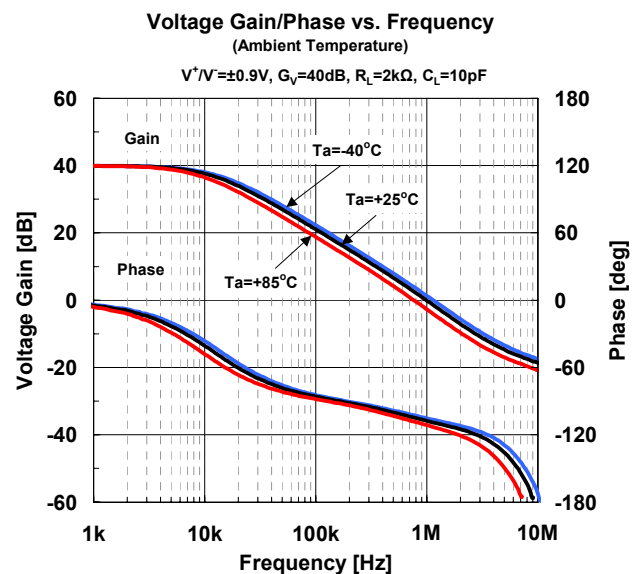
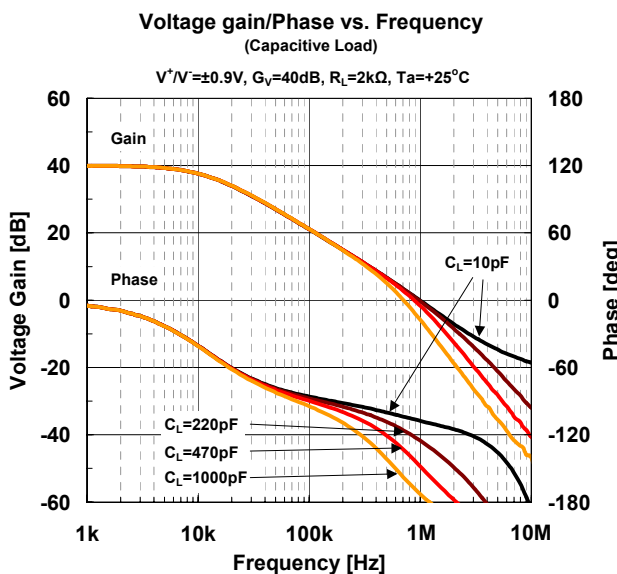
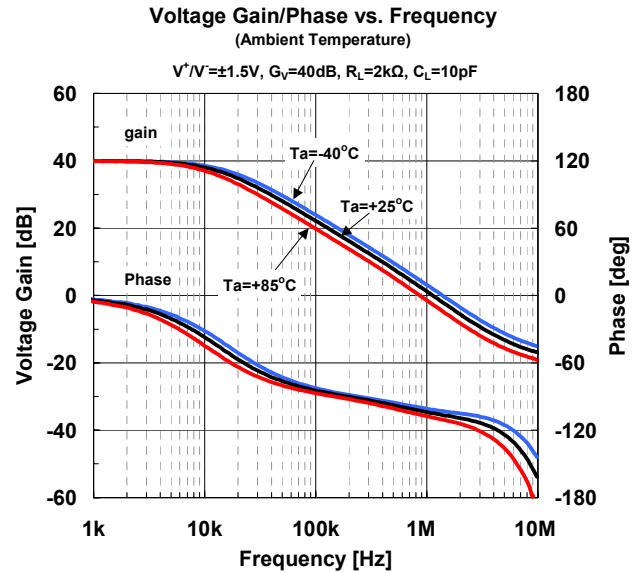
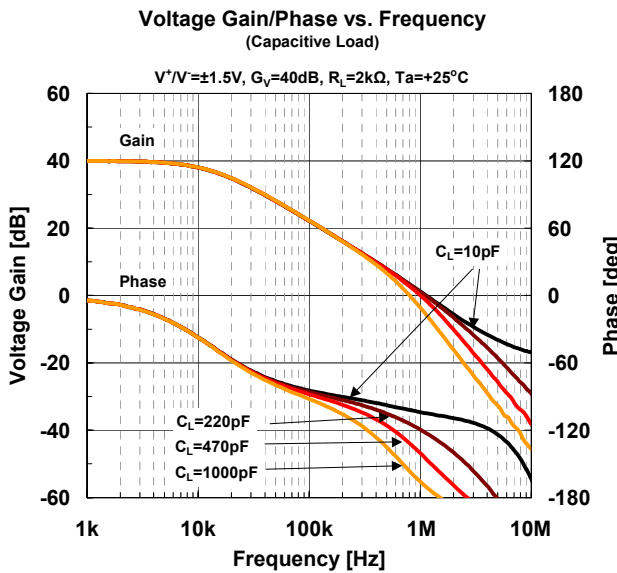
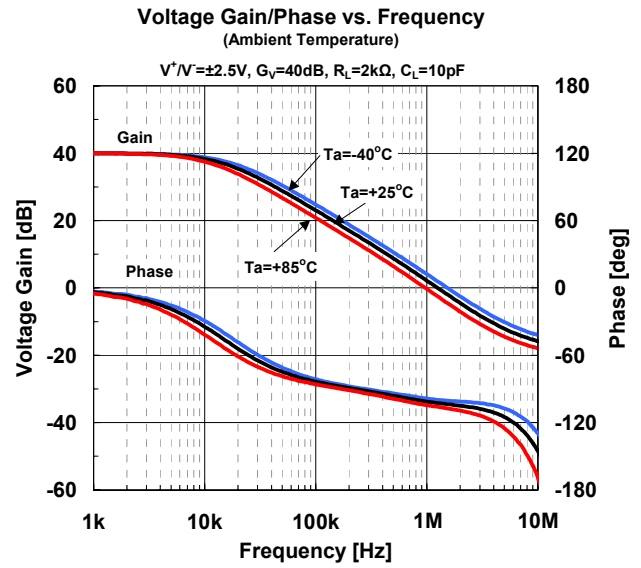
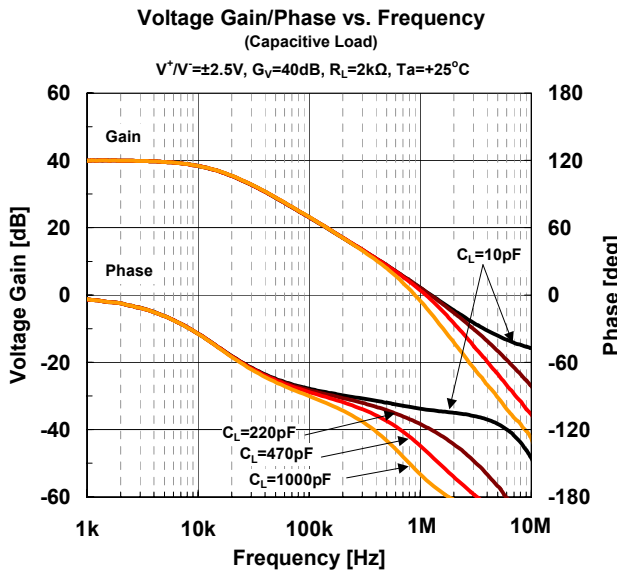










## ■ Typical Characteristics

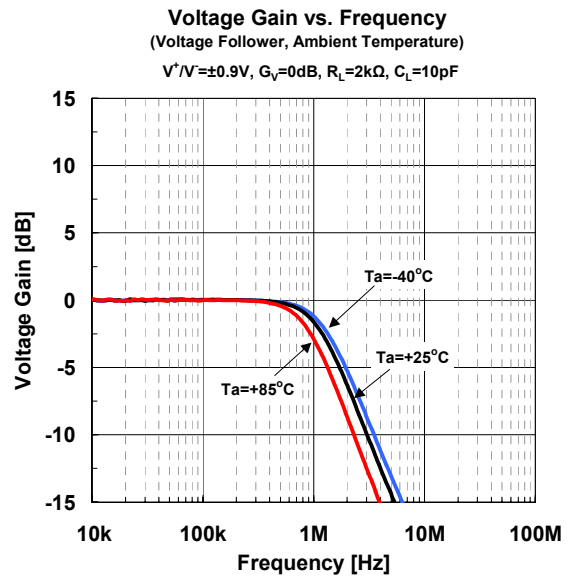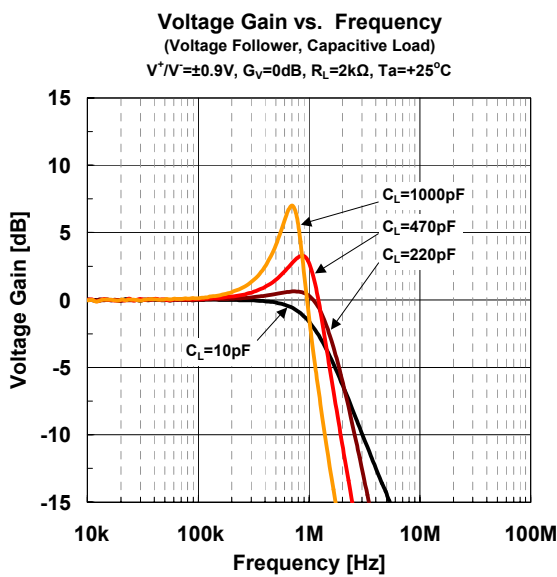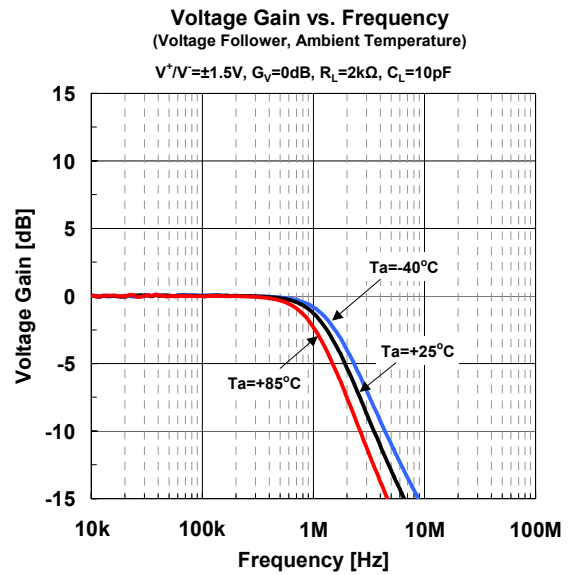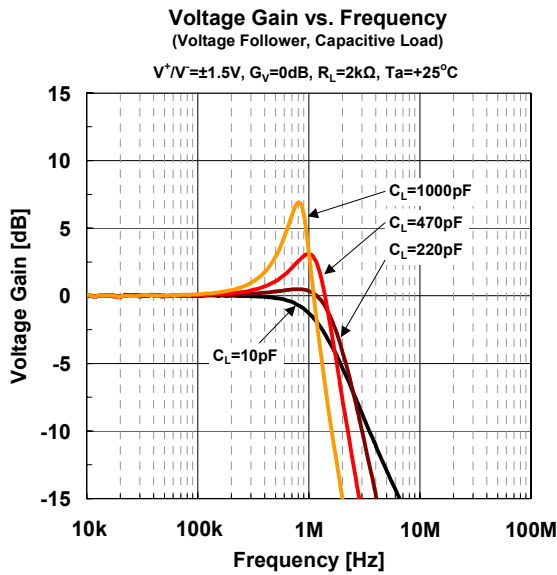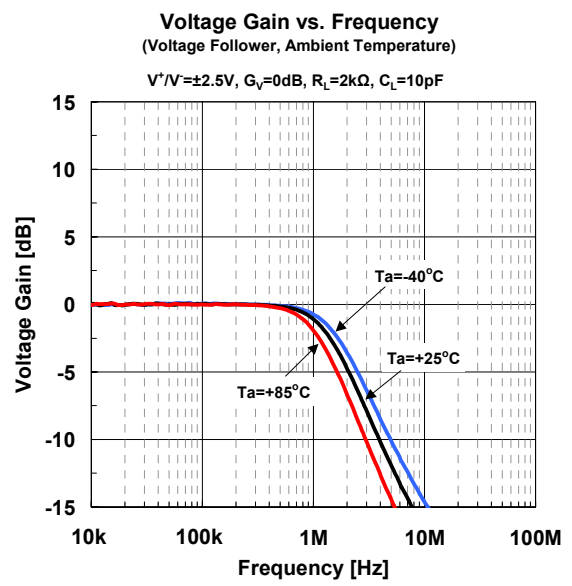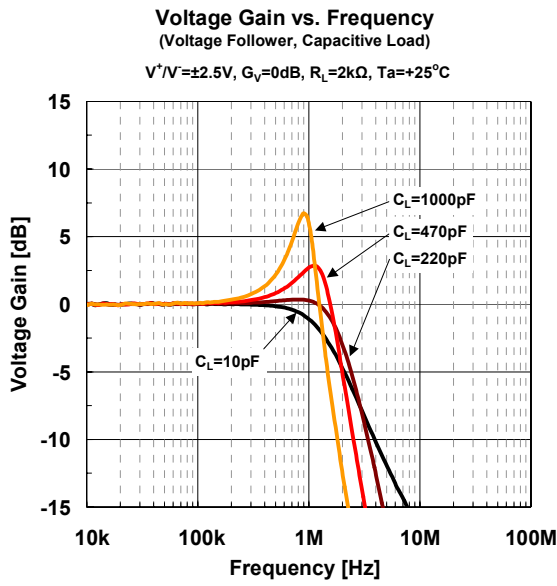




## ■ Typical Characteristics

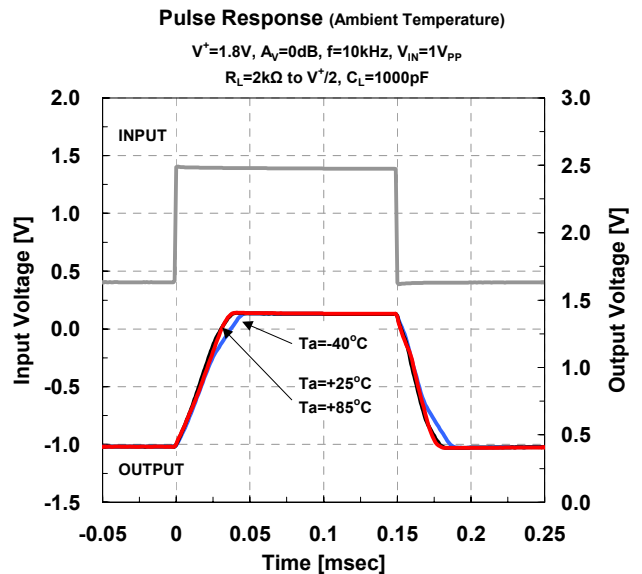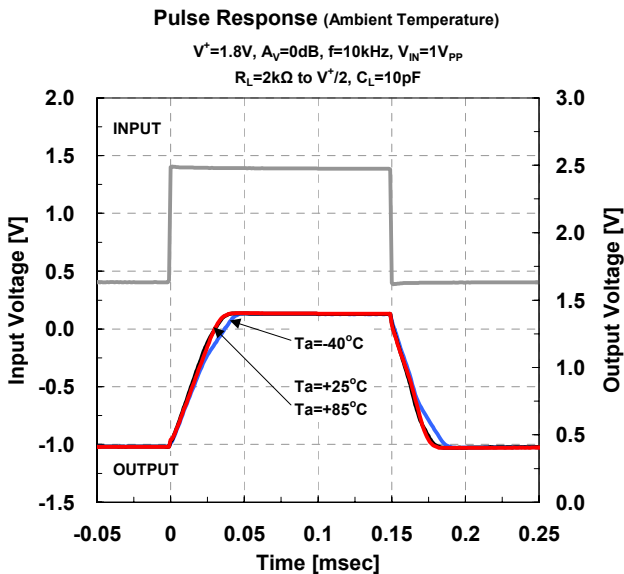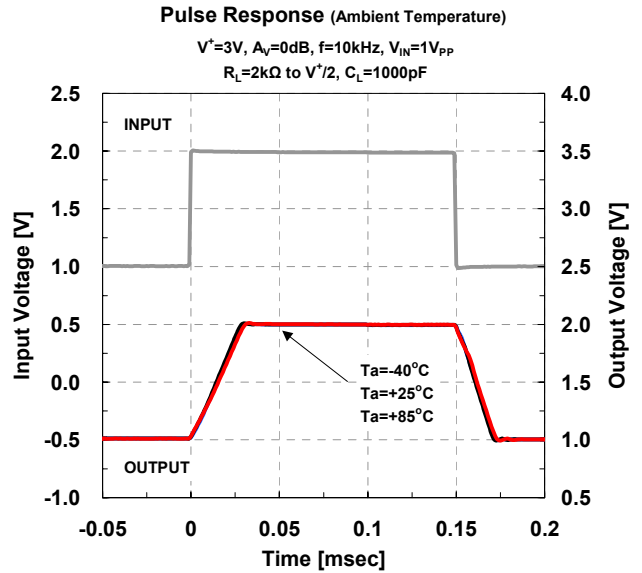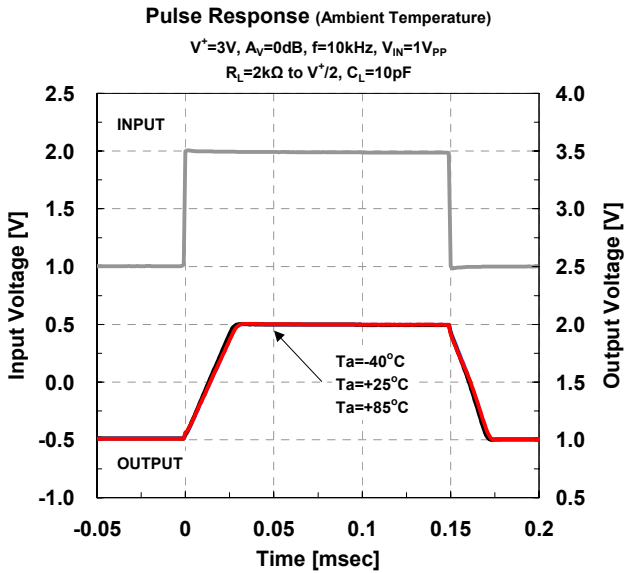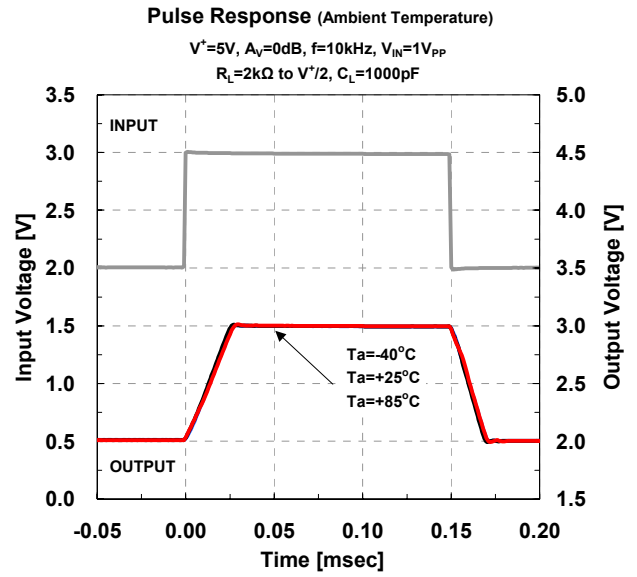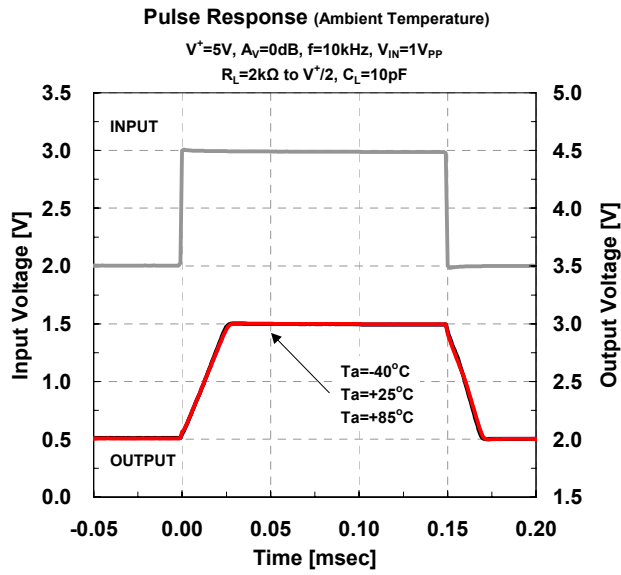

## ■ Typical Characteristics

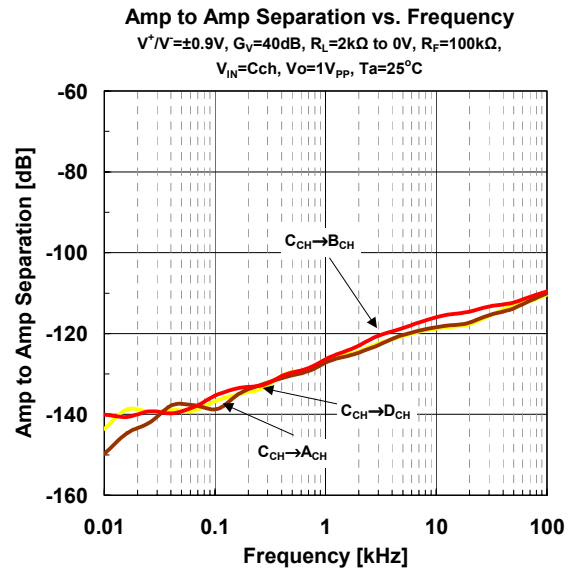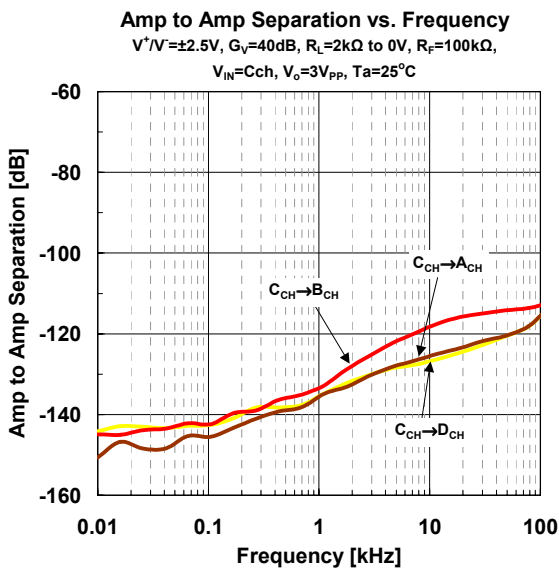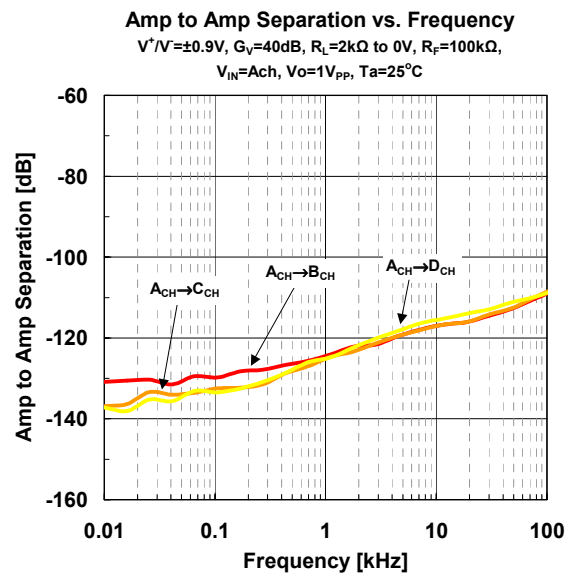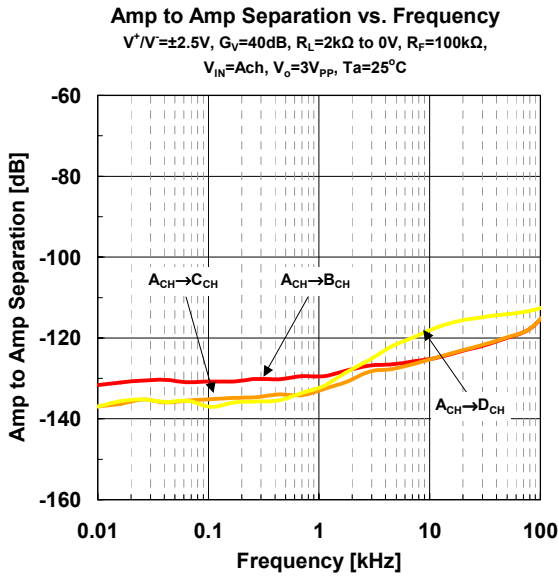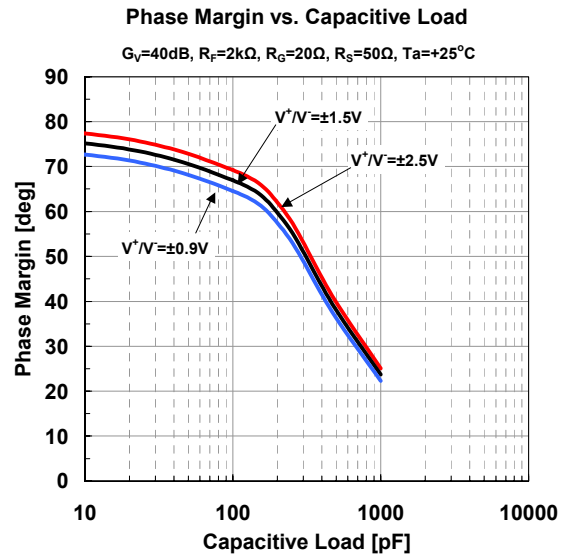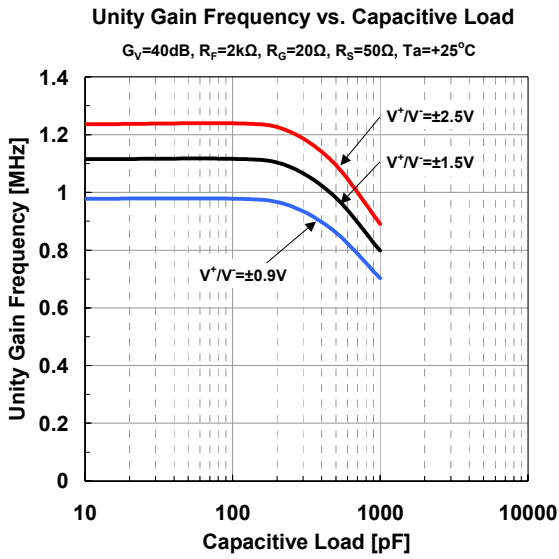

## ■ Typical Characteristics

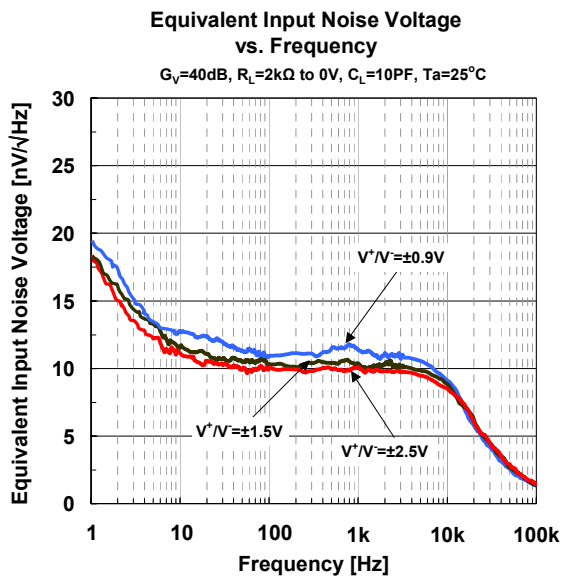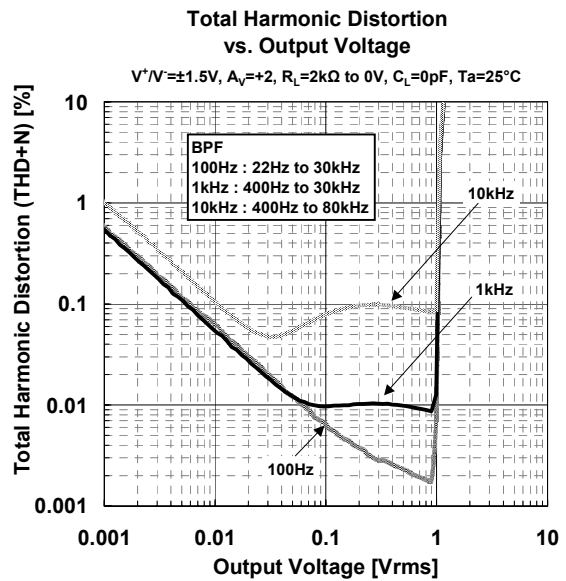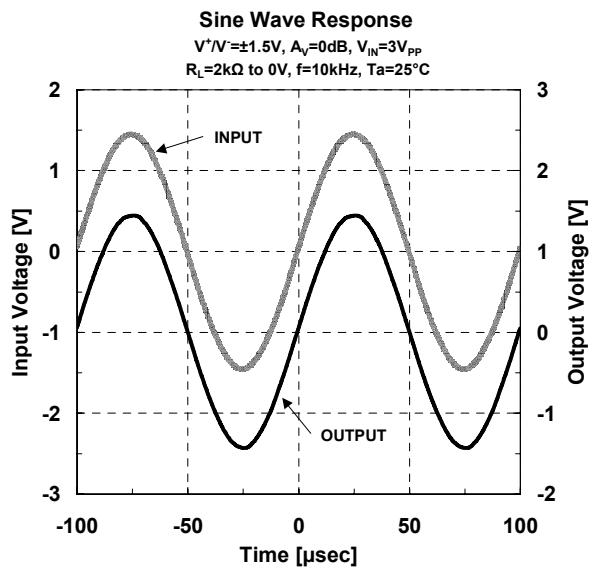

**[CAUTION]**  
 The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.