

# ***Tag-it HF-I Plus Transponder IC***

## *Reference Guide*

***October 2007***

---



**SCBU046 (11-09-21-063)**

# ***Tag-it HF-I Plus Transponder IC***

## ***Reference Guide***



Literature Number: SCBU046 (11-09-21-063)  
October 2007



<b>Preface</b>	<b>5</b>
<b>1 Introduction</b>	<b>7</b>
1.1 General	8
1.2 System Description	8
1.3 Product Description	8
1.4 Functional Description	9
1.5 Memory Organization	9
1.6 Command Set	10
1.7 Ordering Information and Part Numbers	11
<b>2 Specification</b>	<b>13</b>
2.1 Electrical Specification	14
2.2 Mechanical Wafer Specification	14
2.3 Mechanical Die Specification	16
2.4 Bump Specification	17
<b>3 Shipping, Packing &amp; Further Handling</b>	<b>19</b>
3.1 Lot Definition	20
3.2 Wafer identification	20
3.3 Wafer Map File	21
3.4 Ink Dot Specification	22
3.5 Packing for Wafers	23
3.6 Packing for Sawn Wafers	24
3.7 Barcode Label	25
3.8 Storage Conditions	26
<b>4 Regulatory, Safety, and Warranty Notices</b>	<b>27</b>
4.1 Regulatory, Safety, and Warranty Notices	28
4.2 Warranty and Liability	28
4.3 Hazards from Electrostatic Discharge ESD	28
<b>A Terms &amp; Abbreviations</b>	<b>29</b>

---

## List of Figures

1-1	RFID System With Reader, Antenna and Tag-it HF-I Transponder.....	8
1-2	Memory Organization of the Tag-it HF-I Plus Transponder IC .....	10
2-1	Wafer on FFC.....	15
2-2	Antenna and Test Pad Location.....	17
2-3	Cross Section of Bump .....	18
3-1	Position of Wafer Identification Code .....	20
3-2	Wafer Identification Code 1 .....	21
3-3	Wafer Identification Code 2 .....	21
3-4	Ink Dot Drawing .....	22
3-5	Packing of Wafers.....	23
3-6	Packing of Sawn Wafers (Multi) .....	24
3-7	Packing of Sawn Wafers (Single) .....	25
3-8	Barcode Label .....	25

## List of Tables

1-1	Command Set for Tag-it HF-I Plus Transponder IC .....	10
1-2	Part Numbers .....	11
2-1	Absolute Maximum Ratings.....	14
2-2	Recommended Operating Conditions .....	14
2-3	Electrical Characteristics .....	14
2-4	General Mechanical Wafer Specification.....	14
2-5	Mechanical Wafer Specification After Grinding, Sawing on FFC .....	15
2-6	Mechanical Die Specification .....	16
2-7	Antenna and Test Pad Location.....	16
2-8	Bump Specification.....	17
3-1	Ink Dot Specification .....	22
3-2	Ink Dot Placement.....	23
3-3	Storage Conditions .....	26

**Edition Four – October 2007**

This is the fourth edition of this reference guide. It contains a description of the Tag-it HF-I Plus Transponder IC, the specifications, dimensions, part numbers and instructions for further handling.

**Important Notice**

Texas Instruments (TI) reserves the right to make changes to its products or services or to discontinue any product or service at any time without notice. TI provides customer assistance in various technical areas, but does not have full access to data concerning the use and applications of customer's products.

Therefore, TI assumes no liability and is not responsible for customer applications or product or software design or performance relating to systems or applications incorporating TI products. In addition, TI assumes no liability and is not responsible for infringement of patents and/or any other intellectual or industrial property rights of third parties, which may result from assistance provided by TI.

TI products are not designed, intended, authorized or warranted to be suitable for life support applications or any other life critical applications which could involve potential risk of death, personal injury or severe property or environmental damage.

The **TIRIS** and **TI-RFID** logos, and the words **TIRIS**, **TI-RFID**, and **Tag-it** are trade-marks or registered trademarks of Texas Instruments Incorporated.

Copyright = 2007 Texas Instruments Incorporated (TI)

## About This Guide

This reference guide for the Tag-it HF-I Plus Transponder IC is designed for use by TI partners who are engineers experienced with Radio Frequency Identification Devices (RFID) and the processing of wafers.

**Regulatory, safety and warranty notices that must be followed are given in Chapter 4.**

## Conventions

### **WARNING**

**A WARNING IS USED WHERE CARE MUST BE TAKEN, OR A CERTAIN PROCEDURE MUST BE FOLLOWED, IN ORDER TO PREVENT INJURY OR HARM TO YOUR HEALTH.**

### **CAUTION**

This indicates information on conditions that must be met, or a procedure that must be followed, which, if not heeded, could cause permanent damage to the equipment or software.

---

**Note:** Indicates conditions that must be met, or procedures that must be followed, to ensure proper functioning of the equipment or software.

---

---

**Note:** Information: Indicates information that makes usage of the equipment or software easier.

---

## If You Need Assistance

For more information, please contact the sales office or distributor nearest you. This contact information can be found at: <http://www.ti-rfid.com>.

## Introduction

---

---

---

This chapter introduces you to the Tag-it HF-I Plus Transponder IC.

Topic	Page
1.1 General.....	8
1.2 System Description.....	8
1.3 Product Description .....	8
1.4 Functional Description .....	9
1.5 Memory Organization .....	9
1.6 Command Set .....	10
1.7 Ordering Information and Part Numbers .....	11

## 1.1 General

The **Tag-it HF-I Plus** Transponder IC is part of TI's 13.56 MHz product family, which is based on the ISO/IEC 15693 standard for contactless integrated circuit cards (vicinity cards) and ISO/IEC 18000-3 standard for item management. The **Tag-it HF-I Plus** Transponder IC builds the basis for various available inlay shapes, which are used as consumable smart labels in markets requiring quick and accurate identification of items, such as:

- asset tagging
- electronic ticketing
- anti-counterfeit prevention
- distribution logistics and supply chain management
- building access badges
- express parcel delivery
- airline boarding pass and baggage handling


User data is written to and read from memory blocks using a non-volatile EEPROM silicon technology. Each block is separately programmable by the user and can be locked to protect data from modification. Once the data has been 'locked', then it cannot be changed.

To give some examples, information about delivery checkpoints and timing, place of origin/destination, pallet assignments, inventory numbers and even transportation routes can be coded into the transponder.

Multiple transponders, which appear in the Readers RF field, can be identified, read from and written to by using the **Unique Identifier (UID)**, which is programmed and locked at the factory.

## 1.2 System Description

For operation, a reader with antenna is required to send a command to the transponder and to receive its response (see [Figure 1-1](#)). The command of the Reader can be either in addressed or non-addressed mode. The Transponder does not transmit data until the reader sends a request (Reader talks-first principle).

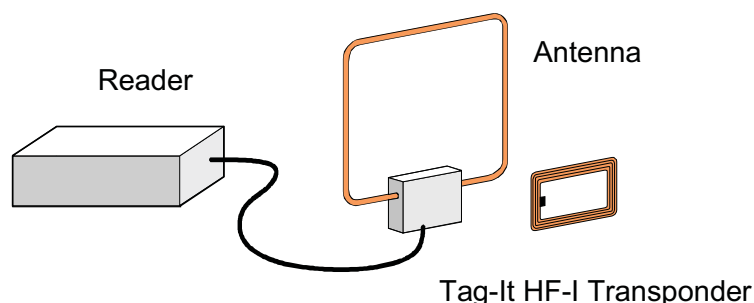

**Figure 1-1. RFID System With Reader, Antenna and Tag-it HF-I Transponder**

## 1.3 Product Description

The Tag-it HF-I Plus Transponder IC is compliant to the ISO/IEC 15693 and ISO/IEC 18000-3 standard. To build a complete transponder, the Tag-it HF-I Plus Transponder IC has to build a resonance circuit with the external antenna it is assembled on (e.g. an etched aluminium antenna).



---

**Note:** As the Tag-it HF-I Plus Transponder IC has no integrated resonance capacitor (only internal parasitic capacitance) it is recommended to build an additional capacitor as part of the antenna or to use an external component.

---

## 1.4 Functional Description

The Tag-it HF-I Plus Transponder IC is a low power, full duplex Transponder IC for use with passive contactless identification transponder systems.

The transponder IC is designed to operate with a 13.56 MHz carrier frequency. The ISO standard defines, for some communication parameters, several modes in order to meet different international radio regulations and different application requirements. Therefore, communication between the reader and the transponder (Down-Link communication) takes place using ASK modulation index between 10% and 30% or 100% and datacoding (pulse position modulation) '1 out of 4' or '1 out of 256'.

According to ISO 15693 Up-Link communication (Transponder to Reader) can be accomplished with one subcarrier (ASK modulation) or with two subcarrier (FSK modulation). Both modes (ASK and FSK) can operate with either high or low data rate. **The transponder answers in the mode it was interrogated from the reader and supports all communication parameter combinations.** Up- and Down-Link are frame synchronized and CRC check sum secured.

Each Tag-it HF-I transponder has a 'unique' address (UID) stored in two blocks, which are factory-programmed and 64 bits long ( $=2^{64}$  different addresses). This can be used for addressing each transponder uniquely and individually for a one-to-one exchange between the reader and the transponder. A mechanism to resolve collisions of a multiplicity of transponders (Anticollision) is also implemented. This special feature allows multiple transponders to be read simultaneously and offers the capability to inventory in a very short time a large number of transponders by their unique address, provided they are within the reader operating range.

Also, the **Application Family Identifier (AFI)** and the **Data Storage Format Identifier (DSFID)**, which are optional in the ISO15693 are supported by the Tag-it HF-I PlusTransponder.


For more details about the communication between reader and transponder see ISO 15693.

Besides the ISO15693 defined functionality, the Tag-it HF-I Plus Transponder IC supports a range of additional specific functions, providing additional application flexibility for the customer:

- A second lock bit per block is designated for "Factory Lock." That means that every block of the user memory can be factory locked during production.
- The ISO Inventory Mode command has been defined in the standard as a stand-alone command to receive DSFID and UID. For more system flexibility, the Texas Instruments Tag-it HF-I PlusTransponder also allows the combination of the Inventory command with other commands (see [Table 1-1](#)).
- Besides the ISO 15693-3 defined commands, TI has implemented additional manufacturer specific commands, which are listed in [Table 1-1](#).

## 1.5 Memory Organization

User data is read and stored in a 2 kbit non-volatile user memory that is organized in 64 blocks. Each block with 32 bit is user programmable and can be locked individually to protect data from modification. Once set, the lock bit cannot be reset. The user memory is field programmable per block. Two levels of block locking are supported: Individual block locking by the user (U) or individual block locking of factory programmed data (F) during manufacturing. Bit 2 of the "Block Security Status" Byte defined in ISO 15693-3 is used to store the Factory Lock Status of the Block. Block locking irreversibly protects the locked data from any further reprogramming. A factory-programmed block contains the IC reference and the physical memory info (Block size and Number of Blocks).

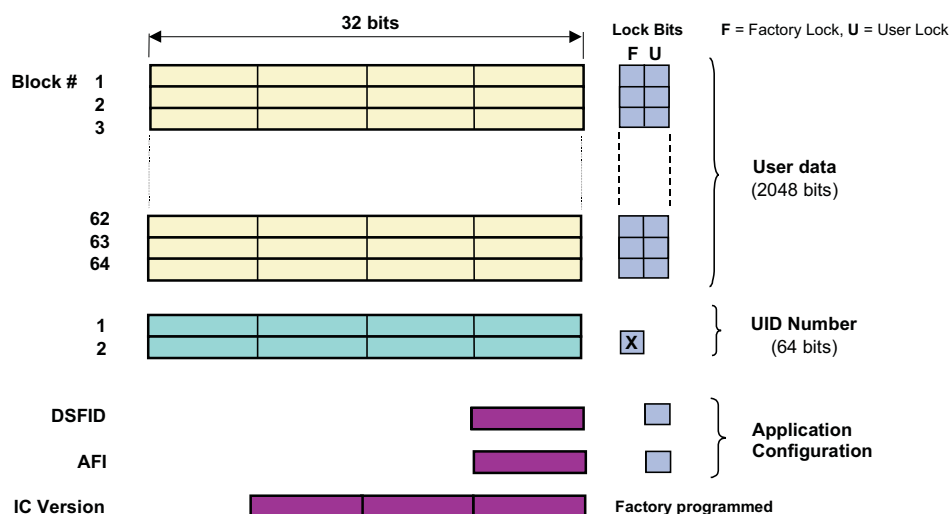

**Figure 1-2. Memory Organization of the Tag-it HF-I Plus Transponder IC**

## 1.6 Command Set

**Table 1-1. Command Set for Tag-it HF-I Plus Transponder IC**

Request	Request Code	Request Mode <sup>(1)</sup>					Option Flag
		Inventory	Addressed	Non Addressed	Select	AFI	
ISO 15693 Mandatory Commands							
Inventory	0x01	√	–	–	–	√	–
Stay Quiet	0x02	–	√	–	–	–	–
ISO 15693 Optional Commands							
Read_Single_Block	0x20	√	√	√	√	√	0/1
Write_Single_Block	0x21	–	√	√	√	–	1
Lock_Block	0x22	–	√	√	√	–	1
Read_Multi_Blocks	0x23	√	√	√	√	√	0/1
Write_Multi_Blocks	0x24	–	–	–	–	–	–
Select Tag	0x25	–	√	–	–	–	–
Reset to Ready	0x26	–	√	√	√	–	–
Write_AFI	0x27	–	√	√	√	–	1
Lock_AFI	0x28	–	√	√	√	–	1
Write DSFID	0x29	–	√	√	√	–	1
Lock DSFID	0x2A	–	√	√	√	–	1
Get_System_info	0x2B	√	√	√	√	√	–
Get_M_Blk_Sec_St	0x2C	√	√	√	√	√	–
TI Custom Commands							
Write_2_Blocks	0xA2	–	√	√	√	–	1
Lock_2_Blocks	0xA3	–	√	√	√	–	1

<sup>(1)</sup> √ = Implemented, – = Not applicable, 0/1 = Option Flag needed

---

**Note:** The Option Flag (Bit 7) of the ISO 15693 defined Request Flags must be set to 1 for all Write and Lock commands to respond properly.

For reliable programming we recommend a programming time  $\geq 10$  ms before the reader sends the End Of Frame (EOF) to request the response from the Transponder.

---

## 1.7 Ordering Information and Part Numbers

The Tag-it HF-I Plus Transponder IC is available with following finishing options:

**Table 1-2. Part Numbers**

Part-Number	Bumping		Inking	Grinding	Sawing	Packing	
	NI/AU	AU				Multi Wafer	Single Wafer
RF-HDT-WNMC-M0						Yes	
RF-HDT-SJLC-G0	Yes		Yes	Yes	Yes		Yes
RF-HDT-AJLC-G0		Yes	Yes	Yes	Yes		Yes



## ***Specification***

---

---

---

This chapter provides the electrical and mechanical specifications of the Tag-it HF-I Plus Transponder IC.

<b>Topic</b>	<b>Page</b>
<b>2.1 Electrical Specification .....</b>	<b>14</b>
<b>2.2 Mechanical Wafer Specification .....</b>	<b>14</b>
<b>2.3 Mechanical Die Specification .....</b>	<b>16</b>
<b>2.4 Bump Specification .....</b>	<b>17</b>

## 2.1 Electrical Specification

**Table 2-1. Absolute Maximum Ratings**

Parameter	Symbol	Note	Min	Nom	Max	Unit
Antenna Input Current	Iant_dc				10	mA
Antenna Input Voltage	Vant_dc				10	V
Storage Temperature	Ts		-40		125	°C
Junction (Chip) Temp.	Tj				150	°C
ESD Immunity	ANT1, ANT2, TDAT, GND	HBM	3.0 2.0			kV

**Note:** Stress beyond the limits of those listed under 'Absolute Maximum Ratings' may cause permanent damage to the device. Functional operation of the device under these or any other conditions beyond those indicated under 'Recommended Operating Conditions' is not implied. Exposure to absolute-maximum-rated conditions for extended time may affect device reliability.

**Table 2-2. Recommended Operating Conditions**

Parameter	Symbol	Note	Min	Nom	Max	Unit
Operating Temperature	TA		-40		85	°C
Carrier Frequency	fTX			13.56		MHz
Antenna Input Voltage	VANT	@ fTX unmodulated	2.5		Vlim	V
Impedance of LC circuit	Z		6.5		15.5	kΩ

**Table 2-3. Electrical Characteristics**

Parameter	Symbol	Note	Min	Nom	Max	Unit
Input Capacitance	C <sub>IN</sub>	@ 2V <sub>RMS</sub>		2.4		pF
Operating Supply Current	ICC	VANT=min			50	μA
Uplink Modulation Index	M <sub>PICC</sub>	VANT<7V	0.1		0.3	
Limiter Clamping Voltage	Vlim				10	V
Data Retention	tDRET	55 = C	10			Years
Write and Erase Endurance	W&E	Ta=25 = C	100 000			Cycles

**Note:** For highest possible read-out coverage we recommend to operate readers at a modulation depth of 20% or higher.


## 2.2 Mechanical Wafer Specification

**Table 2-4. General Mechanical Wafer Specification**

Parameter	Value
Wafer diameter	200 mm ±0.3 mm (8 inch)
Thickness	711 μm
Scribe line width	110 μm
Electrical connection of substrate	VSS potential
Complete dies per wafer	16422

**Table 2-5. Mechanical Wafer Specification After Grinding, Sawing on FFC**

Parameter		Value
Backside Material		Si
Roughness:		
Ra		500 Å
Rtm		2500 Å
	Product	
Thickness	RF-HDT-WNMC-M0	711 µm
	RF-HDT-SJLC-G0	265 µm ± 5 µm
	RF-HDT-AJLC-G0	150 µm ± 5 µm

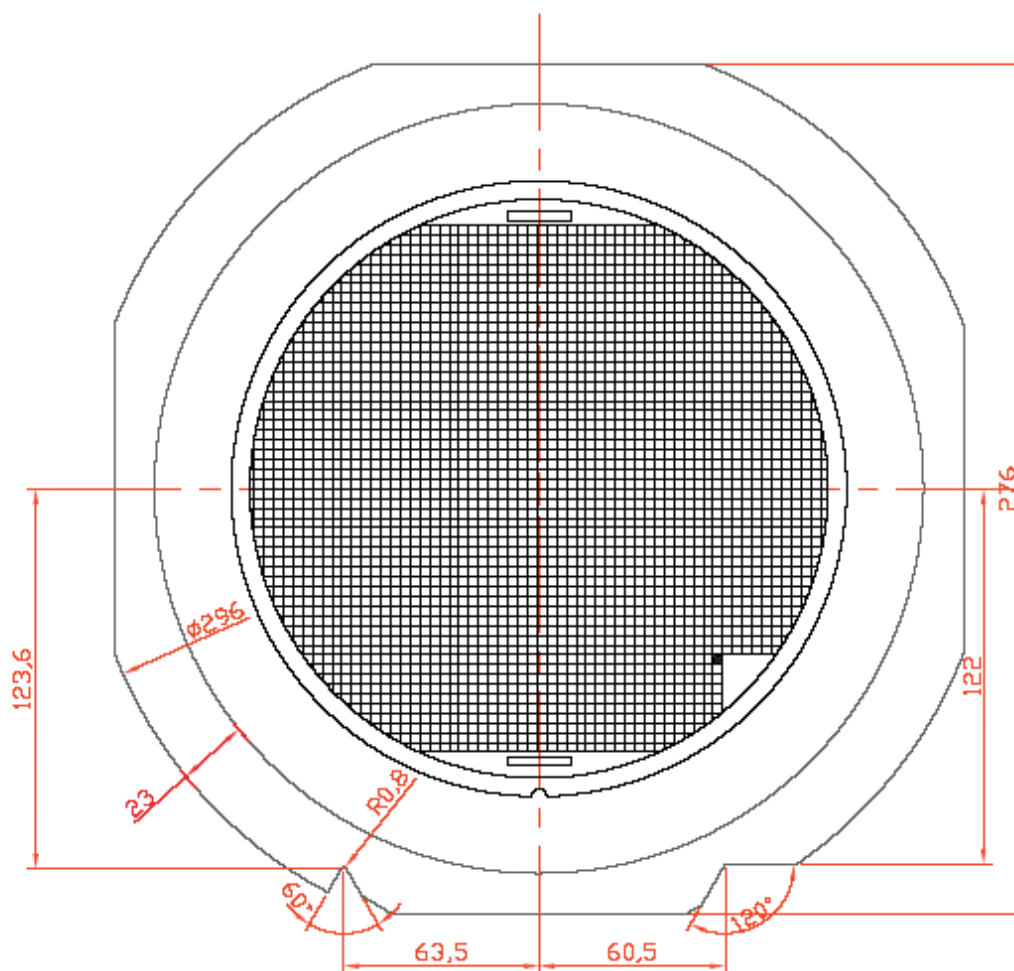

**Figure 2-1. Wafer on FFC**

## 2.3 Mechanical Die Specification

**Table 2-6. Mechanical Die Specification**

Parameter	Value
Antenna pad size	Pad 1: 100*200 $\mu\text{m}$ , Pad 5, 6, 8: 200*200 $\mu\text{m}$
Test pad size	Pad 2, 3, 4: 50*70 $\mu\text{m}$ ,
GND test pad	Pad 7: 90*90 $\mu\text{m}$
Bond pad metallization material	ALCu 0.5 %
Bond pad metallization thickness	0.95 $\mu\text{m}$
Bond and test pad location	Table 6
Die dimension (including scribe line)	1406 * 1226 $\mu\text{m} \pm 15 \mu\text{m}$
Die dimension (excluding scribeline)	1296 * 1116 $\mu\text{m} \pm 15 \mu\text{m}$
Top side passivation material	SiNi
Passivation thickness	1.1 $\mu\text{m}$

**Table 2-7. Antenna and Test Pad Location**

Pad No.	Name	LLCx[ $\mu\text{m}$ ]	LLCy[ $\mu\text{m}$ ]	URCx[ $\mu\text{m}$ ]	URCy[ $\mu\text{m}$ ]
1	ANT1	32	984	232	1084
5	ANT2	1064	884	1264	1084
6	ANT2	1064	32	1264	232
8	ANT1	32	32	232	232
<b>Test pad</b>					
2	TDI	518	1014	568	1084
3	VCCA	623	1014	673	1084
4	TDO	728	1014	778	1084
7	GND	645	90	735	180



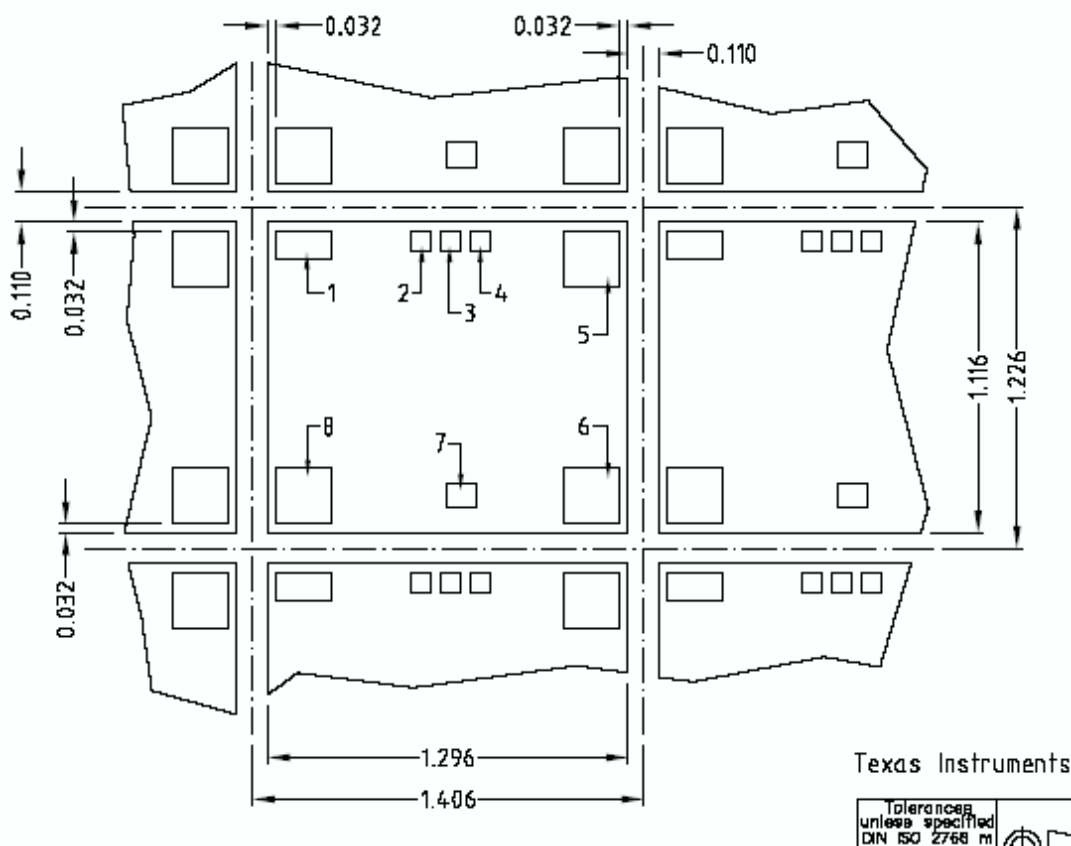



Figure 2-2. Antenna and Test Pad Location

## 2.4 Bump Specification

Table 2-8. Bump Specification

Parameter	Value	
Bump material	NI covered with AU, chemical process	AU
Bump height	25 $\mu\text{m} \pm 10\%$	20 $\mu\text{m} \pm 3 \mu\text{m}$
Bump hardness	>HV 450	HV 35-80
Surface roughness	<1 $\mu\text{m}$	< 3 $\mu\text{m}$
Shear strength	>150 cN	>290 cN

**Note:** Contact between the test pads and the antenna is not allowed as it can have an impact on the electrical performance of the transponder.

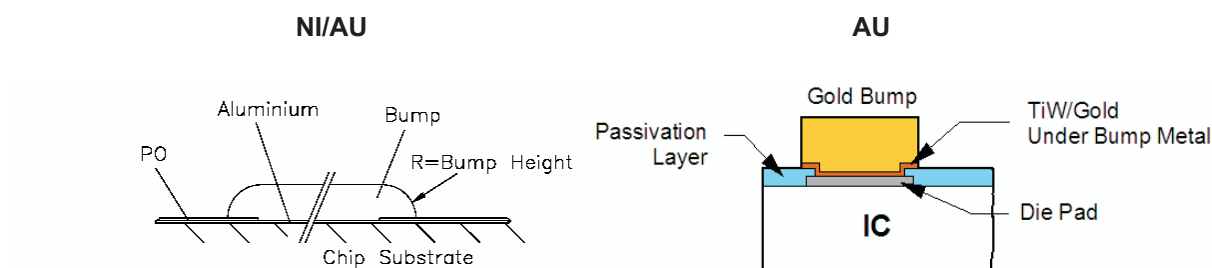

**Figure 2-3. Cross Section of Bump**

## ***Shipping, Packing & Further Handling***

---

---

Topic	Page
3.1 Lot Definition.....	<a href="#">20</a>
3.2 Wafer identification .....	<a href="#">20</a>
3.3 Wafer Map File.....	<a href="#">21</a>
3.4 Ink Dot Specification .....	<a href="#">22</a>
3.5 Packing for Wafers.....	<a href="#">23</a>
3.6 Packing for Sawn Wafers .....	<a href="#">24</a>
3.7 Barcode Label .....	<a href="#">25</a>
3.8 Storage Conditions .....	<a href="#">26</a>


### 3.1 Lot Definition

A definite quantity of wafers from the same diffusion batch produced under presumed uniform conditions. Occasionally a lot equals 25 wafers.

### 3.2 Wafer identification



Each wafer is marked with laser marking to identify the wafer. The wafermap file is linked to the wafer id. There are two marks on the wafer.

The following figure shows the position of the wafer identification codes. The reference die is the black marked die in the corner at the right lower position of the wafer.

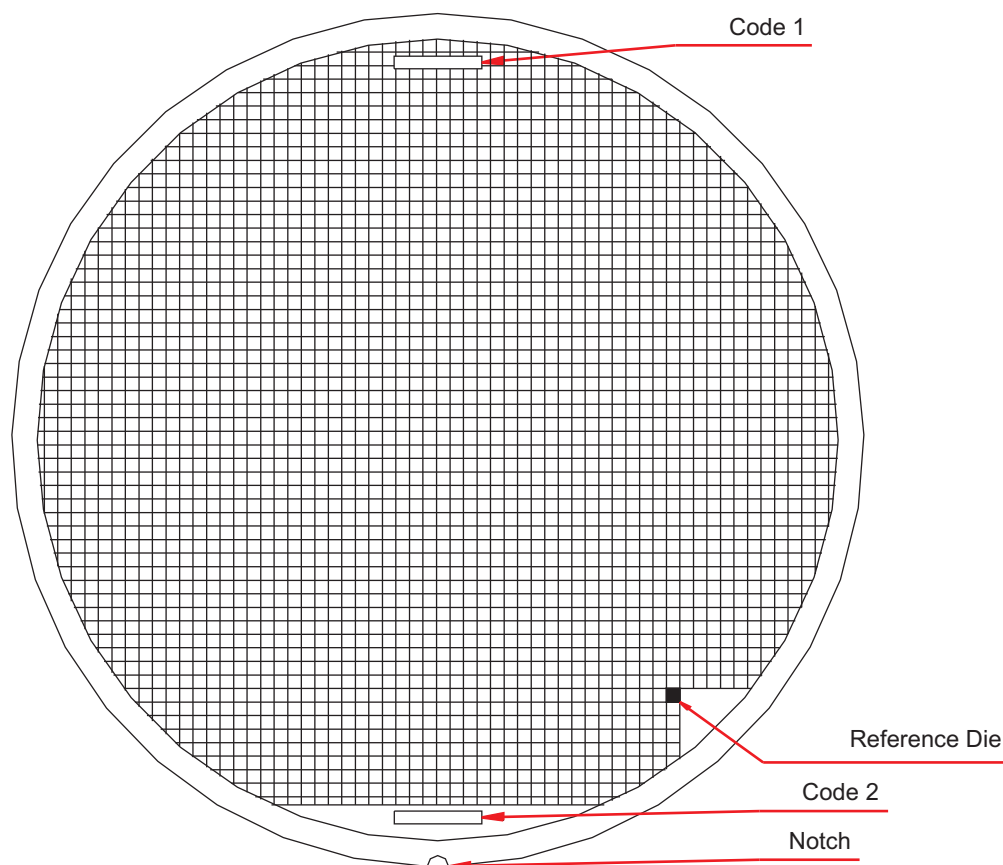


**Figure 3-1. Position of Wafer Identification Code**

**Code 1:** Wafer Lot number naming rule:

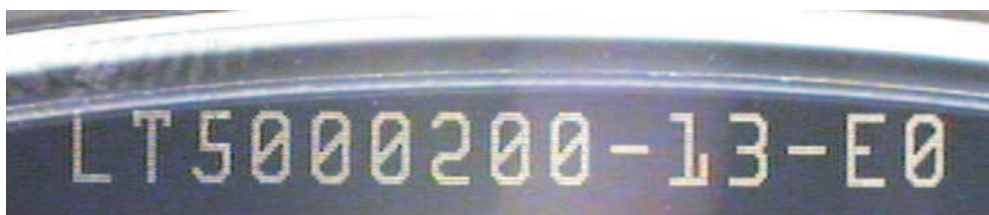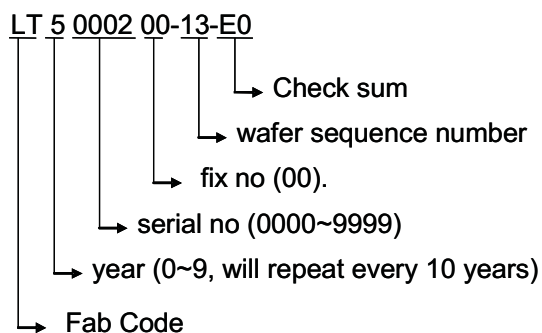

**Figure 3-2. Wafer Identification Code 1**

**Code 2:** Wafer Lot number naming rule:

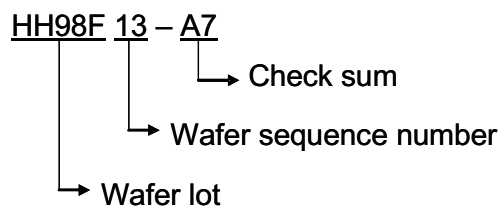


**Figure 3-3. Wafer Identification Code 2**

### 3.3 Wafer Map File

All lots are supplied with wafer mapping file.

The mapping file is stored for 3 years, if any problem might occur. We handle our TI world wide wafer map standard. The wafer file name is explained as follows:

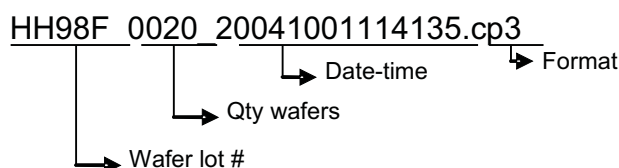

Wafer map files are provided in a TI Worldwide (WW) format, which is in ASCII text form. An example of the TI WW wafer map file is shown below. Contact your sales representative to obtain details on the TI WW format.


```
FACILITY=UMC-F8E
LOT=HH98F
DEVICE=$8TMS37112B
WAFERS=20
X_SIZE=074.134
Y_SIZE=083.858
BIN_NAME.01="G,PASS"
BIN_NAME.09="FAIL"
STATUS="PROD"
SCRIBE="BOTTOM,15,NTRL,FAB"
WAFER_SIZE=200
WAFERID.01=LT5000200-13-E0
NUM_BINS.01=01
BIN_COUNT.01.01=02463
MAP_XY.01.01="Y-10 19 15 12 10/8
Y-9 20 18 15 13/12 9/7
Y-8 20/14 12/10 8/6 3
Y-7 15/13 10 8 4 2"
```

### 3.4 Ink Dot Specification

All Tag-it HF-I Plus Transponder ICs are electrically tested, and dies that fail the probetest will be inked. Bump failures are not marked with an ink dot.

**Table 3-1. Ink Dot Specification**

Parameter	Value
Diameter	Min 250 $\mu\text{m}$
	Max 600 $\mu\text{m}$
Height	Max 25 $\mu\text{m}$
Colour	Black
Position	Central, not to touch bond pads

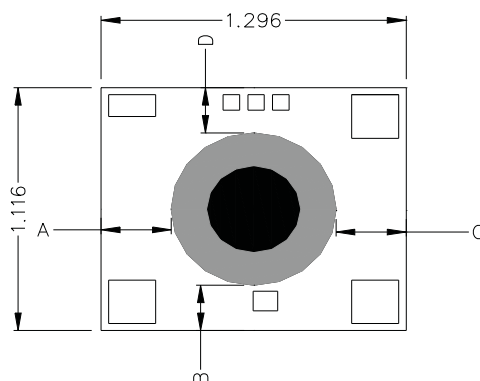

**Figure 3-4. Ink Dot Drawing**


**Table 3-2. Ink Dot Placement**

No.	Max	Min	Remark
A	550	200	
B	400	200	
C	550	200	
D	400	150	
Ink	600	250	Size limit

### 3.5 Packing for Wafers

The wafers are packed for transportation to protect them against shock, static discharge and contamination in a wafer shipper box up to 25 wafers. This box is packed in an antistatic moisture bag with silica gel and in a double layered carton box.

**Note:** When the silica gel has changed the color to blue, it is an indication that moisture has entered the bag.

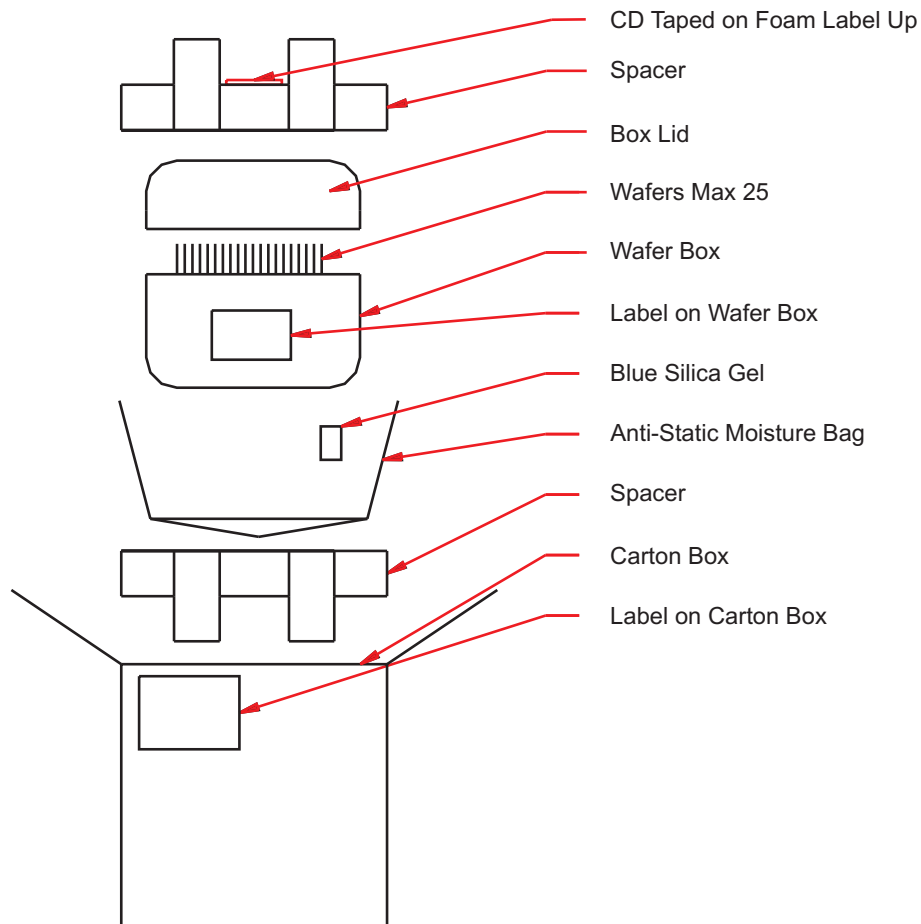


**Figure 3-5. Packing of Wafers**

### 3.6 Packing for Sawn Wafers

#### Packing in Multi Wafer Box

Sawn wafers are mounted on foil and delivered on standard 8" disco wafer frame (see [Figure 2-1 Wafer on FCC](#)). A special plastic container is used to store up to 25 wafers in frames. This plastic container is packed in an antistatic moisture bag with silica gel and in a double layered carton box.

**Note:** When the silica gel has changed the color to blue it is an indication that moisture has entered the bag.

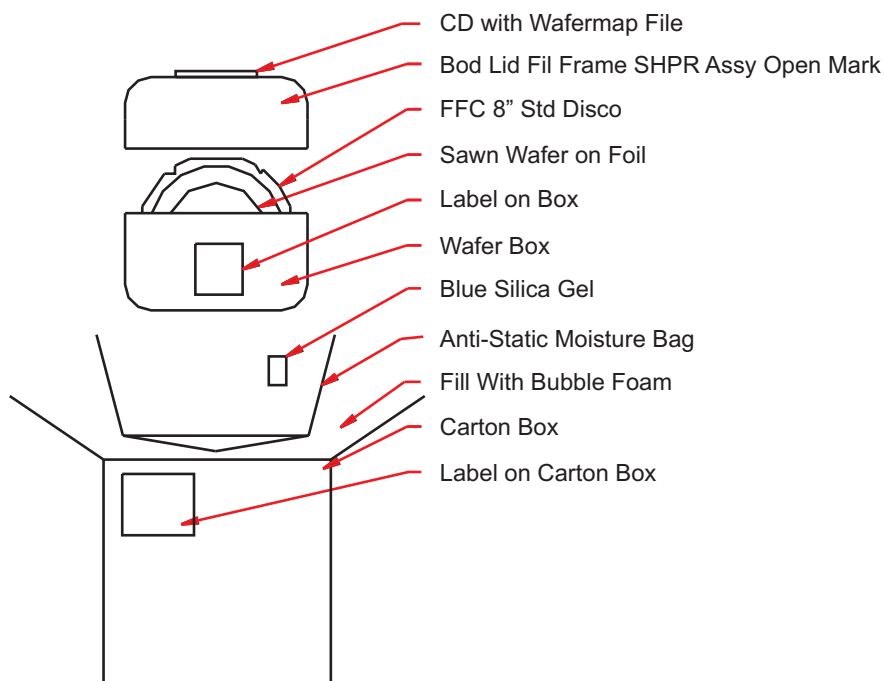

**Figure 3-6. Packing of Sawn Wafers (Multi)**



## Packing in Single Wafer Box

Sawn wafers are mounted on foil and delivered on standard 8" disco wafer frame (see [Figure 2-1](#) Wafer on FCC). A special plastic container is used to store the wafer in frames. This plastic container is packed in an antistatic moisture bag and in a carton box.


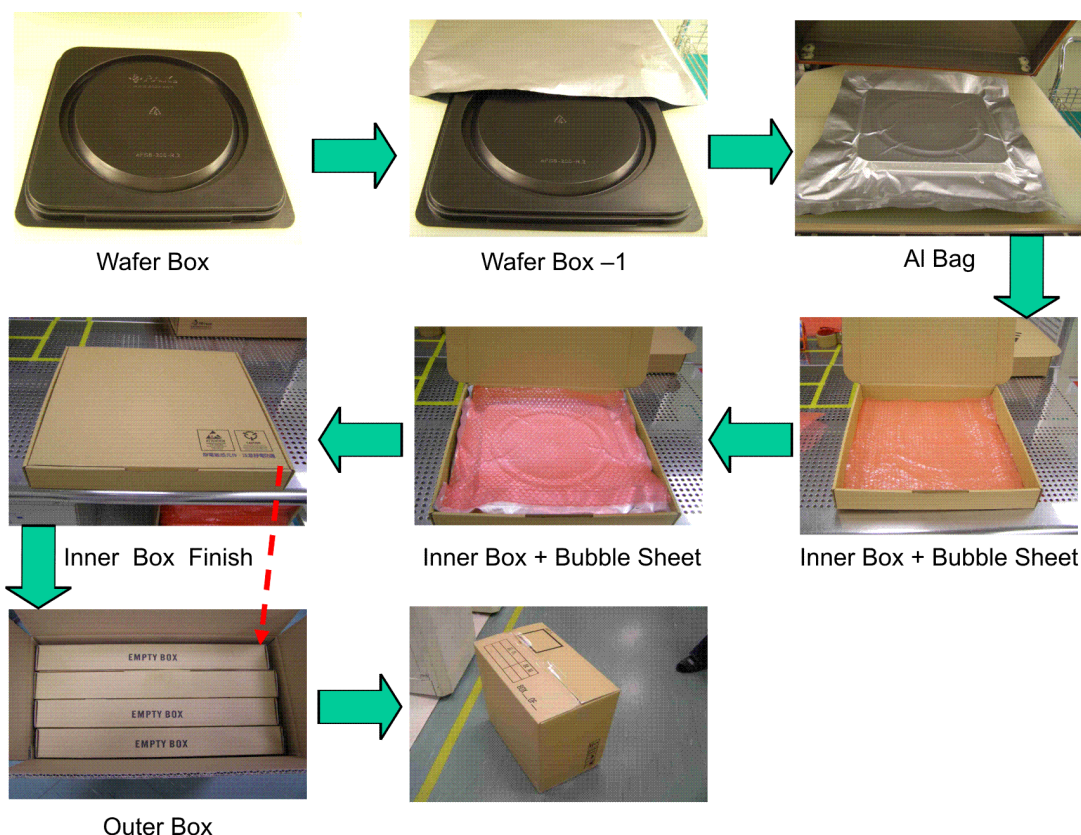


Figure 3-7. Packing of Sawn Wafers (Single)

## 3.7 Barcode Label

The following figure shows the barcode label that is placed on the packing box, the wafer container and the CD with the Map File.

**Note:** The data provided below is an example and should only be viewed as guide values.

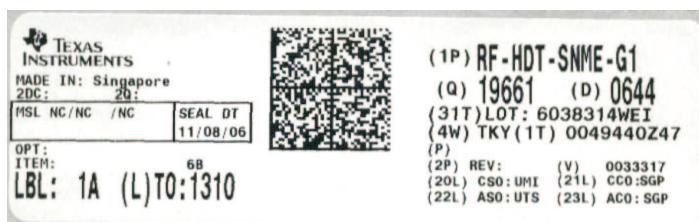

(1P) Part Number  
 (Q) Quantity of functional Chips  
 (D) Datecode; Lot Number

Figure 3-8. Barcode Label

### 3.8 Storage Conditions

The wafers should be kept in the original packing during storage.

**Table 3-3. Storage Conditions**

Parameter	Value
Temperature	20°C ± 5°C
Atmosphere	Dried N2 or dried air with 40%–60% r.h.
Duration	Max. 6 months

## ***Regulatory, Safety, and Warranty Notices***

---

---

---

This chapter describes important safety precautions and safety regulations.

<b>Topic</b>	<b>Page</b>
<b>4.1 Regulatory, Safety, and Warranty Notices .....</b>	<b>28</b>
<b>4.2 Warranty and Liability.....</b>	<b>28</b>
<b>4.3 Hazards from Electrostatic Discharge ESD .....</b>	<b>28</b>

## 4.1 Regulatory, Safety, and Warranty Notices

An RFID system comprises an RF transmission device, and is therefore subject to national and international regulations.

A system reading from or writing to these transponders may be operated only under an experimental license or final approval issued by the relevant approval authority. Before any such device or system can be marketed, an equipment authorization must be obtained from the relevant approval authority.

The Tag-it HF-I Plus Transponder IC has been manufactured using state-of-the-art technology and in accordance with the recognized safety rules.

### Observe precautions in operating instructions

- Condition for the safe processing, handling and fault-free operation of the Tag-it HF-I Plus Transponder IC is the knowledge of the basic safety regulations.
- All persons who operate with the Tag-it HF-I Plus Transponder IC must observe the guidelines and particularly the safety precautions outlined in this document.
- In addition, basic rules and regulations for accident prevention applicable to the operating site must also be considered.

## 4.2 Warranty and Liability

The "General Conditions of Sale and Delivery" of Texas Instruments Incorporated or a TI subsidiary apply. Warranty and liability claims for defect products, injuries to persons and property damages are void if they are the result of one or more of the following causes:

- improper use of the transponders IC
- unauthorized assembly, operation and maintenance of the transponders IC
- operation of the transponder IC with defective and/or non-functioning safety and protective equipment
- failure to observe the instructions given in this document during transport, storage, assembly, operation, maintenance and setting up of the transponder IC
- unauthorized changes to the transponder IC
- insufficient monitoring of the transponder ICs' operation or environmental conditions
- repairs
- catastrophes caused by foreign bodies and acts of God.

### CAUTION

Tag-it HF-I Plus Transponder ICs are 100% thoroughly tested. It is the responsibility of TI's customer to evaluate their assembly process for compatibility with the Tag-it HF-I Plus Transponder IC properties and to ensure through appropriate process controls that determined machine and material parameter are met on an ongoing basis. TI does not accept warranty claims for material that has already undergone packaging or conversion process.

## 4.3 Hazards from Electrostatic Discharge ESD

### WARNING

**ELECTRONIC DEVICES CAN ALSO BE DESTROYED BY  
ELECTROSTATIC ENERGY.**

## ***Terms & Abbreviations***

---

---

---

A list of the abbreviations and terms used in various TI-RFID manuals can now be found in a separate manual:

**TI-RFID Product Manuals – Terms & Abbreviations**

Document number SCBU014 (11-03-21-002)

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
Low Power Wireless	<a href="http://www.ti.com/lpw">www.ti.com/lpw</a>

### Applications

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Broadband	<a href="http://www.ti.com/broadband">www.ti.com/broadband</a>
Digital Control	<a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a>
Military	<a href="http://www.ti.com/military">www.ti.com/military</a>
Optical Networking	<a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Telephony	<a href="http://www.ti.com/telephony">www.ti.com/telephony</a>
Video & Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>
Wireless	<a href="http://www.ti.com/wireless">www.ti.com/wireless</a>

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2007, Texas Instruments Incorporated



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.