

Data Sheet

ADR4520/ADR4525/ADR4530/ADR4533/ADR4540/ADR4550

FEATURES

Maximum temperature coefficient (TCV_{out}):

1 ppm/ $^{\circ}C$ (C grade 0 $^{\circ}C$ to 70 $^{\circ}C$)

2 ppm/ $^{\circ}C$ (B grade -40 $^{\circ}C$ to +125 $^{\circ}C$)

Output noise (0.1 Hz to 10 Hz):

1 μV p-p at V_{out} of 2.048 V typical

Initial output voltage error:

C grade: $\pm 0.02\%$ (maximum)

Input voltage range: 3 V to 15 V

Operating temperature:

A grade and B grade: -40 $^{\circ}C$ to +125 $^{\circ}C$

C grade: 0 $^{\circ}C$ to +70 $^{\circ}C$

Output current: +10 mA source/-10 mA sink

Low quiescent current: 950 μA (maximum)

Low dropout voltage: 300 mV at 2 mA ($V_{out} \geq 3$ V)

8-lead SOIC package

AEC-Q100 qualified for automotive applications

Long-term drift: 51 ppm typical at 4500 hours

APPLICATIONS

Precision data acquisition systems

High resolution data converters

High precision measurement devices

Industrial instrumentation

Medical devices

Automotive battery monitoring

GENERAL DESCRIPTION

The ADR4520/ADR4525/ADR4530/ADR4533/ADR4540/ADR4550 devices are high precision, low power, low noise voltage references featuring $\pm 0.02\%$ C grade maximum initial error, excellent temperature stability, and low output noise.


This family of voltage references uses an innovative core topology to achieve high accuracy while offering industry-leading temperature stability and noise performance. The low, thermally induced output voltage hysteresis and low long-term output voltage drift of the devices also improve system accuracy over time and temperature variations.

A maximum operating current of 950 μA and a maximum low dropout voltage of 300 mV allow the devices to function very well in portable equipment.

The ADR4520/ADR4525/ADR4530/ADR4533/ADR4540/ADR4550 series of references are each provided in an 8-lead SOIC package and are available in a wide range of output voltages, all of which are specified over the extended industrial temperature range of -40 $^{\circ}C$ to +125 $^{\circ}C$. The ADR4525, ADR4540,

PIN CONFIGURATION

ADR4520/ADR4525/
ADR4530/ADR4533/
ADR4540/ADR4550



NOTES

1. NIC = NOT INTERNALLY CONNECTED.

THIS PIN IS NOT CONNECTED INTERNALLY.

2. DNC = DO NOT CONNECT. DO NOT CONNECT TO THIS PIN.

Figure 1. 8-Lead SOIC

10203-001

and ADR4550 are also available in C grade with a temperature range of 0 $^{\circ}C$ to 70 $^{\circ}C$. The ADR4525W, available in an 8-lead SOIC package, is qualified for automotive applications.

Table 1. Selection Guide

Model	Output Voltage (V)	Grade
ADR4520	2.048	A, B
ADR4525	2.5	A, B, C
ADR4525W	2.5	B
ADR4530	3.0	A, B
ADR4533	3.3	A, B
ADR4540	4.096	A, B, C
ADR4550	5.0	A, B, C

Table 2. Voltage Reference Choices from Analog Devices, Inc.

V_{out} (V)	Micropower	Low Power	Ultralow Noise
2.048	ADR3420 LT6656	ADR360 LTC6652 LT6654	ADR440 LTC6655
2.5	ADR3425 LT1461 LT6656	ADR361 LTC6652 LT6654	ADR441 LTC6655
5.0	ADR3450 LT1461 LT6656	ADR365 LTC6652 LT6654	ADR445 LTC6655

Rev. C

Document Feedback

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 781.329.4700 ©2012-2020 Analog Devices, Inc. All rights reserved.
Technical Support www.analog.com

TABLE OF CONTENTS

Features	1
Applications.....	1
General Description	1
Pin Configuration.....	1
Revision History	2
Specifications.....	4
ADR4520 Electrical Characteristics	4
ADR4525 Electrical Characteristics	5
ADR4530 Electrical Characteristics	6
ADR4533 Electrical Characteristics	7
ADR4540 Electrical Characteristics	8
ADR4550 Electrical Characteristics	9
Absolute Maximum Ratings.....	10
Thermal Resistance	10
ESD Caution.....	10
Pin Configuration and Function Descriptions.....	11
Typical Performance Characteristics	12
ADR4520	12
ADR4525	15
ADR4530	18
ADR4533	21
ADR4540	24
ADR4550	27
Terminology	30
Applications Information	31
Basic Voltage Reference Connection	31
Input and Output Capacitors.....	31
Location of Reference in System	31
Power Dissipation.....	31
Sample Applications.....	31
Long-Term Drift (LTD).....	32
Thermal Hysteresis	33
Humidity Sensitivity	34
Power Cycle Hysteresis	35
Outline Dimensions.....	36
Ordering Guide	36
Automotive Products	37

REVISION HISTORY

4/2020—Rev. B to Rev. C

Added ADR4540 C Grade and ADR4550 C Grade...Throughout	
Changes to Table 4.....	5
Changes to Table 7	8
Changes to Table 8.....	9
Deleted Figure 32, Renumbered Sequentially	18
Changes to Figure 39.....	19
Changes to Figure 52.....	22
Added Figure 69, Renumbered Sequentially	26
Changes to Figure 79.....	28
Added Figure 83.....	29
Updated Ordering Guide.....	41

12/2018—Rev. A to Rev. B

Changes to Features Section, Table 1, and Table 2	1
Changes to Table 3.....	4
Changes to Table 4.....	5
Changes to Table 5.....	6
Changes to Table 6.....	7
Changes to Table 7	8
Changes to Table 8.....	9
Added Electrostatic Discharge (ESD) Human Body Model (HBM) Parameter and Moisture Sensitivity Level Rating Parameter, Table 9.....	10
Changes to Thermal Resistance Section and Table 10	10
Deleted Figure 4; Renumbered Sequentially.....	12

Changes to Figure 15.....	14
Deleted Figure 17.....	14
Changes to Figure 16 Caption	15
Added Figure 17; Renumbered Sequentially	15
Deleted Figure 19.....	15
Changes to Figure 29.....	17
Deleted Figure 32.....	17
Deleted Figure 34.....	18
Changes to Figure 43.....	20
Deleted Figure 48.....	20
Deleted Figure 50.....	21
Changes to Figure 56.....	23
Deleted Figure 63.....	23
Deleted Figure 65.....	24
Changes to Figure 69.....	26
Deleted Figure 78.....	26
Deleted Figure 80.....	27
Changes to Figure 82.....	29
Deleted Figure 93.....	29
Changes to Terminology Section	30
Deleted Theory of Operation Section and Long-Term Drift Section.....	31
Moved Power Dissipation Section	31
Added Long-Term Drift (LTD)Section, Figure 86, and Figure 87	32

Added Thermal Hysteresis Section, Figure 88, Figure 89, Figure 90, and Figure 91	33
Added Humidity Sensitivity Section, Figure 92, Figure 93, and Figure 94	34
Added Power Cycle Hysteresis Section and Figure 95	35
Changes to Ordering Guide.....	36

10/2017—Rev. 0 to Rev. A

Changed TP Pin to DNC Pin and NC Pin to NIC Pin.....	Throughout
Changes to Features Section, Figure 1, and General Description Section	1
Changes to Figure 2 and Table 11	10
Changes to Ordering Guide.....	32
Added Automotive Products Section	33

4/2012—Revision 0: Initial Version

SPECIFICATIONS

ADR4520 ELECTRICAL CHARACTERISTICS

Unless otherwise noted, supply voltage (V_{IN}) = 3 V to 15 V, $I_L = 0$ mA, $T_A = 25^\circ\text{C}$.

Table 3.

Parameter	Symbol	Test Conditions/Comments	Min	Typ	Max	Unit
OUTPUT VOLTAGE	V_{OUT}		2.048			V
INITIAL OUTPUT VOLTAGE ERROR B Grade	V_{OUT_ERR}		± 0.02	410	μV	%
A Grade			± 0.04	820	μV	%
SOLDER HEAT RESISTANCE SHIFT			± 0.02			%
TEMPERATURE COEFFICIENT B Grade	TCV_{OUT}	See Terminology section $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (box method) $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (bowtie method)	2	4	4	$\text{ppm}/^\circ\text{C}$
A Grade		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (box method) $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (bowtie method)	4	8	8	$\text{ppm}/^\circ\text{C}$
LINE REGULATION	$\Delta V_{OUT}/\Delta V_{IN}$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	1	10		ppm/V
LOAD REGULATION	$\Delta V_{OUT}/\Delta I_L$	$I_L = 0$ mA to $+10$ mA source, $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	30	80		ppm/mA
		$I_L = 0$ mA to -10 mA sink, $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	100	120		ppm/mA
QUIESCENT CURRENT	I_Q	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, no load	700	950		μA
DROPOUT VOLTAGE	V_{DO}	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, no load	1			V
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, $I_L = 2$ mA	1			V
RIPPLE REJECTION RATIO	RRR	Input frequency (f_{IN}) = 1 kHz	90			dB
OUTPUT CURRENT CAPACITY Sinking Sourcing	I_L		-8	10		mA
						mA
OUTPUT VOLTAGE NOISE	e_{Np-p}	0.1 Hz to 10.0 Hz	1.0			$\mu\text{V p-p}$
OUTPUT VOLTAGE NOISE DENSITY	e_N	1 kHz	35.8			$\text{nV}/\sqrt{\text{Hz}}$
OUTPUT VOLTAGE Hysteresis	ΔV_{OUT_HYS}	T_A = temperature cycled from $+25^\circ\text{C}$ to $+125^\circ\text{C}$ to -40°C to $+25^\circ\text{C}$ (full cycle) 25°C to 125°C to 25°C (half cycle) 25°C to 70°C to 0°C to 25°C (full cycle) 25°C to 70°C to 25°C (half cycle)	-13 -97 -8 -17		ppm ppm ppm ppm	
LONG-TERM DRIFT	ΔV_{OUT_LTD}	$T_A = 25^\circ\text{C}$ 250 hours (early life drift) 1000 hours 4500 hours	19 25 51		ppm ppm ppm	
TURN-ON SETTLING TIME	t_R	Output capacitor (C_{OUT}) = 1 μF , input capacitor (C_{IN}) = 0.1 μF , load resistance (R_{LOAD}) = 1 $k\Omega$	90			μs
LOAD CAPACITANCE			1	100		μF

ADR4525 ELECTRICAL CHARACTERISTICSUnless otherwise noted, $V_{IN} = 3\text{ V}$ to 15 V , $I_L = 0\text{ mA}$, $T_A = 25^\circ\text{C}$.**Table 4.**

Parameter	Symbol	Test Conditions/Comments	Min	Typ	Max	Unit
OUTPUT VOLTAGE	V_{OUT}			2.500		V
INITIAL OUTPUT VOLTAGE ERROR	V_{OUT_ERR}					
C Grade			± 0.02			%
B Grade			500			μV
A Grade			± 0.02			%
			500			μV
			± 0.04			%
			1			mV
SOLDER HEAT RESISTANCE SHIFT				± 0.02		%
A, B, C Grade						
TEMPERATURE COEFFICIENT	TCV_{OUT}	See Terminology section $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$ (box method) $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$ (bowtie method)		1		$\text{ppm}/^\circ\text{C}$
C Grade		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (box method)		2		$\text{ppm}/^\circ\text{C}$
B Grade		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (bowtie method)		2		$\text{ppm}/^\circ\text{C}$
A Grade		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (box method)		4		$\text{ppm}/^\circ\text{C}$
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (bowtie method)		4		$\text{ppm}/^\circ\text{C}$
				8		$\text{ppm}/^\circ\text{C}$
LINE REGULATION	$\Delta V_{OUT}/\Delta V_{IN}$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	1	10		ppm/V
LOAD REGULATION	$\Delta V_{OUT}/\Delta I_L$	$I_L = 0\text{ mA}$ to $+10\text{ mA}$ source, $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ $I_L = 0\text{ mA}$ to -10 mA sink, $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	30	80		ppm/mA
A, B, C Grade			60	120		ppm/mA
QUIESCENT CURRENT	I_Q	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, no load	700	950		μA
DROPOUT VOLTAGE	V_{DO}	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, no load $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, $I_L = 2\text{ mA}$		500		mV
				500		mV
RIPPLE REJECTION RATIO	RRR	$f_{IN} = 1\text{ kHz}$		90		dB
OUTPUT CURRENT CAPACITY	I_L				-10 10	mA mA
Sinking						
Sourcing						
OUTPUT VOLTAGE NOISE	e_{NP-P}	0.1 Hz to 10.0 Hz		1.25		$\mu\text{V p-p}$
OUTPUT VOLTAGE NOISE DENSITY	e_N	1 kHz		41.3		$\text{nV}/\sqrt{\text{Hz}}$
OUTPUT VOLTAGE Hysteresis	ΔV_{OUT_HYS}	$T_A = \text{temperature cycled from } +25^\circ\text{C} \text{ to } +125^\circ\text{C} \text{ to } -40^\circ\text{C} \text{ to } +25^\circ\text{C} \text{ (full cycle)}$ $25^\circ\text{C} \text{ to } 125^\circ\text{C} \text{ to } 25^\circ\text{C} \text{ (half cycle)}$ $25^\circ\text{C} \text{ to } 70^\circ\text{C} \text{ to } 0^\circ\text{C} \text{ to } 25^\circ\text{C} \text{ (full cycle)}$ $25^\circ\text{C} \text{ to } 70^\circ\text{C} \text{ to } 25^\circ\text{C} \text{ (half cycle)}$				
A, B, C Grade				-13		ppm
				-97		ppm
				-8		ppm
				-17		ppm
LONG-TERM DRIFT	ΔV_{OUT_LTD}	$T_A = 25^\circ\text{C}$ 250 hours (early life drift) 1000 hours 4500 hours		19		ppm
A, B, C Grade				25		ppm
				51		ppm
TURN-ON SETTLING TIME	t_R	$C_{OUT} = 1\text{ }\mu\text{F}$, $C_{IN} = 0.1\text{ }\mu\text{F}$, $R_{LOAD} = 1\text{ k}\Omega$		125		μs
LOAD CAPACITANCE				1	100	μF

ADR4530 ELECTRICAL CHARACTERISTICSUnless otherwise noted, $V_{IN} = 3.1$ V to 15 V, $I_L = 0$ mA, $T_A = 25^\circ\text{C}$.**Table 5.**

Parameter	Symbol	Test Conditions/Comments	Min	Typ	Max	Unit
OUTPUT VOLTAGE	V_{OUT}			3.000		V
INITIAL OUTPUT VOLTAGE ERROR B Grade	V_{OUT_ERR}			± 0.02	%	
A Grade				600	μV	
SOLDER HEAT RESISTANCE SHIFT				± 0.04	%	
TEMPERATURE COEFFICIENT B Grade	TCV_{OUT}	See Terminology section $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (box method) $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (bowtie method)		2	$\text{ppm}/^\circ\text{C}$	
A Grade				4	$\text{ppm}/^\circ\text{C}$	
LINE REGULATION	$\Delta V_{OUT}/\Delta V_{IN}$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		4	$\text{ppm}/^\circ\text{C}$	
LOAD REGULATION				8	$\text{ppm}/^\circ\text{C}$	
QUIESCENT CURRENT	I_Q	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, no load		700	950	μA
DROPOUT VOLTAGE	V_{DO}	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, no load $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, $I_L = 2$ mA		100	mV	
RIPPLE REJECTION RATIO	RRR	$f_{IN} = 1$ kHz		300	120	mV
OUTPUT CURRENT CAPACITY Sinking Sourcing	I_L			90	dB	
OUTPUT VOLTAGE NOISE	e_{NP-p}	0.1 Hz to 10.0 Hz		10	10	$\mu\text{V p-p}$
OUTPUT VOLTAGE NOISE DENSITY	e_N	1 kHz		1.6	60	$\text{nV}/\sqrt{\text{Hz}}$
OUTPUT VOLTAGE HYSTERESIS	ΔV_{OUT_HYS}	$T_A = \text{temperature cycled from}$ $+25^\circ\text{C}$ to $+125^\circ\text{C}$ to -40°C to $+25^\circ\text{C}$ (full cycle) 25°C to 125°C to 25°C (half cycle) 25°C to 70°C to 0°C to 25°C (full cycle) 25°C to 70°C to 25°C (half cycle)		-13	ppm	
LONG-TERM DRIFT				-97	ppm	
TURN-ON SETTLING TIME	t_R	$C_{OUT} = 0.1$ μF , $C_{IN} = 0.1$ μF , $R_{LOAD} = 1$ k Ω		-8	ppm	
LOAD CAPACITANCE				-17	ppm	
LONG-TERM DRIFT	ΔV_{OUT_LTD}	$T_A = 25^\circ\text{C}$ 250 hours (early life drift) 1000 hours 4500 hours		19	ppm	
				25	ppm	
				51	ppm	
				130	μs	

ADR4533 ELECTRICAL CHARACTERISTICSUnless otherwise noted, $V_{IN} = 3.4\text{ V}$ to 15 V , $I_L = 0\text{ mA}$, $T_A = 25^\circ\text{C}$.**Table 6.**

Parameter	Symbol	Test Conditions/Comments	Min	Typ	Max	Unit
OUTPUT VOLTAGE	V_{OUT}			3.300		V
INITIAL OUTPUT VOLTAGE ERROR B Grade	V_{OUT_ERR}			± 0.02	μV	\%
A Grade				660		
SOLDER HEAT RESISTANCE SHIFT				± 0.04		%
TEMPERATURE COEFFICIENT B Grade	TCV_{OUT}	See Terminology section $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (box method) $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (bowtie method)		2	$\text{ppm}/^\circ\text{C}$	
A Grade		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (box method) $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (bowtie method)		4		
LINE REGULATION	$\Delta V_{OUT}/\Delta V_{IN}$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		1	10	ppm/V
LOAD REGULATION	$\Delta V_{OUT}/\Delta I_L$	$I_L = 0\text{ mA}$ to $+10\text{ mA}$ source, $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	30	80		ppm/mA
		$I_L = 0\text{ mA}$ to -10 mA sink, $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	60	120		ppm/mA
QUIESCENT CURRENT	I_Q	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, no load	700	950		μA
DROPOUT VOLTAGE	V_{DO}	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, no load		100		mV
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, $I_L = 2\text{ mA}$		300		mV
RIPPLE REJECTION RATIO	RRR	$f_{IN} = 1\text{ kHz}$		90		dB
OUTPUT CURRENT CAPACITY Sinking Sourcing	I_L			-10	mA	
				10		
OUTPUT VOLTAGE NOISE	e_{Np-p}	0.1 Hz to 10.0 Hz		2.1		$\mu\text{V p-p}$
OUTPUT VOLTAGE NOISE DENSITY	e_N	1 kHz		64.2		$\text{nV}/\sqrt{\text{Hz}}$
OUTPUT VOLTAGE HYSTERESIS	ΔV_{OUT_HYS}	$T_A = \text{temperature cycled from } +25^\circ\text{C} \text{ to } +125^\circ\text{C} \text{ to } -40^\circ\text{C} \text{ to } +25^\circ\text{C} \text{ (full cycle)}$ $25^\circ\text{C} \text{ to } 125^\circ\text{C} \text{ to } 25^\circ\text{C} \text{ (half cycle)}$ $25^\circ\text{C} \text{ to } 70^\circ\text{C} \text{ to } 0^\circ\text{C} \text{ to } 25^\circ\text{C} \text{ (full cycle)}$ $25^\circ\text{C} \text{ to } 70^\circ\text{C} \text{ to } 25^\circ\text{C} \text{ (half cycle)}$		-13 -97 -8 -17	ppm ppm ppm ppm	
LONG-TERM DRIFT	ΔV_{OUT_LTD}	$T_A = 25^\circ\text{C}$ 250 hours (early life drift) 1000 hours 4500 hours		19		
				25		
				51		
TURN-ON SETTLING TIME	t_R	$C_{OUT} = 0.1\text{ }\mu\text{F}$, $C_{IN} = 0.1\text{ }\mu\text{F}$, $R_{LOAD} = 1\text{ k}\Omega$		135		μs
LOAD CAPACITANCE				0.1	100	μF

ADR4540 ELECTRICAL CHARACTERISTICSUnless otherwise noted, $V_{IN} = 4.2$ V to 15 V, $I_L = 0$ mA, $T_A = 25^\circ\text{C}$.**Table 7.**

Parameter	Symbol	Test Conditions/Comments	Min	Typ	Max	Unit			
OUTPUT VOLTAGE	V_{OUT}			4.096		V			
INITIAL OUTPUT VOLTAGE ERROR C Grade	V_{OUT_ERR}			± 0.02	%				
				820	μV				
				± 0.02	%				
B Grade				820	μV				
				± 0.04	%				
A Grade			1.64		mV				
SOLDER HEAT RESISTANCE SHIFT				± 0.02		%			
A, B, C Grade									
TEMPERATURE COEFFICIENT	TCV_{OUT}	See Terminology section $0^\circ\text{C} \leq T_A \leq +70^\circ\text{C}$ (box method) $0^\circ\text{C} \leq T_A \leq +70^\circ\text{C}$ (bowtie method)	1		ppm/ $^\circ\text{C}$				
C Grade			2		ppm/ $^\circ\text{C}$				
			2		ppm/ $^\circ\text{C}$				
			4		ppm/ $^\circ\text{C}$				
B Grade			4		ppm/ $^\circ\text{C}$				
			8		ppm/ $^\circ\text{C}$				
A Grade		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (box method) $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (bowtie method)			ppm/ $^\circ\text{C}$				
LINE REGULATION	$\Delta V_{OUT}/\Delta V_{IN}$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	1	10		ppm/V			
LOAD REGULATION A, B, C Grade	$\Delta V_{OUT}/\Delta I_L$	$I_L = 0$ mA to +10 mA source, $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ $I_L = 0$ mA to -10 mA sink, $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	25	80		ppm/mA			
			50	120		ppm/mA			
QUIESCENT CURRENT	I_Q	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, no load	700	950		μA			
DROPOUT VOLTAGE	V_{DO}	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, no load $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, $I_L = 2$ mA		100		mV			
				300		mV			
RIPPLE REJECTION RATIO	RRR	$f_{IN} = 1$ kHz		90		dB			
OUTPUT CURRENT CAPACITY Sinking Sourcing	I_L			-10	mA				
				10					
OUTPUT VOLTAGE NOISE	e_{Np-p}	0.1 Hz to 10.0 Hz		2.7		$\mu\text{V p-p}$			
OUTPUT VOLTAGE NOISE DENSITY	e_N	1 kHz		83.5		nV/ $\sqrt{\text{Hz}}$			
OUTPUT VOLTAGE Hysteresis A, B, C Grade	ΔV_{OUT_HYS}	$T_A =$ temperature cycled from $+25^\circ\text{C}$ to $+125^\circ\text{C}$ to -40°C to $+25^\circ\text{C}$ (full cycle) 25°C to 125°C to 25°C (half cycle) 25°C to 70°C to 0°C to 25°C (full cycle) 25°C to 70°C to 25°C (half cycle)		-13		ppm			
				-97		ppm			
				-8		ppm			
				-17		ppm			
LONG-TERM DRIFT A, B, C Grade	ΔV_{OUT_LTD}	$T_A = 25^\circ\text{C}$ 250 hours (early life drift) 1000 hours 4500 hours		19		ppm			
				25		ppm			
				51		ppm			
TURN-ON SETTLING TIME	t_R	$C_{OUT} = 0.1$ μF , $C_{IN} = 0.1$ μF , $R_{LOAD} = 1$ $\text{k}\Omega$		155		μs			
LOAD CAPACITANCE				0.1	100	μF			

ADR4550 ELECTRICAL CHARACTERISTICSUnless otherwise noted, $V_{IN} = 5.1$ V to 15 V, $I_L = 0$ mA, $T_A = 25^\circ\text{C}$.**Table 8.**

Parameter	Symbol	Test Conditions/Comments	Min	Typ	Max	Unit
OUTPUT VOLTAGE	V_{OUT}			5.000		V
INITIAL OUTPUT VOLTAGE ERROR C Grade	V_{OUT_ERR}			± 0.02	μV	
				1		
				± 0.02		
B Grade				1	mV	
				± 0.04		
A Grade				2	mV	
SOLDER HEAT RESISTANCE SHIFT A, B, C Grade				± 0.02		%
TEMPERATURE COEFFICIENT	TCV_{OUT}	See Terminology section $0^\circ\text{C} \leq T_A \leq +70^\circ\text{C}$ (box method) $0^\circ\text{C} \leq T_A \leq +70^\circ\text{C}$ (bowtie method)		1	$\text{ppm}/^\circ\text{C}$	
C Grade		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (box method) $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (bowtie method)		2		
				2		
				4		
B Grade		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (box method) $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (bowtie method)		4		
				8		
A Grade		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (box method) $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (bowtie method)				
LINE REGULATION	$\Delta V_{OUT}/\Delta V_I$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		1	10	ppm/V
LOAD REGULATION A, B, C Grade	$\Delta V_{OUT}/\Delta I_L$	$I_L = 0$ mA to $+10$ mA source, $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ $I_L = 0$ mA to -10 mA sink, $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		25	80	ppm/mA
				35	120	ppm/mA
QUIESCENT CURRENT	I_Q	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, no load		700	950	μA
DROPOUT VOLTAGE	V_{DO}	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, no load $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, $I_L = 2$ mA			100	mV
					300	mV
RIPPLE REJECTION RATIO	RRR	$f_{IN} = 1$ kHz		90		dB
OUTPUT CURRENT CAPACITY Sinking Sourcing	I_L			-10	mA	
				10		
OUTPUT VOLTAGE NOISE	e_{Np-p}	0.1 Hz to 10.0 Hz		2.8		$\mu\text{V p-p}$
OUTPUT VOLTAGE NOISE DENSITY	e_N	1 kHz		95.3		$\text{nV}/\sqrt{\text{Hz}}$
OUTPUT VOLTAGE Hysteresis A, B, C Grade	ΔV_{OUT_HYS}	$T_A = \text{temperature cycled from } +25^\circ\text{C to } +125^\circ\text{C to } -40^\circ\text{C to } +25^\circ\text{C (full cycle)}$ $25^\circ\text{C to } 125^\circ\text{C to } 25^\circ\text{C (half cycle)}$ $25^\circ\text{C to } 70^\circ\text{C to } 0^\circ\text{C to } 25^\circ\text{C (full cycle)}$ $25^\circ\text{C to } 70^\circ\text{C to } 25^\circ\text{C (half cycle)}$		-13	ppm	
				-97		
				-8		
				-17		
LONG-TERM DRIFT A, B, C Grade	ΔV_{OUT_LTD}	$T_A = 25^\circ\text{C}$ 250 hours (early life drift) 1000 hours 4500 hours		19	ppm	
				25		
				51		
TURN-ON SETTLING TIME	t_R	$C_{OUT} = 0.1$ μF , $C_{IN} = 0.1$ μF , $R_{LOAD} = 1$ $\text{k}\Omega$		160		μs
LOAD CAPACITANCE				0.1	100	μF

ABSOLUTE MAXIMUM RATINGS

T_A = 25°C, unless otherwise noted.

Table 9.

Parameter	Rating
Supply Voltage	16 V
Operating Temperature Range ADR4525, ADR4540, ADR4550 C Grade Only	-40°C to +125°C 0°C to 70°C
Storage Temperature Range	-65°C to +150°C
Junction Temperature Range	-65°C to +150°C
Electrostatic Discharge (ESD) Human Body Model (HBM)	6 kV
Moisture Sensitivity Level Rating	MSL-1

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

THERMAL RESISTANCE

Thermal performance is directly linked to printed circuit board (PCB) design and operating environment. Close attention to PCB thermal design is required.

Table 10. Thermal Resistance

Package Type	θ _{JA}	θ _{Jc} ¹	Unit
8-Lead SOIC ²			
1-Layer JEDEC Board	N/A ³	63	°C/W
2-Layer JEDEC Board	120	N/A ³	°C/W

¹ For the θ_{Jc} test, 100 μm thermal interface material (TIM) is used. TIM is assumed to have 3.6 W/mK.

² Thermal impedance simulated values are based on a JEDEC thermal test board. See JEDEC JESD51.


³ N/A means not applicable.

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

**NOTES**

1. NIC = NOT INTERNALLY CONNECTED.
THIS PIN IS NOT CONNECTED INTERNALLY.
2. DNC = DO NOT CONNECT. DO NOT CONNECT TO THIS PIN.

10203-002

Figure 2. Pin Configuration

Table 11. Pin Function Descriptions

Pin No.	Mnemonic	Description
1	NIC	Not Internally Connected. This pin is not connected internally.
2	V _{IN}	Input Voltage Connection.
3	NIC	Not Internally Connected. This pin is not connected internally.
4	GND	Ground.
5	NIC	Not Internally Connected. This pin is not connected internally.
6	V _{OUT}	Output Voltage.
7	NIC	Not Internally Connected. This pin is not connected internally.
8	DNC	Do Not Connect. Do not connect to this pin.

TYPICAL PERFORMANCE CHARACTERISTICS

$T_A = 25^\circ\text{C}$, unless otherwise noted.

ADR4520

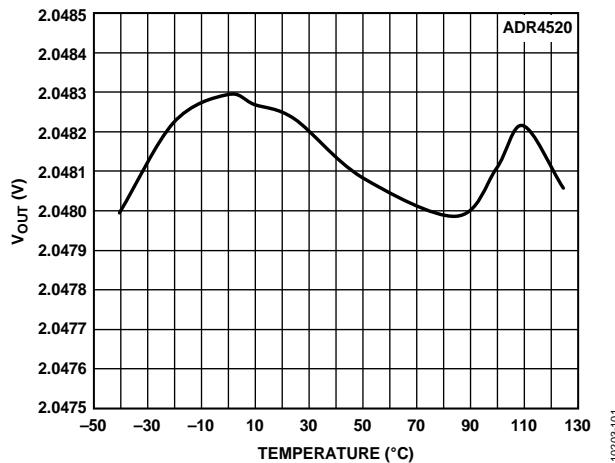


Figure 3. ADR4520 B Grade Output Voltage vs. Temperature

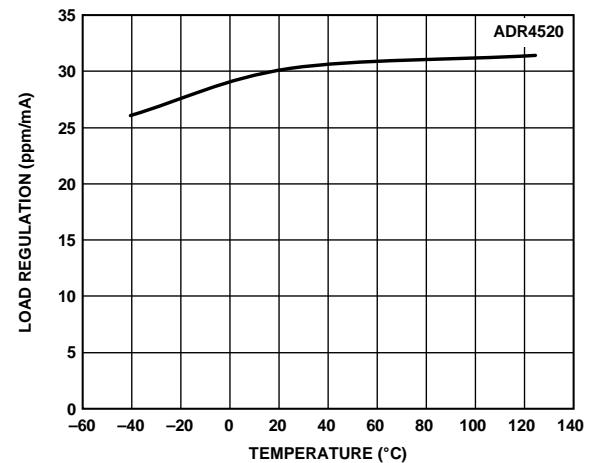


Figure 6. ADR4520 Load Regulation vs. Temperature (Sourcing)

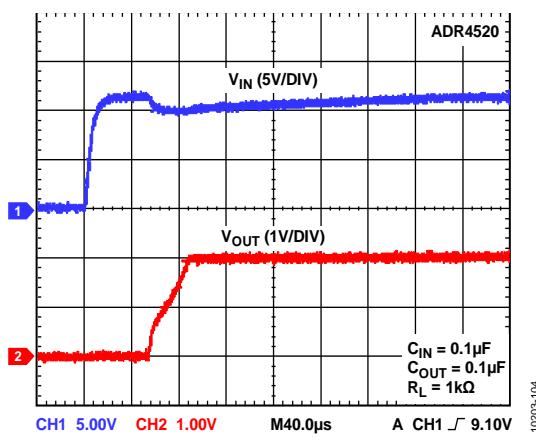


Figure 4. ADR4520 Output Voltage Start-Up Response

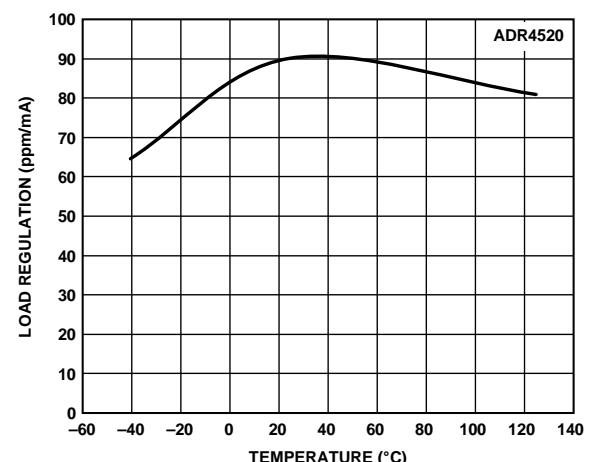


Figure 7. ADR4520 Load Regulation vs. Temperature (Sinking)

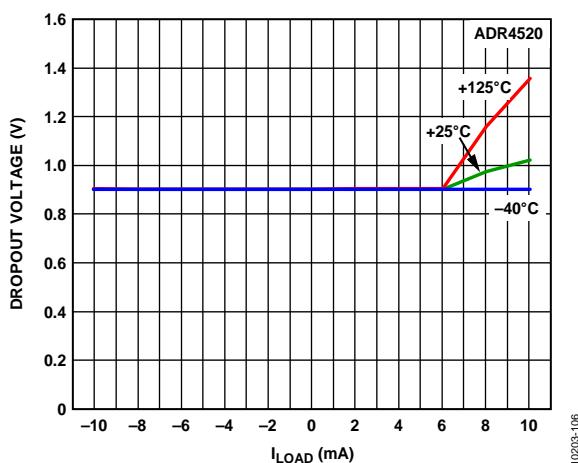


Figure 5. ADR4520 Dropout Voltage vs. Load Current



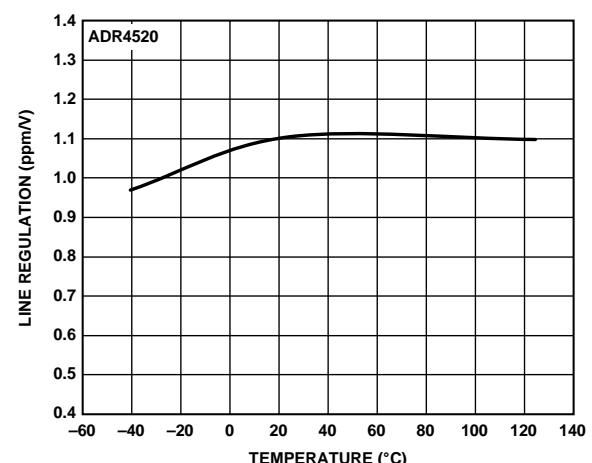



Figure 8. ADR4520 Line Regulation vs. Temperature

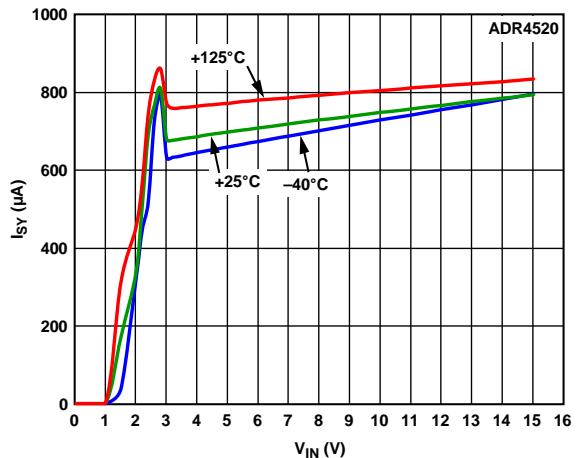


10203-110

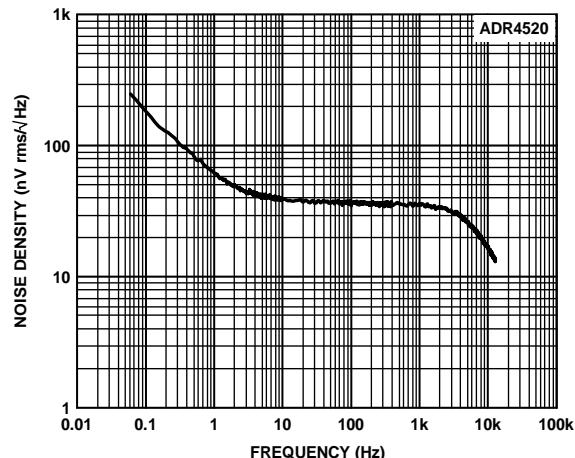

10203-112

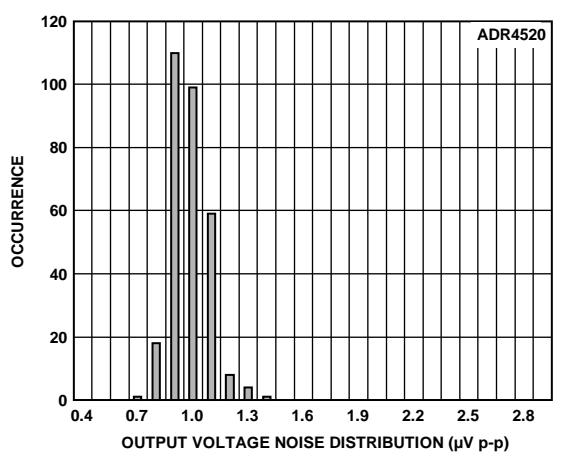

10203-111

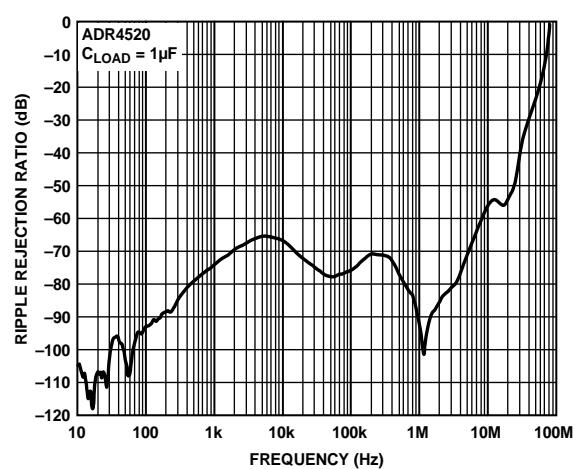

10203-113

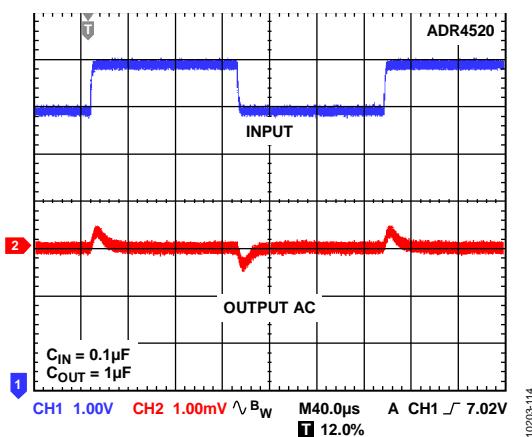


Figure 13. ADR4520 Line Transient Response

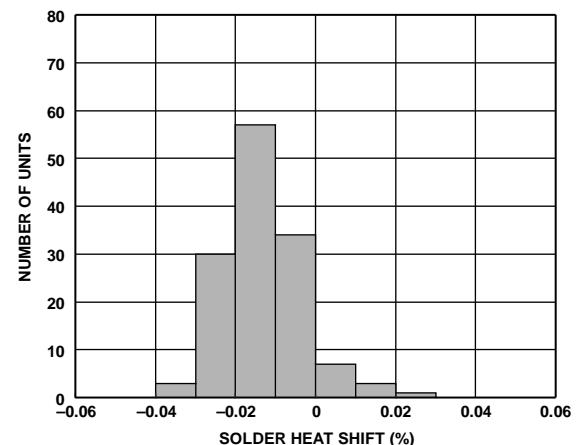


Figure 15. ADR4520 Solder Heat Resistance Shift (3 × Reflow)

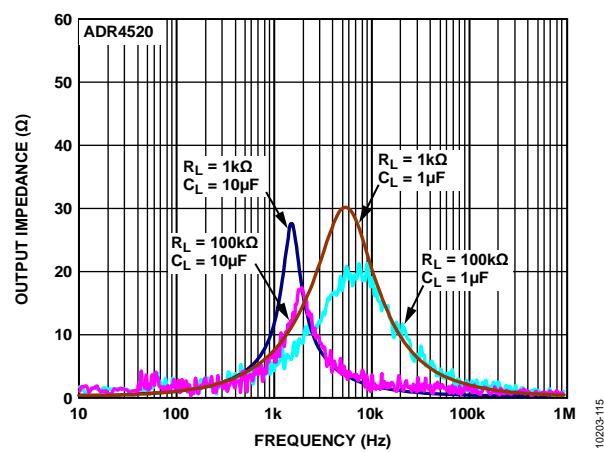


Figure 14. ADR4520 Output Impedance vs. Frequency

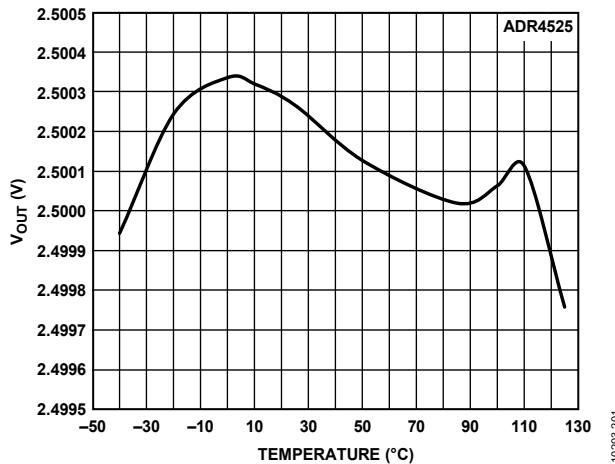
ADR4525

Figure 16. ADR4525 B Grade Output Voltage vs. Temperature

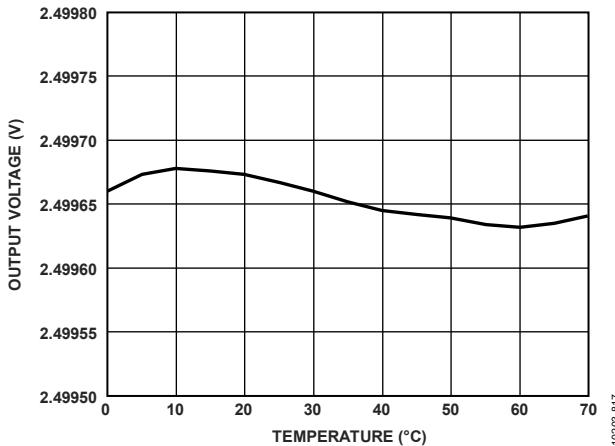


Figure 17. ADR4525 C Grade Output Voltage vs. Temperature

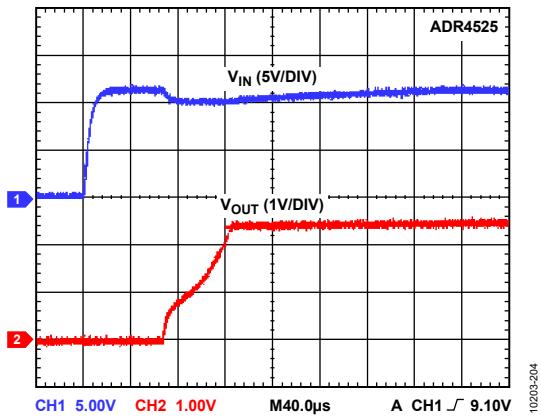


Figure 18. ADR4525 Output Voltage Start-Up Response

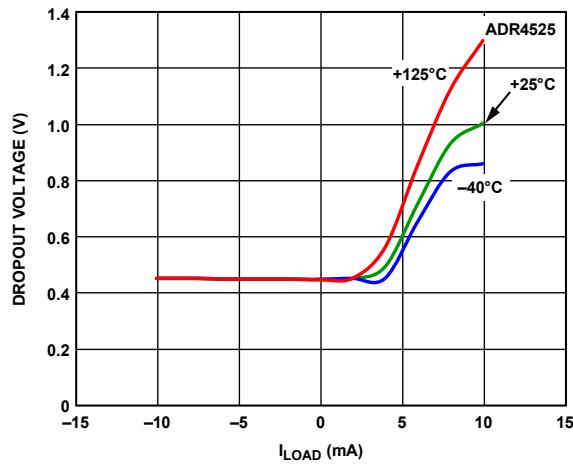


Figure 19. ADR4525 Dropout Voltage vs. Load Current

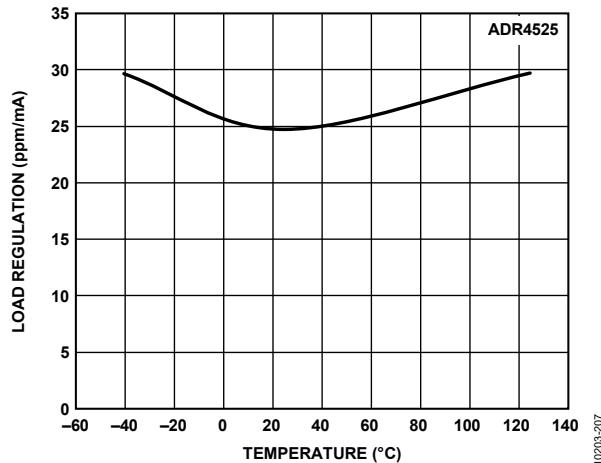


Figure 20. ADR4525 Load Regulation vs. Temperature (Sourcing)

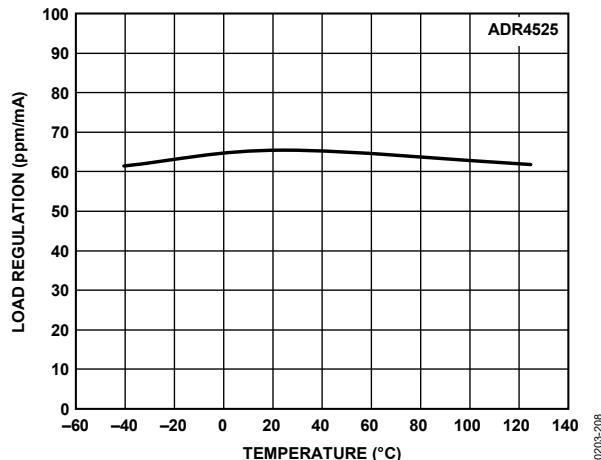


Figure 21. ADR4525 Load Regulation vs. Temperature (Sinking)

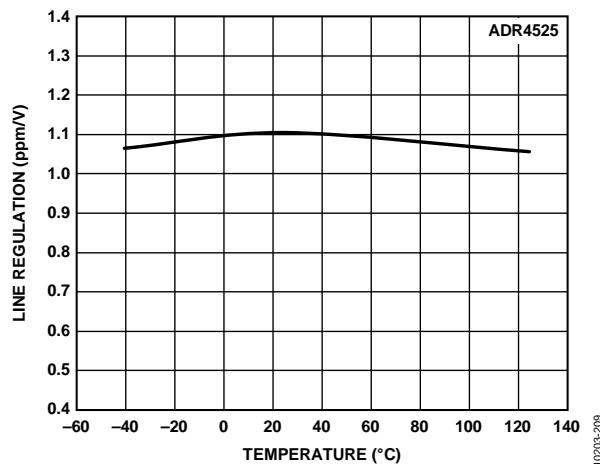


Figure 22. ADR4525 Line Regulation vs. Temperature

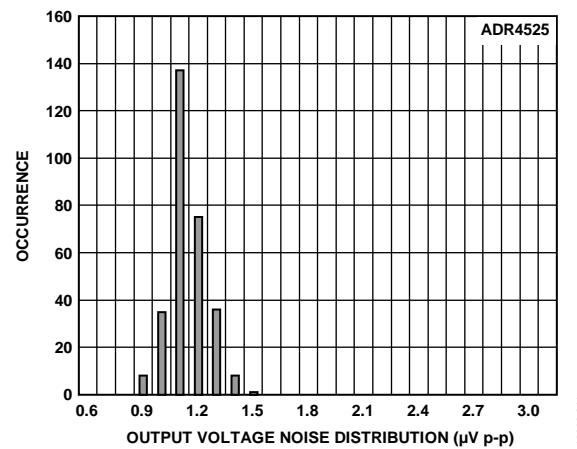
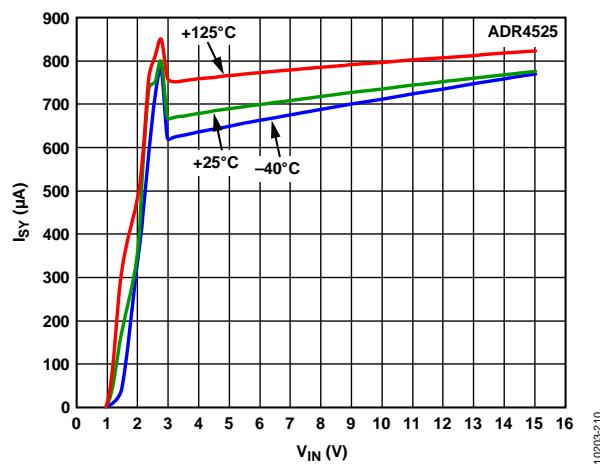
Figure 24. ADR4525 Output Voltage Noise
(Maximum Amplitude from 0.1 Hz to 10 Hz)

Figure 23. ADR4525 Supply Current vs. Supply Voltage

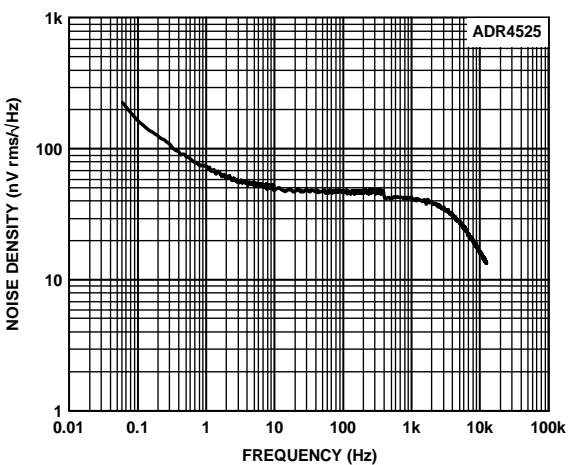


Figure 25. ADR4525 Output Noise Spectral Density

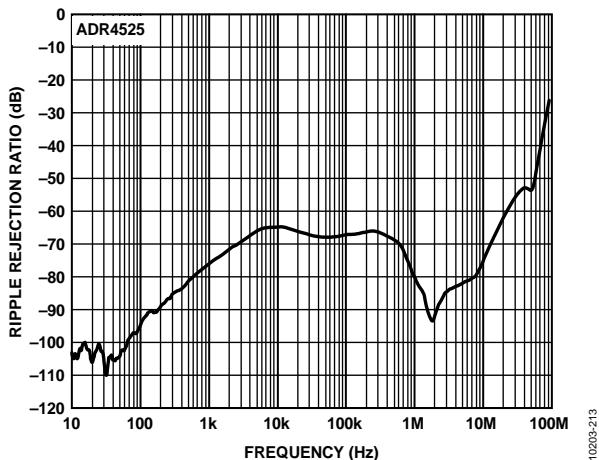


Figure 26. ADR4525 Ripple Rejection Ratio vs. Frequency

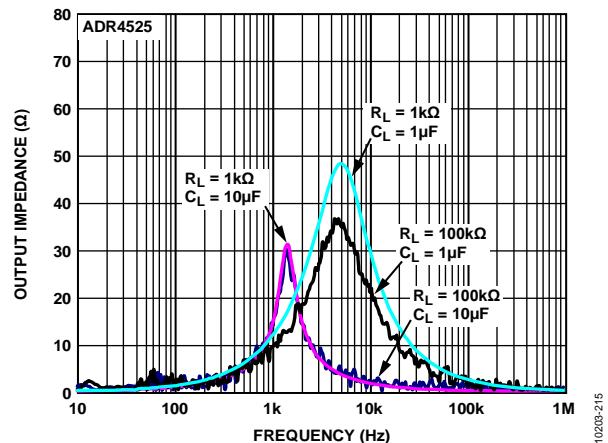


Figure 28. ADR4525 Output Impedance vs. Frequency

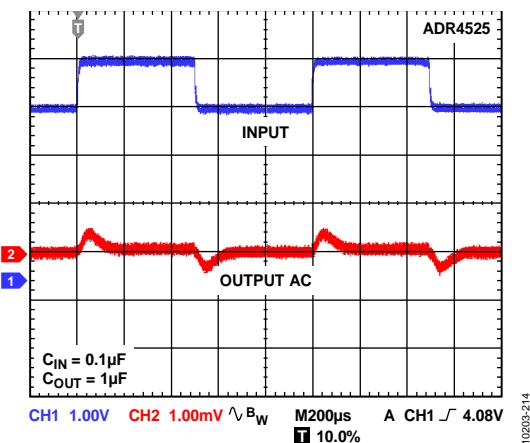


Figure 27. ADR4525 Line Transient Response

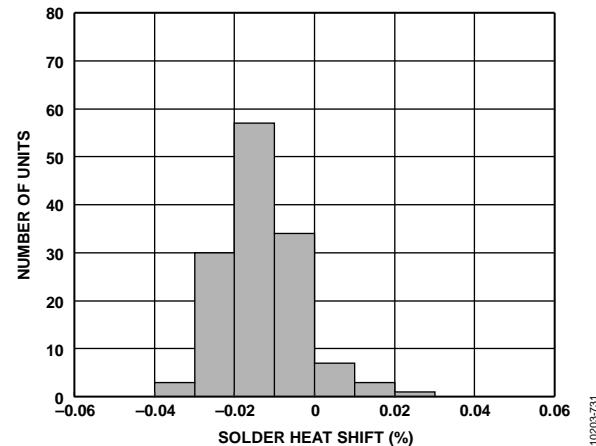


Figure 29. ADR4525 Solder Heat Resistance Shift (3 × Reflow)

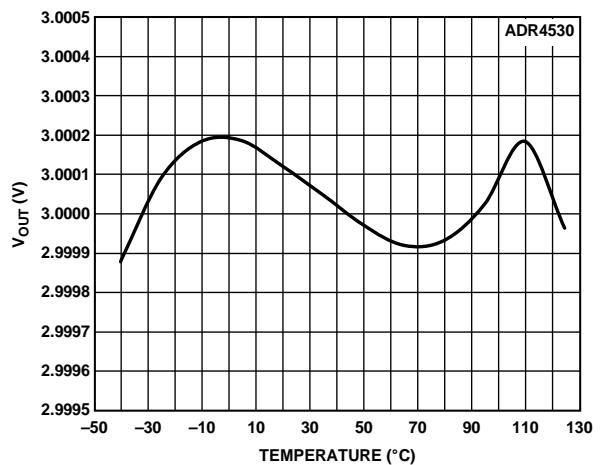
ADR4530

Figure 30. ADR4530 B Grade Output Voltage vs. Temperature

10203-301

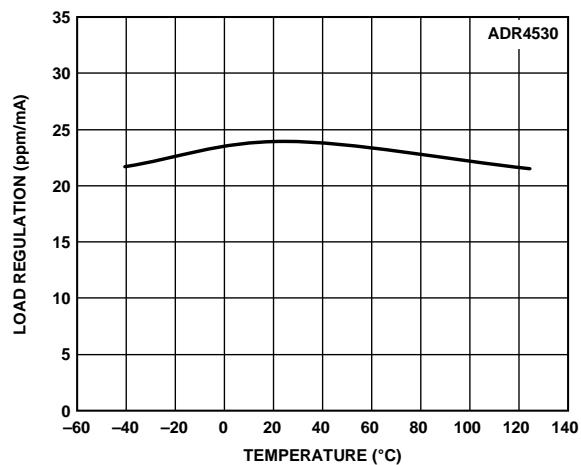


Figure 33. ADR4530 Load Regulation vs. Temperature (Sourcing)

10203-307

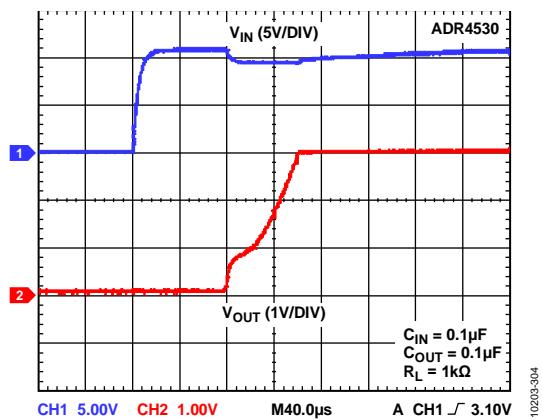


Figure 31. ADR4530 Output Voltage Start-Up Response

10203-304

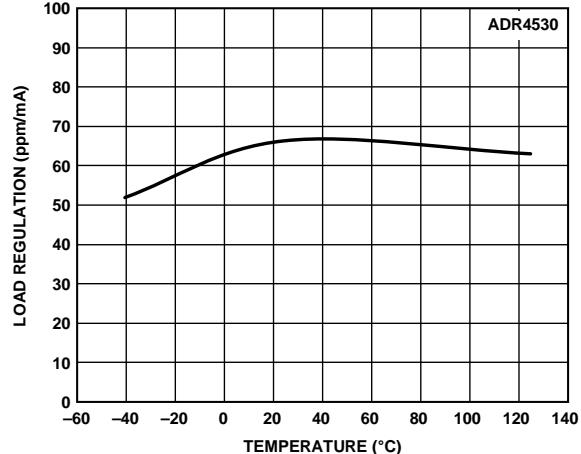


Figure 34. ADR4530 Load Regulation vs. Temperature (Sinking)

10203-308

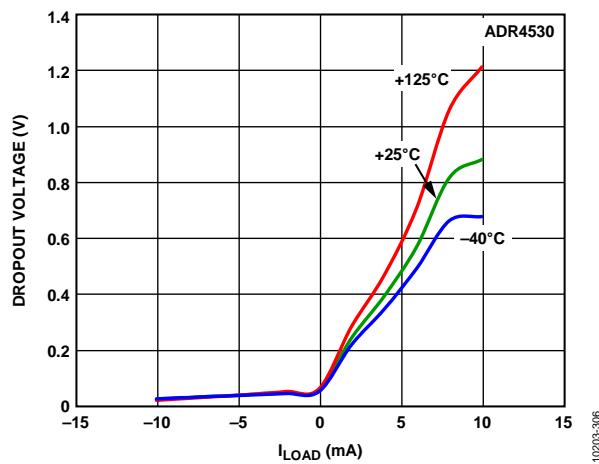


Figure 32. ADR4530 Dropout Voltage vs. Load Current

10203-306


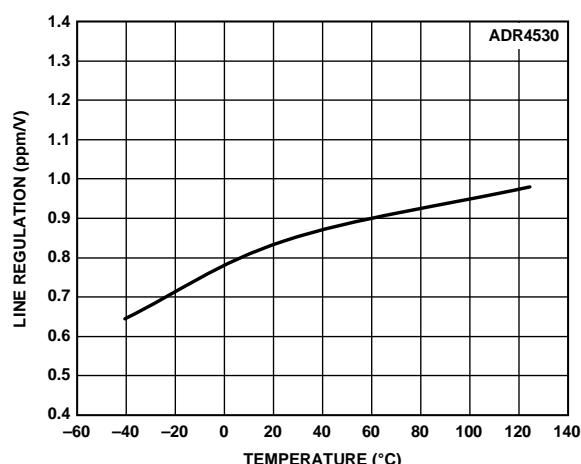
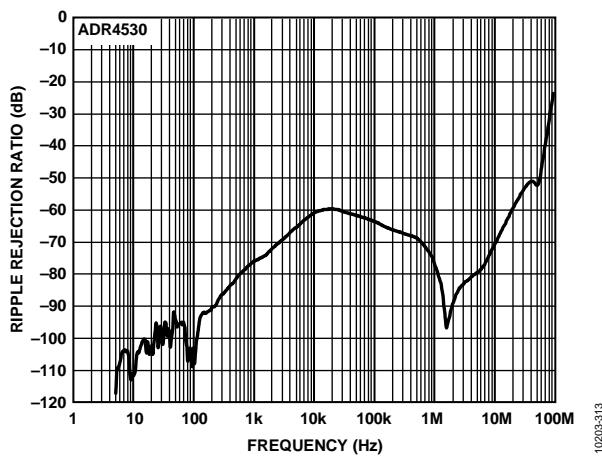
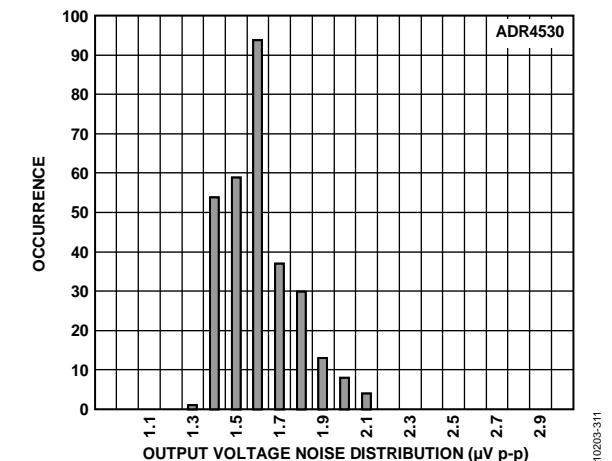
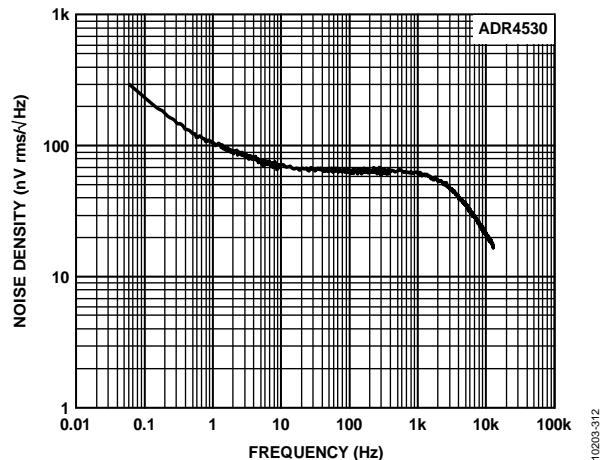


Figure 35. ADR4530 Line Regulation vs. Temperature

10203-309

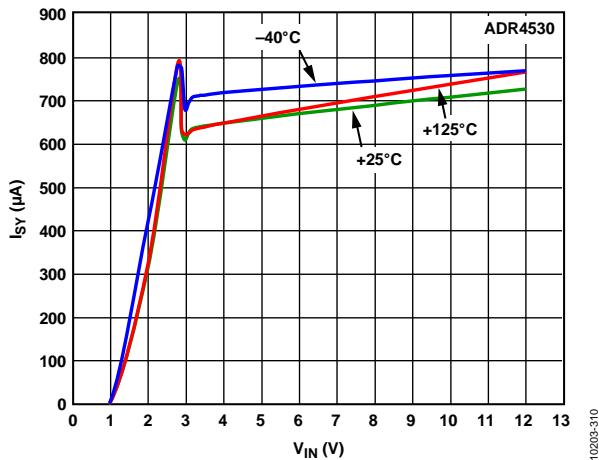

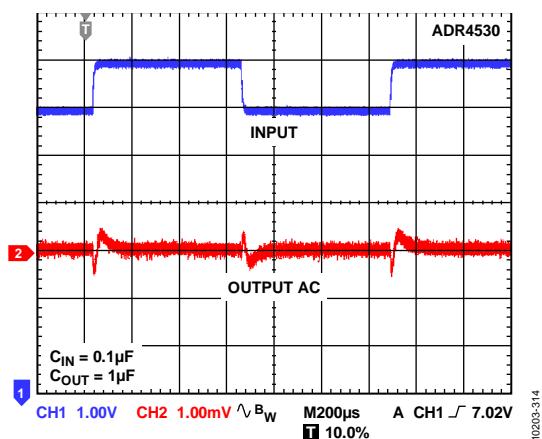


Figure 40. ADR4530 Line Transient Response

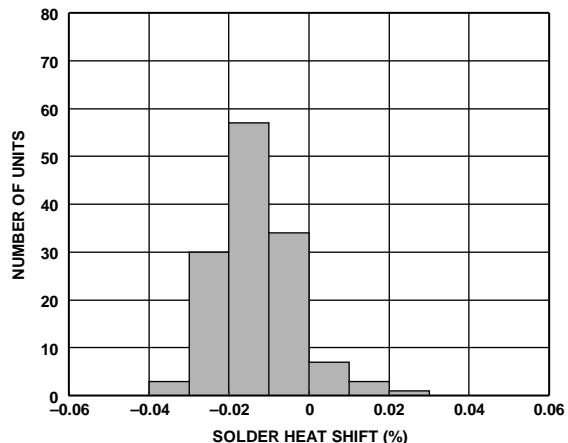


Figure 42. ADR4530 Solder Heat Resistance Shift (3 × Reflow)

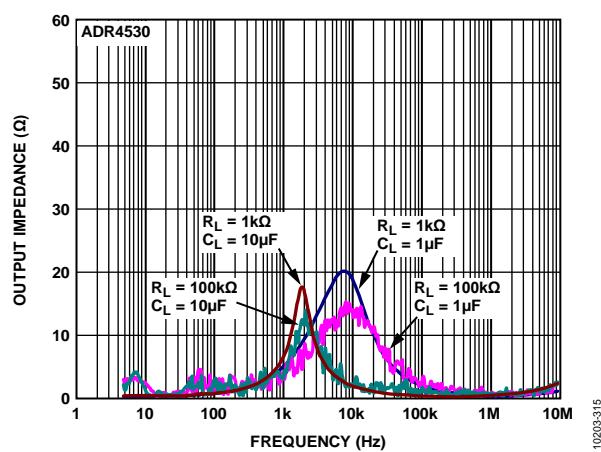


Figure 41. ADR4530 Output Impedance vs. Frequency

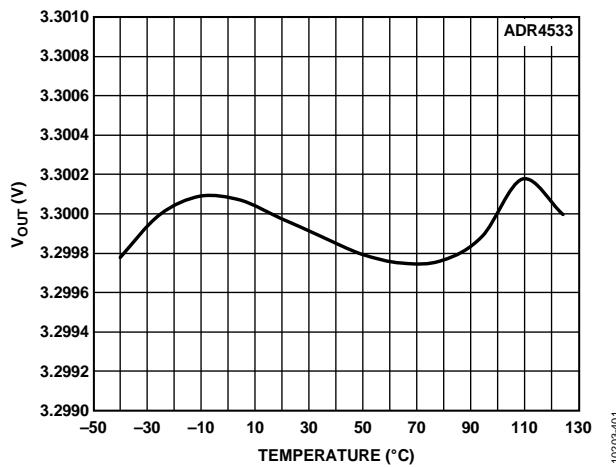
ADR4533

Figure 43. ADR4533 B Grade Output Voltage vs. Temperature

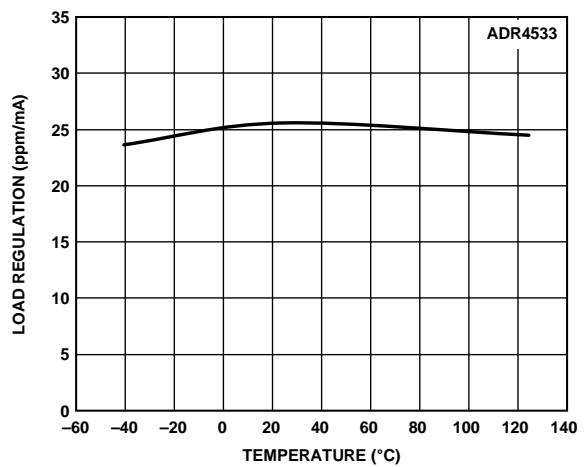


Figure 46. ADR4533 Load Regulation vs. Temperature (Sourcing)

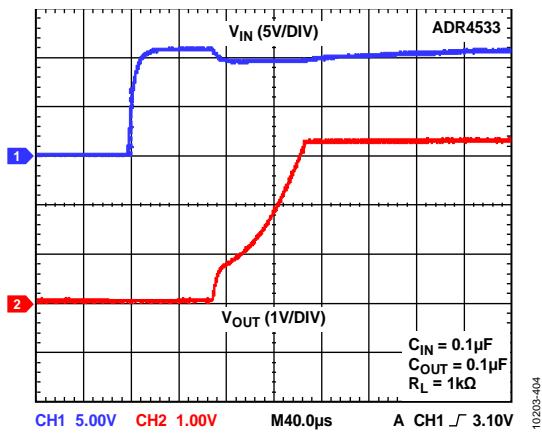


Figure 44. ADR4533 Output Voltage Start-Up Response

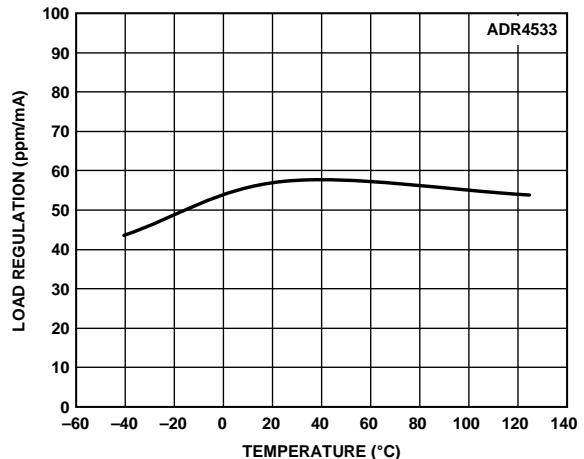


Figure 47. ADR4533 Load Regulation vs. Temperature (Sinking)

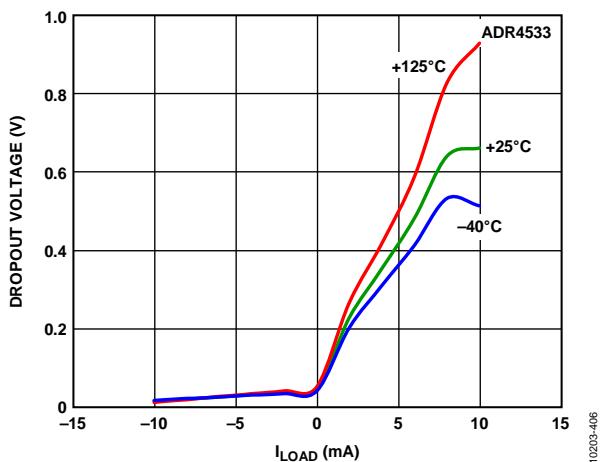


Figure 45. ADR4533 Dropout Voltage vs. Load Current

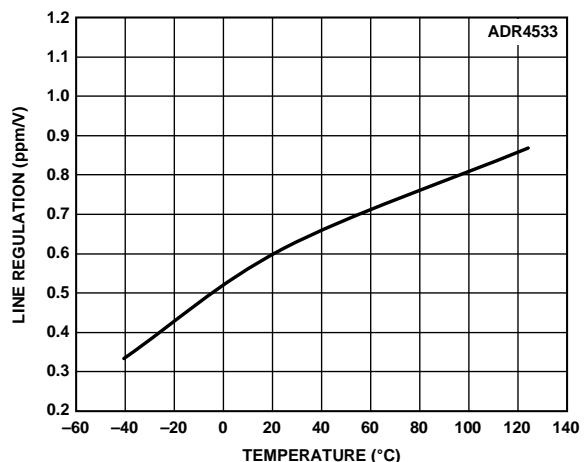


Figure 48. ADR4533 Line Regulation vs. Temperature

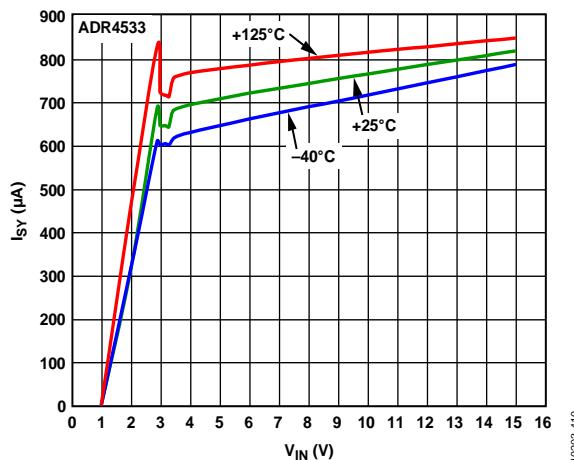


Figure 49. ADR4533 Supply Current vs. Supply Voltage

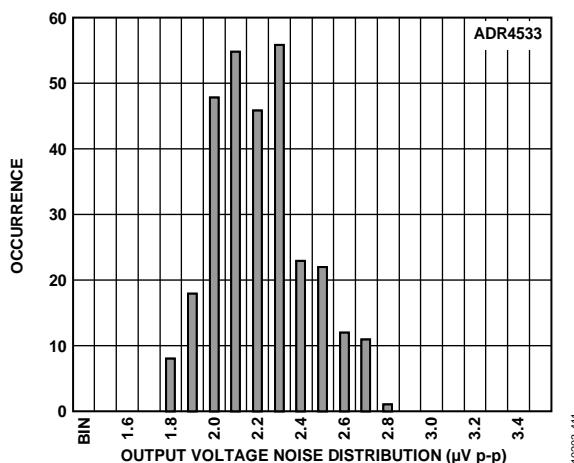
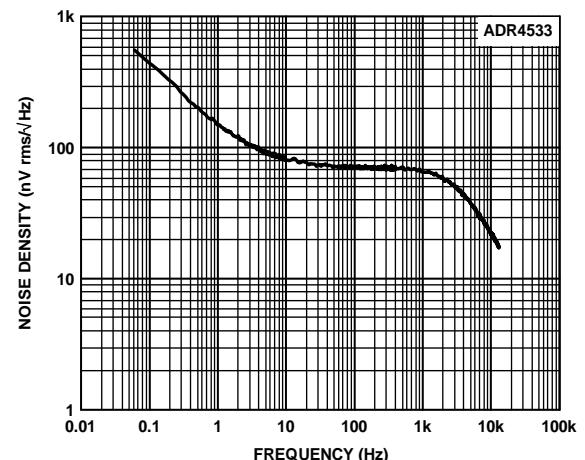
Figure 50. ADR4533 Output Voltage Noise
(Maximum Amplitude from 0.1 Hz to 10 Hz)

Figure 51. ADR4533 Output Noise Spectral Density

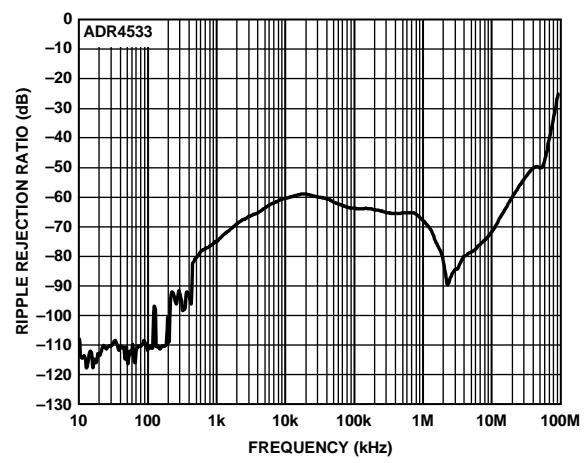


Figure 52. ADR4533 Ripple Rejection Ratio vs. Frequency

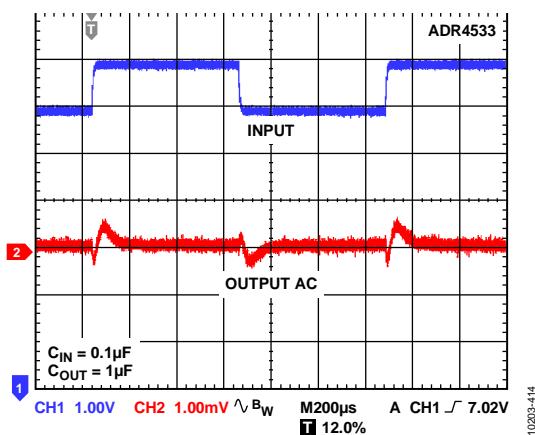


Figure 53. ADR4533 Line Transient Response

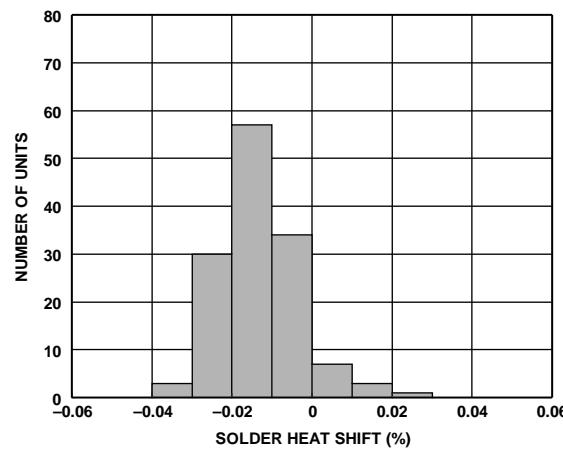


Figure 55. ADR4533 Solder Heat Resistance Shift (3 x Reflow)

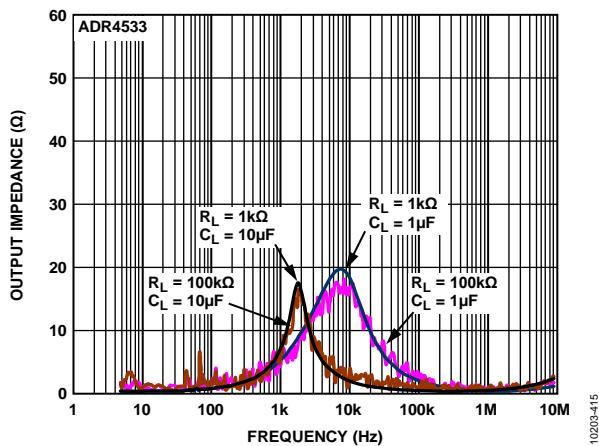


Figure 54. ADR4533 Output Impedance vs. Frequency

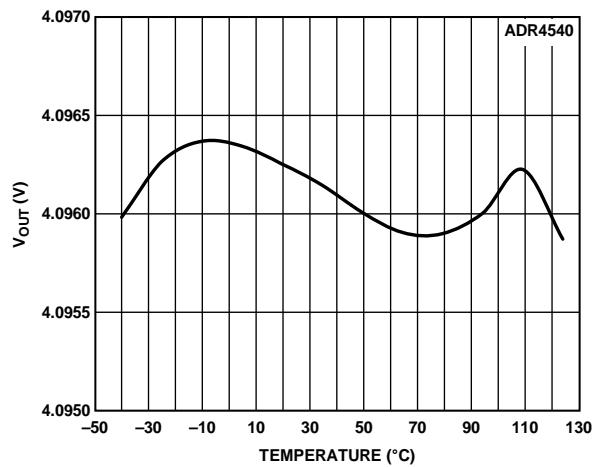
ADR4540

Figure 56. ADR4540 B Grade Output Voltage vs. Temperature

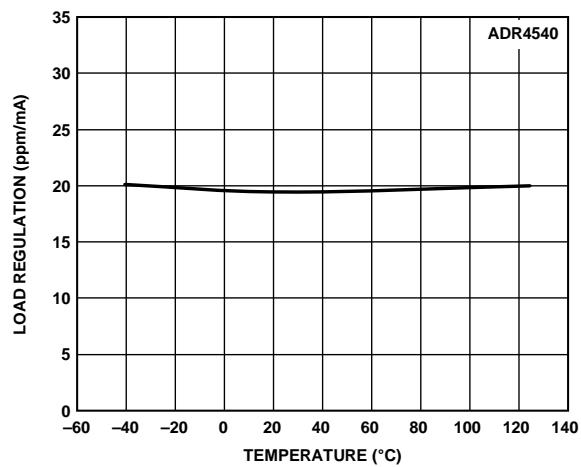


Figure 59. ADR4540 Load Regulation vs. Temperature (Sourcing)

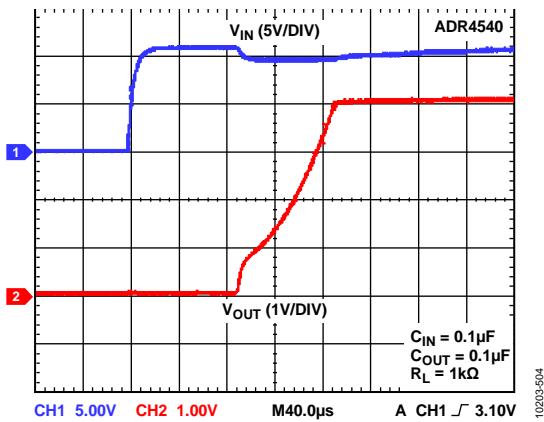


Figure 57. ADR4540 Output Voltage Start-Up Response

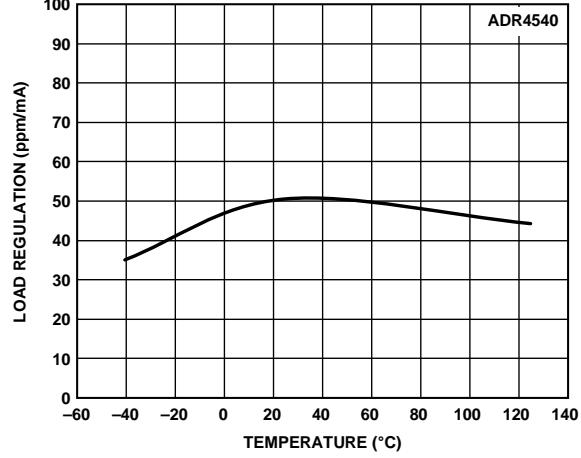


Figure 60. ADR4540 Load Regulation vs. Temperature (Sinking)

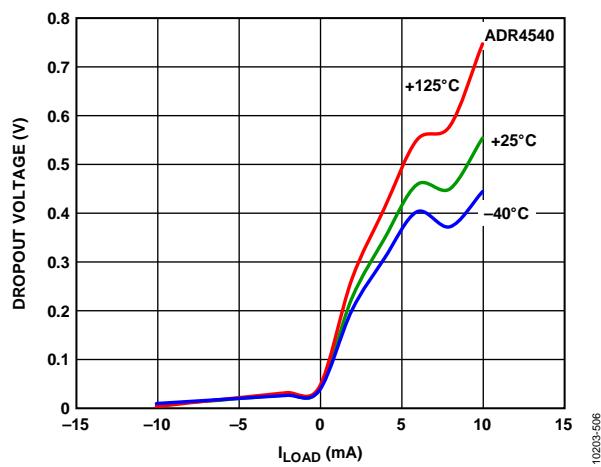


Figure 58. ADR4540 Dropout Voltage vs. Load Current

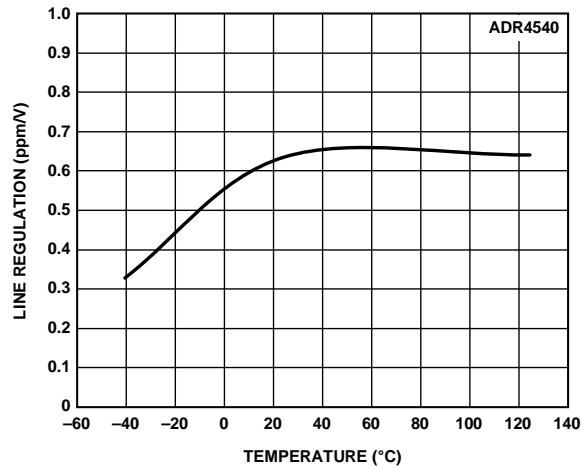


Figure 61. ADR4540 Line Regulation vs. Temperature

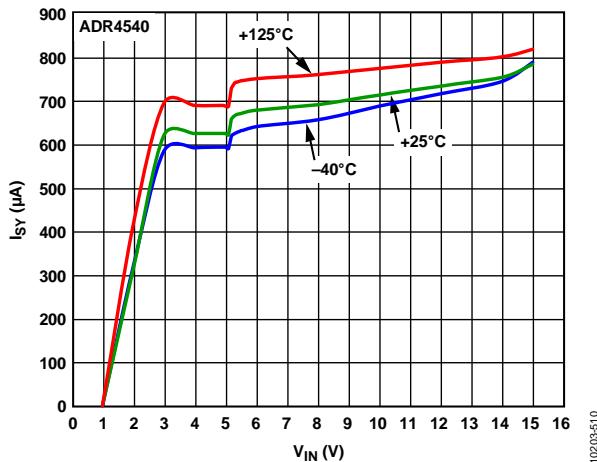


Figure 62. ADR4540 Supply Current vs. Supply Voltage

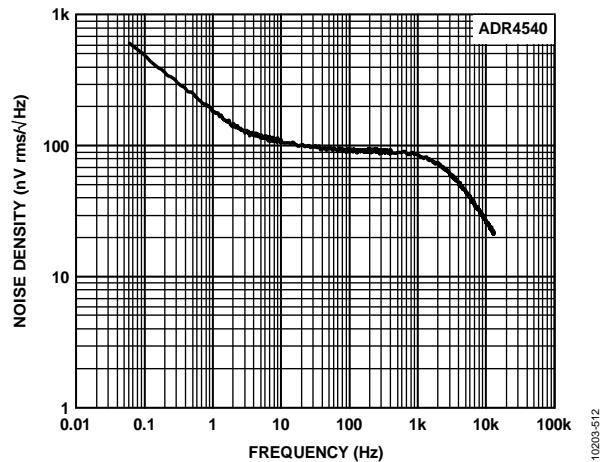


Figure 64. ADR4540 Output Noise Spectral Density


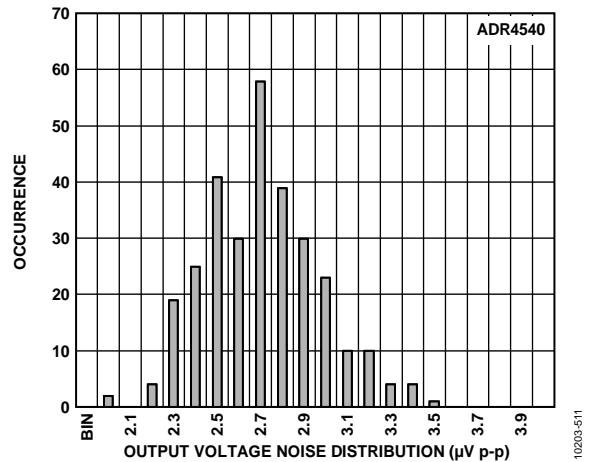
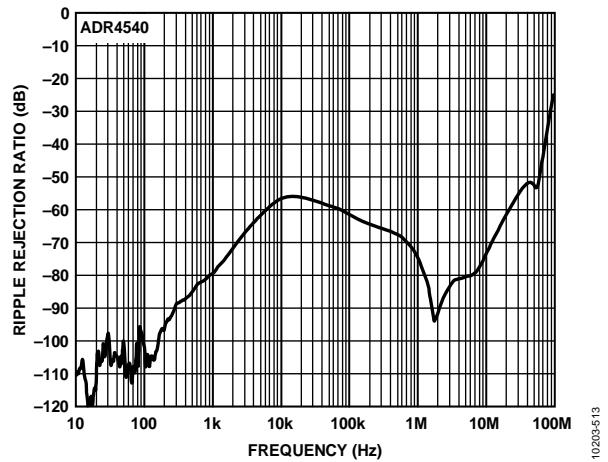
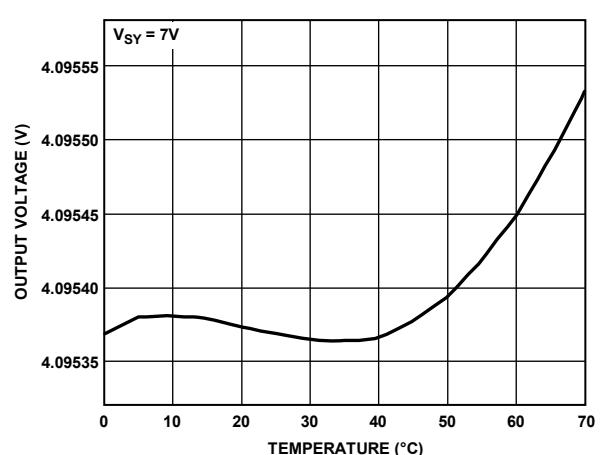
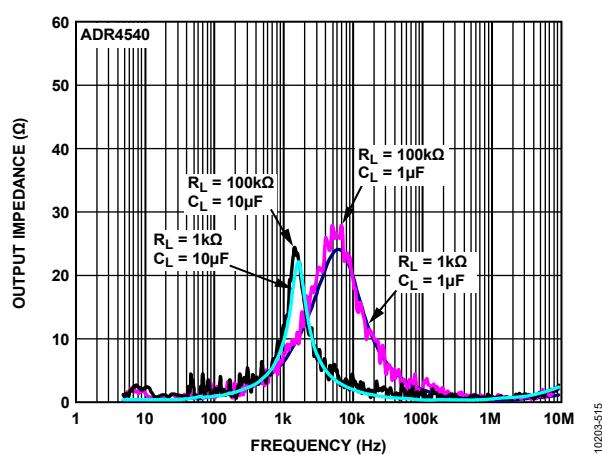
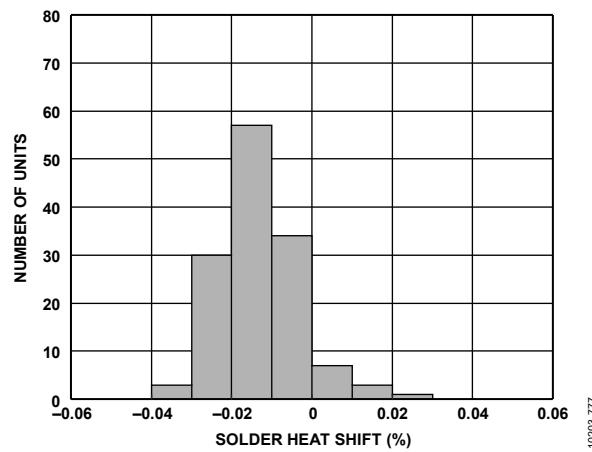
Figure 63. ADR4540 Output Voltage Noise
(Maximum Amplitude from 0.1 Hz to 10 Hz)

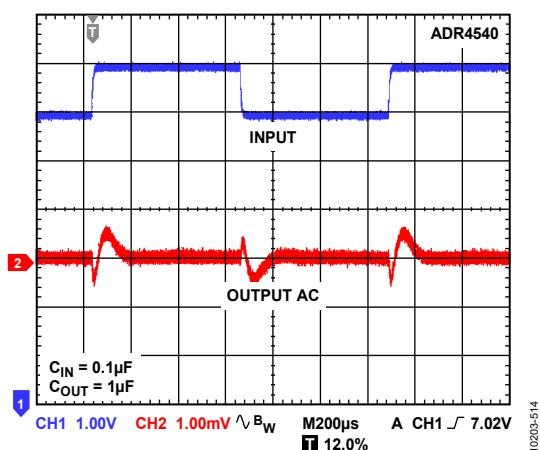Figure 65. ADR4540 Ripple Rejection Ratio vs. Frequency



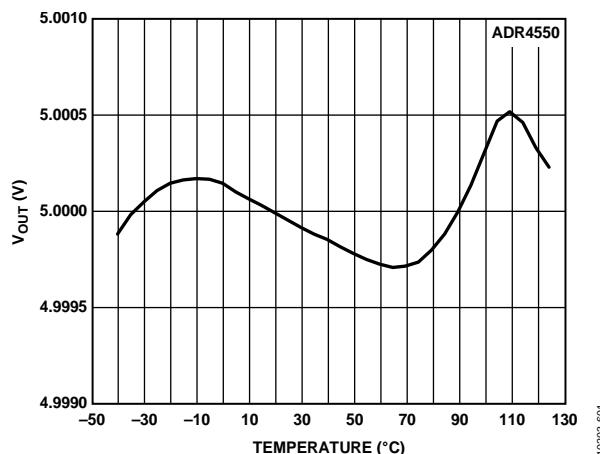
ADR4550

Figure 70. ADR4550 B Grade Output Voltage vs. Temperature

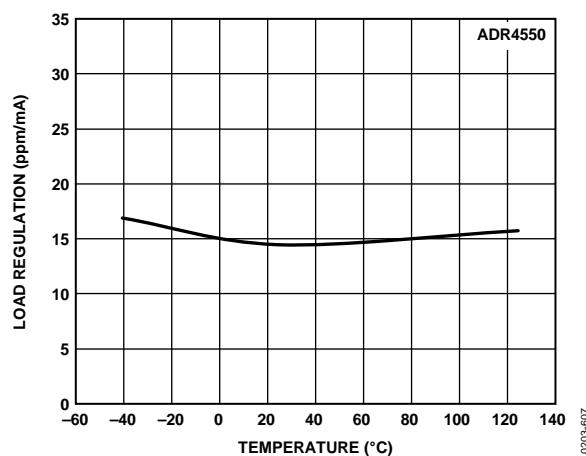


Figure 73. ADR4550 Load Regulation vs. Temperature (Sourcing)

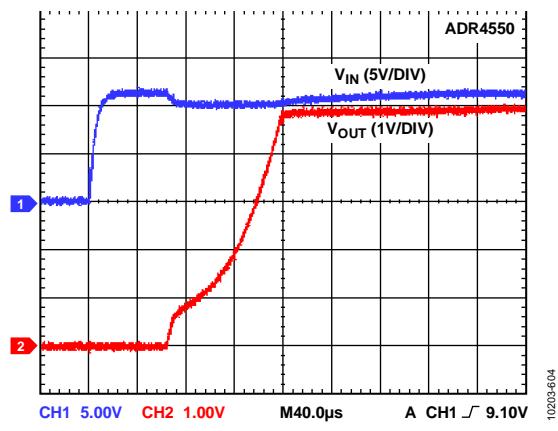


Figure 71. ADR4550 Output Voltage Start-Up Response

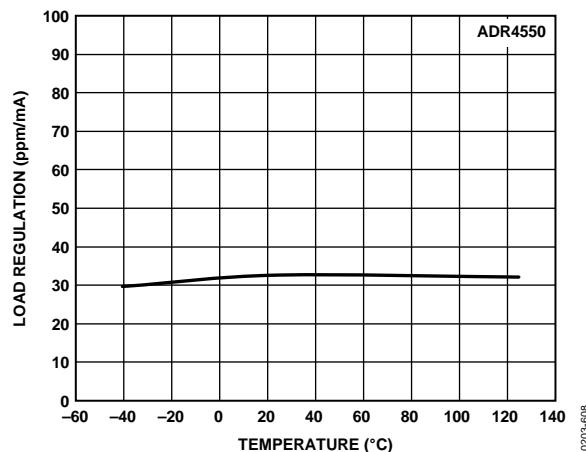


Figure 74. ADR4550 Load Regulation vs. Temperature (Sinking)

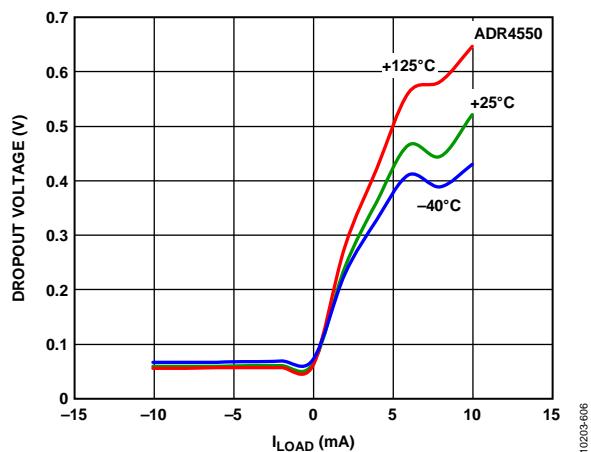


Figure 72. ADR4550 Dropout Voltage vs. Load Current

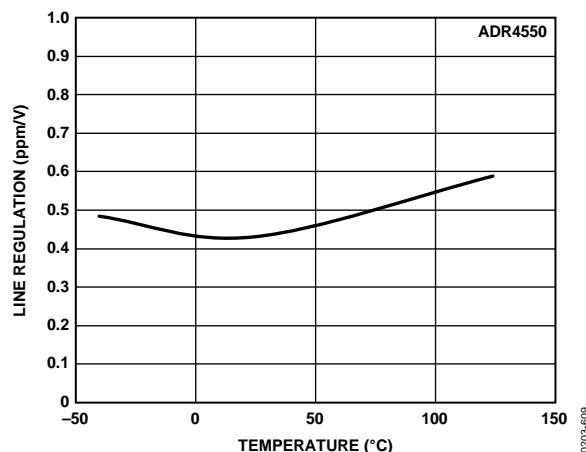


Figure 75. ADR4550 Line Regulation vs. Temperature

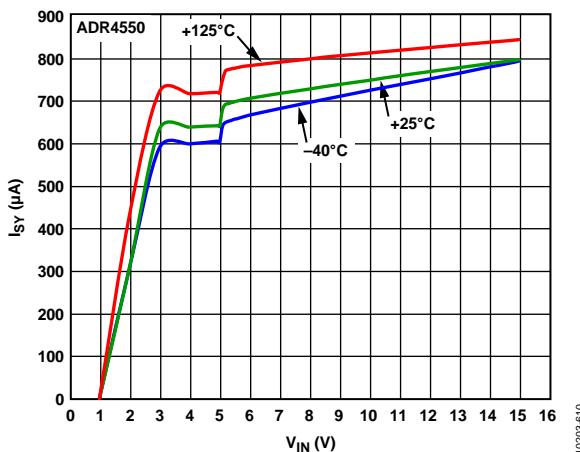


Figure 76. ADR4550 Supply Current vs. Supply Voltage

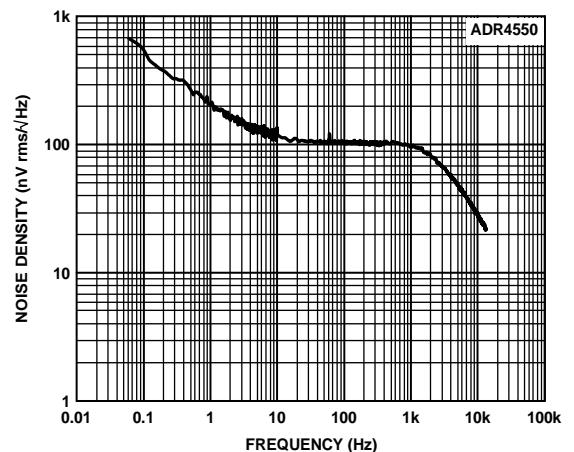


Figure 78. ADR4550 Output Noise Spectral Density

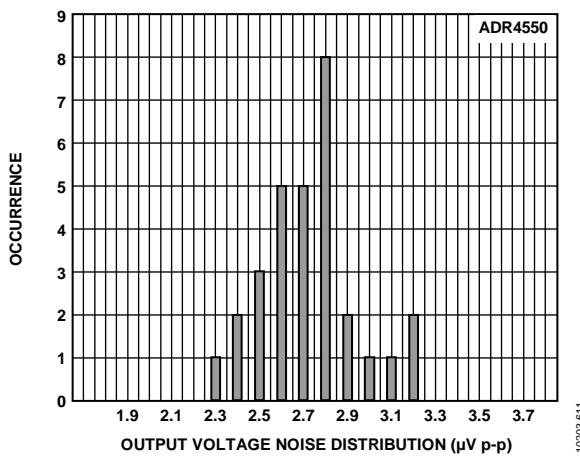
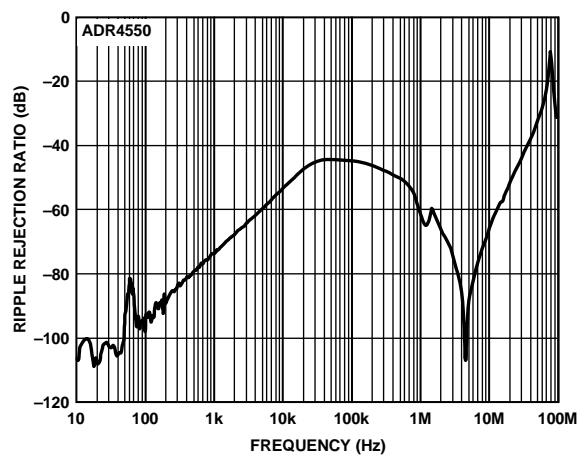
Figure 77. ADR4550 Output Voltage Noise
(Maximum Amplitude from 0.1 Hz to 10 Hz)

Figure 79. ADR4550 Ripple Rejection Ratio vs. Frequency

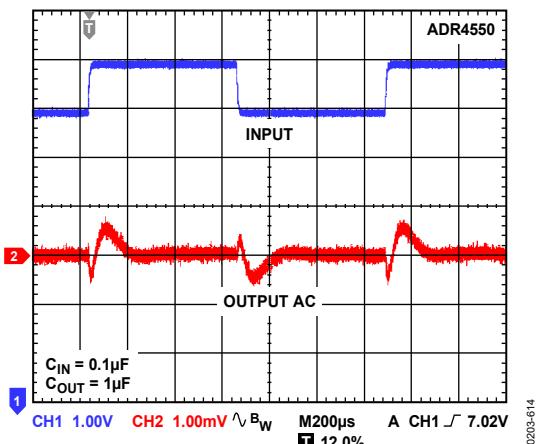


Figure 80. ADR4550 Line Transient Response

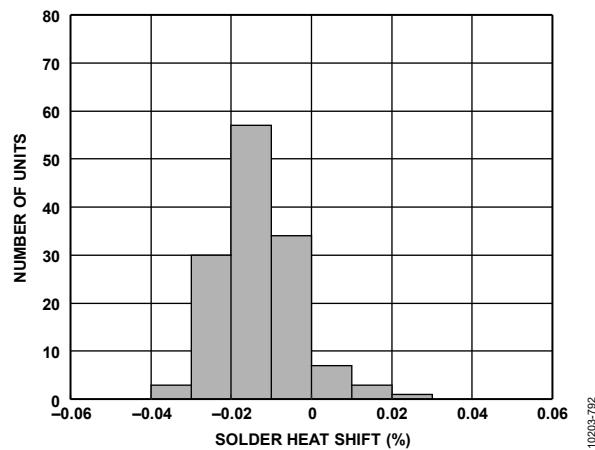


Figure 82. ADR4550 Solder Heat Resistance Shift (3 x Reflow)

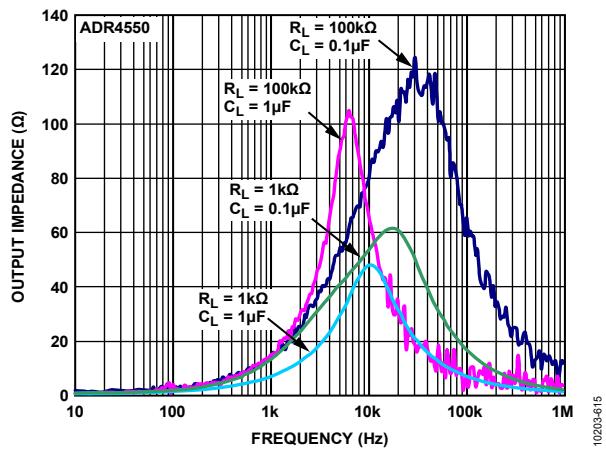


Figure 81. ADR4550 Output Impedance vs. Frequency

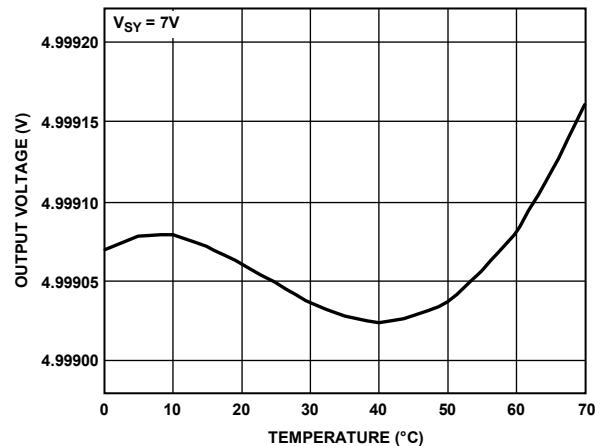


Figure 83. ADR4550 C Grade Output Voltage vs. Temperature

TERMINOLOGY

Dropout Voltage (V_{DO})

Dropout voltage, sometimes referred to as supply voltage headroom or supply output voltage differential, is defined as the minimum voltage differential between the input and output such that the output voltage is maintained to within 0.1% accuracy.

$$V_{DO} = (V_{IN} - V_{OUT})_{min}|I_L = \text{constant}$$

Because the dropout voltage depends on the current passing through the device, it is always specified for a given load current. In series mode devices, the dropout voltage typically increases proportionally to the load current (see Figure 5, Figure 19, Figure 32, Figure 45, Figure 58, and Figure 72).

Line Regulation

Line regulation refers to the change in output voltage in response to a given change in input voltage and is expressed in percent per volt, ppm per volt, or μV per volt change in input voltage. This parameter accounts for the effects of self heating.

Load Regulation

Load regulation refers to the change in output voltage in response to a given change in load current and is expressed in μV per mA, ppm per mA, or ohms of dc output resistance. This parameter accounts for the effects of self heating.

Solder Heat Resistance (SHR) Shift

SHR shift refers to the permanent shift in output voltage that is induced by exposure to reflow soldering and is expressed as a percentage of the output voltage. This shift is caused by changes in the stress exhibited on the die by the package materials when these materials are exposed to high temperatures. This effect is more pronounced in lead-free soldering processes due to higher reflow temperatures. SHR is calculated after three solder reflow cycles to simulate the worst case conditions when assembling a two-sided PCB with surface mount components with one additional rework cycle. The reflow cycles use the JEDEC standard reflow temperature profile.

Temperature Coefficient (TCV_{OUT})

The temperature coefficient relates the change in the output voltage to the change in the ambient temperature of the device, as normalized by the output voltage at 25°C. The TCV_{OUT} for the ADR4520/ADR4525/ADR4530/ADR4533/ADR4540/ADR4550 A grade and B grade is fully tested over three temperatures: -40°C, +25°C, and +125°C. The TCV_{OUT} for the C grade is fully tested over three temperatures: 0°C, +25°C, and +70°C. This parameter is specified using two methods. The box method is the most common method and accounts for the temperature coefficient over the full temperature range, whereas the bowtie method calculates the worst case slope from +25°C and is therefore more useful for systems which are calibrated at +25°C.

Box Method

The box method is represented by the following equation:

$$TCV_{OUT} = \left| \frac{\max\{V_{OUT}(T_1, T_2, T_3)\} - \min\{V_{OUT}(T_1, T_2, T_3)\}}{V_{OUT}(T_2) \times (T_3 - T_1)} \right| \times 10^6$$

where:

TCV_{OUT} is expressed in ppm/°C.

$V_{OUT}(T_x)$ is the output voltage at Temperature T_x .

$T_1 = -40^\circ\text{C}$.

$T_2 = +25^\circ\text{C}$.

$T_3 = +125^\circ\text{C}$.

This box method ensures that TCV_{OUT} accurately portrays the maximum difference between any of the three temperatures at which the output voltage of the device is measured.

Bowtie Method

The bowtie method is represented by the following equation:

$$TCV_{OUT} = |\max\{TCV_{OUT1}, TCV_{OUT2}\}|$$

where:

$$TCV_{OUT1} = \left| \frac{\max\{V_{OUT}(T_1, T_2)\} - \min\{V_{OUT}(T_1, T_2)\}}{V_{OUT}(T_2) \times (T_2 - T_1)} \right| \times 10^6$$

$$TCV_{OUT2} = \left| \frac{\max\{V_{OUT}(T_2, T_3)\} - \min\{V_{OUT}(T_2, T_3)\}}{V_{OUT}(T_2) \times (T_3 - T_2)} \right| \times 10^6$$

TCV_{OUT} is expressed in ppm/°C.

$V_{OUT}(T_x)$ is the output voltage at Temperature T_x .

$T_1 = 0^\circ\text{C}$.

$T_2 = +25^\circ\text{C}$.

$T_3 = +70^\circ\text{C}$.

Thermally Induced Output Voltage Hysteresis (ΔV_{OUT_HYS})

Thermally induced output voltage hysteresis represents the change in the output voltage after the device is exposed to a specified temperature cycle. This is expressed as a difference in ppm from the nominal output.

$$\Delta V_{OUT_HYS} = \frac{V_{OUT1_25^\circ\text{C}} - V_{OUT2_25^\circ\text{C}}}{V_{OUT_25^\circ\text{C}}} \times 10^6 [\text{ppm}]$$

where:

$V_{OUT1_25^\circ\text{C}}$ is the output voltage at 25°C.

$V_{OUT2_25^\circ\text{C}}$ is the output voltage after temperature cycling.

Long-Term Stability (ΔV_{OUT_LTD})

Long-term stability refers to the shift in the output voltage versus time. This is expressed as a difference in ppm from the nominal output.

$$\Delta V_{OUT_LTD} = \left| \frac{V_{OUT}(t_1) - V_{OUT}(t_0)}{V_{OUT}(t_0)} \right| \times 10^6 [\text{ppm}]$$

where:

$V_{OUT}(t_0)$ is the V_{OUT} at the starting time of the measurement.

$V_{OUT}(t_1)$ is the V_{OUT} at the end time of the measurement.

APPLICATIONS INFORMATION

BASIC VOLTAGE REFERENCE CONNECTION

The circuit shown in Figure 84 shows the basic configuration for the ADR4520/ADR4525/ADR4530/ADR4533/ADR4540/ADR4550 family of voltage references.

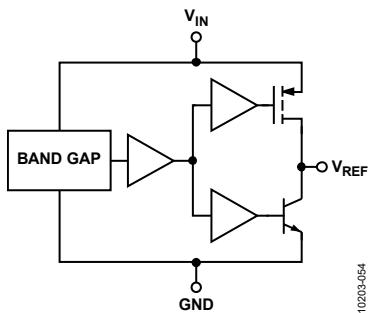


Figure 84. ADR4520/ADR4525/ADR4530/ADR4533/ADR4540/ADR4550
Simplified Schematic

INPUT AND OUTPUT CAPACITORS

Input Capacitors

A 1 μ F to 10 μ F electrolytic or ceramic capacitor can be connected to the input to improve transient response in applications where the supply voltage may fluctuate. It is recommended to connect an additional 0.1 μ F ceramic capacitor in parallel to reduce supply noise.

Output Capacitors

An output capacitor is required for stability and to filter out low level voltage noise. The minimum value of the output capacitor (C_{OUT}) is shown in Table 12.

Table 12. Minimum C_{OUT} Value

Part Number	Minimum C_{OUT} Value
ADR4520, ADR4525	1.0 μ F
ADR4530, ADR4533,	0.1 μ F
ADR4540, ADR4550	

An additional 1 μ F to 10 μ F electrolytic or ceramic capacitor can be added in parallel to improve transient performance in response to sudden changes in load current; however, doing so increases the turn-on time of the device.

LOCATION OF REFERENCE IN SYSTEM

It is recommended to place the ADR4520/ADR4525/ADR4530/ADR4533/ADR4540/ADR4550 reference as close to the load as possible to minimize the length of the output traces and, therefore, the error introduced by the voltage drop. Current flowing through a PCB trace produces a voltage drop; with longer traces, this drop can reach several millivolts or more, introducing considerable error into the output voltage of the reference. A 1-inch long, 5 mm wide trace of 1-ounce copper has a resistance of approximately 100 m Ω at room temperature; at a load current of 10 mA, this resistance can introduce a full millivolt of error.

POWER DISSIPATION

The ADR4520/ADR4525/ADR4530/ADR4533/ADR4540/ADR4550 voltage references are capable of sourcing and sinking up to 10 mA of load current at room temperature across the rated input voltage range. However, when used in applications subject to high ambient temperatures, the input voltage and load current must be monitored carefully to ensure that the device does not exceed its maximum power dissipation rating. The maximum power dissipation of the device can be calculated using the following equation:

$$P_D = \frac{T_J - T_A}{\theta_{JA}}$$

where:

P_D is the device power dissipation.

T_J is the device junction temperature.

T_A is the ambient temperature.

θ_{JA} is the package (junction to air) thermal resistance.

This relationship can cause acceptable load current in high temperature conditions to be less than the maximum current sourcing capability of the device. Do not operate the device outside of its maximum power rating, because doing so can result in premature failure or permanent damage to the device.

SAMPLE APPLICATIONS

Bipolar Output Reference

Figure 85 shows a bipolar reference configuration. By connecting the output of the ADR4550 to the inverting terminal of an operational amplifier, it is possible to obtain both positive and negative reference voltages. R1 and R2 must be matched as closely as possible to ensure minimal difference between the negative and positive outputs. Resistors with low temperature coefficients must also be used if the circuit is deployed in environments with large temperature swings; otherwise, a voltage difference develops between the two outputs as the ambient temperature changes.

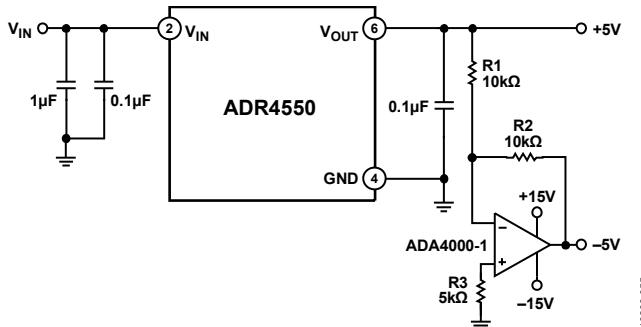


Figure 85. ADR4550 Bipolar Output Reference

Boosted Output Current Reference

Figure 86 shows a configuration for obtaining higher current drive capability from the ADR4520/ADR4525/ADR4530/ADR4533/ADR4540/ADR4550 references without sacrificing accuracy. The op amp regulates the current flow through the metal-oxide semiconductor field effect transistor (MOSFET) until V_{OUT} equals the output voltage of the reference; current is then drawn directly from V_{IN} instead of from the reference itself, allowing increased current drive capability.

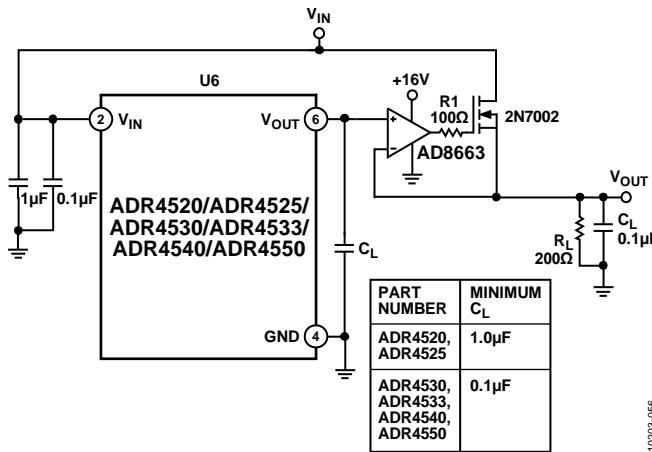


Figure 86. Boosted Output Current Reference

Because the current sourcing capability of this circuit depends only on the current rating of the MOSFET, the output drive capability can be adjusted to the application simply by choosing an appropriate MOSFET. In all cases, tie the V_{OUT} pin directly to the load device to maintain maximum output voltage accuracy.

LONG-TERM DRIFT

The stability of a precision signal path over its lifetime or between calibration procedures is dependent on the long-term stability of the analog components in the path, such as op amps, references, and data converters. To help system designers predict the long-term drift of circuits that use the ADR4520/ADR4525/ADR4530/ADR4533/ADR4540/ADR4550, Analog Devices measured the output voltage of multiple units for more than 4500 hours (more than 6 months) using a high precision measurement system, including an ultrastable oil bath. To replicate real-world system performance, the devices under test (DUTs) were soldered onto an FR4 PCB using a standard reflow profile (as defined in the JEDEC J-STD-020D standard), rather than testing them in sockets. This manner of testing is important because expansion and contraction of the PCB can apply stress to the integrated circuit (IC) package and contribute to shifts in the offset voltage.

Figure 87 shows the long-term drift of the ADR4520/ADR4525/ADR4530/ADR4533/ADR4540/ADR4550. Sample 1, Sample 2, and Sample 3 plot traces show sample units. The mean drift after 4500 hours is 51 ppm. Note that the early life drift (0 hours to 250 hours) accounts for 40% of the total drift observed over 4500 hours, as shown in Figure 88. The first 1000 hours account for 50% of the total drift, and the remaining 3500 hours account for the remaining 50% of the drift. Thus, the early life drift is the dominant contributor, whereas the drift after 1000 hours is significantly lower.

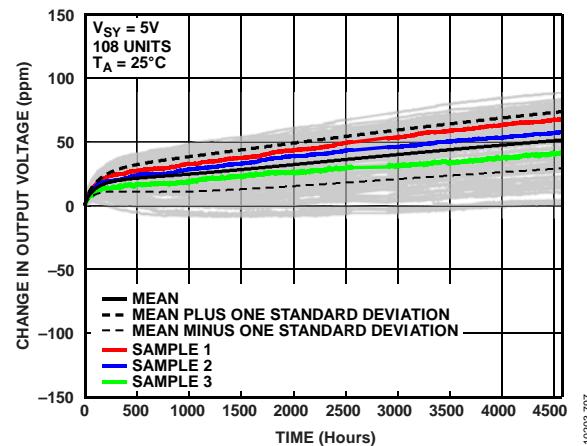


Figure 87. Measured Long-Term Drift of the ADR4520/ADR4525/ADR4530/ADR4533/ADR4540/ADR4550 over 4,500 Hours

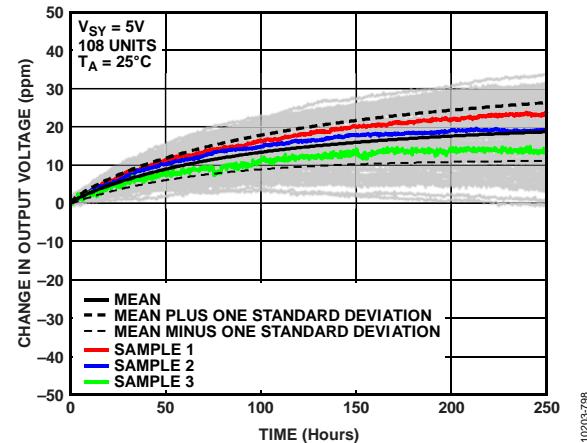


Figure 88. Measured Early Life Drift of the ADR4520/ADR4525/ADR4530/ADR4533/ADR4540/ADR4550

Thermal Hysteresis

In addition to stability over time, as described in the Long-Term Drift section, it is useful to know the thermal hysteresis, that is, the stability vs. cycling of temperature. Thermal hysteresis is an important parameter because it tells the system designer how closely the signal returns to its starting amplitude after the ambient temperature changes and the subsequent return to room temperature. Figure 89 shows the change in output voltage as the temperature cycles three times from room temperature to $+125^{\circ}\text{C}$ to -40°C and back to room temperature.

In the three full cycles, the output hysteresis is typically -13 ppm . The histogram in Figure 90 shows that the hysteresis is larger when the device is cycled through only a half cycle, from room temperature to 125°C and back to room temperature, typically -97 ppm .

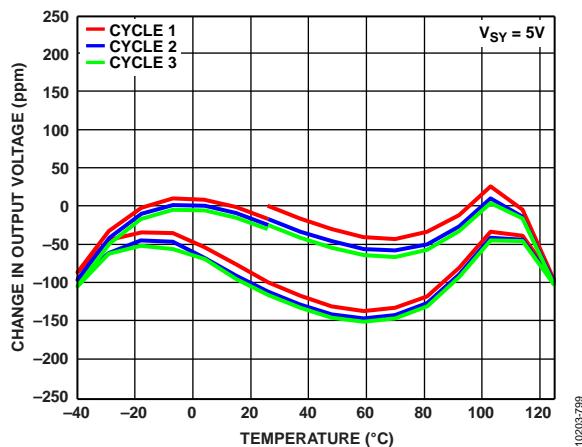


Figure 89. Change in Output Voltage over Three Full Temperature Cycles (-40°C to $+125^{\circ}\text{C}$)

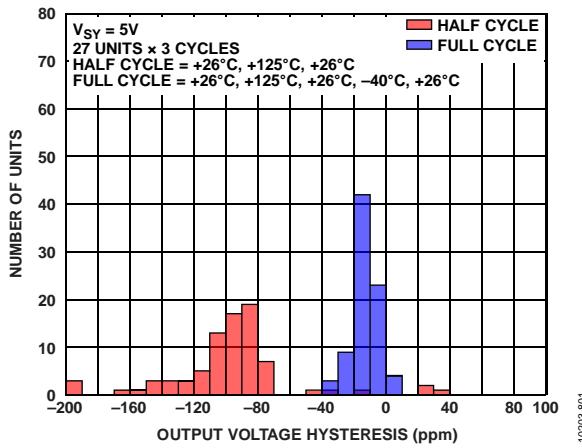


Figure 90. Histogram Showing the Temperature Hysteresis of the Output Voltage (-40°C to $+125^{\circ}\text{C}$)

Figure 91 shows the change in input offset voltage as the temperature cycles three times from room temperature to $+70^{\circ}\text{C}$ to 0°C and back to room temperature. In the three full cycles, the output hysteresis is typically -8 ppm . The histogram in Figure 92 shows that the hysteresis is larger when the device is cycled through only a half cycle, from room temperature to $+70^{\circ}\text{C}$ and back to room temperature, typically -17 ppm .

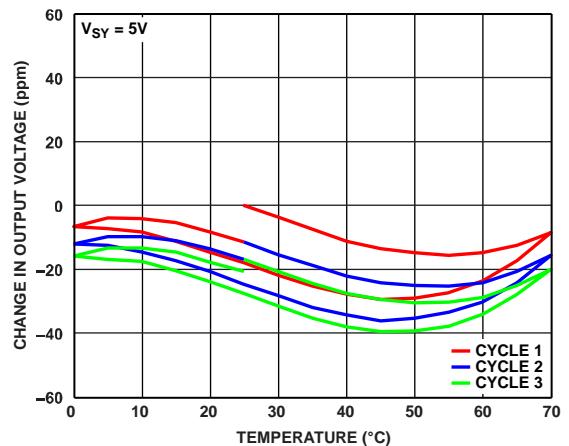


Figure 91. Change in Output Voltage over Three Full Temperature Cycles (0°C to 70°C)

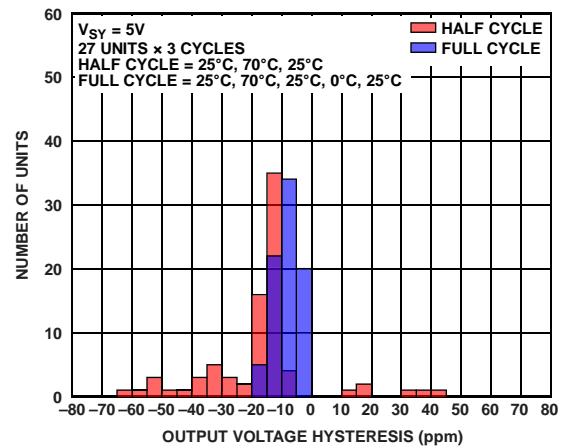


Figure 92. Histogram Showing the Temperature Hysteresis of the Output Voltage (0°C to 70°C)

Measuring thermal hysteresis over the full operating temperature range is not reflective of a typical operating environment in most applications. Instead, smaller temperature variations are more normal. The ADR4520/ADR4525/ADR4530/ADR4533/ADR4540/ADR4550 were tested over 20 different temperature cycles of increasing magnitude, centered at +25°C, starting with $+25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ and going up to the full operating temperature range of -40°C to $+125^{\circ}\text{C}$. The results are shown in Figure 93.

For a temperature delta of 100°C (that is, $+25^{\circ}\text{C} \pm 50^{\circ}\text{C}$) the thermal hysteresis is less than 20 ppm for both the full cycle and the half cycle. Above this range, the thermal hysteresis increases significantly. These results show that the standard specification, which covers the full operating temperature range, is close to the worst case performance.

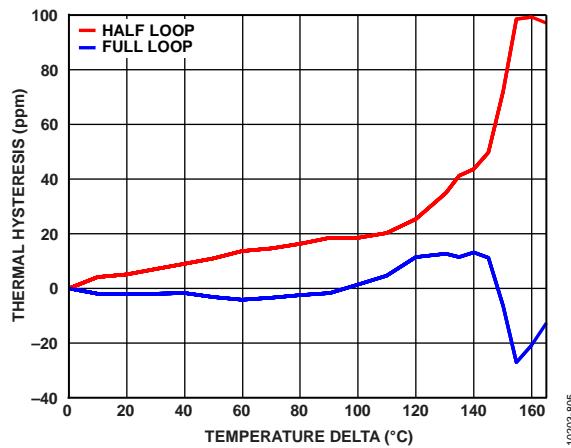


Figure 93. Thermal Hysteresis for Increasing Temperature Range

HUMIDITY SENSITIVITY

The ADR4520/ADR4525/ADR4530/ADR4533/ADR4540/ADR4550 is packaged in a SOIC plastic package and has a moisture sensitivity level of MSL-1, per the JEDEC standard. However, moisture absorption from the air into the package changes the internal mechanical stresses on the die causing shifts in the output voltage. Figure 94 shows the effects of a step change in relative humidity on the output voltage over time. The humidity chamber is maintained at an ambient temperature of $+25^{\circ}\text{C}$, while the relative humidity undergoes a step change from 20% to 80% at time zero. The relative humidity is maintained at 80% for the duration of the testing. Note that the output voltage shifts quickly compared to the overall settling time, following the step change in relative humidity.

Figure 95 shows the effects of 10% increases in relative humidity from 30% to 70% and back to 30%. Note that after the relative humidity returns to 30%, the output voltage is settling back to its starting point.

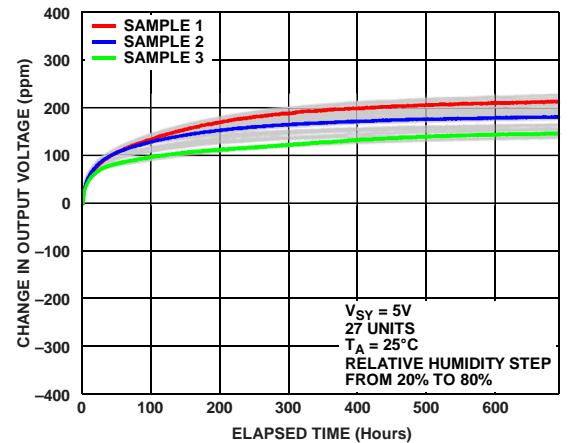


Figure 94. Change in Output Voltage vs. Time After Humidity Step Change (20% to 80% Relative Humidity)

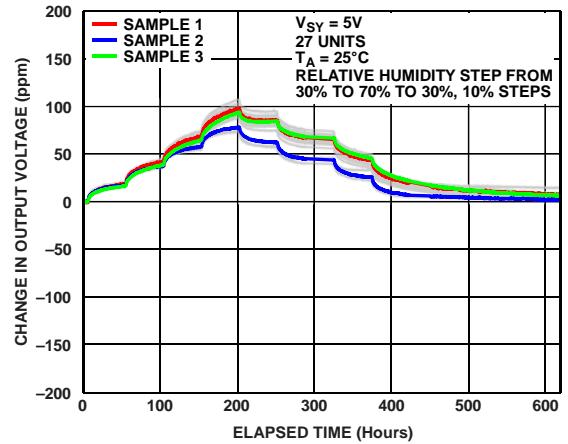


Figure 95. Change in Output Voltage vs. Time for 10% Humidity Steps (30% to 70% to 30% Relative Humidity in 10% Steps)

POWER CYCLE HYSTERESIS

By power cycling large numbers of samples, the power cycle hysteresis can be determined. To keep this measurement independent of other variables and environmental effects, the power cycle testing was performed using a high precision measurement system, including an ultrastable oil bath.

Figure 96 shows the power cycle hysteresis. The units were powered down for approximately four hours and then powered up. The ADR4520/ADR4525/ADR4530/ADR4533/ADR4540/ADR4550 do not have any power cycle hysteresis even after a long power-down period, making these devices very suitable for equipment which must maintain its calibration accuracy between power cycles.


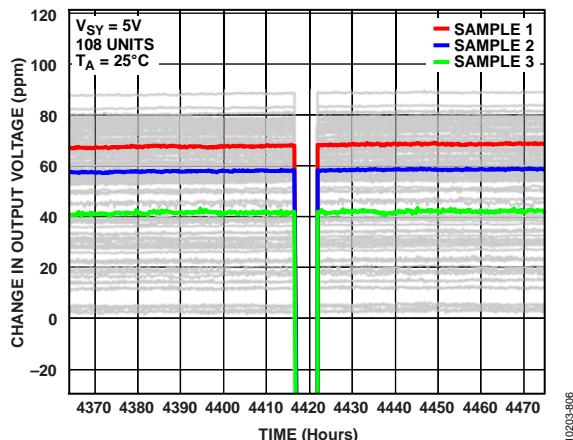


Figure 96. Power Cycle Hysteresis

10203-806

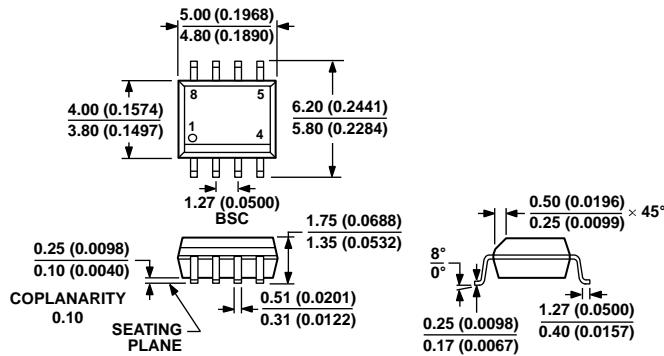OUTLINE DIMENSIONS



COMPLIANT TO JEDEC STANDARDS MS-012-AA

CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS
(IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR
REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

012407-A

Figure 97. 8-Lead Standard Small Outline Package [SOIC_N]

Narrow Body

(R-8)

Dimensions shown in millimeters and (inches)

ORDERING GUIDE

Model ^{1,2}	Temperature Range	Package Description	Package Option	Ordering Quantity
ADR4520ARZ	-40°C to +125°C	8-Lead SOIC_N	R-8	98
ADR4520ARZ-R7	-40°C to +125°C	8-Lead SOIC_N	R-8	1,000
ADR4520BRZ	-40°C to +125°C	8-Lead SOIC_N	R-8	98
ADR4520BRZ-R7	-40°C to +125°C	8-Lead SOIC_N	R-8	1,000
ADR4525ARZ	-40°C to +125°C	8-Lead SOIC_N	R-8	98
ADR4525ARZ-R7	-40°C to +125°C	8-Lead SOIC_N	R-8	1,000
ADR4525BRZ	-40°C to +125°C	8-Lead SOIC_N	R-8	98
ADR4525BRZ-R7	-40°C to +125°C	8-Lead SOIC_N	R-8	1,000
ADR4525CRZ	0°C to 70°C	8-Lead SOIC_N	R-8	98
ADR4525CRZ-R7	0°C to 70°C	8-Lead SOIC_N	R-8	1,000
ADR4525WBRZ-R7	-40°C to +125°C	8-Lead SOIC_N	R-8	1,000
ADR4530ARZ	-40°C to +125°C	8-Lead SOIC_N	R-8	98
ADR4530ARZ-R7	-40°C to +125°C	8-Lead SOIC_N	R-8	1,000
ADR4530BRZ	-40°C to +125°C	8-Lead SOIC_N	R-8	98
ADR4530BRZ-R7	-40°C to +125°C	8-Lead SOIC_N	R-8	1,000
ADR4533ARZ	-40°C to +125°C	8-Lead SOIC_N	R-8	98
ADR4533ARZ-R7	-40°C to +125°C	8-Lead SOIC_N	R-8	1,000
ADR4533BRZ	-40°C to +125°C	8-Lead SOIC_N	R-8	98
ADR4533BRZ-R7	-40°C to +125°C	8-Lead SOIC_N	R-8	1,000
ADR4540ARZ	-40°C to +125°C	8-Lead SOIC_N	R-8	98
ADR4540ARZ-R7	-40°C to +125°C	8-Lead SOIC_N	R-8	1,000
ADR4540BRZ	-40°C to +125°C	8-Lead SOIC_N	R-8	98
ADR4540BRZ-R7	-40°C to +125°C	8-Lead SOIC_N	R-8	1,000
ADR4540CRZ	0°C to 70°C	8-Lead SOIC_N	R-8	98
ADR4540CRZ-R7	0°C to 70°C	8-Lead SOIC_N	R-8	1,000

Model ^{1,2}	Temperature Range	Package Description	Package Option	Ordering Quantity
ADR4550ARZ	−40°C to +125°C	8-Lead SOIC_N	R-8	98
ADR4550ARZ-R7	−40°C to +125°C	8-Lead SOIC_N	R-8	1,000
ADR4550BRZ	−40°C to +125°C	8-Lead SOIC_N	R-8	98
ADR4550BRZ-R7	−40°C to +125°C	8-Lead SOIC_N	R-8	1,000
ADR4550CRZ	0°C to 70°C	8-Lead SOIC_N	R-8	98
ADR4550CRZ-R7	0°C to 70°C	8-Lead SOIC_N	R-8	1,000

¹ Z = RoHS Compliant Part.² W = Qualified for Automotive Applications. See the Automotive Products section.

AUTOMOTIVE PRODUCTS

The ADR4525W model is available with controlled manufacturing to support the quality and reliability requirements of automotive applications. Note that this automotive model may have specifications that differ from the commercial models; therefore, designers should review the Specifications section of this data sheet carefully. Only the automotive grade product shown is available for use in automotive applications. Contact your local Analog Devices account representative for specific product ordering information and to obtain the specific Automotive Reliability reports for this model.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.