

G3VM-□AY□/□DY□

MOS FET Relays Small DIP4 package with High dielectric strength type

Small DIP4 package with Dielectric Strength of 5,000 VAC between I/O

- Load voltage 40V/60V/200V/350V/400V/600V
- Standard type: Trigger LED forward current 3mA (max.)
- High sensitive type: Trigger LED forward current 2mA (max.)



NEW

Note: The actual product is marked differently from the image shown here.


RoHS Compliant

Refer to "Common Precautions".

Application Examples

- Electrical power unit
- Security equipment
- Medical equipment
- Test & measurement equipment
- Industrial equipment

Package (Unit : mm, Average)

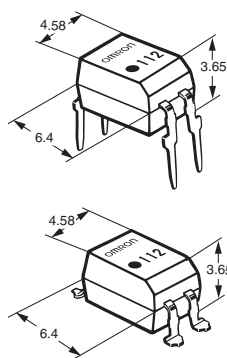

Note: The actual product is marked differently from the image shown here.

Model Number Legend

G3VM-□□□□□
1 2 3 4 5

1. Load Voltage

- 4: 40V
- 6: 60V
- 20: 200V
- 35: 350V
- 40: 400V
- 60: 600V

2. Contact form

- 1: 1a (SPST-NO)

3. Package type

- A: DIP4 pin PCB terminals
- D: DIP4 pin Surface-mounting Terminals

4. Additional functions

- Y: Dielectric strength between I/O above 2,500V type

5. Other informations

When specifications overlap, serial code is added in the recorded order.

Ordering Information

Standard type

| Package type | Contact form | Load voltage (peak value) * | Continuous load current (peak value) * | Packing/Tube | | Packing/Tape & reel | | |
|--------------|--------------|-----------------------------|--|---------------|----------------------------|--------------------------|----------------------------|--------------------------|
| | | | | Model | | Minimum package quantity | Model | |
| | | | | PCB terminals | Surface-mounting Terminals | | Surface-mounting Terminals | Minimum package quantity |
| DIP4 | 1a | 40V | 2000mA | G3VM-41AY1 | G3VM-41DY1 | 100 pcs. | G3VM-41DY1(TR05) | 500 pcs. |
| | | 60V | 500mA | G3VM-61AY1 | G3VM-61DY1 | | G3VM-61DY1(TR05) | |
| | | 200V | 250mA | G3VM-201AY1 | G3VM-201DY1 | | G3VM-201DY1(TR05) | |
| | | 350V | 100mA | G3VM-351AY1 | G3VM-351DY1 | | G3VM-351DY1(TR05) | |
| | | 400V | 120mA | G3VM-401AY1 | G3VM-401DY1 | | G3VM-401DY1(TR05) | |
| | | 600V | 90mA | G3VM-601AY1 | G3VM-601DY1 | | G3VM-601DY1(TR05) | |

* The AC peak and DC value are given for the load voltage and continuous load current.

High sensitive type

| Package type | Contact form | Load voltage (peak value) * | Continuous load current (peak value) * | Packing/Tube | | Packing/Tape & reel | | |
|--------------|--------------|-----------------------------|--|---------------|----------------------------|--------------------------|----------------------------|--------------------------|
| | | | | Model | | Minimum package quantity | Model | |
| | | | | PCB terminals | Surface-mounting Terminals | | Surface-mounting Terminals | Minimum package quantity |
| DIP4 | 1a | 40V | 2000mA | G3VM-41AY | G3VM-41DY | 100 pcs. | G3VM-41DY(TR) | 1,500 pcs. |
| | | 60V | 500mA | G3VM-61AY | G3VM-61DY | | G3VM-61DY(TR) | |
| | | 200V | 250mA | G3VM-201AY | G3VM-201DY | | G3VM-201DY(TR) | |
| | | 350V | 100mA | G3VM-351AY | G3VM-351DY | | G3VM-351DY(TR) | |
| | | 400V | 120mA | G3VM-401AY | G3VM-401DY | | G3VM-401DY(TR) | |
| | | 600V | 90mA | G3VM-601AY | G3VM-601DY | | G3VM-601DY(TR) | |

* The AC peak and DC value are given for the load voltage and continuous load current.

■ Absolute Maximum Ratings (Ta = 25°C)

● Standard type, High sensitive type

| Item | Symbol | G3VM-41AY1 | G3VM-61AY1 | G3VM-201AY1 | G3VM-351AY1 | G3VM-401AY1 | G3VM-601AY1 | Unit | Measurement conditions | | |
|---|--------------------------------------|------------|------------|-------------|-------------|-------------|-------------|------|-------------------------------|------------------------|--------------------|
| | | G3VM-41DY1 | G3VM-61DY1 | G3VM-201DY1 | G3VM-351DY1 | G3VM-401DY1 | G3VM-601DY1 | | | | |
| Input | LED forward current | IF | | | | | | 30 | mA | | |
| | Repetitive peak LED forward current | IFP | | | | | | 1 | A | 100 μs pulses, 100 pps | |
| | LED forward current reduction rate | ΔIF/°C | | | | | | -0.3 | mA/°C | Ta≥25°C | |
| | LED reverse voltage | VR | | | | | | 5 | V | | |
| | Connection temperature | TJ | | | | | | 125 | °C | | |
| Output | Load voltage (AC peak/DC) | VOFF | | 40 | 60 | 200 | 350 | 400 | 600 | V | |
| | Continuous load current (AC peak/DC) | Io | | 2,000 | 500 | 250 | 100 | 120 | 90 | mA | |
| | ON current reduction rate | ΔIo/°C | | -20 | -5 | -2.5 | -1 | -1.2 | -0.9 | mA/°C | Ta≥25°C |
| | Pulse ON current | Iop | | 6 | 1.5 | 0.75 | 0.3 | 0.36 | 0.27 | A | t=100ms, Duty=1/10 |
| | Connection temperature | TJ | | | | | | 125 | °C | | |
| Dielectric strength between I/O (See note 1.) | VI-o | | 5,000 | | | | | Vrms | AC for 1 min | | |
| Ambient operating temperature | Ta | | -40~+85 | | | | | °C | With no icing or condensation | | |
| Ambient storage temperature | Tstg | | -55~+125 | | | | | °C | | | |
| Soldering temperature | - | | 260 | | | | | °C | 10s | | |

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■Electrical Characteristics (Ta = 25°C)


●Standard type

| Item | Symbol | Model | | | | | | | | Unit | Measurement conditions | | |
|---|-------------------|--------------------------|--------------------------|----------------------------|----------------------------|----------------------------|----------------------------|--------|--|------|---|--|--|
| | | G3VM-41AY1 G3VM-41DY1 | G3VM-61AY1 G3VM-61DY1 | G3VM-201AY1 G3VM-201DY1 | G3VM-351AY1 G3VM-351DY1 | G3VM-401AY1 G3VM-401DY1 | G3VM-601AY1 G3VM-601DY1 | | | | | | |
| LED forward voltage | V _F | Minimum | 1.1 | | | | | | | | V | I _F =10mA | |
| | | Typical | 1.27 | | | | | | | | | | |
| | | Maximum | 1.4 | | | | | | | | | | |
| Reverse current | I _R | Maximum | 10 | | | | | | | | μA | V _R =5V | |
| Capacity between terminals | C _T | Typical | 50 | | | | | | | | pF | V=0, f=1MHz | |
| Trigger LED forward current | I _{FT} | Minimum | 0.5 | 0.6 | | | | 0.5 | | mA | G3VM-41AY1/DY1 : I _o =1A Others : I _o =Continuous load current ratings | | |
| | | Maximum | 3 | | | | | | | | | | |
| Release LED forward current | I _{FC} | Minimum | 0.1 | | | | | | | | mA | I _{OFF} =10μA | |
| Maximum resistance with output ON | R _{ON} | Typical | 0.09(0.06) | 0.6 | 5 | 35(25) | 22(17) | 45(30) | | Ω | I _F =5mA, I _o =Continuous load current ratings (value at t<1s) | | |
| | | Maximum | 0.15(0.10) | 2 | 8 | 50(35) | 35(28) | 60(40) | | | | | |
| Current leakage when the relay is open | I _{LEAK} | Maximum | 1 | | | | | | | | μA | V _{OFF} =Load voltage ratings | |
| Capacity between terminals | C _{OFF} | Typical | 300 | 130 | 90 | 30 | 80 | 75 | | pF | V=0, f=1MHz | | |
| Capacity between I/O terminals | C _{I-O} | Typical | 0.8 | | | | | | | | pF | f=1MHz, V _S =0V | |
| Insulation resistance between I/O terminals | R _{I-O} | Minimum | 1000 | | | | | | | | MΩ | V _{I-O} =500VDC, R _{oH} ≤60% | |
| | | Typical | 10 ⁸ | | | | | | | | | | |
| Turn-ON time | t _{ON} | Typical | 2.8 | 1 | | 0.3 | | 0.6 | | 0.5 | | ms | G3VM-41AY1/DY1 : R _L =200Ω, I _F =10mA, V _{DD} =20V G3VM-601AY1/DY1 : R _L =200Ω, I _F =5mA, V _{DD} =10V Others : R _L =200Ω, I _F =5mA, V _{DD} =20V (See note 2.) |
| | | Maximum | 5 | 3 | | 2 | | | | | | | |
| Turn-OFF time | t _{OFF} | Typical | 0.3 | 0.2 | 0.1 | | 0.2 | | | | ms | | |
| | | Maximum | 1 | | | | | | | | | | |

●High sensitive type

| Item | Symbol | Model | | | | | | | | Unit | Measurement conditions | |
|---|-------------------|------------------------|------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------|--|------|--|---|
| | | G3VM-41AY G3VM-41DY | G3VM-61AY G3VM-61DY | G3VM-201AY G3VM-201DY | G3VM-351AY G3VM-351DY | G3VM-401AY G3VM-401DY | G3VM-601AY G3VM-601DY | | | | | |
| LED forward voltage | V _F | Minimum | 1.45 | | | | | | | | V | I _F =10mA |
| | | Typical | 1.63 | | | | | | | | | |
| | | Maximum | 1.75 | | | | | | | | | |
| Reverse current | I _R | Maximum | 10 | | | | | | | | μA | V _R =5V |
| Capacity between terminals | C _T | Typical | 40 | | | | | | | | pF | V=0, f=1MHz |
| Trigger LED forward current | I _{FT} | Minimum | 0.3 | | | | | | | | mA | G3VM-41AY/DY : I _o =1A Others : I _o =Continuous load current ratings |
| | | Maximum | 2 | | | | | | | | | |
| Release LED forward current | I _{FC} | Minimum | 0.1 | | | | | | | | mA | I _{OFF} =10μA |
| Maximum resistance with output ON | R _{ON} | Typical | 0.09(0.06) | 0.6 | 5 | 35(25) | 22(17) | 45(30) | | Ω | I _F =5mA, I _o =Continuous load current ratings (value at t<1s) | |
| | | Maximum | 0.15(0.10) | 2 | 8 | 50(35) | 35(28) | 60(40) | | | | |
| Current leakage when the relay is open | I _{LEAK} | Maximum | 1 | | | | | | | | μA | V _{OFF} =Load voltage ratings |
| Capacity between terminals | C _{OFF} | Typical | 300 | 130 | 90 | 30 | 80 | 75 | | pF | V=0, f=1MHz | |
| Capacity between I/O terminals | C _{I-O} | Typical | 0.8 | | | | | | | | pF | f=1MHz, V _S =0V |
| Insulation resistance between I/O terminals | R _{I-O} | Minimum | 1000 | | | | | | | | MΩ | V _{I-O} =500VDC, R _{oH} ≤60% |
| | | Typical | 10 ⁸ | | | | | | | | | |
| Turn-ON time | t _{ON} | Typical | 2 | 0.5 | | 0.1 | | 0.2 | | ms | G3VM-601AY/DY : R _L =200Ω, I _F =5mA, V _{DD} =10V Others : R _L =200Ω, I _F =5mA, V _{DD} =20V (See note 2.) | |
| | | Maximum | 5 | 1 | | | | | | | | |
| Turn-OFF time | t _{OFF} | Typical | 0.3 | 0.2 | | | | | | ms | | |
| | | Maximum | 1 | | | | | | | | | |

Note: 2. Turn-ON and Turn-OFF Times



Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.

Standard type

| Item | Symbol | | G3VM-41AY1 | G3VM-61AY1 | G3VM-201AY1 | G3VM-351AY1 | G3VM-401AY1 | G3VM-601AY1 | Unit |
|--------------------------------------|-----------------|---------|------------|------------|-------------|-------------|-------------|-------------|------|
| | | | G3VM-41DY1 | G3VM-61DY1 | G3VM-201DY1 | G3VM-351DY1 | G3VM-401DY1 | G3VM-601DY1 | |
| Load voltage (AC peak/DC) | V _{DD} | Maximum | 32 | 48 | 160 | 280 | 320 | 480 | V |
| | | Minimum | 5 | | | | | | |
| Operating LED forward current | I _F | Typical | 7.5 | | | | | | mA |
| | | Maximum | 25 | | | | | | |
| | | Maximum | 2000 | 500 | 250 | 100 | 120 | 90 | |
| Continuous load current (AC peak/DC) | I _o | Maximum | 2000 | 500 | 250 | 100 | 120 | 90 | |
| Ambient operating temperature | T _a | Minimum | -20 | | | | | | °C |
| | | Maximum | 65 | | | | | | |

High sensitive type

| Item | Symbol | | G3VM-41AY | G3VM-61AY | G3VM-201AY | G3VM-351AY | G3VM-401AY | G3VM-601AY | Unit |
|--------------------------------------|-----------------|---------|-----------|-----------|------------|------------|------------|------------|------|
| | | | G3VM-41DY | G3VM-61DY | G3VM-201DY | G3VM-351DY | G3VM-401DY | G3VM-601DY | |
| Load voltage (AC peak/DC) | V _{DD} | Maximum | 32 | 48 | 160 | 280 | 320 | 480 | V |
| | | Minimum | 3 | | | | | | |
| Operating LED forward current | I _F | Typical | 5 | | | | | | mA |
| | | Maximum | 15 | | 20 | | | | |
| | | Maximum | 2000 | 500 | 250 | 100 | 120 | 90 | |
| Continuous load current (AC peak/DC) | I _o | Maximum | 2000 | 500 | 250 | 100 | 120 | 90 | |
| Ambient operating temperature | T _a | Minimum | -20 | | | | | | °C |
| | | Maximum | 65 | | | | | | |


Spacing and Insulation

Standard type and High sensitive type


| Item | Standard | Unit |
|------------------------------|-------------|------|
| Creepage distances | Minimum 7.0 | mm |
| Clearance distances | Minimum 7.0 | |
| Internal isolation thickness | Minimum 0.4 | |

Engineering Data

LED forward current vs. Ambient temperature

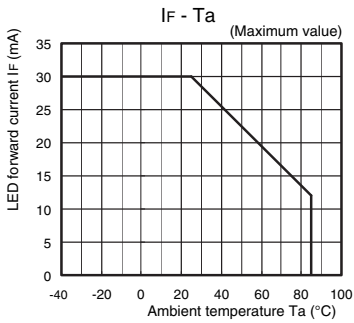


LED forward current vs. LED forward voltage




Continuous load current vs. Ambient temperature


G3VM-41AY/DY/AY1/DY1

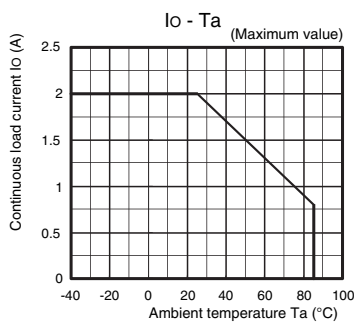

G3VM-61AY/DY/AY1/DY1
G3VM-201AY/DY/AY1/DY1

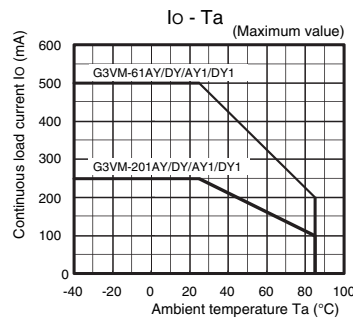


G3VM-351AY/DY/AY1/DY1
G3VM-401AY/DY/AY1/DY1
G3VM-601AY/DY/AY1/DY1

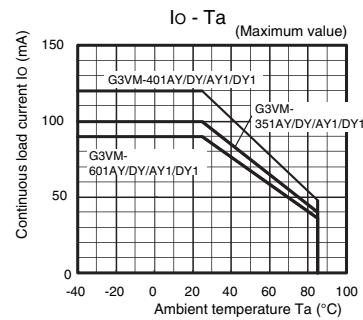


Continuous load current vs. On-state voltage


G3VM-41AY/DY/AY1/DY1



G3VM-61AY/DY/AY1/DY1
G3VM-201AY/DY/AY1/DY1




G3VM-351AY/DY/AY1/DY1
G3VM-401AY/DY/AY1/DY1
G3VM-601AY/DY/AY1/DY1




On-state resistance vs. Ambient temperature


G3VM-41AY/DY/AY1/DY1



G3VM-61AY/DY/AY1/DY1
G3VM-201AY/DY/AY1/DY1



G3VM-351AY/DY/AY1/DY1
G3VM-401AY/DY/AY1/DY1
G3VM-601AY/DY/AY1/DY1

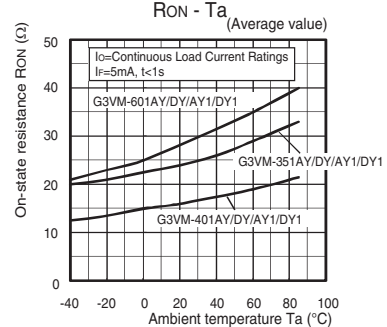


DIP

G3VM-□AY□/□DY□


Engineering Data

Trigger LED forward current vs. Ambient temperature


G3VM-41AY/DY/AY1/DY1
G3VM-61AY/DY/AY1/DY1



G3VM-201AY/DY/AY1/DY1
G3VM-351AY/DY/AY1/DY1




G3VM-401AY/DY/AY1/DY1
G3VM-601AY/DY/AY1/DY1

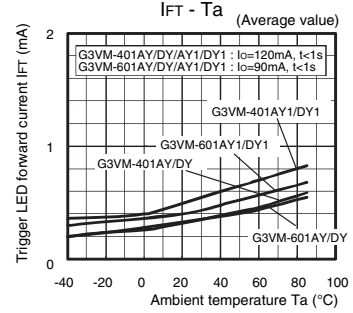


Turn ON, Turn OFF time vs. LED forward current


G3VM-41AY1/DY1
G3VM-61AY1/DY1




G3VM-201AY1/DY1
G3VM-351AY1/DY1




G3VM-401AY1/DY1
G3VM-601AY1/DY1

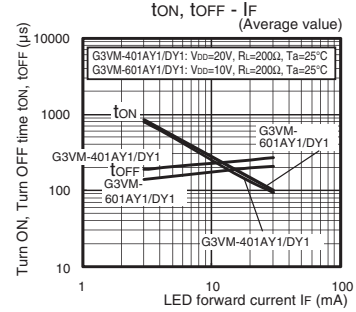


G3VM-41AY/DY
G3VM-61AY/DY



G3VM-201AY/DY
G3VM-351AY/DY




G3VM-401AY/DY
G3VM-601AY/DY

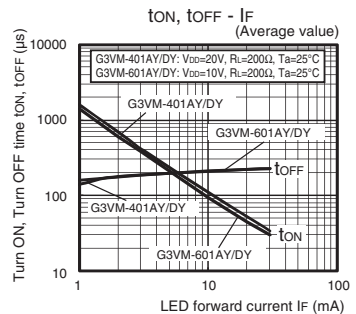


Turn ON, Turn OFF time vs. Ambient temperature


G3VM-41AY1/DY1
G3VM-61AY1/DY1



G3VM-201AY1/DY1
G3VM-351AY1/DY1

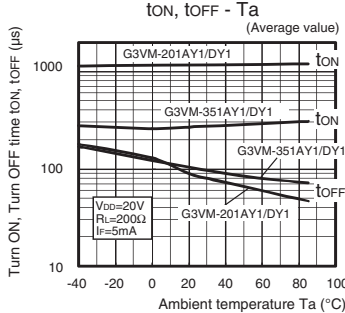

G3VM-401AY1/DY1
G3VM-601AY1/DY1

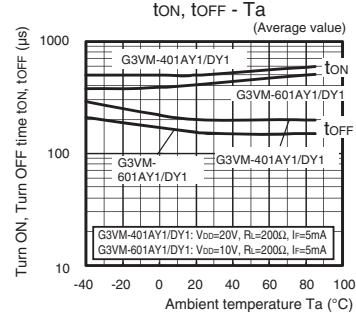


DIP

G3VM-□AY□/□DY□


Engineering Data

● Turn ON, Turn OFF time vs. Ambient temperature


G3VM-41AY1/DY1
G3VM-61AY1/DY1

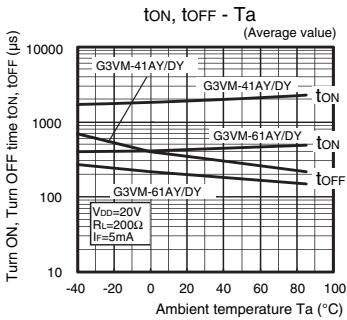

G3VM-201AY/DY
G3VM-351AY/DY

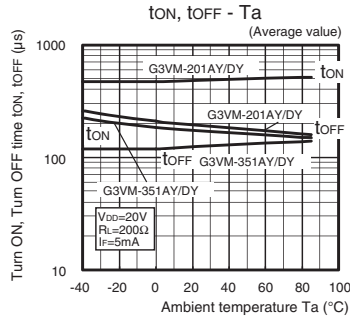


G3VM-401AY/DY
G3VM-601AY/DY

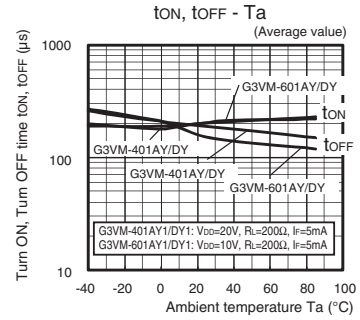


● Current leakage vs. Ambient temperature


G3VM-41AY/DY/AY1/DY1
G3VM-61AY/DY/AY1/DY1

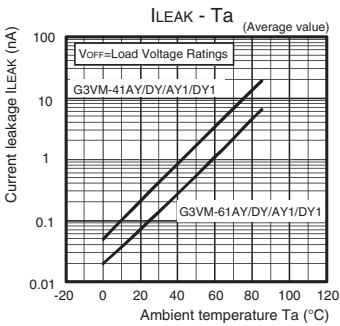

G3VM-201AY/DY/AY1/DY1
G3VM-351AY/DY/AY1/DY1

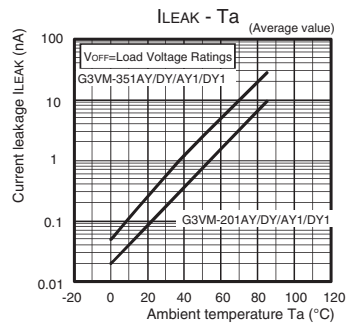

G3VM-401AY/DY/AY1/DY1
G3VM-601AY/DY/AY1/DY1

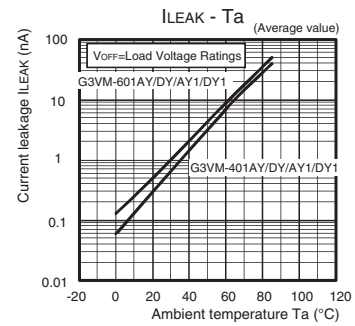


DIP

G3VM-□AY□/□DY□

■ Appearance/Terminal Arrangement/Internal Connections


■ Appearance

DIP (Dual Inline Package)
DIP4

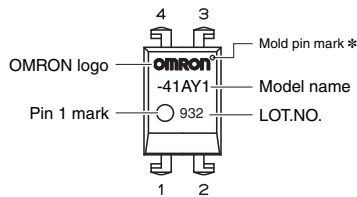

Note: The actual product is marked differently from the image shown here.
* The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.


■ Terminal Arrangement/Internal Connections



■ Dimensions (Unit: mm)




PCB Terminals
Weight: 0.25 g

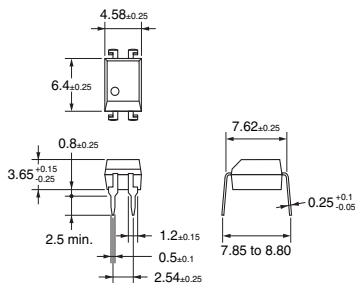


Note: The actual product is marked differently from the image shown here.




Surface-mounting Terminals
Weight: 0.25 g

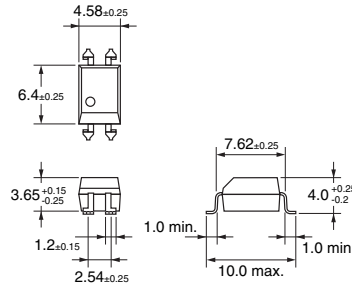

PCB Dimensions (BOTTOM VIEW)



Actual Mounting Pad Dimensions
(Recommended Value, TOP VIEW)



■ Approved Standards

UL recognized

● Standard type and High sensitive type

| Approved Standards | Contact form | File No. |
|--------------------|-----------------|----------|
| UL recognized | 1a (SPST-NO) | E80555 |

■ Safety Precautions

• Refer to "Common Precautions" for all G3VM models.

• Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
• Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation

Electronic and Mechanical Components Company

Contact: www.omron.com/ecb

Cat. No. K275-E1-02
0215(0115)(O)

DIP
G3VM-□AY□/□DY□



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.