



Product Facts

- **1000V optical isolation protects control and driver circuitry from load transients.**
- **Buffered/current limited input for direct drive from CMOS or TTL logic.**
- **Power MOSFET output chips for low voltage drop and virtually no offset voltage.**
- **90 & 240mA output current options.**
- **100 & 400V output voltage options.**
- **Subminiature hermetically sealed .100 grid package.**
- **Screened per "Y" level of MIL-PRF-28750D or CII "W" level.**
- **Direct replacement for TELEDYNE M92F series**

MS14 series subminiature SSRs employ state of the art photo-voltaic optical isolation providing 1000Vrms input/output isolation and back to back power MOSFET output chips for ultra-reliable high

speed switching of AC, DC and bipolar DC loads up to 240mA at load voltages up to 400Vdc. The input is current regulated and buffered to minimize power dissipation and permit driving the relay direct from CMOS or

TTL. The relay is packaged in a custom hermetically sealed low-profile .100 grid package which conserves space for high density PC board circuitry.

CII Part No.	DSCC Dwg. No.	Output Rating
MS14-1Y*	N/A	±90mA / 400V
MS14-2Y*	N/A	±180mA / 200V
MS14-3Y*	87034-001 (qualification pending)	±240mA / 100V

* Note: "W" suffix denotes screening to CII "W" level.

Environmental Characteristics

Ambient Temperature Range:
Operating: -55°C to +105°C.
Storage: -55°C to +125°C.

Vibration Resistance:
100 G's, 10-3,000 Hz.

Shock Resistance:
1,500 G's, 0.5 ms pulse.

Constant Acceleration Resistance:
5,000 G's.

Mechanical Characteristics


Weight (max.):
.07 oz. (2 grams)

Materials:
Case: DIP, hermetically sealed.
Pins: Copper, gold plated


Electrical Specifications (-55°C to +105°C unless otherwise specified)

Input (2 terminal configuration)	
Input supply voltage range (Vcc)	3.8 - 32 Vdc (Notes 1 & 2, Figures 1 & 2)
Input current (max.) @ 5Vdc	15mAdc (Notes 1 & 2, Figures 1 & 2)
Must turn-on voltage	3.8Vdc
Must turn-off voltage	1.5Vdc
Reverse voltage protection	-32Vdc
Input (3 terminal configuration)	
Control voltage range	0 - 18 Vdc
Control current (max.)	250µAdc @ 5V, 1mA @ 18V
Input supply voltage range (Vcc)	3.8 - 32 Vdc (Notes 1 & 2, Figures 1 & 2)
Input current (max.) @ 5Vdc	15mAdc (Notes 1 & 2, Figures 1 & 2)
Must turn-on voltage	0.3Vdc
Must turn-off voltage	2.8Vdc
Schmitt hysteresis (min.)	1.0Vdc
I/O	
Dielectric Strength (min.)	1,000V rms
Insulation Resistance (min.) @ 500Vdc	10 ⁹ ohms
Capacitance (max.)	10pF
Output	
Continuous load current (max.) @ 25°C: MS14-1	±90mA (Note 5, Figure 4)
Continuous load current (max.) @ 25°C: MS14-3	±240mA (Note 5, Figure 4)
Continuous load voltage, DC max. or ACpk: MS14-1	±100V
Continuous load voltage, DC max. or ACpk: MS14-3	±400V
On resistance (max.) @ T _j = 25°C, I _L = 100ma: MS14-1	50 ohms (Note 6, Figure 5)
On resistance (max.) @ T _j = 25°C, I _L = 100ma: MS14-3	8 ohms (Note 6, Figure 5)
Off-state leakage current (max.) @ V _L = 80% max. rated	±50µAdc
Turn-on time (max.)	1 ms (Figure 3)
Turn-off time (max.)	1 ms (Figure 3)
Junction temperature (max.)	150°C

2 Terminal Input Configuration



3 Terminal Input Configuration



© 2005 by Tyco Electronics Corporation. All Rights Reserved.

CII and TYCO are trademarks.

Other products and company names mentioned herein may be trademarks of their respective owners.



MS14 Series Military Solid State Relay (Continued)

Figure 1 - Max. Input Current vs. Input Voltage

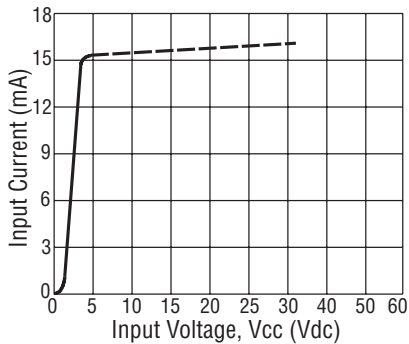


Figure 2 - Series Res. vs. Vcc Supply Voltage (Note 1)

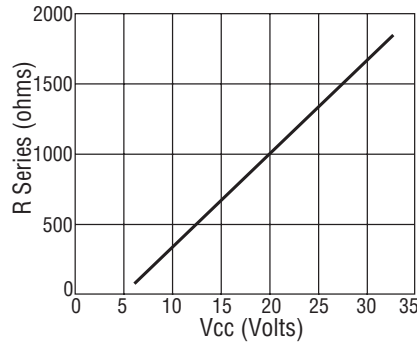


Figure 3 - Output Turn-on and Turn-off Timing

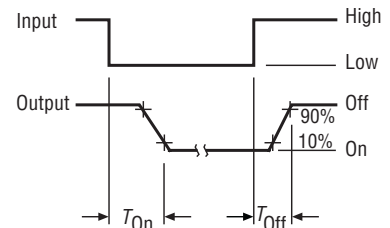


Figure 4 - Temperature Derating Curve

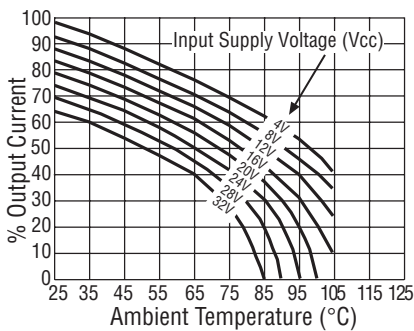


Figure 5 - On-Resistance vs. Temperature (Note 6)

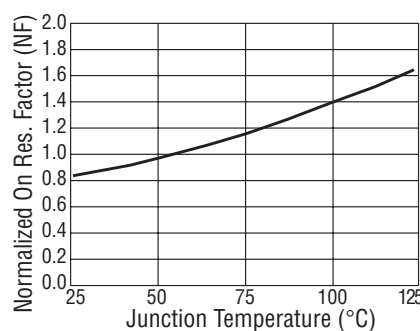


Figure 6 - Simplified Circuit


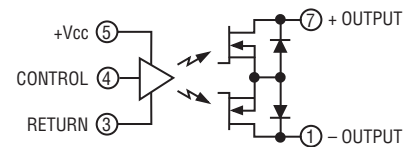


Figure 7 - Outline Dimensions

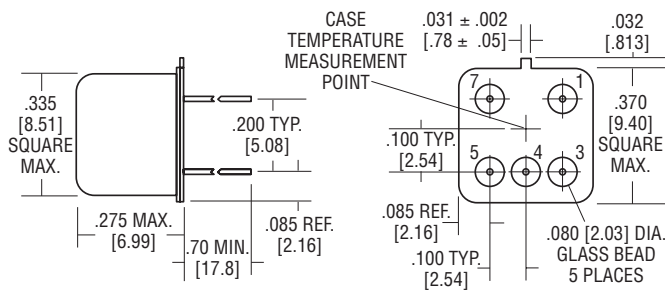

Unless otherwise specified, tolerances are:
 ±0.010 [0.25] for 2 place decimals
 ±0.005 [0.13] for 3 place decimals

Terminal numbers are for reference only and do not appear on the header.

Notes

1. 2 terminal input configuration is compatible with CMOS or open collector TTL (with pull-up resistor).
2. For Vcc levels above 6Vdc, a series limiting resistor is required. See Fig. 2 for resistor value. Use standard resistor value equal to or less than value from the curve.
3. Vcc = 5Vdc for all tests unless otherwise specified.
4. All MS14 Series relays may drive loads connected to either positive or negative referenced power supply lines. Inductive loads must be diode suppressed.
5. If an input series current limiting resistor is used, derating of output current vs. Vcc is not necessary. Curve for 4V applies.
6. On-resistance at any ambient temperature other than 25°C can be computed as follows:

$$R (@ \text{any } T) = R (@ +25^\circ\text{C}) \times e^{0.006(T - 25)}$$
 where T = new temperature - 25°C, e = 2.7182818 .



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.