

# Thermomagnetic device circuit breaker - CB TM2 6A F1 P - 2800896

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic F1 (fast-blow), 2 PDT contacts, plug for base element.

The figure shows the CB TM2  
0.5A F1 P version

## Product description

Thermomagnetic device circuit breaker



## Key commercial data

|                        |                                                                                                         |
|------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit           | 0                                                                                                       |
| Minimum order quantity | 1                                                                                                       |
| GTIN                   | <br>4 046356 690577 |
| Custom tariff number   | 85363010                                                                                                |
| Country of origin      | GERMANY                                                                                                 |

## Technical data

### General

|                                         |                                                                                                               |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Installation instructions               | When mounted in rows, the nominal device current can be limited to just 80% or must be oversized accordingly. |
| Height                                  | 45 mm                                                                                                         |
| Width                                   | 24.6 mm                                                                                                       |
| Depth                                   | 52 mm                                                                                                         |
| Ambient temperature (operation)         | -30 °C ... 60 °C                                                                                              |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C                                                                                              |
| Inflammability class according to UL 94 | V0                                                                                                            |
| Degree of protection                    | IP30 (Actuation area)                                                                                         |
| Mounting type                           | On base element                                                                                               |
| Color                                   | gray                                                                                                          |
| Number of positions                     | 2                                                                                                             |
| Insulating material group               | II                                                                                                            |
| Pollution degree                        | 2                                                                                                             |

# Thermomagnetic device circuit breaker - CB TM2 6A F1 P - 2800896

## Technical data

### Technical data

|                                                 |                                                                     |
|-------------------------------------------------|---------------------------------------------------------------------|
| Fuse type                                       | fast blow                                                           |
| Rated surge voltage                             | 2.5 kV (Increased insulation in actuation area)                     |
| Rated voltage                                   | 240 V AC (Ue according to IEC 60934)                                |
| Rated voltage                                   | 277 V AC (UL 1077)                                                  |
| Rated voltage                                   | 277 V AC (UL 508 - with plug-in base)                               |
| Rated voltage                                   | 80 V DC (IEC 60934)                                                 |
| Rated voltage                                   | 80 V DC (UL 1077)                                                   |
| Rated voltage                                   | 80 V DC (UL 508 - with plug-in base)                                |
| Rated current $I_n$                             | 6 A (IEC 60934)                                                     |
| Rated current $I_n$                             | 6 A AC (inductive load according to UL 1077)                        |
| Rated current $I_n$                             | 6 A DC (low-induction load according to UL 1077)                    |
| Rated current $I_n$                             | 6 A AC (inductive load according to UL 508 - with plug-in base)     |
| Rated current $I_n$                             | 6 A DC (low-induction load according to UL 508 - with plug-in base) |
| Rated insulation voltage $U_i$                  | 277 V AC (UL 1077)                                                  |
| Rated insulation voltage $U_i$                  | 250 V AC (IEC 60934)                                                |
| Insulation resistance $R_{iso}$ :               | > 100 M $\Omega$ (500 V DC)                                         |
| Auxiliary circuit                               | 277 V AC / 0.5 A (Low-induction)                                    |
| Auxiliary circuit                               | 277 V AC / 1 A (Low-induction, maximum of 2000 cycles)              |
| Auxiliary circuit                               | 50 V DC / 1 A (Low-induction)                                       |
| Type of actuation                               | S type                                                              |
| Tripping method                                 | TM (thermomagnetic)                                                 |
| Tripping level                                  | Trip-free mechanism (positive)                                      |
| Required backup fuse                            | $\geq 24$ A                                                         |
| Rated short-circuit switching capacity $I_{cn}$ | 400 A (240 V AC)                                                    |
| Rated short-circuit switching capacity $I_{cn}$ | 600 A (80 V DC)                                                     |
| Dielectric strength                             | 3000 V AC (Actuation area)                                          |
| Dielectric strength                             | 1500 V AC (Main to auxiliary circuit)                               |
| Dielectric strength                             | 1500 V AC (Open main circuit)                                       |
| Dielectric strength                             | 1000 V AC (Open auxiliary circuit)                                  |
| Dielectric strength                             | 1500 V AC (Position to position)                                    |
| Voltage drop                                    | 0.29 V (at $1 \times I_n$ )                                         |
| Cycles, max.                                    | 6000 (240 V AC/ $1 \times I_n$ )                                    |
| Cycles, max.                                    | 3000 (80 V DC/ $1 \times I_n$ )                                     |
| Contact type                                    | 2 PDT                                                               |

### Standards

|                              |                      |
|------------------------------|----------------------|
| Standard - Electrical safety | EN 60934             |
| Standard - Electrical safety | UL 1077              |
| Standard - Electrical safety | UL 508               |
| Standard - Electrical safety | CSA 22.2 No. 235-041 |

# Thermomagnetic device circuit breaker - CB TM2 6A F1 P - 2800896

## Classifications

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC000899 |
| ETIM 4.0 | EC000899 |
| ETIM 5.0 | EC000899 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 11     | 39121411 |
| UNSPSC 12.01  | 39121411 |
| UNSPSC 13.2   | 39121411 |
| UNSPSC 6.01   | 30211812 |
| UNSPSC 7.0901 | 39121411 |

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27141116 |
| eCl@ss 4.1 | 27141116 |
| eCl@ss 5.0 | 27141116 |
| eCl@ss 5.1 | 27141116 |
| eCl@ss 6.0 | 27141116 |
| eCl@ss 7.0 | 27141116 |

## Approvals

### Approvals

#### Approvals

VDE Zeichengenehmigung / UL Recognized / cUL Recognized / cULus Recognized

#### Ex Approvals

#### Approvals submitted

### Approval details

VDE Zeichengenehmigung 

UL Recognized 

# Thermomagnetic device circuit breaker - CB TM2 6A F1 P - 2800896

## Approvals

cUL Recognized 

cULus Recognized 

## Accessories

### Additional products

Base element - CB 1/6-2/4 PT-BE - 2800929



Base element with push-in connection technology for CB ... device circuit breakers

Jumper - CB PT BRIDGE - 2801014



Bridge plugs for the CB 1/6-2/4 PT-BE base element

Plug-in bridge - FBS 2-6 - 3030336



Plug-in bridge, Number of positions: 2, Color: red

Plug-in bridge - FBS 3-6 - 3030242



Plug-in bridge, Number of positions: 3, Color: red

# Thermomagnetic device circuit breaker - CB TM2 6A F1 P - 2800896

## Accessories

Plug-in bridge - FBS 4-6 - 3030255



Plug-in bridge, Number of positions: 4, Color: red

---

Plug-in bridge - FBS 5-6 - 3030349



Plug-in bridge, Number of positions: 5, Color: red

---

Plug-in bridge - FBS 10-6 - 3030271



Plug-in bridge, Number of positions: 10, Color: red

---

Plug-in bridge - FBS 20-6 - 3030365



Plug-in bridge, Number of positions: 20, Color: red

---

Plug-in bridge - FBS 50-6 - 3032224



Plug-in bridge, Number of positions: 50, Color: red

---

# Thermomagnetic device circuit breaker - CB TM2 6A F1 P - 2800896

## Accessories

Cable-cutting tool - CUTFOX-FBS - 1212124




Cutting tool, for separating individual jumper bars from FBS ... plug-in bridges and EB ... insertion bridges

---

## Drawings


### Diagram

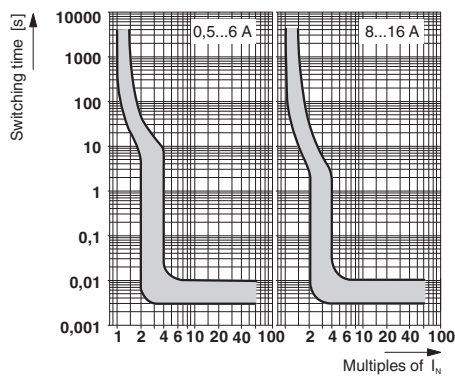

Trigger characteristic in the DC range

## Thermomagnetic device circuit breaker - CB TM2 6A F1 P - 2800896

Dimensioned drawing

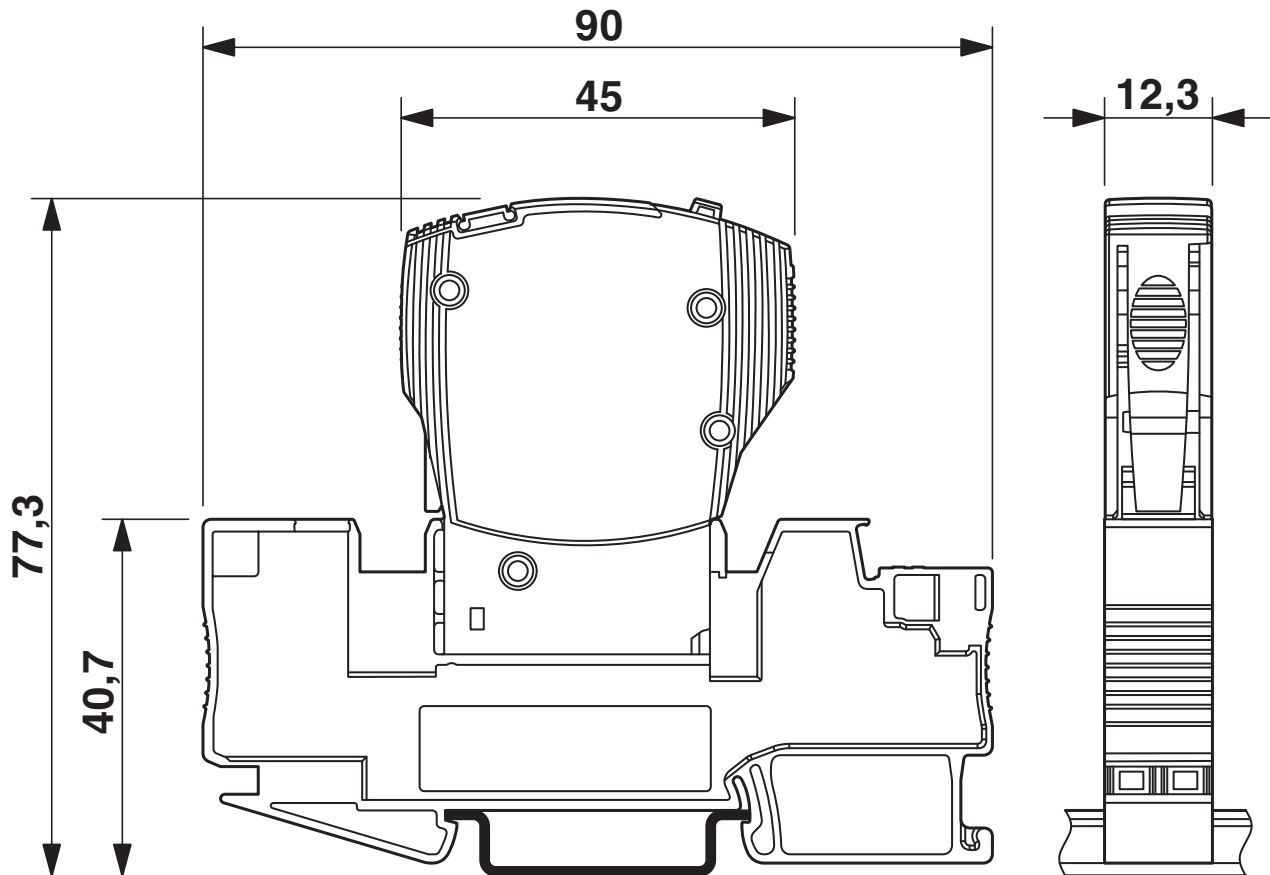

The figure shows the complete module consisting of a base element and connector





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.