

# HIGH POWER 8C-30C SERIES

## 8kV to 30kV High Voltage Cap-Charging Supplies

This High Power line of high-voltage regulated DC to DC converters is an extension of the C Series, directly addressing the high power density needs of >30 watt applications. High Power 8C - 30C units provide up to 60/125/250 watts. This high power density is especially suited to high-energy systems with large capacitances, fast repetition rates, or high continuous-DC-power requirements. See Application Note 10 for more changing information. Typical applications for the High Power 8C-30C Series include the following: laser, cap-charger, pulse generators, Q-switch, and TDR test equipment.

- 7 models from 0 to 8kV through 0 to 30kV
- 60, 125, or 250 watts of output power
- Maximum Iout capability down to 0 Volts
- Maximum Iout during charge/rise time
- Output short-circuit protection
- Very fast rise with very low overshoot



- High efficiency
- High power to voltage density
- Very low profile
- Output current & voltage monitors
- >200,000 hour MTBF @65°C
- Fixed-frequency, low-stored-energy design
- UL/cUL Recognized Component; CE Mark (LVD & RoHS)

| PARAMETER                         | CONDITIONS                              | ALL TYPES  |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | UNITS       |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
|-----------------------------------|---|--|----------|----------|----------|----------|-------------|----------|----------|---------|----------|-------------|---------|----------|---------|---------|-------------|---------|--------|---------|--------|-------------|----|-----|-----|----|-------------|-----|----|-----|-----|-------------|-----|-----|----|-----|-------|-------|
| <b>INPUT</b>                      |   | <b>ALL TYPES</b>   |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        |             |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Voltage Range                     | Full Power                              | + 23 to 30   |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | VDC         |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Voltage Range                     | Derated Power Range                     | 60W, 125W: + 11 to 30, 250W: 15-30                                     |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | VDC         |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Current                           | Standby / Disable                       | < 40   |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | mA          |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Current                           | No Load, Max Eout                       | 8C to 15C < 500, 20C to 25C < 600                                      |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | mA          |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Current                           | Max Load, Max Eout                      | 60W: 3.25, 125W: 6.5, 250W: 13   |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | A           |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| AC Ripple Current                 | Nominal Input, Full Load                | < 50   |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | mA p-p      |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| <b>OUTPUT</b>                     |   | <b>8C</b>  |          |          |          |          | <b>10C</b>  |          |          |         |          | <b>12C</b>  |         |          |         |         | <b>15C</b>  |         |        |         |        | <b>20C</b>  |    |     |     |    | <b>25C</b>  |     |    |     |     | <b>30C</b>  |     |     |    |     |       |       |
| Voltage Range                     | Nominal Input                           | 0 to 8,000   |          |          |          |          | 0 to 10,000 |          |          |         |          | 0 to 12,000 |         |          |         |         | 0 to 15,000 |         |        |         |        | 0 to 20,000 |    |     |     |    | 0 to 25,000 |     |    |     |     | 0 to 30,000 |     |     |    |     | VDC   |       |
| Power                             | Nominal Input, Max Eout                 | 60   | 125      | 250      | 60       | 125      | 250         | 60       | 125      | 250     | 60       | 125         | 250     | 60       | 125     | 250     | 60          | 125     | 250    | 60      | 125    | 250         | 60 | 125 | 250 | 60 | 125         | 250 | 60 | 125 | 250 | 60          | 125 | 250 | 60 | 125 | 250   | Watts |
| Current                           | Iout, Entire Output Voltage Range       | 7.5  | 15.5     | 31.2     | 6        | 12.5     | 25          | 5        | 10.5     | 20.8    | 4        | 8.3         | 16.7    | 3        | 6.25    | 12.5    | 2.4         | 5       | 10     | 2       | 4.17   | 8.33        |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       | mA    |
| Current Scale Factor              | Full Load                               | 4.7  | 14.2     | 6.25     | 4.1      | 10.9     | 5           | 4.0      | 7.4      | 4.17    | 4.0      | 7.5         | 3.33    | .65      | .653    | 2.5     | .65         | .650    | 2      | .65     | .642   | 1.67        |    |     |     |    |             |     |    |     |     |             |     |     |    |     | mAV   |       |
| Voltage Monitor Scaling           |   | 60W & 125W Models - 1000:1 ± 2% into 10MΩ; 250W Models - 10,000:1 ± 2% |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | -           |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Internal Capacitance              | Capacitance / 95% Decay (50Meg Load)    | 4400/659   | 2200/330 | 1500/225 | 2933/439 | 1467/220 | 1500/225    | 2933/439 | 1467/220 | 750/112 | 2200/330 | 1100/165    | 750/112 | 1320/200 | 880/132 | 750/112 | 1100/165    | 733/110 | 500/75 | 825/125 | 550/85 | 500/75      |    |     |     |    |             |     |    |     |     |             |     |     |    |     | pF/mS |       |
| Ripple                            | Full Load, Max Eout                     | < 1%   |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | V p-p       |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Rise Time                         | Max Iout, Various C Loads & Eout        | Figure A   |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | -           |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Storage Capacitance               | Internal                                | 4400   | 2200     | 1500     | 2933     | 1467     | 1500        | 2933     | 1467     | 750     | 2200     | 1100        | 750     | 1320     | 880     | 750     | 1100        | 733     | 500    | 825     | 550    | 500         |    |     |     |    |             |     |    |     |     |             |     |     |    | pF  |       |       |
| Overshoot                         | C Load, 0 Eout to Full Eout             | < 1%   |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | V pk        |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Line Regulation                   | Nom. Input, Max Eout, Full Power        | < 0.01%  |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | VDC         |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Static Load Regulation            | No Load to Full Load, Max Eout          | < 0.01%  |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | VDC         |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Stability                         | 30 Min. warmup, per 8 hr/ per day       | < 0.01% / < 0.02%  |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | VDC         |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| <b>PROGRAMMING &amp; CONTROLS</b> |   | <b>ALL TYPES</b>   |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        |             |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Input Impedance                   | Nominal Input                           | + Output Models 1.1MΩ to GND, - Output Models 1.1MΩ to +5 Vref         |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | MΩ          |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Adjust Resistance                 | Typical Potentiometer Values            | 10K to 100K (Pot across Vref. & Signal GND, Wiper to Adjust)           |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | Ω           |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Adjust Logic                      | 0 to +5 for +Out, +5 to 0 for - Out     | +4.64 VDC for +Output or +0.36 for -Output = Nominal Eout              |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | -           |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Output Voltage & Impedance        | T=+25°C                                 | + 5.00VDC ± 1%, Zout = 464Ω ± 1%                                       |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | -           |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Enable/Disable                    |   | 0 to +0.8V Disable, +2.0 to 32 Enable (Default = Enable)               |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | VDC         |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| <b>ENVIRONMENTAL</b>              |   | <b>ALL TYPES</b>   |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        |             |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Operating                         | Full Load, Max E out, Case Temperature  | -40 to +65   |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | °C          |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Coefficient                       | Over the Specified Temperature          | ±50 (±25 Optional)   |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | PPM/°C      |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Thermal Shock                     | Mil-Std-810, Method 503-4, Proc. II     | -40 to +65   |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | °C          |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Storage                           | Non-Operating, Case Temp.               | -55 to +105  |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | °C          |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Humidity                          | All Conditions, Standard Package        | 0 to 95% non-condensing  |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | -           |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Altitude                          | Standard Package, All Conditions        | Sea Level through 70,000   |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | ft          |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Shock                             | Mil-Std-810, Method 516.5, Proc. IV     | 20   |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | G's         |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |
| Vibration                         | Mil-Std-810, Method 514.5, Fig.514.5C-3 | 10   |          |          |          |          |             |          |          |         |          |             |         |          |         |         |             |         |        |         |        | G's         |    |     |     |    |             |     |    |     |     |             |     |     |    |     |       |       |

C = uF  
V = Volts  
I = mA  
T = mS

$$T = \frac{C \times V}{I}$$

C = uF  
V = kV  
I = mA  
F = Hz

$$I = C \times V \times F$$

C = uF  
V = kV  
I = mA  
F = Hz

$$F = \frac{I}{C \times V}$$

Specifications subject to change without notice.

C = uF  
E<sup>2</sup> = kV  
J = Ws

$$J = \frac{C \times E^2}{2}$$

Figure A - Rise Time Formulas

NOTES: Capacitance must include HVPS internal Capacitance.



Making High Voltage Easier!®

Higher Service, Higher Performance, Higher Reliability

©2011, UltraVolt Inc. All rights reserved.


# HIGH POWER 8C-30C SERIES

8kV to 30kV High Voltage Cap-Charging Supplies

8C TO 15C - 60/125W



20C TO 30C - 60/125W

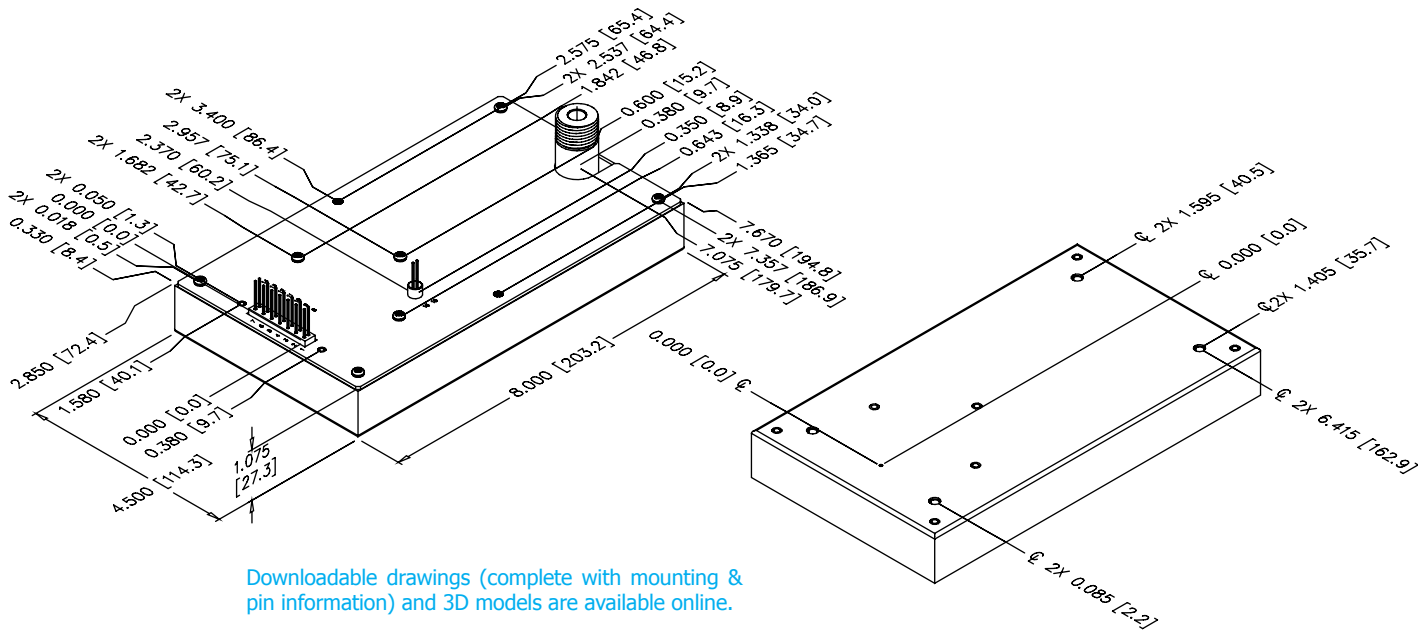

Downloadable drawings (complete with mounting & pin information) and 3D models are available online.




Making High Voltage Easier!®

1800 Ocean Avenue, Ronkonkoma, NY 11779  
 Phone: 1-631-471-4444 Fax: 1-631-471-4696 www.ultravolt.com

# HIGH POWER 8C-30C SERIES

## 8kV to 30kV High Voltage Cap-Charging Supplies

### 8C TO 30C - 250W (PRELIMINARY)

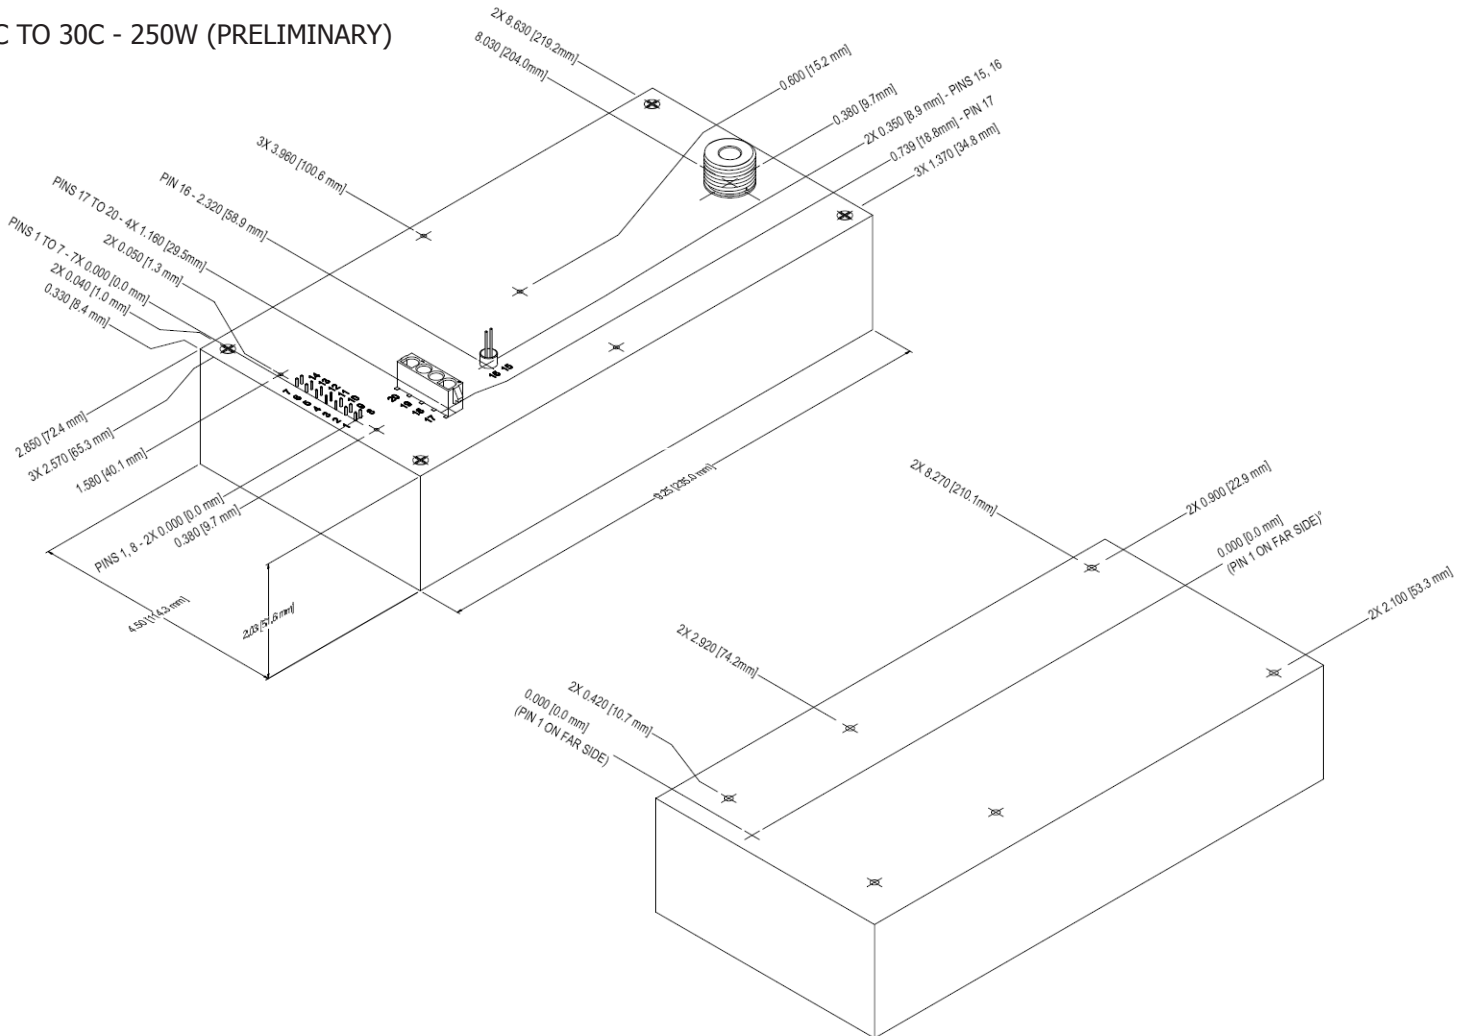

#### CONSTRUCTION

Epoxy-filled Aluminum Box  
Chem film per MIL-A-8625 Type II (Anodizing)

#### SIZE - 60 & 125W MODELS

Volume 38.7 in<sup>3</sup> (634cc)  
Weight 2.6 lbs. (1.18kg)

#### SIZE - 250W MODELS

Volume 84.5 in<sup>3</sup> (1386cc)  
Weight 5.6 lbs. (2.54kg)

#### TOLERANCE

Overall  $\pm 0.025''$  (0.64)  
Pin to Pin  $\pm 0.015''$  (0.38)  
Hole to hole location  $\pm 0.025''$  (0.64)

#### PINS

Gold-plated 0.025 (0.64) sq.

The center of the pins and mounting holes are located from the center of pin 1

Pins 1 thru 14 spacing 0.100 (2.54) x 0.200 (5.08) on center, height from cover 0.280 (7.11) min

Pins 15 and 16 spacing 0.100 (2.54) on center, height from cover 0.450 (11.43) min

#### HV OUTPUT CONNECTION

Unit requires an LGH flying lead connector for proper operation:

8C to 15C (60W & 125W Models) = CA-20KV-1000

20C to 30C (60W & 125W Models) = CA-40KV-1000

8C to 30C (250W Models) = CA-40KV-1000



Making High Voltage Easier!®

1800 Ocean Avenue, Ronkonkoma, NY 11779  
Phone: 1-631-471-4444 Fax: 1-631-471-4696 www.ultravolt.com

# HIGH POWER 8C-30C SERIES


## 8kV to 30kV High Voltage Cap-Charging Supplies

| CONNECTIONS  |                            |
|--------------|----------------------------|
| PIN          | FUNCTION                   |
| 1 & 8        | Input-Power Ground Return  |
| 2 & 9        | Positive Power Input       |
| 3            | Iout Monitor               |
| 4            | Enable/Disable             |
| 5            | Signal Ground Return       |
| 6            | Remote Adjust Input        |
| 7            | +5VDC Reference Output     |
| 10           | N/C (or Arc Detect option) |
| 11, 12, & 13 | N/C                        |
| 14           | Eout Monitor               |
| 15 & 16      | HV Ground Return           |

All grounds joined internally. Power-supply mounting points isolated from internal grounds by >100kΩ, .01uF / 500V (Max).

| ORDERING INFORMATION |                                   |        |
|----------------------|-----------------------------------|--------|
| Type                 | 0 to 8,000 VDC Output             | 8C     |
|                      | 0 to 10,000 VDC Output            | 10C    |
|                      | 0 to 12,000 VDC Output            | 12C    |
|                      | 0 to 15,000 VDC Output            | 15C    |
|                      | 0 to 20,000 VDC Output            | 20C    |
|                      | 0 to 25,000 VDC Output            | 25C    |
|                      | 0 to 30,000 VDC Output            | 30C    |
| Input                | 24VDC Nominal                     | 24     |
| Polarity             | Positive Output                   | -P     |
|                      | Negative Output                   | -N     |
| Power                | 60 Watts Output                   | 60     |
|                      | 125 Watts Output                  | 125    |
|                      | 250 Watts Output                  | 250    |
| Heat Sink            | .400" High (sized to fit case)    | -H     |
| PCB Support          | (5) 0.187" standoffs on top cover | -Z11   |
| Enhanced Interface   | 5V Controls and Monitors          | -I5    |
|                      | 10V Control and Monitors          | -I10   |
| Options              | Arc Detect                        | -AD    |
|                      | Arc Quench                        | -AQ    |
|                      | 25PPM Temperature Coefficient     | -25PPM |

Note: For more information on the enhanced interface options, download the [I5/I10 Option datasheet](#).

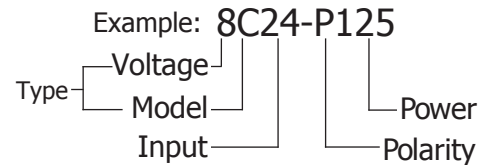

Popular accessories ordered with this product include CONN-KIT-HP, BR-7 and BR-8 mounting bracket kits and our full range of high voltage output connectors (see Accessories & Connectors datasheet).



Non-RoHS compliant units are available. Please contact the factory for more information.

Manufactured in USA



*Making High Voltage Easier!®*





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.