

## Product Brief

# TLE5041plusC

## Differential iGMR (Giant Magneto Resistive) Wheel Speed Sensor for indirect TPMS Systems (iTTPMS)

TLE5041plusC is Infineon's first productive GMR Speed Sensor, specially designed to fulfill the tight jitter-requirements coming with indirect TPMS systems. These systems control the car's tire pressure based on the information they receive from the wheel speed sensors. As the calculation algorithms need accurate data to start with, low jitter as guaranteed by iGMR technology, is crucial for correct functioning of the system. Traditional Hall sensors get to their limits with these requirements. TLE5041plusC operates, as its Hall predecessors, as a differential system, thus being particularly robust against stray field. Even though, because of Infineon's integrated iGMR technology, this brand new high-end chip is offered at the same price as its Hall based sibling TLE4941plusC.

Considering all points above, the increasingly popular magnetic encoder applications ("pole wheel"), TLE5041plusC is available in the same package as its Hall based relatives (PG-SSO-2-53), with its integrated capacitor for high EMC robustness.

For the use in older steel wheel systems, Infineon can offer support for a back bias sensor design: this is particularly important as back bias solutions for MR-technologies are technically more difficult to design than for Hall, as they require specially shaped magnets.

Being part of the extremely successful Infineon wheel speed sensor family, TLE5041plusC is ideally suited for automotive wheel speed applications, such as ABS and ESC, especially when (but not restricted to that) indirect TPMS systems require extremely jitter-accurate speed information.

### TLE5041plusC is Specially Designed to Support iTTPMS



[www.infineon.com](http://www.infineon.com)

### Features


- High sensitivity
- Best-in-class operating air gap at very low jitter suitable for iTTPMS
- High resistance against temperature change: No unwanted pulses at thermal drift
- Differential measurement principle, highly immune against disturbing external magnetic fields
- Wide frequency range of ~ 0.5Hz to 5kHz
- C type with 1.8nF overmolded capacitor
- Fast start-up
- Advanced performance by dynamic self calibration principle
- 2-wire current interface
- Identical package as Hall sensor TLE4941plusC
- Wide operating temperature ranges of  $-40^{\circ}\text{C} \leq T_j \leq +175^{\circ}\text{C}$
- Evaluation tool available for internal signal read-out, e.g. for air gap indication




# TLE5041plusC

Differential iGMR (Giant Magneto Resistive) Wheel Speed Sensor for indirect TPMS Systems (iTPTS)

## Block Diagram

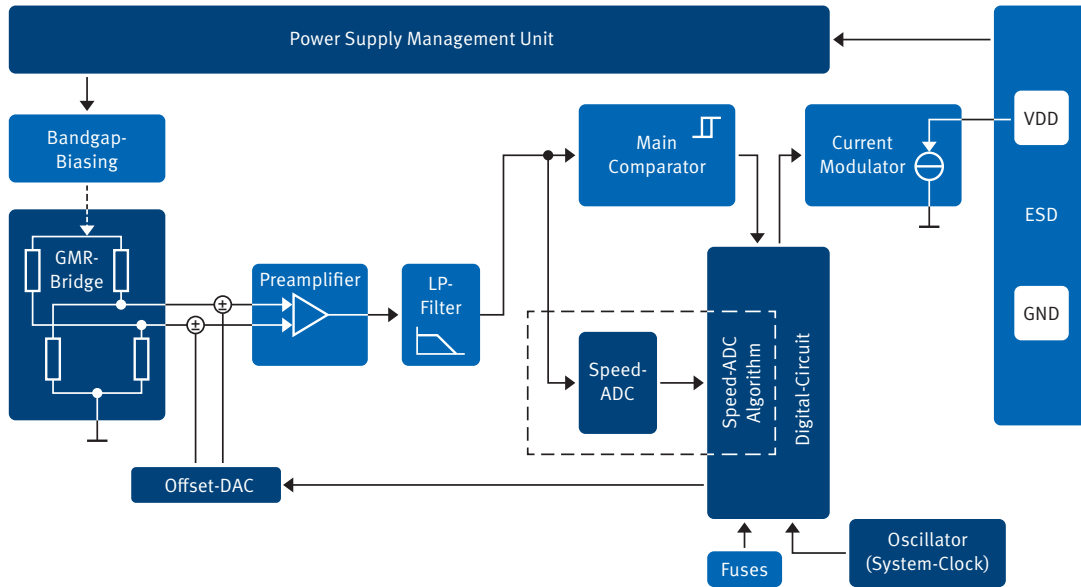

## Magnetic Encoder Wheel

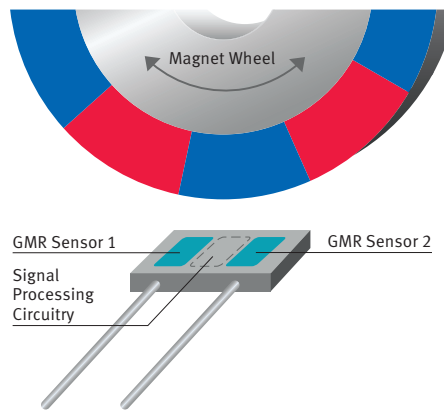

| Sales Name   | Description                                  | Order Code  |
|--------------|--|-------------|
| TLE5041plusC | TLE5041plusC in standard PG-SSO-2-53 package | SP001029256 |

Published by  
Infineon Technologies AG  
85579 Neubiberg, Germany

© 2013 Infineon Technologies AG.  
All Rights Reserved.

Visit us:  
[www.infineon.com](http://www.infineon.com)

Order Number: B142-H9847-X-X-7600  
Date: 11 / 2013

### Attention please!

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

### Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

### Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office. Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.