

Tilt Sensor Switch


| | | | | | |
|----------|------------|-------------|--------------|---------------|----|
| Item No. | RBS350100T | Description | Ball-Contact | Version | 11 |
| Page | 1 of 15 | | Publish Date | Jul. 03, 2018 | |

- FUNCTIONS

Rotation Detecting for 4 directions in vertical mode

- APPLICATIONS

1. Screen rotation for portable 3C products

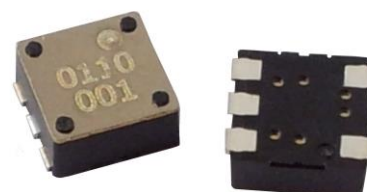

- FEATURES

1. Housing made of high insulation plastic material, free from electric conduction and rust problem.
2. Detecting with photo transistors, not affected by metal oxidization or wear. Possesses highly reliable and stable signals.
3. All plastic materials subject to industrial purpose, resist high temperature and meet fireproof function.
4. Simple ON and OFF signals, easy for design.
5. Suitable to vertical PCB.
6. RoHS compliance, an ideal substitute for mercury switch.
7. A more economical tilt and rotation detection option than IC design solution.
8. All made in Taiwan and examined before shipment.

- PATENTS

1. Taiwan Patent No. M 397113
2. Taiwan Patent No. I 441221
3. China Patent No. ZL 201020272893.2
4. Japan Patent No. 5281060
5. U.S.A. Patent No. US 8,586,910 B2




Tilt Sensor Switch

| | | | | | |
|----------|------------|-------------|--------------|---------------|----|
| Item No. | RBS350100T | Description | Ball-Contact | Version | 11 |
| Page | 2 of 15 | | Publish Date | Jul. 03, 2018 | |


● DIMENSIONS / P.C.B. LAYOUT (Unit: mm, Tolerance: ±0.20mm)

Fig. 1

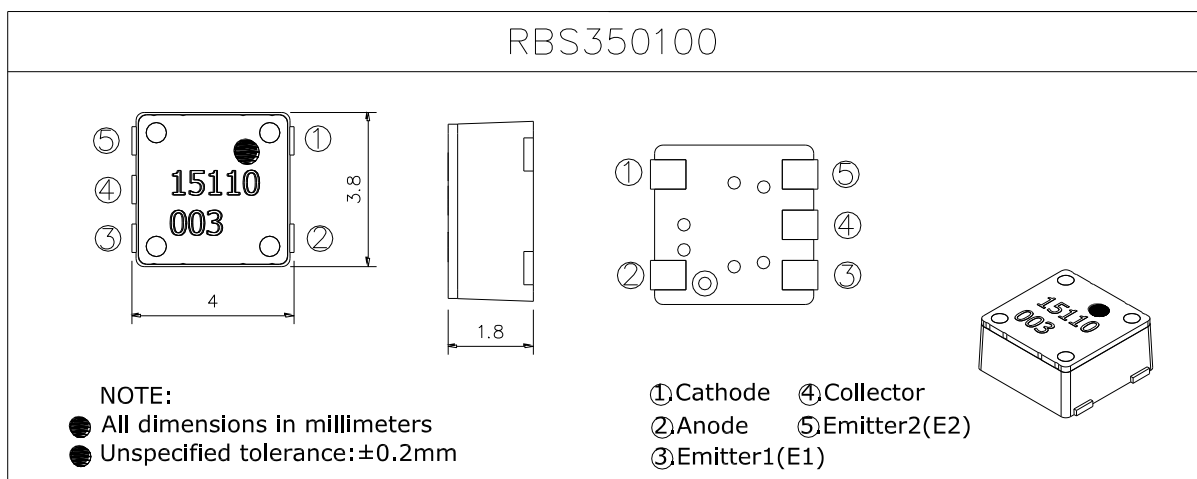

● PACKING ICON OF TAPE & REEL

Fig. 2

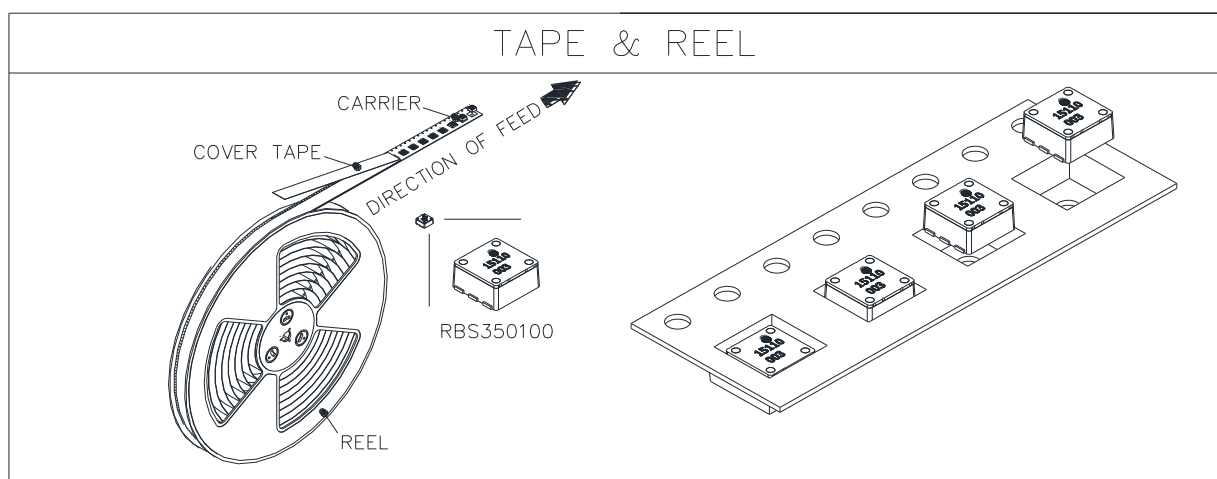

Tilt Sensor Switch

| | | | | | |
|----------|------------|-------------|--------------|---------------|----|
| Item No. | RBS350100T | Description | Ball-Contact | Version | 11 |
| Page | 3 of 15 | | Publish Date | Jul. 03, 2018 | |


● TILT ANGLE RANGE

I . Clarification:

1. Element with respect to the space Z axis inclination angle α is within 30° , can be normal actuation.
2. Component rotation angle Θ exceeding 75° , the output signal will be switched.

II. Fig. 3



| | E1 | E2 |
|-------------------------------------------------------------------------------------|----|----|
|  | 0 | 1 |
|  | 0 | 0 |
|  | 1 | 0 |
|  | 1 | 1 |

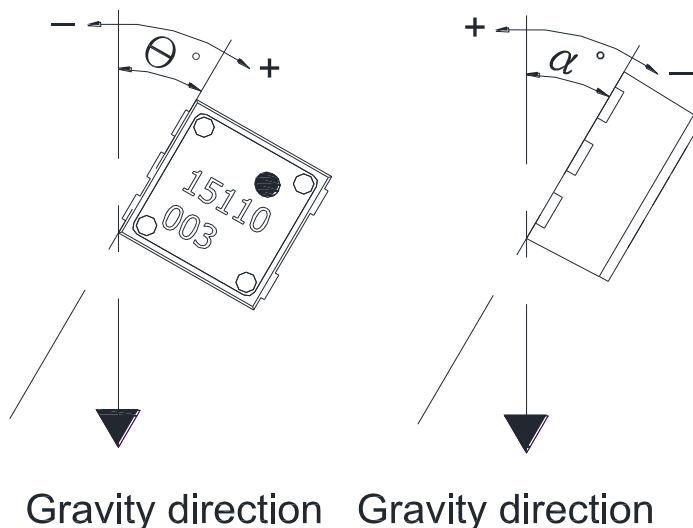

Tilt Sensor Switch

| | | | | | |
|----------|------------|-------------|--------------|---------------|----|
| Item No. | RBS350100T | Description | Ball-Contact | Version | 11 |
| Page | 4 of 15 | | Publish Date | Jul. 03, 2018 | |

III. Fig. 4

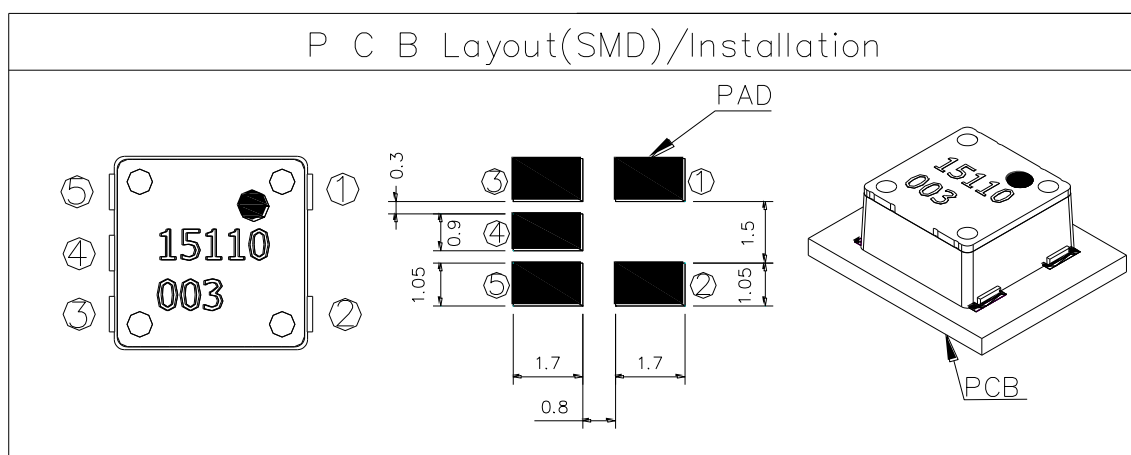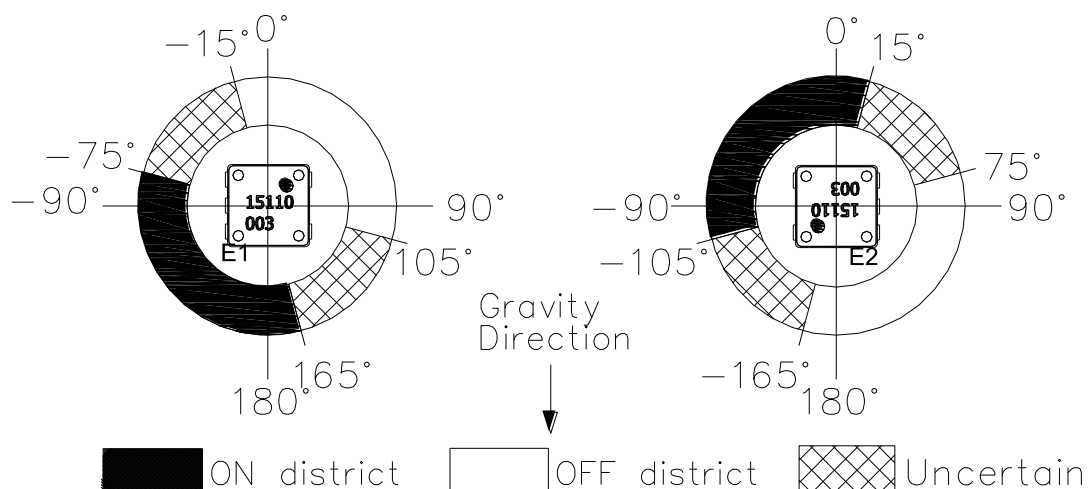


Tilt Sensor Switch

| | | | | | |
|----------|------------|-------------|--------------|---------------|----|
| Item No. | RBS350100T | Description | Ball-Contact | Version | 11 |
| Page | 5 of 15 | | Publish Date | Jul. 03, 2018 | |

● CIRCUIT SUGGESTED

Application Circuit

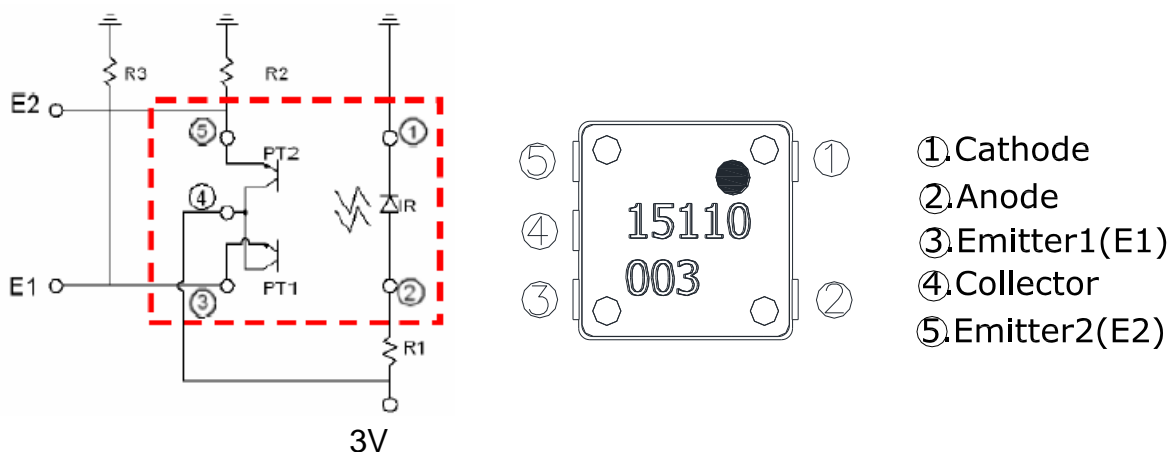

Note :

- E1 : Output current of phototransistors PT1
- E2 : Output current of phototransistors PT2
- ON : Output current of phototransistors : 100μA or more
- OFF : Output current of phototransistors : 20μA or less
- Output current of ON/OFF is output when device is at a standstill



Tilt Sensor Switch

| | | | | | |
|----------|------------|-------------|--------------|---------------|----|
| Item No. | RBS350100T | Description | Ball-Contact | Version | 11 |
| Page | 6 of 15 | | Publish Date | Jul. 03, 2018 | |

● Recommended current and voltage

| Input Current (mA) | Operating Voltage (V) | Conditions |
|--------------------|-----------------------|-----------------------------------------------------------------|
| 3.5 | 3 | $V_{CE}=3V$ $R_1=510\text{ ohm}$ $R_2、R_3=22K\text{ ohm}$ |

| Input Current (mA) | Operating Voltage (V) | Conditions |
|--------------------|-----------------------|--------------------------------------------------------------------|
| 3.5 | 3.3 | $V_{CE}=3.3V$ $R_1=560\text{ ohm}$ $R_2、R_3=22\text{ K ohm}$ |

* Please refer to above Application Circuit for designing electrical circuit.

● Absolute Maximum Rating ($T_a=25^{\circ}\text{C}$)

| Item | | Symbol | Rating | Unit |
|----------------------------|-----------------------------|-----------|---------|--------------------|
| Input | Power Dissipation | P_d | 75 | mW |
| | Reverse Voltage | V_R | 5 | V |
| | Forward Current | I_F | 50 | mA |
| | Peak Forward Current (*1) | I_{FP} | 1 | A |
| Output | Collector Power Dissipation | P_C | 100 | mW |
| | Collector Current | I_c | 20 | mA |
| | C-E Voltage | V_{CEO} | 30 | V |
| | E-C Voltage | V_{ECO} | 5 | V |
| Operating Temperature | | T_{opr} | -25~+85 | $^{\circ}\text{C}$ |
| Storage Temperature | | T_{stg} | -40~+85 | $^{\circ}\text{C}$ |
| Soldering Temperature (*2) | | T_{sol} | 260 | $^{\circ}\text{C}$ |

(*1) $t_w=100\text{ uSec.}$, $T=10\text{ mSec.}$

(*2) $t=5\text{ Sec}$



Tilt Sensor Switch

| | | | | | |
|----------|------------|-------------|--------------|---------------|----|
| Item No. | RBS350100T | Description | Ball-Contact | Version | 11 |
| Page | 7 of 15 | | Publish Date | Jul. 03, 2018 | |

● Optical/Electrical Characteristics (Ta=25°C)

| Parameter | | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | |
|--------------------------------------|------------------------|---------------|------------------------------|-------------------------------------------------|------|------|---------|----|
| Input | Forward voltage | V_F | $I_F=20mA$ | - | 1.25 | 1.3 | V | |
| | Reverse current | I_R | $V_R=5V$ | - | - | 10 | μA | |
| *1 Output | Collector dark current | I_{CE} | $V_{CE}=20V$ | - | - | 50 | nA | |
| *1 Coupling Characteristics | Collector current | I_C | $V_{CE}=3.0V, R_1=510\Omega$ | 100 | - | - | μA | |
| | *2 Leak current | I_{LEAK} | $V_{CE}=3.0V, R_1=510\Omega$ | - | - | 20 | μA | |
| | Response Time | Rise time | t_r | $V_{CE}=3.0V, I_C=100\mu A$ $R_L=1000\Omega$ | - | 50 | 150 | us |
| | | Fall time | t_r | | - | 50 | 150 | us |
| Collector-emitter Saturation voltage | | $V_{CE(sat)}$ | $I_F=2mA, I_C=100\mu A$ | - | - | 0.3 | V | |
| Operation Angle | | θ | Fig. 4 | | | | ° | |

*1 Output and coupling characteristics are common to the both phototransistors.

*2 Leak current is the output of transistor when $\theta=0^\circ$ or $\pm 90^\circ$, $\phi=0^\circ$ and $I_C=OFF$.



Tilt Sensor Switch

| | | | | | |
|----------|------------|-------------|--------------|---------------|----|
| Item No. | RBS350100T | Description | Ball-Contact | Version | 11 |
| Page | 8 of 15 | | Publish Date | Jul. 03, 2018 | |

● Typical Electrical / Optical Characteristics Curves (Ta=25°C)

Fig.1 Power Dissipation vs. Ambient Temperature

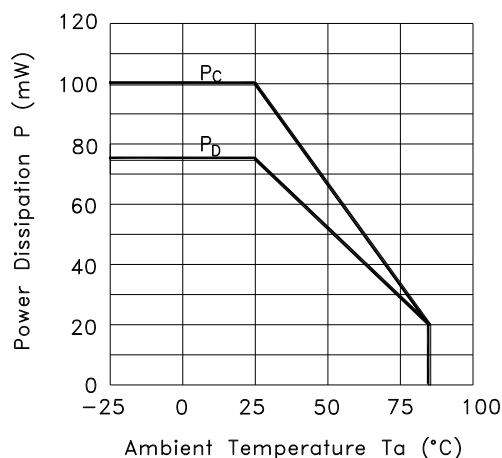


Fig.2 Forward Current vs. Forward Voltage

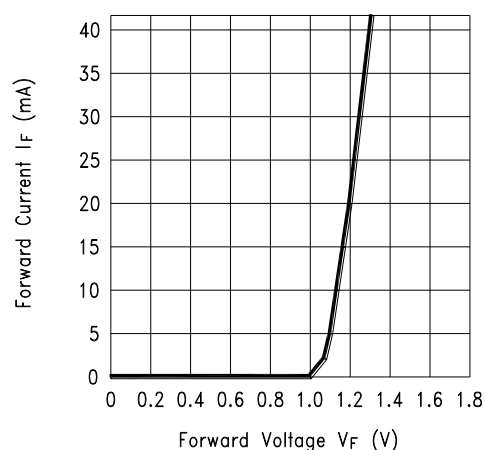


Fig.3 Collector Current vs. Collector-emitter Voltage


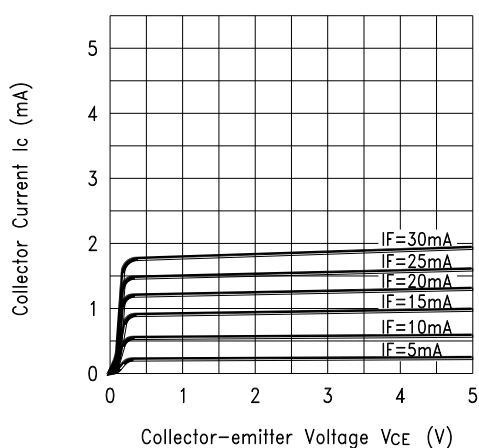


Fig.4 Collector Current vs. Ambient Temperature

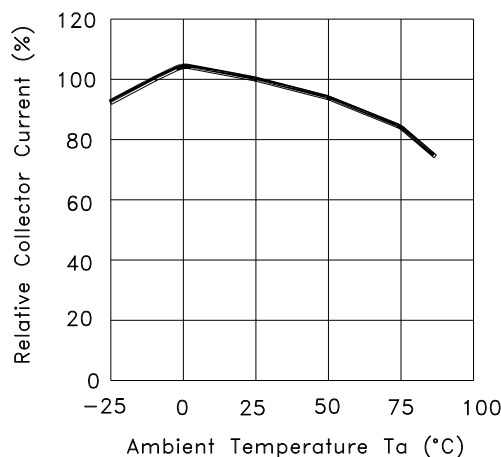

Tilt Sensor Switch

| | | | | | |
|----------|------------|-------------|--------------|---------------|----|
| Item No. | RBS350100T | Description | Ball-Contact | Version | 11 |
| Page | 9 of 15 | | Publish Date | Jul. 03, 2018 | |

Fig.5 Collector-emitter Saturation Voltage vs. Ambient Temperature

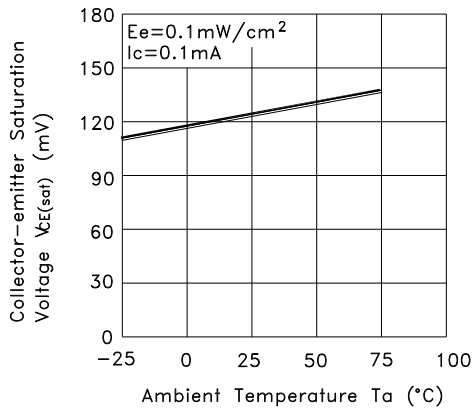


Fig.6 Response Time vs. Load Resistance



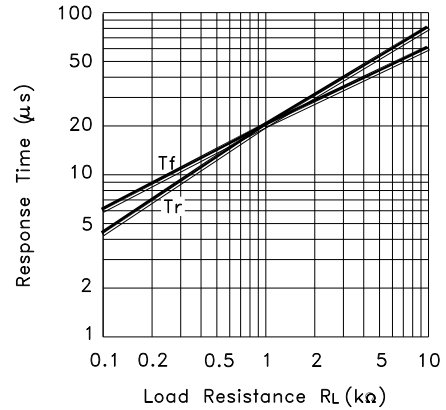


Fig.7 Sensing Position Characteristics (Typical)

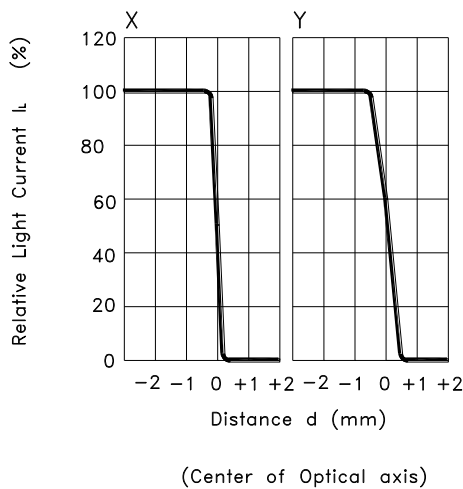

Test Circuit for Response Time

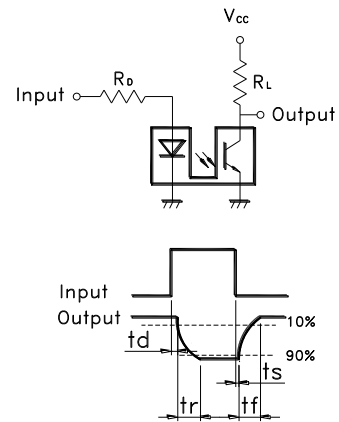

Tilt Sensor Switch

| | | | | | |
|----------|------------|-------------|--------------|---------------|----|
| Item No. | RBS350100T | Description | Ball-Contact | Version | 11 |
| Page | 10 of 15 | | Publish Date | Jul. 03, 2018 | |

● RELIABLE TEST ITEMS

Reliable Test for RBS350100T

| | Test Item | Contents |
|---|-----------------------|-----------------------------------------------------------------|
| 1 | IR Reflow | Peak temp.=255~260°C |
| 2 | Operating Temperature | -25°C ~ 85°C |
| 3 | Storage Temperature | -40°C ~ 85°C |
| 4 | Humidity | 40 °C / 95 %RH |
| 5 | Mechanical Life | 2Hz, horizontal 1,000,000 times |
| 6 | Electrical Life | I _F =20 mA, V _{CE} =5 V TIME: 30,000 hrs |

● SOLDERING CONDITION

Following soldering conditions are for reference only, please use soldering information that solder paste manufacturer recommends.

| Condition Suitable Production Process | Soldering Temperature | Soldering Time | Wattage of Manual Soldering | Type |
|------------------------------------------------|---------------------------------------------------------------------------------|------------------|----------------------------------------------------------|------|
| IR Reflow | Please refer to following < Table of classification Reflow profile > and Fig. 5 | | - | SMD |
| Manual Soldering | 300±5°C | < 3 seconds max. | 30W or Temperature- controlled manual soldering | SMD |



Tilt Sensor Switch

| | | | | | |
|----------|------------|-------------|--------------|---------------|----|
| Item No. | RBS350100T | Description | Ball-Contact | Version | 11 |
| Page | 11 of 15 | | Publish Date | Jul. 03, 2018 | |

< Table of classification Reflow profile >


| Item | Pb process | Pb free process |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|----------------------------------|
| Pre-heat and Soak Temperature min.(T _{smin}) Temperature max.(T _{smax}) Time (T _{smin} to T _{smax})(t _s) | 100°C 150°C 60-120 seconds | 150°C 200°C 60-120 seconds |
| Average ram-up Rate (T _{smax} to T _p) | 3°C/second max. | 3 °C/second max. |
| Liquidous Temperature (TL) Time at Liquidous (tL) | 183°C 60-150 seconds | 217°C 60-150 seconds |
| Peak package body Temperature (T _p)* | 230°C ~235°C * | 255°C ~260°C * |
| Classification temperature(T _c) | 235°C | 260°C |
| Time(tp)** within 5 °C of the specified classification temperature (T _c) | 20** seconds | 30** seconds |
| Average ram-down Rate (T _p to T _{smax}) | 6°C/second max. | 6°C/second max. |
| Time 25 °C to peak temperature | 6 minutes max. | 8 minutes max. |
| * Tolerance for peak profile temperature (T _p) is defined as a supplier minimum and a user maximum. ** Tolerance for time at peak profile temperature (tp) is defined as a supplier minimum and a user maximum. | | |



Tilt Sensor Switch

| | | | | | |
|----------|------------|-------------|--------------|---------------|----|
| Item No. | RBS350100T | Description | Ball-Contact | Version | 11 |
| Page | 12 of 15 | | Publish Date | Jul. 03, 2018 | |

Fig. 5

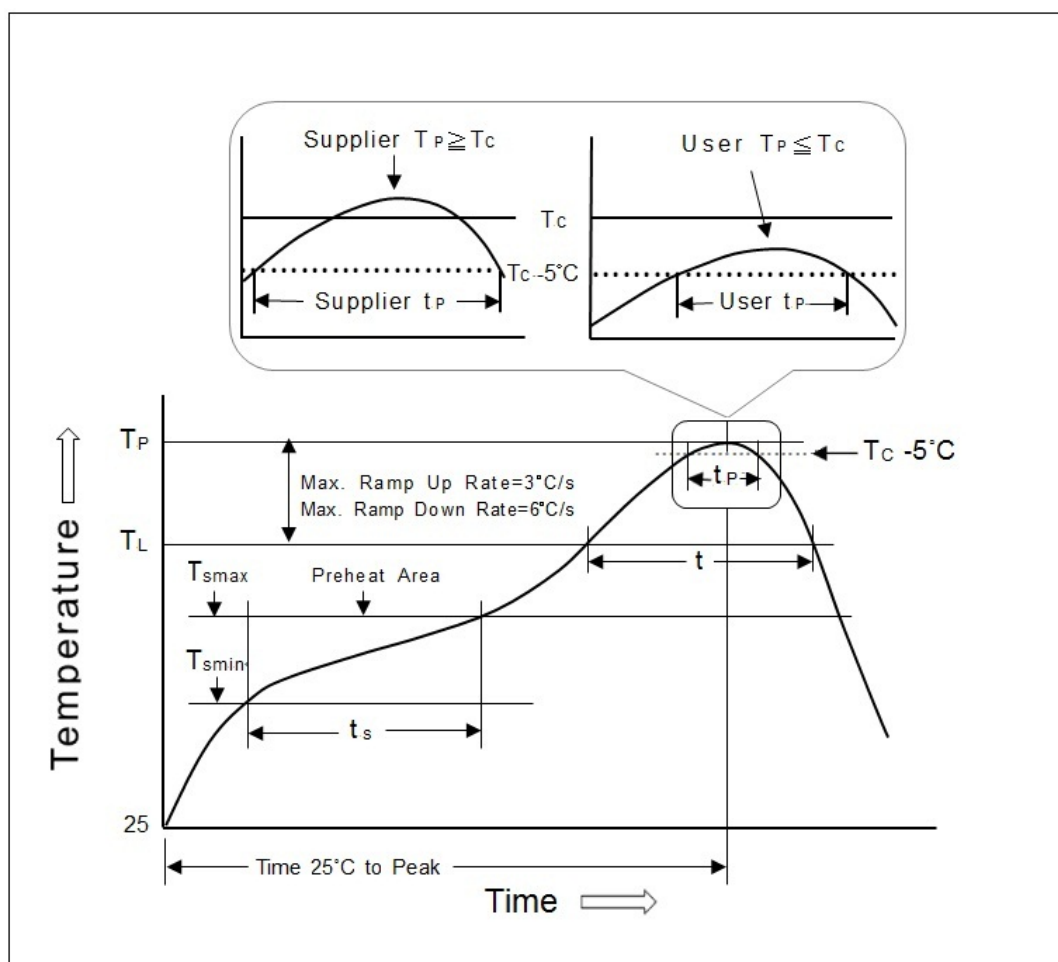


Tilt Sensor Switch

| | | | | | |
|----------|------------|-------------|--------------|---------------|----|
| Item No. | RBS350100T | Description | Ball-Contact | Version | 11 |
| Page | 13 of 15 | | Publish Date | Jul. 03, 2018 | |

● PACKAGE

| | Part Number | Package | Quantity | Total | Dimension (mm) |
|----|-------------|-------------|-----------|------------|----------------|
| 1. | RBS350100T | Tape & reel | 3,500 pcs | 3,500 pcs | φ300*12.5H |
| | | Inner box | 3 reels | 10,500 pcs | 355L*340W*68H |
| | | Carton | 4 boxes | 42,000 pcs | 373L*358W*309H |

※ Package shown as below for reference.

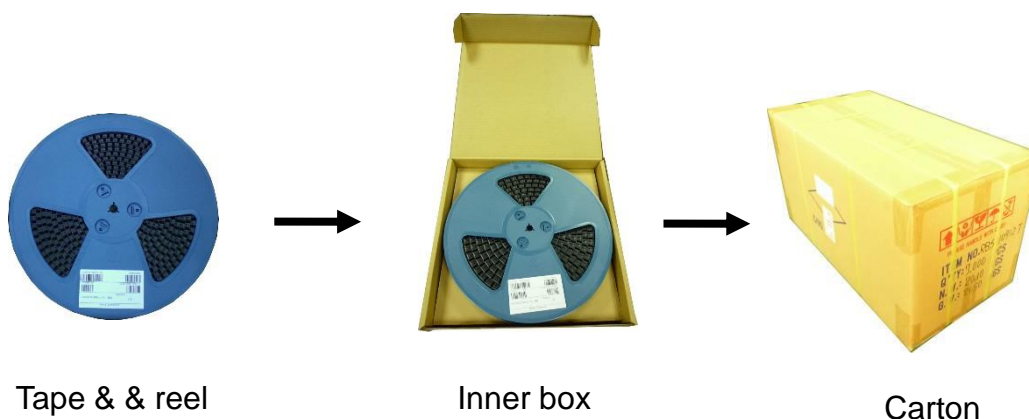

Tilt Sensor Switch

| | | | | | |
|----------|------------|-------------|--------------|---------------|----|
| Item No. | RBS350100T | Description | Ball-Contact | Version | 11 |
| Page | 14 of 15 | | Publish Date | Jul. 03, 2018 | |

● NOTE:

I. Design:

1. Caution should be taken not to overload with instantaneous voltage at the turning ON and OFF of the circuit.
2. When using the pulse drive care must be taken to keep the average current with the rate figures.
3. Avoid close to or direct circuit connect to magnetic devices. (ex: Relay, transformer ...and so on)
4. Don't try to clean the switch with a solvent or similar substance after the soldering process.
5. The switch might be damaged if using the water-soluble flux.

II. Storage:

1. In order to avoid the absorption of moisture, it is recommended to solder as soon as possible after unpacking the sealed bag.
2. If the bag is still sealed, to store it in the environment as following:
 - (1) Temperature: 5°C - 30°C (40°F) ;
Relative humidity: RH 60% MAX.
 - (2) After the packaging bag is opened to perform the IR reflow or soldering process, the necessary conditions are as below:
 - a. Completed within 168 hours
 - b. Stored at less than 30% RH.
 - (3) If parts is being unable to conform to condition of (2)a or (2)b, it must be baking before it goes to welding again.
 - (4) If baking is required, device must be baked under below condition:
48 hours at 60°C +/-3°C.



Tilt Sensor Switch

| | | | | | |
|----------|------------|-------------|--------------|---------------|----|
| Item No. | RBS350100T | Description | Ball-Contact | Version | 11 |
| Page | 15 of 15 | | Publish Date | Jul. 03, 2018 | |

III. Others:

1. If the products is intended to be used for other endurance equipment requiring higher safety and reliability such as life support system, space and aviation devices, disaster and safety system, it's necessary to make verification of conformity or contact us for the details before using.
2. To prevent damaging IR and PT, please make electrostatic protective treatment, for example: wearing a conductive wrist strap or antistatic gloves during production process, grounding machinery etc.

● Remark:

For the continued product improvement as one of the company policy, specifications may change or update without notice. The latest information can be obtained through our sales offices. Normally, all products are supplied under our standard conditions.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.