

2ch VOLTAGE DETECTOR


■ GENERAL DESCRIPTION

The NJU7712/13 is a 2ch low quiescent current voltage detector featuring high precision detection voltage.

The detection voltage is internally fixed with an accuracy of 1.0%.

NJU7712 is Nch. Open Drain and NJU7713 is a C-MOS output type.

■ PACKAGE OUTLINE



NJU7712/13F




NJU7712/13F3


■ FEATURES

- High Precision detection Voltage $\pm 1.0\%$
- Low Quiescent Current $0.8\mu\text{A typ. (per 1ch)}$
- Detection Voltage Range $1.5 \sim 6.0\text{V} (0.1\text{V step})$ It applies only to 1ch(Over Voltage Detect).
 $1.3 \sim 6.0\text{V} (0.1\text{V step})$ It applies only to 2ch(Low Voltage Detect).
- 1ch: Over Voltage Detect, 2ch: Low Voltage Detect
- Output Configuration
 NJU7712: Nch. Open Drain Type
 NJU7713: C-MOS Output Type
- CMOS Technology
- Package Outline SOT-23-5 / SC88A

■ PIN CONFIGURATION

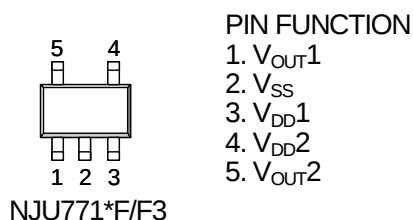

■ EQUIVALENT CIRCUIT

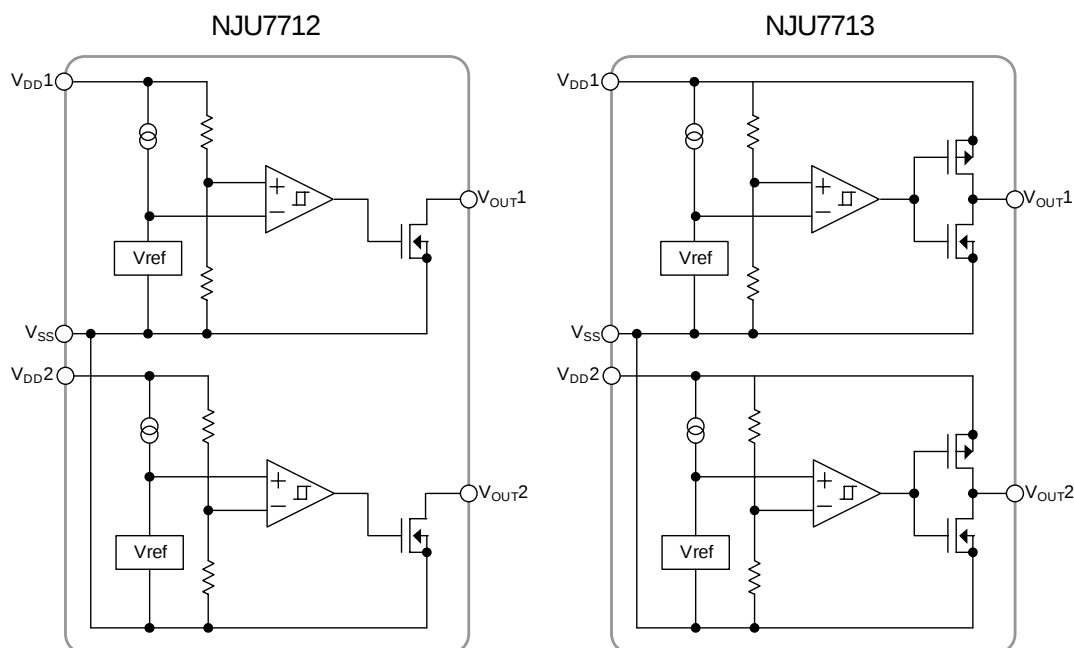

NJU7712/13

■ DETECTION VOLTAGERANK LIST

●NJU7712

Device Name	Package	V _{DET}	
		CH1	CH2
NJU7712F4227	SOT-23-5	4.2V	2.7V
NJU7712F0613		6.0V	1.3V
NJU7712F3-4227	SC88A	4.2V	2.7V
NJU7712F3-0613		6.0V	1.3V

●NJU7713

Device Name	Package	V _{DET}	
		CH1	CH2
NJU7713F0433	SOT-23-5	4.0V	3.3V
NJU7713F4227		4.2V	2.7V
NJU7713F0613		6.0V	1.3V
NJU7713F3-0433	SC88A	4.0V	3.3V
NJU7713F3-4227		4.2V	2.7V
NJU7713F3-0613		6.0V	1.3V

■ NJU7712

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V _{DD}	+10	V
Output Voltage	V _{OUT}	V _{SS} -0.3 ~ +10	V
Output Current	I _{OUT}	50	mA
Power Dissipation	P _D	SOT-23-5	350(*1)
			200(*2)
		SC88A	250(*1)
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +125	°C

(*1) : Mounted on glass epoxy board based on EIA/JEDEC. (114.3x76.2x1.6mm: 2Layers)

(*2) : Device itself

■ ELECTRICAL CHARACTERISTICS

(1ch: Over Voltage Detect, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Detection Voltage	V _{DET1}		-1.0%	—	+1.0%	V
Hysteresis Voltage	V _{HYS1}		V _{DET} ×0.03	V _{DET} ×0.05	V _{DET} ×0.08	V
Quiescent Current	I _{SS1}	V _{DD1} =V _{DET1} +1V	V _{DET1} =1.5V ~ 1.7V Version	—	0.5	1.0
			V _{DET1} =1.8V ~ 6.0V Version	—	0.8	1.6
Output Current	I _{OUT1}	Nch, V _{DS1} =0.5V	V _{DD1} =4.8V(≤4.3V Version)	6	13	—
			V _{DD1} =7.0V	8	18	—
Output Leak Current	I _{LEAK1}	V _{DD1} =1V, V _{OUT1} =9V	—	—	0.1	μA
Detection Voltage Temperature Coefficient	ΔV _{DET1} /ΔTa	Ta=0 ~ +85°C	—	±100	—	ppm/°C
Operating Voltage (*3)	V _{DD1}	R _{L1} =100kΩ	0.8	—	9	V

(*3): The minimum Operating Voltage(V_{OPL}) indicates the same value of the output voltage(V_{OUT}) on condition that V_{OUT} becomes 90% or less of the input voltage(V_{DD}).


(2ch: Low Voltage Detect, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Detection Voltage	V _{DET2}		-1.0%	—	+1.0%	V
Hysteresis Voltage	V _{HYS2}		V _{DET} ×0.03	V _{DET} ×0.05	V _{DET} ×0.08	V
Quiescent Current	I _{SS2}	V _{DD2} =V _{DET2} +1V	V _{DET2} =1.3V ~ 1.7V Version	—	0.5	1.0
			V _{DET2} =1.8V ~ 6.0V Version	—	0.8	1.6
Output Current	I _{OUT2}	Nch, V _{DS2} =0.5V	V _{DD2} =1.2V	0.75	2.0	—
			V _{DD2} =2.4V (≥2.7V Version)	4.5	7.0	—
Output Leak Current	I _{LEAK2}	V _{DD2} =V _{OUT2} =9V	—	—	0.1	μA
Detection Voltage Temperature Coefficient	ΔV _{DET2} /ΔTa	Ta=0 ~ +85°C	—	±100	—	ppm/°C
Operating Voltage (*4)	V _{DD2}	R _{L2} =100kΩ	0.8	—	9	V


(*4): The minimum Operating Voltage(V_{OPL}) indicates the same value of the output voltage(V_{OUT}) on condition that V_{OUT} becomes 10% or less of the input voltage(V_{DD}).

■ TEST CIRCUIT

① COMMON TEST CIRCUIT

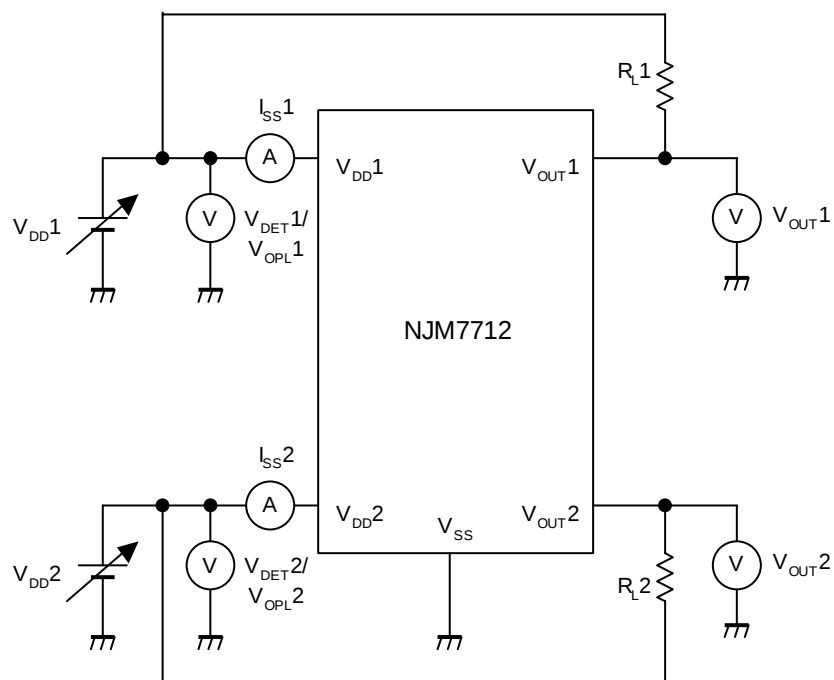


② OUTPUT CURRENT / LEAK CURRENT TEST CIRCUIT

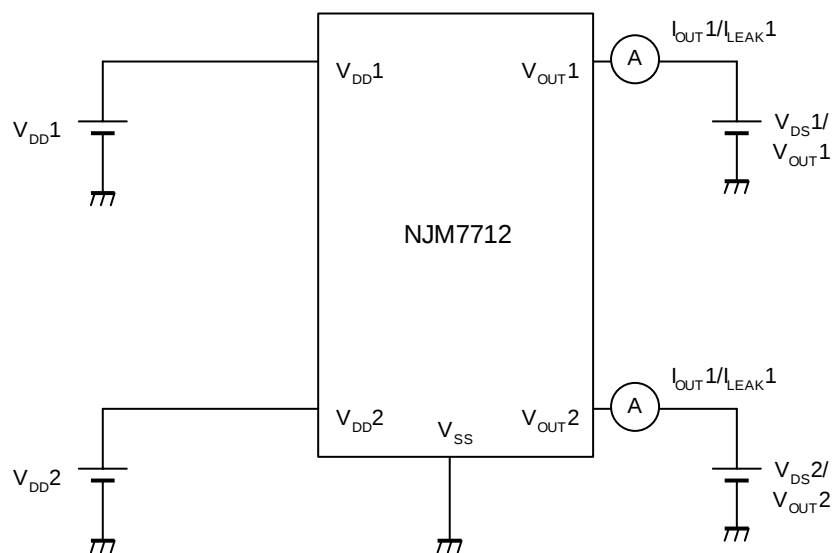


■ TYPICAL APPLICATION

① Battery voltage supervision

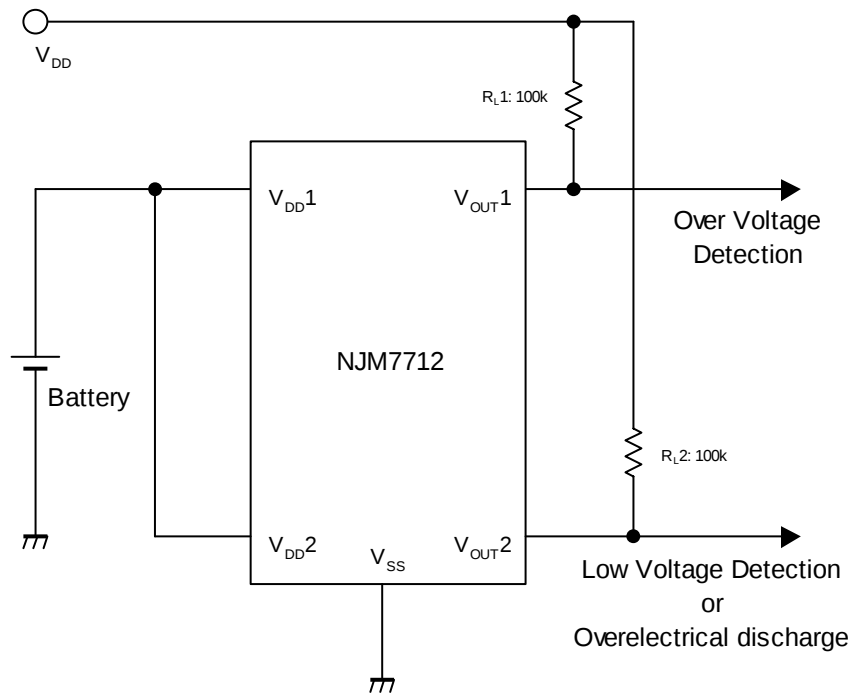

② Window Comparator

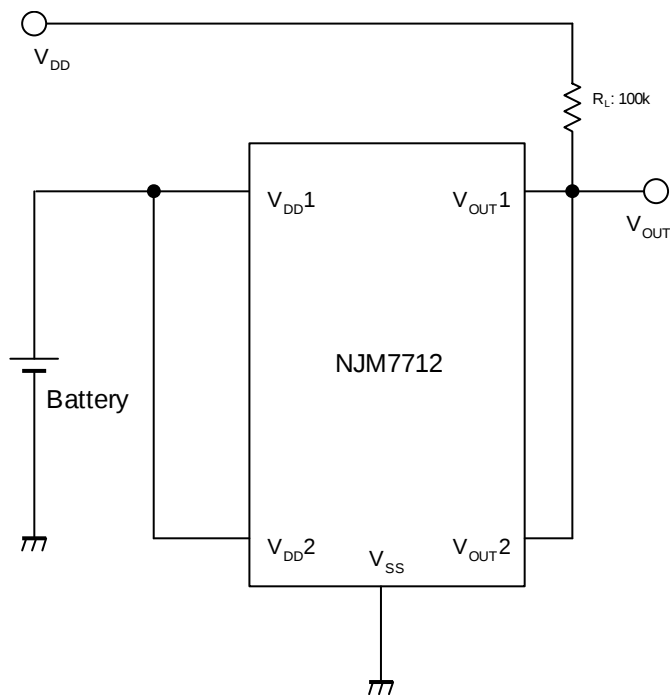

NJU7712/13

■ NJU7713

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{DD}	+10	V
Output Voltage	V_{OUT}	$V_{SS}-0.3 \sim +10$	V
Output Current	I_{OUT}	50	mA
Power Dissipation	P_D	SOT-23-5	350(*5)
			200(*6)
		SC88A	250(*5)
Operating Temperature	T_{opr}	-40 ~ +85	°C
Storage Temperature	T_{stg}	-40 ~ +125	°C

(*5) : Mounted on glass epoxy board based on EIA/JEDEC. (114.3x76.2x1.6mm: 2Layers)

(*6) : Device itself

■ ELECTRICAL CHARACTERISTICS

(1ch: Over Voltage Detect, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Detection Voltage	V_{DET1}		-1.0%	—	+1.0%	V
Hysteresis Voltage	V_{HYS1}		$V_{DET} \times 0.03$	$V_{DET} \times 0.05$	$V_{DET} \times 0.08$	V
Quiescent Current	I_{SS1}	$V_{DD1}=V_{DET1}+1V$	$V_{DET1}=1.5V \sim 1.7V$ Version	0.5	1.0	μA
			$V_{DET1}=1.8V \sim 6.0V$ Version	0.8	1.6	μA
Output Current	I_{OUT1}	Nch, $V_{DS1}=0.5V$	$V_{DD1}=4.8V(\leq 4.3V$ Version)	6	13	mA
			$V_{DD1}=7.0V$	8	18	mA
		Pch, $V_{DS1}=0.5V$	$V_{DD1}=1.4V$	0.1	0.4	mA
			$V_{DD1}=2.4V(\geq 2.7V$ Version)	0.6	1.6	mA
Detection Voltage Temperature Coefficient	$\Delta V_{DET1}/\Delta T_a$	$T_a=0 \sim +85^\circ C$	—	±100	—	ppm/°C
Operating Voltage (*7)	V_{DD1}	$R_L1=100k\Omega$	1.2	—	9	V

(*7): The minimum Operating Voltage(V_{OPL}) indicates the same value of the output voltage(V_{OUT}) on condition that V_{OUT} becomes 90% or less of the input voltage(V_{DD}).


(2ch: Low Voltage detect, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Detection Voltage	V_{DET2}		-1.0%	—	+1.0%	V
Hysteresis Voltage	V_{HYS2}		$V_{DET} \times 0.03$	$V_{DET} \times 0.05$	$V_{DET} \times 0.08$	V
Quiescent Current	I_{SS2}	$V_{DD2}=V_{DET2}+1V$	$V_{DET2}=1.3V \sim 1.7V$ Version	0.5	1.0	μA
			$V_{DET2}=1.8V \sim 6.0V$ Version	0.8	1.6	μA
Output Current	I_{OUT2}	Nch, $V_{DS2}=0.5V$	$V_{DD2}=4.8V(\leq 4.3V$ Version)	0.75	2.0	mA
			$V_{DD2}=7.0V$	4.5	7.0	mA
		Pch, $V_{DS2}=0.5V$	$V_{DD2}=1.4V$	2.0	3.5	mA
			$V_{DD2}=2.4V$ (4.0V~5.6V Version)	2.5	4.0	mA
			$V_{DD2}=8.4V (\geq 5.7V$ Version)	3.0	5.0	mA
Detection Voltage Temperature Coefficient	$\Delta V_{DET2}/\Delta T_a$	$T_a=0 \sim +85^\circ C$	—	±100	—	ppm/°C
Operating Voltage (*8)	V_{DD2}	$R_L2=100k\Omega$	0.8	—	9	V


(*8): The minimum Operating Voltage(V_{OPL}) indicates the same value of the output voltage(V_{OUT}) on condition that V_{OUT} becomes 10% or less of the input voltage(V_{DD}).

■ TEST CIRCUIT


① COMMON TEST CIRCUIT

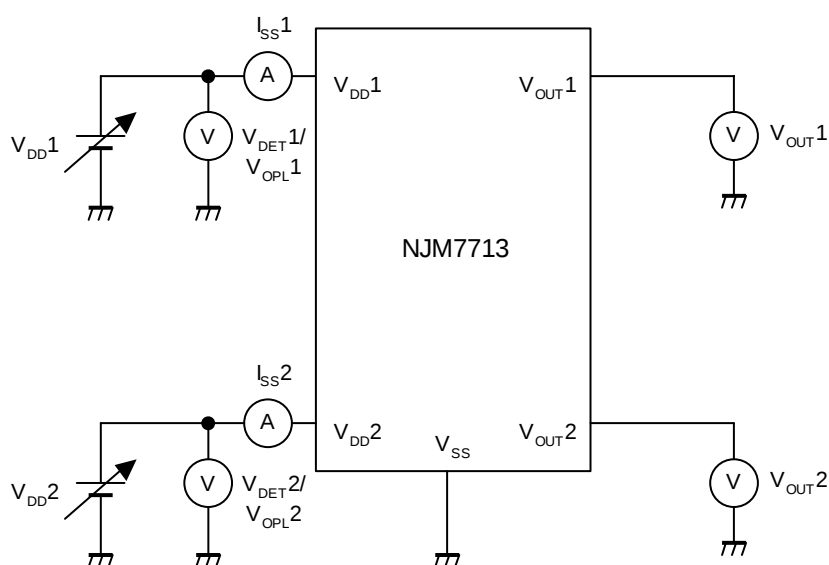


② Nch OUTPUT CURRENT TEST CIRCUIT

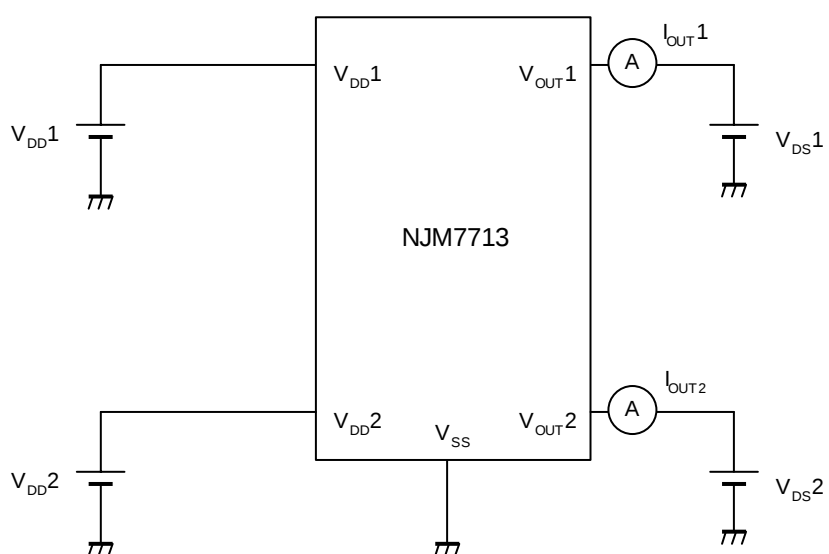

③ Pch OUTPUT CURRENT TEST CIRCUIT

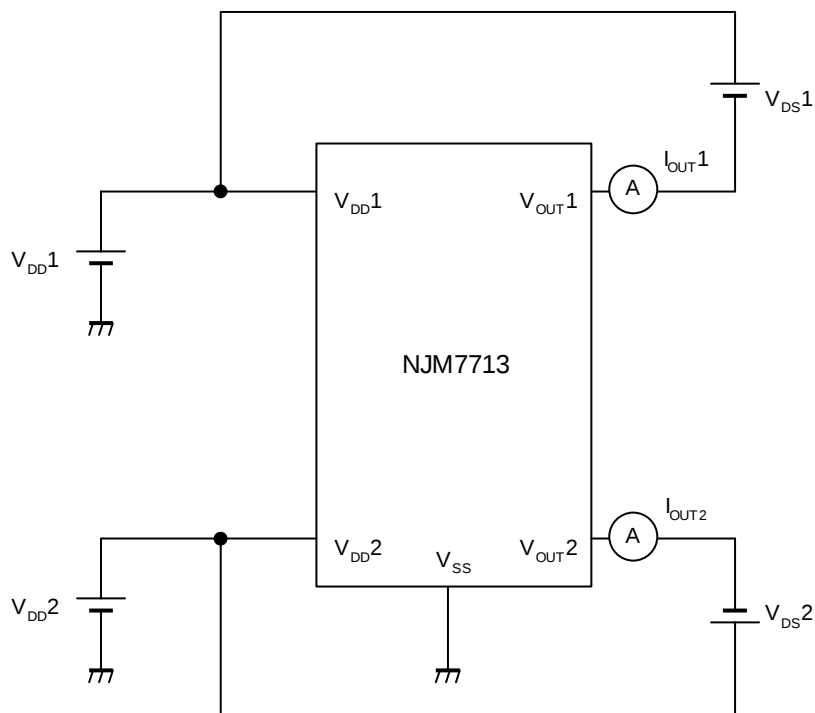


④ MINIMUM OPERATING VOLTAGE TEST CIRCUIT

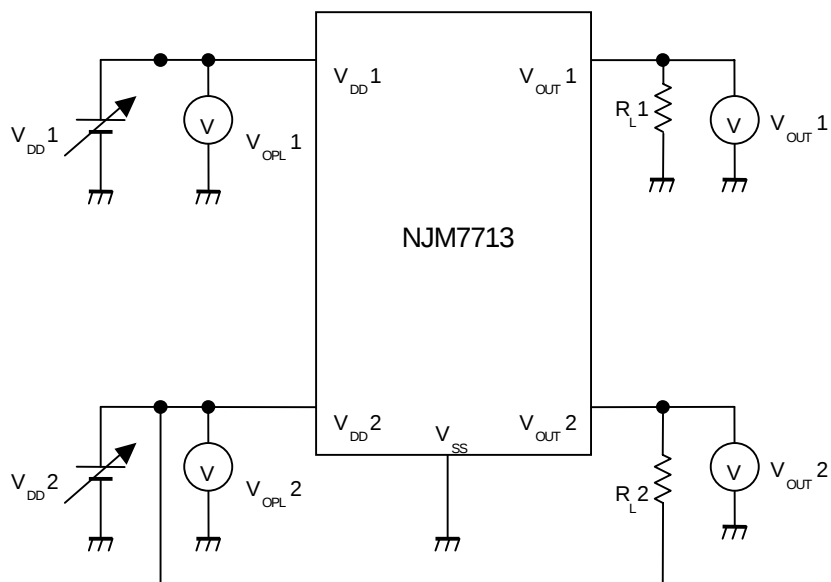

■ TYPICAL APPLICATION

① Battery voltage supervision

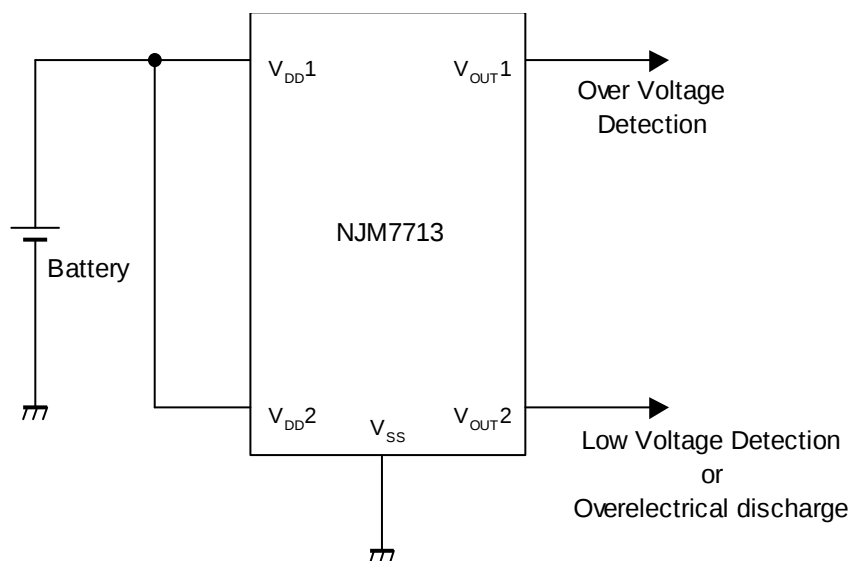

[CAUTION]
 The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJU7712F3-4227-TE1](#) [NJU7712F0613-TE1](#) [NJU7713F4227-TE1](#) [NJU7712F4227-TE1](#) [NJU7713F3-0613-TE1](#)
[NJU7713F0613-TE1](#) [NJU7712F3-0613-TE1](#) [NJU7713F3-4227-TE1](#) [NJU7713F0433-TE1](#) [NJU7713F3-0433-TE1](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.