



# SC70, Single/Dual Low-Voltage, Low-Power $\mu$ P Reset Circuits

**MAX6381–MAX6390**

## General Description

The MAX6381–MAX6390 microprocessor ( $\mu$ P) supervisory circuits monitor power supply voltages from +1.8V to +5.0V while consuming only 3 $\mu$ A of supply current at +1.8V. Whenever  $V_{CC}$  falls below the factory-set reset thresholds, the reset output asserts and remains asserted for a minimum reset timeout period after  $V_{CC}$  rises above the reset threshold. Reset thresholds are available from +1.58V to +4.63V, in approximately 100mV increments. Seven minimum reset timeout delays ranging from 1ms to 1200ms are available.


The MAX6381/MAX6384/MAX6387 have a push-pull active-low reset output. The MAX6382/MAX6385/MAX6388 have a push-pull active-high reset output, and the MAX6383/MAX6386/MAX6389/MAX6390 have an open-drain active-low reset output. The MAX6384/MAX6385/MAX6386 also feature a debounced manual reset input (with internal pullup resistor). The MAX6387/MAX6388/MAX6389 have an auxiliary input for monitoring a second voltage. The MAX6390 offers a manual reset input with a longer  $V_{CC}$  reset timeout period (1120ms or 1200ms) and a shorter manual reset timeout (140ms or 150ms).

The MAX6381/MAX6382/MAX6383 are available in 3-pin SC70 packages and the MAX6384–MAX6390 are available in 4-pin SC70 packages.

## Applications

Computers  
Controllers  
Intelligent Instruments  
Critical  $\mu$ P and  $\mu$ C Power Monitoring  
Portable/Battery-Powered Equipment  
Dual Voltage Systems

## Pin Configurations

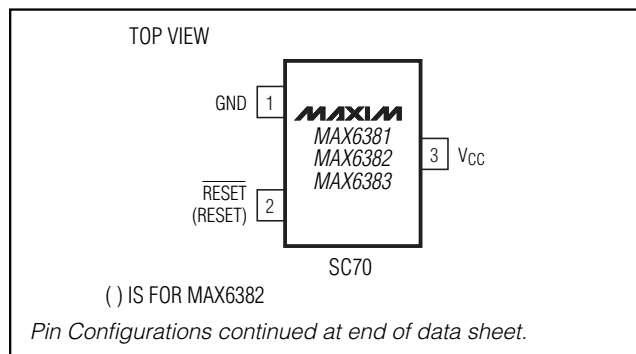

## Features

- ◆ Factory-Set Reset Threshold Voltages Ranging from +1.58V to +4.63V in Approximately 100mV Increments
- ◆  $\pm 2.5\%$  Reset Threshold Accuracy Over Temperature ( $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ )
- ◆ Seven Reset Timeout Periods Available: 1ms, 20ms, 140ms, 280ms, 560ms, 1120ms, 1200ms (min)
- ◆ 3 Reset Output Options
  - Active-Low Push-Pull
  - Active-High Push-Pull
  - Active-Low Open-Drain
- ◆ Reset Output State Guaranteed Valid Down to  $V_{CC} = 1\text{V}$
- ◆ Manual Reset Input (MAX6384/MAX6385/MAX6386)
- ◆ Auxiliary RESET IN (MAX6387/MAX6388/MAX6389)
- ◆  $V_{CC}$  Reset Timeout (1120ms or 1200ms)/Manual Reset Timeout (140ms or 150ms) (MAX6390)
- ◆ Negative-Going  $V_{CC}$  Transient Immunity
- ◆ Low Power Consumption of 6 $\mu$ A at +3.6V and 3 $\mu$ A at +1.8V
- ◆ Pin Compatible with
  - MAX809/MAX810/MAX803/MAX6326/MAX6327/
  - MAX6328/MAX6346/MAX6347/MAX6348,
  - and MAX6711/MAX6712/MAX6713
- ◆ Tiny 3-Pin SC70 and 4-Pin SC70 Packages

## Ordering Information

| PART          | TEMP. RANGE                                     | PIN-PACKAGE |
|---------------|-------------------------------------------------|-------------|
| MAX6381XR_D-T | $-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ | 3 SC70-3    |
| MAX6382XR_D-T | $-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ | 3 SC70-3    |
| MAX6383XR_D-T | $-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ | 3 SC70-3    |

**Note:** Insert reset threshold suffix (see Reset Threshold table) after "XR" or "XS". Insert reset timeout delay (see Reset Timeout Delay table) after "D" to complete the part number. Sample stock is generally held on standard versions only (see Standard Versions table). Standard versions have an order increment requirement of 2500 pieces. Nonstandard versions have an order increment requirement of 10,000 pieces. Contact factory for availability of nonstandard versions.

\*MAX6390 is available with D4 or D7 timing only.

**Ordering Information continued at end of data sheet.**

**Typical Operating Circuit appears at end of data sheet.**  
**Selector Guide appears at end of data sheet.**



# SC70, Single/Dual Low-Voltage, Low-Power $\mu$ P Reset Circuits

## ABSOLUTE MAXIMUM RATINGS

$V_{CC}$  to GND .....-0.3V to +6.0V  
 $\overline{\text{RESET}}$  Open-Drain Output .....-0.3V to +6.0V  
 $\overline{\text{RESET}}$ , RESET (Push-Pull Output) .....-0.3V to ( $V_{CC}$  + 0.3V)  
 $\overline{\text{MR}}$ , RESET IN .....-0.3V to ( $V_{CC}$  + 0.3V)  
 Input Current ( $V_{CC}$ ) .....20mA  
 Output Current (All Pins) .....20mA

Continuous Power Dissipation ( $T_A = +70^\circ\text{C}$ )  
   3-Pin SC70 (derate 2.9mW/ $^\circ\text{C}$  above  $+70^\circ\text{C}$ ) .....235mW  
   4-Pin SC70 (derate 3.1mW/ $^\circ\text{C}$  above  $+70^\circ\text{C}$ ) .....245mW  
 Operating Temperature Range .....-40 $^\circ\text{C}$  to +125 $^\circ\text{C}$   
 Storage Temperature Range .....-65 $^\circ\text{C}$  to +150 $^\circ\text{C}$   
 Lead Temperature (soldering, 10s) .....+300 $^\circ\text{C}$

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS

( $V_{CC}$  = full range,  $T_A = -40^\circ\text{C}$  to +125 $^\circ\text{C}$ , unless otherwise specified. Typical values are at  $T_A = +25^\circ\text{C}$ .) (Note 1)

| PARAMETER                                                            | SYMBOL                         | CONDITIONS                                                                                      | MIN              | TYP      | MAX                 | UNITS                 |
|----------------------------------------------------------------------|--------------------------------|-------------------------------------------------------------------------------------------------|------------------|----------|---------------------|-----------------------|
| Operating Voltage Range                                              | $V_{CC}$                       |                                                                                                 | 1.0              |          | 5.5                 | V                     |
| $V_{CC}$ Supply Current                                              | $I_{CC}$                       | $V_{CC} = 5.5\text{V}$ , no load                                                                |                  | 7        | 13                  | $\mu\text{A}$         |
|                                                                      |                                | $V_{CC} = 3.6\text{V}$ , no load                                                                |                  | 6        | 11                  |                       |
|                                                                      |                                | $V_{CC} = 2.5\text{V}$ , no load                                                                |                  | 4        | 7                   |                       |
|                                                                      |                                | $V_{CC} = 1.8\text{V}$ , no load                                                                |                  | 3        | 6                   |                       |
| $V_{CC}$ Reset Threshold<br>(See Reset Thresholds table)             | $V_{TH}$                       | $T_A = +25^\circ\text{C}$                                                                       | $V_{TH} - 1.5\%$ | $V_{TH}$ | $V_{TH} + 1.5\%$    | V                     |
|                                                                      |                                | $T_A = -40^\circ\text{C}$ to +125 $^\circ\text{C}$                                              | $V_{TH} - 2.5\%$ | $V_{TH}$ | $V_{TH} + 2.5\%$    |                       |
| Reset Threshold Tempco                                               | $\Delta V_{TH}/^\circ\text{C}$ |                                                                                                 |                  | 60       |                     | ppm/ $^\circ\text{C}$ |
| $V_{CC}$ to Reset Delay                                              |                                | $V_{CC}$ falling at 10mV/ $\mu\text{s}$ from $V_{TH} + 100\text{mV}$ to $V_{TH} - 100\text{mV}$ |                  | 35       |                     | $\mu\text{s}$         |
| Reset Timeout Period<br>MAX6381-MAX6389<br>(See Reset Timeout table) | $t_{RP}$                       | D1                                                                                              | 1                |          | 2                   | ms                    |
|                                                                      |                                | D2                                                                                              | 20               |          | 40                  |                       |
|                                                                      |                                | D3                                                                                              | 140              |          | 280                 |                       |
|                                                                      |                                | D5                                                                                              | 280              |          | 560                 |                       |
|                                                                      |                                | D6                                                                                              | 560              |          | 1120                |                       |
|                                                                      |                                | D4                                                                                              | 1120             |          | 2240                |                       |
|                                                                      |                                | D7                                                                                              | 1200             |          | 2400                |                       |
| Reset Timeout Period<br>MAX6390                                      | $t_{RP}$                       | $\overline{\text{MR}}$ timeout period                                                           | D4               | 140      | 280                 | ms                    |
|                                                                      |                                |                                                                                                 | D7               | 150      | 300                 |                       |
|                                                                      |                                | $V_{CC}$ timeout period                                                                         | D4               | 1120     | 2240                |                       |
|                                                                      |                                |                                                                                                 | D7               | 1200     | 2400                |                       |
| $\overline{\text{MR}}$ Input Voltage                                 | $V_{IL}$                       | $V_{TH} < 4\text{V}$                                                                            |                  |          | $0.3 \times V_{CC}$ | V                     |
|                                                                      | $V_{IH}$                       |                                                                                                 |                  |          | $0.7 \times V_{CC}$ |                       |
|                                                                      | $V_{IL}$                       | $V_{TH} > 4\text{V}$                                                                            |                  |          | 0.8                 |                       |
|                                                                      | $V_{IH}$                       |                                                                                                 |                  |          | 2.4                 |                       |

# SC70, Single/Dual Low-Voltage, Low-Power $\mu$ P Reset Circuits

MAX6381-MAX6390

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{CC}$  = full range,  $T_A$  = -40°C to +125°C, unless otherwise specified. Typical values are at  $T_A$  = +25°C.) (Note 1)









| PARAMETER                                            | SYMBOL        | CONDITIONS                                                                          | MIN                 | TYP     | MAX   | UNITS     |
|------------------------------------------------------|---------------|-------------------------------------------------------------------------------------|---------------------|---------|-------|-----------|
| $\overline{MR}$ Minimum Input Pulse Width            |               |                                                                                     | 1                   |         |       | $\mu$ s   |
| $\overline{MR}$ Glitch Rejection                     |               |                                                                                     |                     | 100     |       | ns        |
| $\overline{MR}$ to Reset Delay                       |               |                                                                                     |                     | 200     |       | ns        |
| $\overline{MR}$ Internal Pullup Resistance           |               | MAX6381-MAX6389                                                                     | 32                  | 63      | 100   | $k\Omega$ |
|                                                      |               | MAX6390                                                                             | 800                 | 1350    | 2300  | $\Omega$  |
| Reset IN Input Threshold                             | $V_{THRST}$   | $T_A$ = +25°C                                                                       | 1.245               | 1.27    | 1.295 | V         |
|                                                      |               | $T_A$ = 0°C to +85°C                                                                | 1.232               |         | 1.308 |           |
|                                                      |               | $T_A$ = -40°C to +125°C                                                             | 1.219               |         | 1.321 |           |
| RESET IN to RESET Delay                              |               | $V_{RESETIN}$ falling at 4mV/ $\mu$ s from $V_{THRST}$ + 40mV to $V_{THRST}$ - 40mV |                     | 4.5     |       | $\mu$ s   |
| RESET IN Input Leakage Current                       | $I_{RESETIN}$ |                                                                                     | -50                 | $\pm 1$ | +50   | nA        |
| Open-Drain $\overline{RESET}$ Output Voltage         | $V_{OL}$      | $V_{CC} \geq 4.5V$ , $I_{SINK} = 3.2mA$ , reset asserted                            |                     |         | 0.4   | V         |
|                                                      |               | $V_{CC} \geq 2.5V$ , $I_{SINK} = 1.2mA$ , reset asserted                            |                     |         | 0.3   |           |
|                                                      |               | $V_{CC} \geq 1.0V$ , $I_{SINK} = 80\mu A$ , reset asserted                          |                     |         | 0.3   |           |
| Open-Drain $\overline{RESET}$ Output Leakage Current | $I_{LKG}$     | $V_{CC} > V_{TH}$ , $\overline{RESET}$ not asserted                                 |                     |         | 1.0   | $\mu A$   |
| Push-Pull $\overline{RESET}$ Output Voltage          | $V_{OL}$      | $V_{CC} \geq 4.5V$ , $I_{SINK} = 3.2mA$ , reset asserted                            |                     |         | 0.4   | V         |
|                                                      |               | $V_{CC} \geq 2.5V$ , $I_{SINK} = 1.2mA$ , reset asserted                            |                     |         | 0.3   |           |
|                                                      |               | $V_{CC} \geq 1.0V$ , $I_{SINK} = 80\mu A$ , reset asserted                          |                     |         | 0.3   |           |
|                                                      | $V_{OH}$      | $V_{CC} \geq 4.5V$ , $I_{SOURCE} = 800\mu A$ , reset not asserted                   | $0.8 \times V_{CC}$ |         |       |           |
|                                                      |               | $V_{CC} \geq 2.5V$ , $I_{SOURCE} = 500\mu A$ , reset not asserted                   | $0.8 \times V_{CC}$ |         |       |           |
|                                                      |               | $V_{CC} \geq 1.0V$ , $I_{SOURCE} = 1\mu A$ , reset asserted                         | $0.8 \times V_{CC}$ |         |       |           |
| Push-Pull RESET Output Voltage                       | $V_{OH}$      | $V_{CC} \geq 4.5V$ , $I_{SOURCE} = 800\mu A$ , reset asserted                       | $0.8 \times V_{CC}$ |         |       | V         |
|                                                      |               | $V_{CC} \geq 2.5V$ , $I_{SOURCE} = 500\mu A$ , reset asserted                       | $0.8 \times V_{CC}$ |         |       |           |
|                                                      |               | $V_{CC} \geq 1.8V$ , $I_{SOURCE} = 150\mu A$ , reset asserted                       | $0.8 \times V_{CC}$ |         |       |           |
|                                                      |               | $V_{CC} \geq 1.0V$ , $I_{SOURCE} = 1\mu A$ , reset asserted                         | $0.8 \times V_{CC}$ |         |       |           |
|                                                      | $V_{OL}$      | $V_{CC} \geq 4.5V$ , $I_{SINK} = 3.2mA$ , reset not asserted                        |                     |         | 0.4   |           |
|                                                      |               | $V_{CC} \geq 2.5V$ , $I_{SINK} = 1.2mA$ , reset not asserted                        |                     |         | 0.3   |           |

**Note 1:** Specifications over temperature are guaranteed by design, not production tested.

# SC70, Single/Dual Low-Voltage, Low-Power $\mu$ P Reset Circuits

## Typical Operating Characteristics

( $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

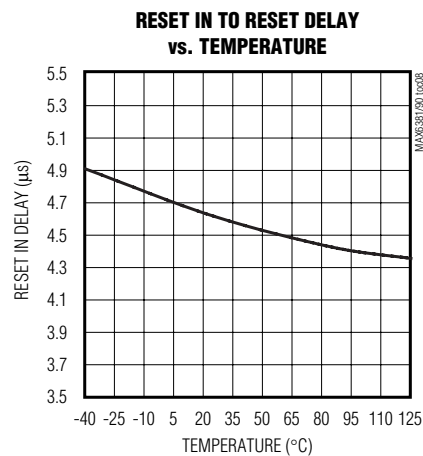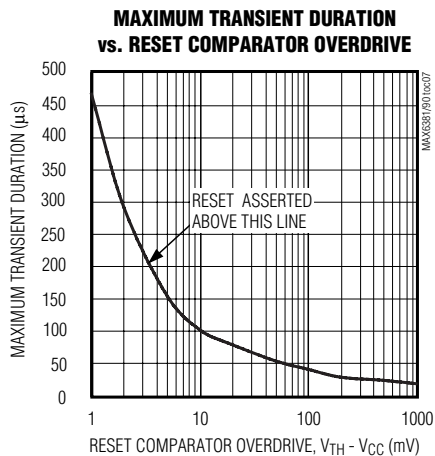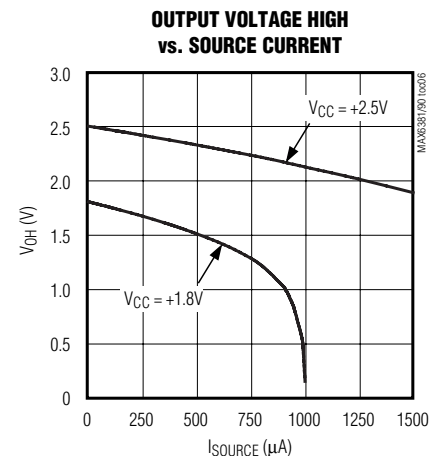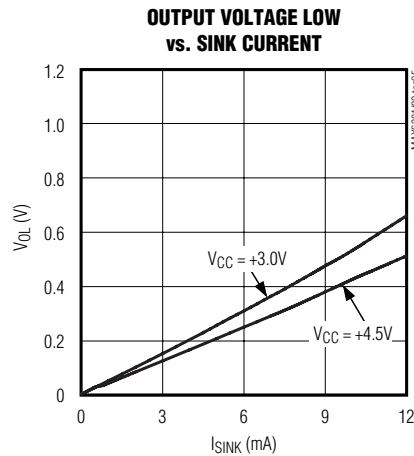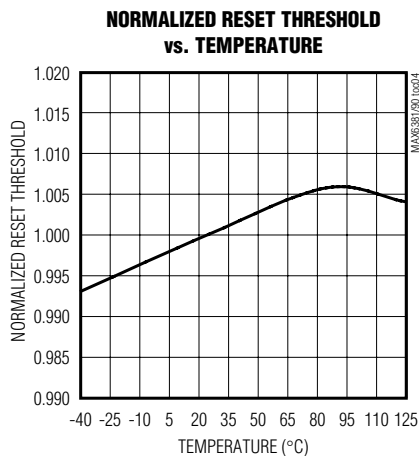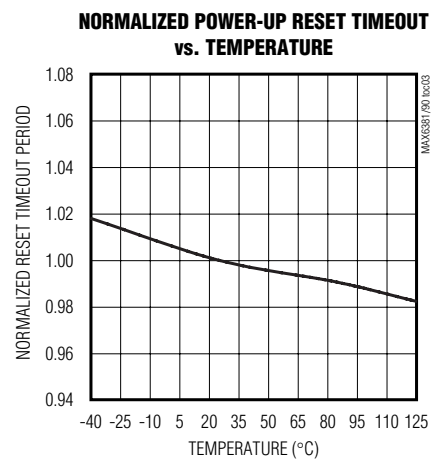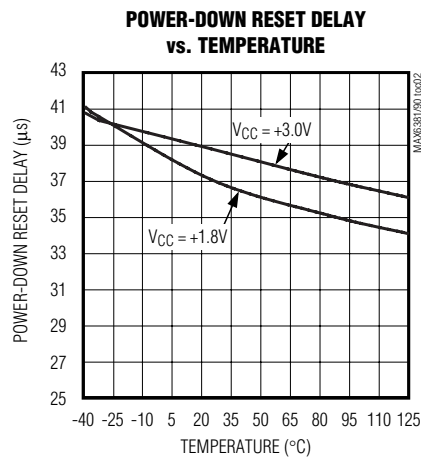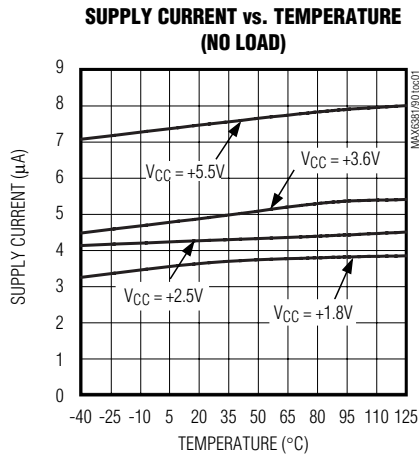

# SC70, Single/Dual Low-Voltage, Low-Power $\mu$ P Reset Circuits

## Pin Description

MAX6381-MAX6390

| PIN                 |         |                                 |         |                     |         | NAME               | FUNCTION                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------|---------|---------------------------------|---------|---------------------|---------|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MAX6381/<br>MAX6383 | MAX6382 | MAX6384/<br>MAX6386/<br>MAX6390 | MAX6385 | MAX6387/<br>MAX6389 | MAX6388 |                    |                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 1                   | 1       | 1                               | 1       | 1                   | 1       | GND                | Ground                                                                                                                                                                                                                                                                                                                                                                                                                     |
| —                   | 2       | —                               | 2       | —                   | 2       | RESET              | Active-High Push-Pull Reset Output. RESET changes from low to high when any monitored voltage ( $V_{CC}$ or $V_{RESETIN}$ ) drops below the reset threshold or $\overline{MR}$ is pulled low. RESET remains high for the reset timeout period after monitored voltages exceed the reset thresholds or $\overline{MR}$ is released.                                                                                         |
| 2                   | —       | 2                               | —       | 2                   | —       | $\overline{RESET}$ | Active-Low Open-Drain/Push-Pull Reset Output. $\overline{RESET}$ changes from high to low when any monitored voltage ( $V_{CC}$ or $V_{RESETIN}$ ) drops below the reset threshold or $\overline{MR}$ is pulled low. $\overline{RESET}$ remains low for the reset timeout period after the monitored voltages exceed the reset thresholds or $\overline{MR}$ is released. Open-drain requires an external pullup resistor. |
| —                   | —       | 3                               | 3       | —                   | —       | $\overline{MR}$    | Active-Low Manual Reset Input. Drive low to force a reset. Reset remains active as long as $\overline{MR}$ is low and for the reset timeout period after $\overline{MR}$ is released. Leave unconnected or connect to $V_{CC}$ if unused. $\overline{MR}$ has an internal $63k\Omega$ ( $1.35k\Omega$ for MAX6390) pullup resistor to $V_{CC}$ .                                                                           |
| —                   | —       | —                               | —       | 3                   | 3       | RESET IN           | Auxiliary Reset Input. High-impedance input to the auxiliary reset comparator. Connect RESET IN to the center point of an external resistor voltage-divider network to set the reset threshold voltage. Reset asserts when either $V_{CC}$ or RESET IN falls below its threshold voltage.                                                                                                                                  |
| 3                   | 3       | 4                               | 4       | 4                   | 4       | $V_{CC}$           | Supply Voltage for the device and input for fixed $V_{CC}$ reset threshold monitor.                                                                                                                                                                                                                                                                                                                                        |

# SC70, Single/Dual Low-Voltage, Low-Power $\mu$ P Reset Circuits

## Detailed Description

### RESET Output

A  $\mu$ P reset input starts the  $\mu$ P in a known state. These  $\mu$ P supervisory circuits assert reset to prevent code execution errors during power-up, power-down, or brownout conditions.

Reset asserts when  $V_{CC}$  is below the reset threshold; once  $V_{CC}$  exceeds the reset threshold, an internal timer keeps the reset output asserted for the reset timeout period. After this interval, reset output deasserts. Reset output is guaranteed to be in the correct logic state for  $V_{CC} \geq 1V$ .

### Manual Reset Input (MAX6384/MAX6385/MAX6386/MAX6390)

Many  $\mu$ P-based products require manual reset capability, allowing the operator, a test technician, or external logic circuitry to initiate a reset. A logic low on  $\overline{MR}$  asserts reset. Reset remains asserted while  $\overline{MR}$  is low, and for the reset active timeout period ( $t_{RP}$ ) after  $\overline{MR}$  returns high. This input has an internal 63k $\Omega$  pullup resistor (1.35k $\Omega$  for MAX6390), so it can be left unconnected if it is not used.  $\overline{MR}$  can be driven with TTL or CMOS logic levels, or with open-drain/collector outputs. Connect a normally open momentary switch from  $\overline{MR}$  to GND to create a manual-reset function; external debounce circuitry is not required. If  $\overline{MR}$  is driven from long cables or if the device is used in a noisy environment, connecting a 0.1 $\mu$ F capacitor from  $\overline{MR}$  to GND provides additional noise immunity.

### RESET IN Comparator (MAX6387/MAX6388/MAX6389)

RESET IN is compared to an internal +1.27V reference. If the voltage at RESET IN is less than 1.27V, reset asserts. Use the RESET IN comparator as a user-adjustable reset detector or as a secondary power-supply monitor by implementing a resistor-divider at RESET IN (shown in Figure 1). Reset asserts when either  $V_{CC}$  or RESET IN falls below its respective threshold voltage. Use the following equation to set the threshold:

$$V_{INTH} = V_{THRST} (R1/R2 + 1)$$

where  $V_{THRST} = +1.27V$ . To simplify the resistor selection, choose a value of  $R2$  and calculate  $R1$ :

$$R1 = R2 [(V_{INTH}/V_{THRST}) - 1]$$

Since the input current at RESET IN is 50nA (max), large values can be used for  $R2$  with no significant loss in accuracy.

## Reset Thresholds (-40°C to +125°C)

| SUFFIX | $V_{TH}$ (min) | $V_{TH}$ (nom) | $V_{TH}$ (max) |
|--------|----------------|----------------|----------------|
| 46     | 4.51           | 4.63           | 4.74           |
| 45     | 4.39           | 4.50           | 4.61           |
| 44     | 4.27           | 4.38           | 4.48           |
| 43     | 4.19           | 4.30           | 4.41           |
| 42     | 4.10           | 4.20           | 4.31           |
| 41     | 4.00           | 4.10           | 4.20           |
| 40     | 3.90           | 4.00           | 4.10           |
| 39     | 3.80           | 3.90           | 4.00           |
| 38     | 3.71           | 3.80           | 3.90           |
| 37     | 3.61           | 3.70           | 3.79           |
| 36     | 3.51           | 3.60           | 3.69           |
| 35     | 3.41           | 3.50           | 3.59           |
| 34     | 3.32           | 3.40           | 3.49           |
| 33     | 3.22           | 3.30           | 3.38           |
| 32     | 3.12           | 3.20           | 3.28           |
| 31     | 3.00           | 3.08           | 3.15           |
| 30     | 2.93           | 3.00           | 3.08           |
| 29     | 2.85           | 2.93           | 3.00           |
| 28     | 2.73           | 2.80           | 2.87           |
| 27     | 2.63           | 2.70           | 2.77           |
| 26     | 2.56           | 2.63           | 2.69           |
| 25     | 2.44           | 2.50           | 2.56           |
| 24     | 2.34           | 2.40           | 2.46           |
| 23     | 2.26           | 2.31           | 2.37           |
| 22     | 2.13           | 2.19           | 2.24           |
| 21     | 2.05           | 2.10           | 2.15           |
| 20     | 1.95           | 2.00           | 2.05           |
| 19     | 1.85           | 1.90           | 1.95           |
| 18     | 1.76           | 1.80           | 1.85           |
| 17     | 1.62           | 1.67           | 1.71           |
| 16     | 1.54           | 1.58           | 1.61           |

## Applications Information

### Negative-Going $V_{CC}$ Transients

In addition to issuing a reset to the  $\mu$ P during power-up, power-down, and brownout conditions, the MAX6381–MAX6390 are relatively immune to short duration negative-going  $V_{CC}$  transients (glitches).

The *Typical Operating Characteristics* section shows the Maximum Transient Durations vs. Reset Comparator Overdrive, for which the MAX6381–MAX6390 do not generate a reset pulse. This graph was generated using

# SC70, Single/Dual Low-Voltage, Low-Power $\mu$ P Reset Circuits

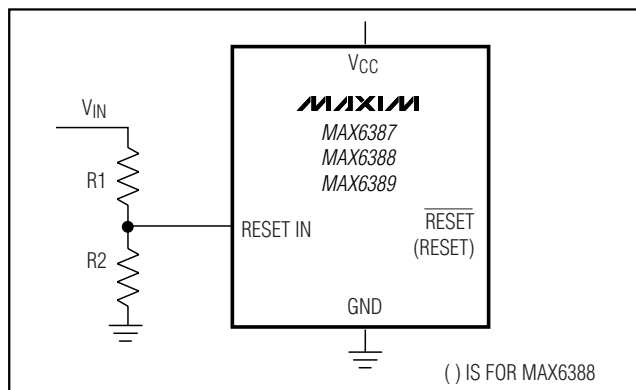


Figure 1. RESET IN Configuration

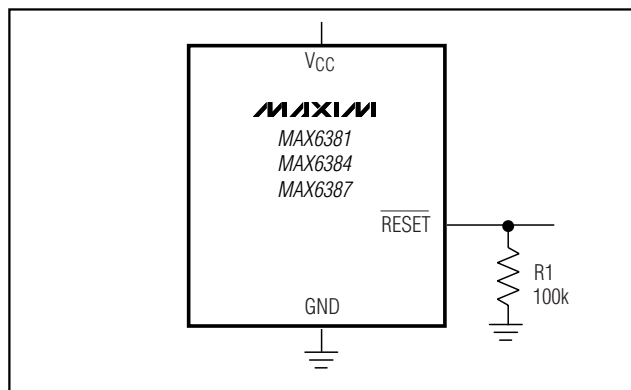


Figure 2. RESET Valid to  $V_{CC}$  = Ground Circuit

## Reset Timeout Delay

| SUFFIX      | MIN          |
|-------------|--------------|
| D1          | 1ms          |
| D2          | 20ms         |
| D3          | 140ms        |
| D5          | 280ms        |
| D6          | 560ms        |
| D4          | 1120ms       |
| D7          | 1200ms       |
| MAX6390XSD4 | 1120/140ms * |
| MAX6390XSD7 | 1200/150ms * |

\* The MAX6390 has a 1120ms or 1200ms *RESET* timeout and a 140ms or 150ms manual reset timeout

a negative-going pulse applied to  $V_{CC}$ , starting above the actual reset threshold and ending below it by the magnitude indicated (reset comparator overdrive). The graph indicates the typical maximum pulse width a negative-going  $V_{CC}$  transient may have without causing a reset pulse to be issued. As the magnitude of the transient increases (goes farther below the reset threshold), the maximum allowable pulse width decreases. A 0.1 $\mu$ F capacitor mounted as close as possible to  $V_{CC}$  provides additional transient immunity.

## Ensuring a Valid RESET Output Down to $V_{CC} = 0$

The MAX6381–MAX6390 are guaranteed to operate properly down to  $V_{CC} = 1V$ . In applications that require valid reset levels down to  $V_{CC} = 0$ , a pulldown resistor to active-low outputs (push/pull only, Figure 2) and a pullup resistor to active-high outputs (push/pull only) will ensure that the reset line is valid while the reset output can no longer sink or source current. This scheme does

not work with the open-drain outputs of the MAX6383/MAX6386/MAX6389/MAX6390. The resistor value used is not critical, but it must be small enough not to load the reset output when  $V_{CC}$  is above the reset threshold. For most applications, 100k $\Omega$  is adequate.

## Standard Versions

| PART    | RESET THRESHOLD | RESET TIMEOUT |
|---------|-----------------|---------------|
| MAX638_ | 46              | D3            |
|         | 44              |               |
|         | 31              |               |
|         | 29              |               |
|         | 26              |               |
|         | 23              |               |
|         | 22              |               |
|         | 17              |               |
|         | 16              |               |
|         | 16              |               |
| MAX6390 | 46              | D4            |
|         | 44              |               |
|         | 31              |               |
|         | 29              |               |
|         | 26              |               |
|         | 23              |               |
|         | 22              |               |
|         | 17              |               |
|         | 16              |               |
|         | 16              |               |


# SC70, Single/Dual Low-Voltage, Low-Power $\mu$ P Reset Circuits

## Selector Guide

| PART NUMBER | PUSH-PULL<br>ACTIVE-LOW | PUSH-PULL<br>ACTIVE-HIGH | OPEN-DRAIN<br>ACTIVE-LOW | MANUAL RESET<br>INPUT $\overline{MR}$ | RESET IN |
|-------------|-------------------------|--------------------------|--------------------------|---------------------------------------|----------|
| MAX6381     | X                       |                          |                          |                                       |          |
| MAX6382     |                         | X                        |                          |                                       |          |
| MAX6383     |                         |                          | X                        |                                       |          |
| MAX6384     | X                       |                          |                          | X                                     |          |
| MAX6385     |                         | X                        |                          | X                                     |          |
| MAX6386     |                         |                          | X                        | X                                     |          |
| MAX6390*    |                         |                          | X                        | X                                     |          |
| MAX6387     | X                       |                          |                          |                                       | X        |
| MAX6388     |                         | X                        |                          |                                       | X        |
| MAX6389     |                         |                          | X                        |                                       | X        |

\*The MAX6390 offers a  $V_{CC}$  reset timeout of 1120ms or 1200ms (min) and a manual reset timeout of 140ms or 150ms (min).

## Typical Operating Circuit

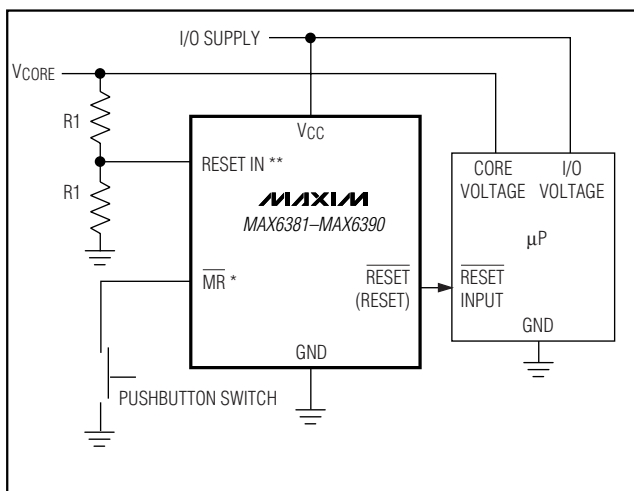

\*  $\overline{MR}$  is for MAX6384/MAX6385/MAX6386/MAX6390

\*\* RESET IN is for MAX6387/MAX6388/MAX6389

( ) are for MAX6382/MAX6385/MAX6388



## Chip Information

TRANSISTOR COUNT: 647

PROCESS: BiCMOS

## Pin Configurations (continued)

TOP VIEW

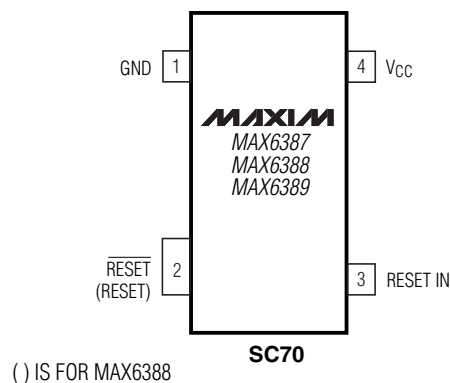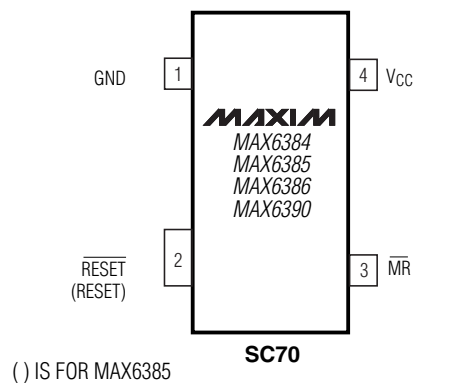

# SC70, Single/Dual Low-Voltage, Low-Power $\mu$ P Reset Circuits

## Ordering Information (continued)

| PART           | TEMP. RANGE     | PIN-PACKAGE |
|----------------|-----------------|-------------|
| MAX6384XS_D-T  | -40°C to +125°C | 4 SC70-4    |
| MAX6385XS_D-T  | -40°C to +125°C | 4 SC70-4    |
| MAX6386XS_D-T  | -40°C to +125°C | 4 SC70-4    |
| MAX6387XS_D-T  | -40°C to +125°C | 4 SC70-4    |
| MAX6388XS_D-T  | -40°C to +125°C | 4 SC70-4    |
| MAX6389XS_D-T  | -40°C to +125°C | 4 SC70-4    |
| MAX6390XS_D-T* | -40°C to +125°C | 4 SC70-4    |



**Note:** Insert reset threshold suffix (see Reset Threshold table) after "XR" or "XS". Insert reset timeout delay (see Reset Timeout Delay table) after "D" to complete the part number. Sample stock is generally held on standard versions only (see Standard Versions table). Standard versions have an order increment requirement of 2500 pieces. Nonstandard versions have an order increment requirement of 10,000 pieces. Contact factory for availability of nonstandard versions.

\*MAX6390 is available with D4 or D7 timing only.


MAX6381-MAX6390

# SC70, Single/Dual Low-Voltage, Low-Power $\mu$ P Reset Circuits

## Package Information

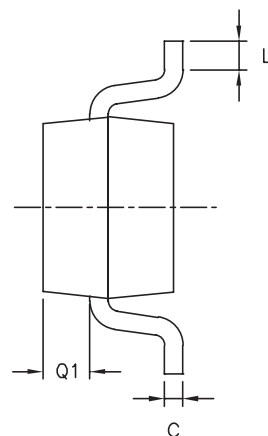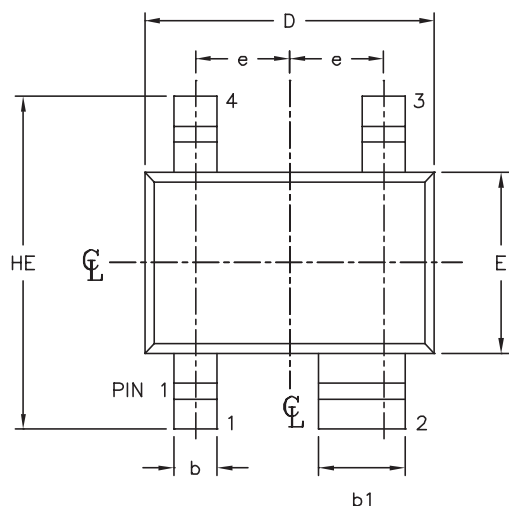

| SYMBOL | MIN  | MAX  |
|--------|------|------|
| e      | 0.65 | BSC  |
| D      | 1.80 | 2.25 |
| b      | 0.15 | 0.40 |
| b1     | 0.55 | 0.70 |
| E      | 1.15 | 1.35 |
| HE     | 1.80 | 2.40 |
| Q1     | 0.10 | 0.40 |
| A2     | 0.80 | 1.00 |
| A1     | 0.00 | 0.10 |
| A      | 0.80 | 1.10 |
| c      | 0.10 | 0.18 |
| L      | 0.10 | 0.30 |

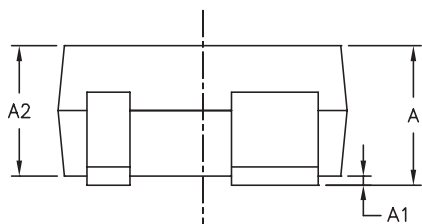

### NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. DIMENSIONS ARE INCLUSIVE OF PLATING.
3. DIMENSIONS ARE EXCLUSIVE OF MOLD FLASH & METAL BURR.
4. ALL SPECIFICATIONS COMPLY TO EIAJ SC70.
5. DIE IS FACING UP FOR MOLD AND FACING DOWN FOR TRIM/FORM. ie: REVERSE TRIM/FORM.
6. PACKAGE SURFACE TO BE MIRROR FINISH.

|                           |                      |     |     |
|---------------------------|----------------------|-----|-----|
|                           |                      |     |     |
| PROPRIETARY INFORMATION   |                      |     |     |
| TITLE:                    |                      |     |     |
| PACKAGE OUTLINE, SC70, 4L |                      |     |     |
| APPROVAL                  | DOCUMENT CONTROL NO. | REV | 1/1 |
|                           | 21-0098              | A   |     |



SC70, 4L EPS

# SC70, Single/Dual Low-Voltage, Low-Power $\mu$ P Reset Circuits

## Package Information (continued)

MAX6381-MAX6390


SC70, 3L, EPS

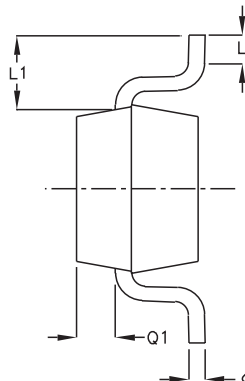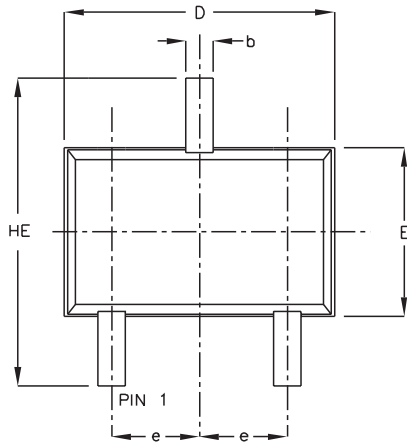

| SYMBOL | MIN   | MAX  |
|--------|-------|------|
| e      | 0.65  | BSC  |
| D      | 1.80  | 2.20 |
| b      | 0.25  | 0.40 |
| E      | 1.15  | 1.35 |
| HE     | 1.80  | 2.40 |
| Q1     | 0.10  | 0.40 |
| A2     | 0.80  | 1.00 |
| A1     | 0.00  | 0.10 |
| A      | 0.80  | 1.10 |
| c      | 0.10  | 0.18 |
| L      | 0.10  | 0.30 |
| L1     | 0.425 | TYP. |

### NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS
2. DIMENSIONS ARE INCLUSIVE OF PLATING
3. DIMENSIONS ARE EXCLUSIVE OF MOLD FLASH & METAL BURR
4. ALL SPECIFICATIONS COMPLY TO EIAJ SC70
5. COPLANARITY 4 MILS. MAX.

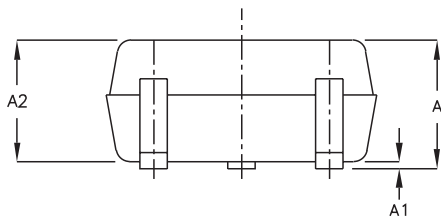

|                           |                      |     |     |
|---------------------------|----------------------|-----|-----|
| <b>MAXIM</b>              |                      |     |     |
| PROPRIETARY INFORMATION   |                      |     |     |
| TITLE:                    |                      |     |     |
| PACKAGE OUTLINE, SC70, 3L |                      |     |     |
| APPROVAL                  | DOCUMENT CONTROL NO. | REV | 1/1 |
|                           | 21-0075              | B   |     |

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600 11



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.