

1N53 Series

5 Watt Surmetic™ 40 Zener Voltage Regulators

This is a complete series of 5 Watt Zener diodes with tight limits and better operating characteristics that reflect the superior capabilities of silicon-oxide passivated junctions. All this in an axial lead, transfer-molded plastic package that offers protection in all common environmental conditions.

Features

- Zener Voltage Range – 3.3 V to 200 V
- ESD Rating of Class 3 (>16 kV) per Human Body Model
- Surge Rating of up to 180 W @ 8.3 ms
- Maximum Limits Guaranteed on up to Six Electrical Parameters
- Pb-Free Packages are Available*

Mechanical Characteristics

CASE: Void free, transfer-molded, thermosetting plastic

FINISH: All external surfaces are corrosion resistant and leads are readily solderable

MAXIMUM LEAD TEMPERATURE FOR SOLDERING PURPOSES: 260°C, 1/16 in. from the case for 10 seconds

POLARITY: Cathode indicated by polarity band

MOUNTING POSITION: Any

MAXIMUM RATINGS

| Rating | Symbol | Value | Unit |
|---------------------------------------------------------------------------------------------------------------|----------------|-------------------------|-------|
| Max. Steady State Power Dissipation @ $T_L = 25^\circ\text{C}$, Lead Length = 3/8 in Derate above 25°C | P_D | 5 | W |
| Junction-to-Lead Thermal Resistance | θ_{JL} | 40 | mW/°C |
| Operating and Storage Temperature Range | T_J, T_{stg} | -65 to +200 (Note 1) | °C |



Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Max operating temperature for DC conditions is 150°C, but not to exceed 200°C for pulsed conditions with low duty cycle or non-repetitive.




ON Semiconductor®

<http://onsemi.com>

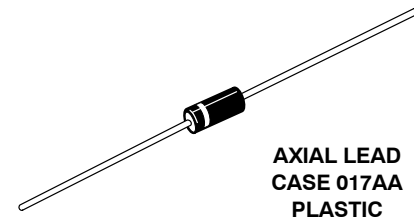

MARKING DIAGRAM

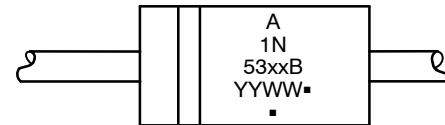

- A = Assembly Location
 - 1N53xxB = Device Number
(Refer to Tables on Pages 3 & 4)
 - YY = Year
 - WW = Work Week
 - = Pb-Free Package
- (Note: Microdot may be in either location)

ORDERING INFORMATION

| Device | Package | Shipping† |
|--------------|-------------------------|------------------|
| 1N53xxB, G | Axial Lead (Pb-Free) | 1000 Units/Box |
| 1N53xxBRL, G | Axial Lead (Pb-Free) | 4000/Tape & Reel |


†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

1N53 Series

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted, $V_F = 1.2\text{ V Max @ } I_F = 1.0\text{ A}$ for all types)

| Symbol | Parameter |
|--------------|--------------------------------------------------|
| V_Z | Reverse Zener Voltage @ I_{ZT} |
| I_{ZT} | Reverse Current |
| Z_{ZT} | Maximum Zener Impedance @ I_{ZT} |
| I_{ZK} | Reverse Current |
| Z_{ZK} | Maximum Zener Impedance @ I_{ZK} |
| I_R | Reverse Leakage Current @ V_R |
| V_R | Breakdown Voltage |
| I_F | Forward Current |
| V_F | Forward Voltage @ I_F |
| I_R | Maximum Surge Current @ $T_A = 25^\circ\text{C}$ |
| ΔV_Z | Reverse Zener Voltage Change |
| I_{ZM} | Maximum DC Zener Current |

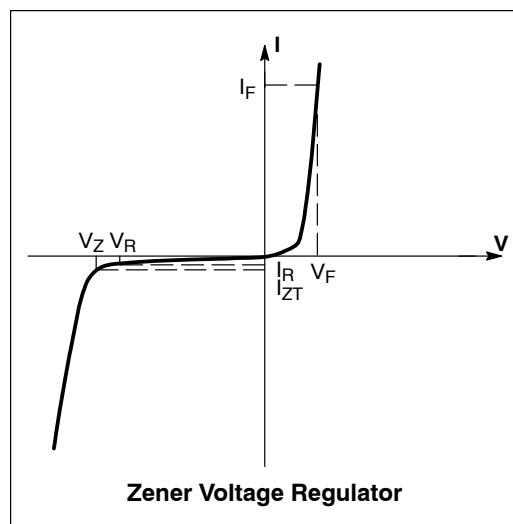

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted, $V_F = 1.2\text{ V Max @ } I_F = 1.0\text{ A}$ for all types)

| Device [†] (Note 2) | Device Marking | Zener Voltage (Note 3) | | | | Zener Impedance (Note 3) | | | Leakage Current | | I_R (Note 4) | ΔV_Z (Note 5) | I_{ZM} (Note 6) |
|---------------------------------|-------------------|------------------------|------------|-------------|------------|--------------------------|---------------------|----------|--------------------|------------|-------------------|--------------------------|----------------------|
| | | V_Z (Volts) | | | @ I_{ZT} | Z_{ZT} @ I_{ZT} | Z_{ZK} @ I_{ZK} | I_{ZK} | I_R @ V_R | | | | |
| | | Min | Nom | Max | mA | Ω | Ω | mA | $\mu\text{A Max}$ | Volts | A | Volts | mA |
| 1N5333B | 1N5333B | 3.14 | 3.3 | 3.47 | 380 | 3 | 400 | 1 | 300 | 1 | 20 | 0.85 | 1440 |
| 1N5334B | 1N5334B | 3.42 | 3.6 | 3.78 | 350 | 2.5 | 500 | 1 | 150 | 1 | 18.7 | 0.8 | 1320 |
| 1N5335B | 1N5335B | 3.71 | 3.9 | 4.10 | 320 | 2 | 500 | 1 | 50 | 1 | 17.6 | 0.54 | 1220 |
| 1N5336B | 1N5336B | 4.09 | 4.3 | 4.52 | 290 | 2 | 500 | 1 | 10 | 1 | 16.4 | 0.49 | 1100 |
| 1N5337B | 1N5337B | 4.47 | 4.7 | 4.94 | 260 | 2 | 450 | 1 | 5 | 1 | 15.3 | 0.44 | 1010 |
| 1N5338B | 1N5338B | 4.85 | 5.1 | 5.36 | 240 | 1.5 | 400 | 1 | 1 | 1 | 14.4 | 0.39 | 930 |
| 1N5339B | 1N5339B | 5.32 | 5.6 | 5.88 | 220 | 1 | 400 | 1 | 1 | 2 | 13.4 | 0.25 | 865 |
| 1N5340B | 1N5340B | 5.70 | 6.0 | 6.30 | 200 | 1 | 300 | 1 | 1 | 3 | 12.7 | 0.19 | 790 |
| 1N5341B | 1N5341B | 5.89 | 6.2 | 6.51 | 200 | 1 | 200 | 1 | 1 | 3 | 12.4 | 0.1 | 765 |
| 1N5342B | 1N5342B | 6.46 | 6.8 | 7.14 | 175 | 1 | 200 | 1 | 10 | 5.2 | 11.5 | 0.15 | 700 |
| 1N5343B | 1N5343B | 7.13 | 7.5 | 7.88 | 175 | 1.5 | 200 | 1 | 10 | 5.7 | 10.7 | 0.15 | 630 |
| 1N5344B | 1N5344B | 7.79 | 8.2 | 8.61 | 150 | 1.5 | 200 | 1 | 10 | 6.2 | 10 | 0.2 | 580 |
| 1N5345B | 1N5345B | 8.27 | 8.7 | 9.14 | 150 | 2 | 200 | 1 | 10 | 6.6 | 9.5 | 0.2 | 545 |
| 1N5346B | 1N5346B | 8.65 | 9.1 | 9.56 | 150 | 2 | 150 | 1 | 7.5 | 6.9 | 9.2 | 0.22 | 520 |
| 1N5347B | 1N5347B | 9.50 | 10 | 10.5 | 125 | 2 | 125 | 1 | 5 | 7.6 | 8.6 | 0.22 | 475 |

Devices listed in **bold, italic** are ON Semiconductor **Preferred** devices. **Preferred** devices are recommended choices for future use and best overall value.

- TOLERANCE AND TYPE NUMBER DESIGNATION:** The JEDEC type numbers shown indicate a tolerance of $\pm 5\%$.
- ZENER VOLTAGE (V_Z) and IMPEDANCE (I_{ZT} and I_{ZK}):** Test conditions for zener voltage and impedance are as follows: I_Z is applied 40 ± 10 ms prior to reading. Mounting contacts are located $3/8''$ to $1/2''$ from the inside edge of mounting clips to the body of the diode ($T_A = 25^\circ\text{C} + 8^\circ\text{C}, -2^\circ\text{C}$).
- SURGE CURRENT (I_R):** Surge current is specified as the maximum allowable peak, non-recurrent square-wave current with a pulse width, PW, of 8.3 ms. The data given in Figure 5 may be used to find the maximum surge current for a square wave of any pulse width between 1 ms and 1000 ms by plotting the applicable points on logarithmic paper. Examples of this, using the 3.3 V and 200 V zener are shown in Figure 6. Mounting contact located as specified in Note 2 ($T_A = 25^\circ\text{C} + 8^\circ\text{C}, -2^\circ\text{C}$).
- VOLTAGE REGULATION (ΔV_Z):** The conditions for voltage regulation are as follows: V_Z measurements are made at 10% and then at 50% of the I_Z max value listed in the electrical characteristics table. The test current time duration for each V_Z measurement is 40 ± 10 ms. Mounting contact located as specified in Note 2 ($T_A = 25^\circ\text{C} + 8^\circ\text{C}, -2^\circ\text{C}$).
- MAXIMUM REGULATOR CURRENT (I_{ZM}):** The maximum current shown is based on the maximum voltage of a 5% type unit, therefore, it applies only to the B-suffix device. The actual I_{ZM} for any device may not exceed the value of 5 watts divided by the actual V_Z of the device. $T_L = 25^\circ\text{C}$ at $3/8''$ maximum from the device body.

[†]The "G" suffix indicates Pb-Free package or Pb-Free packages are available.

1N53 Series

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted, $V_F = 1.2\text{ V Max @ } I_F = 1.0\text{ A}$ for all types)

| Device [†] (Note 7) | Device Marking | Zener Voltage (Note 8) | | | | Zener Impedance (Note 8) | | | Leakage Current | | I_R (Note 9) | ΔV_Z (Note 10) | I_{ZM} (Note 11) |
|---------------------------------|-------------------|------------------------|------------|--------------|------------|--------------------------|---------------------|----------|--------------------|-------------|-------------------|------------------------------|-----------------------|
| | | V_Z (Volts) | | | @ I_{ZT} | Z_{ZT} @ I_{ZT} | Z_{ZK} @ I_{ZK} | I_{ZK} | I_R @ V_R | | | | |
| | | Min | Nom | Max | mA | Ω | Ω | mA | $\mu\text{A Max}$ | Volts | | | |
| 1N5348B | 1N5348B | 10.45 | 11 | 11.55 | 125 | 2.5 | 125 | 1 | 5 | 8.4 | 8.0 | 0.25 | 430 |
| 1N5349B | 1N5349B | 11.4 | 12 | 12.6 | 100 | 2.5 | 125 | 1 | 2 | 9.1 | 7.5 | 0.25 | 395 |
| 1N5350B | 1N5350B | 12.35 | 13 | 13.65 | 100 | 2.5 | 100 | 1 | 1 | 9.9 | 7.0 | 0.25 | 365 |
| 1N5351B | 1N5351B | 13.3 | 14 | 14.7 | 100 | 2.5 | 75 | 1 | 1 | 10.6 | 6.7 | 0.25 | 340 |
| 1N5352B | 1N5352B | 14.25 | 15 | 15.75 | 75 | 2.5 | 75 | 1 | 1 | 11.5 | 6.3 | 0.25 | 315 |
| 1N5353B | 1N5353B | 15.2 | 16 | 16.8 | 75 | 2.5 | 75 | 1 | 1 | 12.2 | 6.0 | 0.3 | 295 |
| 1N5354B | 1N5354B | 16.15 | 17 | 17.85 | 70 | 2.5 | 75 | 1 | 0.5 | 12.9 | 5.8 | 0.35 | 280 |
| 1N5355B | 1N5355B | 17.1 | 18 | 18.9 | 65 | 2.5 | 75 | 1 | 0.5 | 13.7 | 5.5 | 0.4 | 264 |
| 1N5356B | 1N5356B | 18.05 | 19 | 19.95 | 65 | 3 | 75 | 1 | 0.5 | 14.4 | 5.3 | 0.4 | 250 |
| 1N5357B | 1N5357B | 19 | 20 | 21 | 65 | 3 | 75 | 1 | 0.5 | 15.2 | 5.1 | 0.4 | 237 |
| 1N5358B | 1N5358B | 20.9 | 22 | 23.1 | 50 | 3.5 | 75 | 1 | 0.5 | 16.7 | 4.7 | 0.45 | 216 |
| 1N5359B | 1N5359B | 22.8 | 24 | 25.2 | 50 | 3.5 | 100 | 1 | 0.5 | 18.2 | 4.4 | 0.55 | 198 |
| 1N5360B | 1N5360B | 23.75 | 25 | 26.25 | 50 | 4 | 110 | 1 | 0.5 | 19 | 4.3 | 0.55 | 190 |
| 1N5361B | 1N5361B | 25.65 | 27 | 28.35 | 50 | 5 | 120 | 1 | 0.5 | 20.6 | 4.1 | 0.6 | 176 |
| 1N5362B | 1N5362B | 26.6 | 28 | 29.4 | 50 | 6 | 130 | 1 | 0.5 | 21.2 | 3.9 | 0.6 | 170 |
| 1N5363B | 1N5363B | 28.5 | 30 | 31.5 | 40 | 8 | 140 | 1 | 0.5 | 22.8 | 3.7 | 0.6 | 158 |
| 1N5364B | 1N5364B | 31.35 | 33 | 34.65 | 40 | 10 | 150 | 1 | 0.5 | 25.1 | 3.5 | 0.6 | 144 |
| 1N5365B | 1N5365B | 34.2 | 36 | 37.8 | 30 | 11 | 160 | 1 | 0.5 | 27.4 | 3.5 | 0.65 | 132 |
| 1N5366B | 1N5366B | 37.05 | 39 | 40.95 | 30 | 14 | 170 | 1 | 0.5 | 29.7 | 3.1 | 0.65 | 122 |
| 1N5367B | 1N5367B | 40.85 | 43 | 45.15 | 30 | 20 | 190 | 1 | 0.5 | 32.7 | 2.8 | 0.7 | 110 |
| 1N5368B | 1N5368B | 44.65 | 47 | 49.35 | 25 | 25 | 210 | 1 | 0.5 | 35.8 | 2.7 | 0.8 | 100 |
| 1N5369B | 1N5369B | 48.45 | 51 | 53.55 | 25 | 27 | 230 | 1 | 0.5 | 38.8 | 2.5 | 0.9 | 93 |
| 1N5370B | 1N5370B | 53.2 | 56 | 58.8 | 20 | 35 | 280 | 1 | 0.5 | 42.6 | 2.3 | 1.0 | 86 |
| 1N5371B | 1N5371B | 57 | 60 | 63 | 20 | 40 | 350 | 1 | 0.5 | 45.5 | 2.2 | 1.2 | 79 |
| 1N5372B | 1N5372B | 58.9 | 62 | 65.1 | 20 | 42 | 400 | 1 | 0.5 | 47.1 | 2.1 | 1.35 | 76 |
| 1N5373B | 1N5373B | 64.6 | 68 | 71.4 | 20 | 44 | 500 | 1 | 0.5 | 51.7 | 2.0 | 1.52 | 70 |
| 1N5374B | 1N5374B | 71.25 | 75 | 78.75 | 20 | 45 | 620 | 1 | 0.5 | 56 | 1.9 | 1.6 | 63 |
| 1N5375B | 1N5375B | 77.9 | 82 | 86.1 | 15 | 65 | 720 | 1 | 0.5 | 62.2 | 1.8 | 1.8 | 58 |
| 1N5377B | 1N5377B | 86.45 | 91 | 95.55 | 15 | 75 | 760 | 1 | 0.5 | 69.2 | 1.6 | 2.2 | 52.5 |
| 1N5378B | 1N5378B | 95 | 100 | 105 | 12 | 90 | 800 | 1 | 0.5 | 76 | 1.5 | 2.5 | 47.5 |
| 1N5380B | 1N5380B | 114 | 120 | 126 | 10 | 170 | 1150 | 1 | 0.5 | 91.2 | 1.3 | 2.5 | 39.5 |
| 1N5381B | 1N5381B | 123.5 | 130 | 136.5 | 10 | 190 | 1250 | 1 | 0.5 | 98.8 | 1.2 | 2.5 | 36.6 |
| 1N5383B | 1N5383B | 142.5 | 150 | 157.5 | 8 | 330 | 1500 | 1 | 0.5 | 114 | 1.1 | 3.0 | 31.6 |
| 1N5384B | 1N5384B | 152 | 160 | 168 | 8 | 350 | 1650 | 1 | 0.5 | 122 | 1.1 | 3.0 | 29.4 |
| 1N5386B | 1N5386B | 171 | 180 | 189 | 5 | 430 | 1750 | 1 | 0.5 | 137 | 1.0 | 4.0 | 26.4 |
| 1N5387B | 1N5387B | 180.5 | 190 | 199.5 | 5 | 450 | 1850 | 1 | 0.5 | 144 | 0.9 | 5.0 | 25 |
| 1N5388B | 1N5388B | 190 | 200 | 210 | 5 | 480 | 1850 | 1 | 0.5 | 152 | 0.9 | 5.0 | 23.6 |

Devices listed in **bold, italic** are ON Semiconductor **Preferred** devices. **Preferred** devices are recommended choices for future use and best overall value.

- TOLERANCE AND TYPE NUMBER DESIGNATION:** The JEDEC type numbers shown indicate a tolerance of $\pm 5\%$.
- ZENER VOLTAGE (V_Z) and IMPEDANCE (I_{ZT} and I_{ZK}):** Test conditions for zener voltage and impedance are as follows: I_Z is applied 40 ± 10 ms prior to reading. Mounting contacts are located $3/8''$ to $1/2''$ from the inside edge of mounting clips to the body of the diode ($T_A = 25^\circ\text{C} + 8^\circ\text{C}, -2^\circ\text{C}$).
- SURGE CURRENT (I_P):** Surge current is specified as the maximum allowable peak, non-recurrent square-wave current with a pulse width, PW, of 8.3 ms. The data given in Figure 5 may be used to find the maximum surge current for a square wave of any pulse width between 1 ms and 1000 ms by plotting the applicable points on logarithmic paper. Examples of this, using the 3.3 V and 200 V zener are shown in Figure 6. Mounting contact located as specified in Note 7 ($T_A = 25^\circ\text{C} + 8^\circ\text{C}, -2^\circ\text{C}$).
- VOLTAGE REGULATION (ΔV_Z):** The conditions for voltage regulation are as follows: V_Z measurements are made at 10% and then at 50% of the I_Z max value listed in the electrical characteristics table. The test current time duration for each V_Z measurement is 40 ± 10 ms. Mounting contact located as specified in Note 7 ($T_A = 25^\circ\text{C} + 8^\circ\text{C}, -2^\circ\text{C}$).
- MAXIMUM REGULATOR CURRENT (I_{ZM}):** The maximum current shown is based on the maximum voltage of a 5% type unit, therefore, it applies only to the B-suffix device. The actual I_{ZM} for any device may not exceed the value of 5 watts divided by the actual V_Z of the device. $T_L = 25^\circ\text{C}$ at $3/8''$ maximum from the device body.

[†]The "G" suffix indicates Pb-Free package or Pb-Free packages are available.

1N53 Series

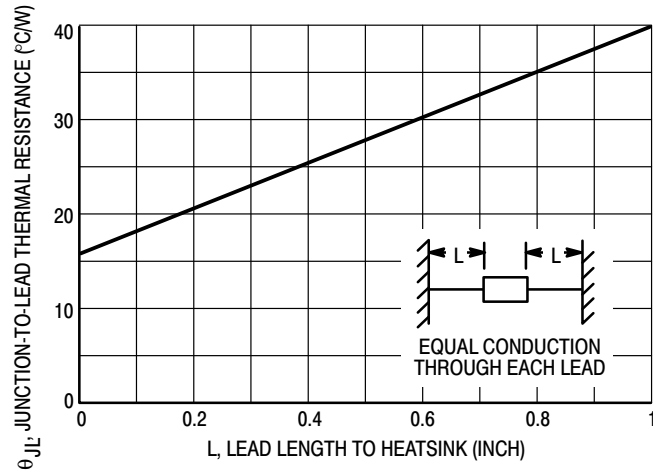


Figure 1. Typical Thermal Resistance

TEMPERATURE COEFFICIENTS

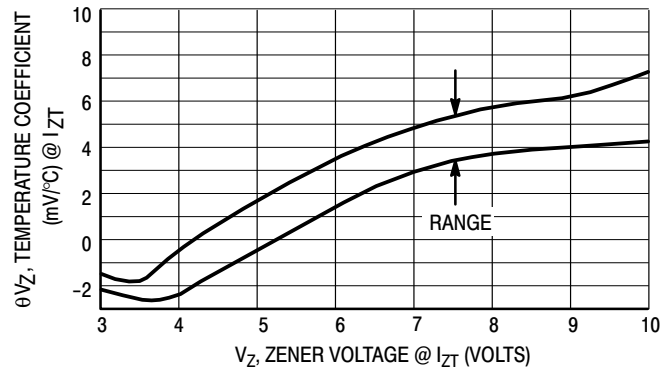


Figure 2. Temperature Coefficient-Range for Units 3 to 10 Volts

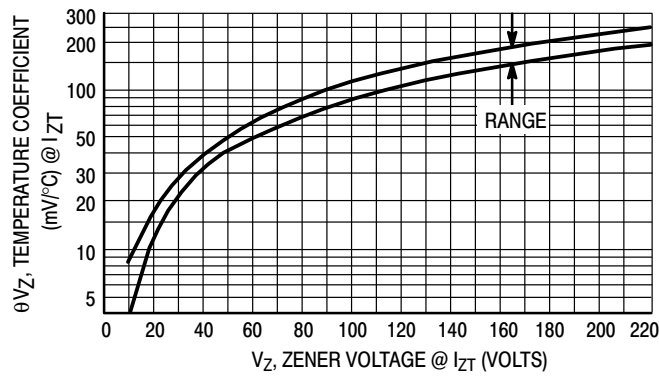


Figure 3. Temperature Coefficient-Range for Units 10 to 220 Volts

1N53 Series

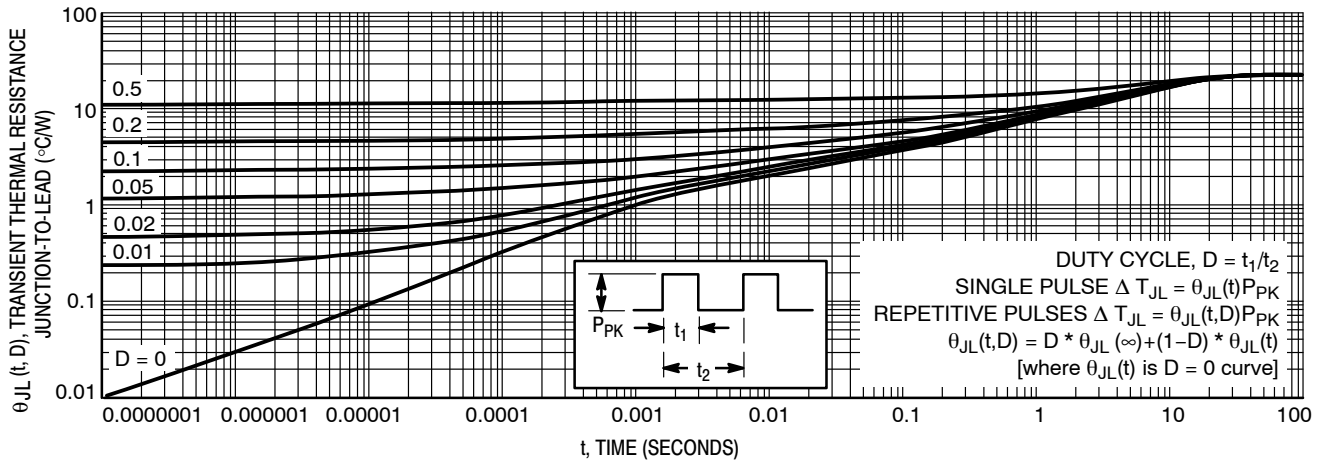


Figure 4. Typical Thermal Response
L, Lead Length = 3/8 Inch

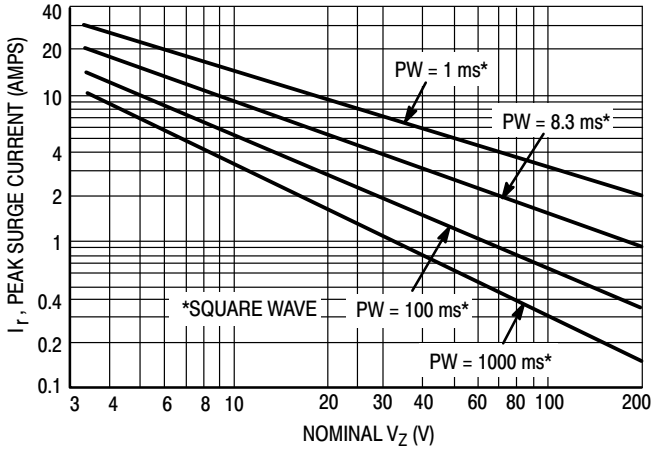


Figure 5. Maximum Non-Repetitive Surge Current versus Nominal Zener Voltage
(See Note 4)

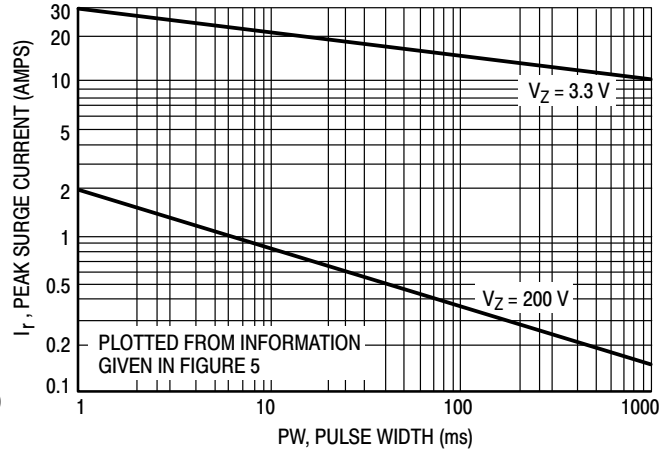


Figure 6. Peak Surge Current versus Pulse Width
(See Note 4)

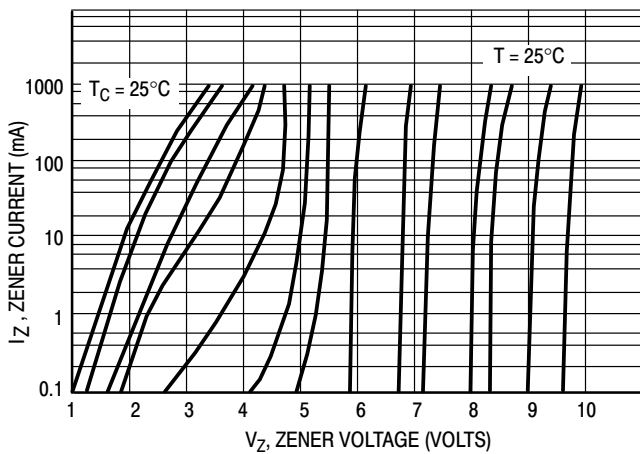


Figure 7. Zener Voltage versus Zener Current
 $V_Z = 3.3$ thru 10 Volts

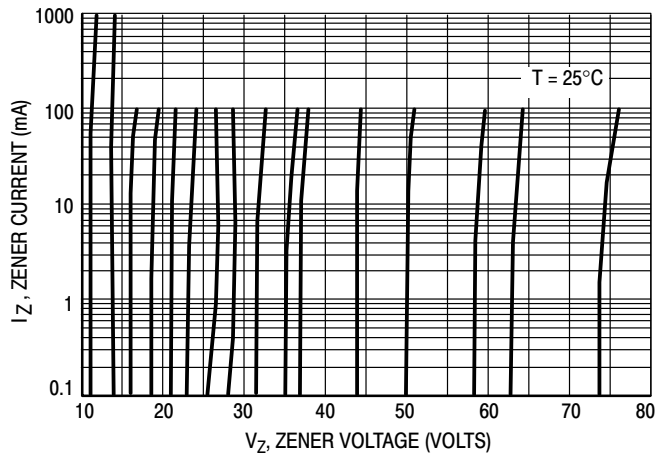
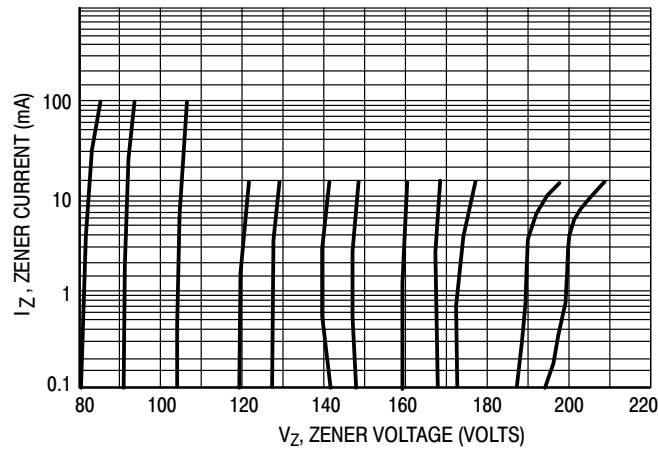


Figure 8. Zener Voltage versus Zener Current
 $V_Z = 11$ thru 75 Volts

1N53 Series



**Figure 9. Zener Voltage versus Zener Current
V_Z = 82 thru 200 Volts**

APPLICATION NOTE

Since the actual voltage available from a given Zener diode is temperature dependent, it is necessary to determine junction temperature under any set of operating conditions in order to calculate its value. The following procedure is recommended:

Lead Temperature, T_L, should be determined from:

$$T_L = \theta_{LA} P_D + T_A$$

θ_{LA} is the lead-to-ambient thermal resistance and P_D is the power dissipation.

Junction Temperature, T_J, may be found from:

$$T_J = T_L + \Delta T_{JL}$$

ΔT_{JL} is the increase in junction temperature above the lead temperature and may be found from Figure 4 for a train of power pulses or from Figure 1 for dc power.

$$\Delta T_{JL} = \theta_{JL} P_D$$

For worst-case design, using expected limits of I_Z, limits of P_D and the extremes of T_J (ΔT_J) may be estimated. Changes in voltage, V_Z, can then be found from:

$$\Delta V = \theta_{VZ} \Delta T_J$$

θ_{VZ} , the Zener voltage temperature coefficient, is found from Figures 2 and 3.


Under high power-pulse operation, the Zener voltage will vary with time and may also be affected significantly by the zener resistance. For best regulation, keep current excursions as low as possible.

Data of Figure 4 should not be used to compute surge capability. Surge limitations are given in Figure 5. They are lower than would be expected by considering only junction temperature, as current crowding effects cause temperatures to be extremely high in small spots resulting in device degradation should the limits of Figure 5 be exceeded.

1N53 Series

PACKAGE DIMENSIONS

SURMETIC 40, AXIAL LEAD CASE 017AA ISSUE O

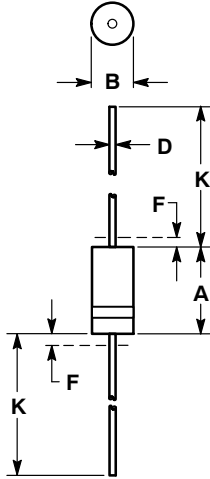


NOTES:

1. CONTROLLING DIMENSION: INCH
2. LEAD DIAMETER AND FINISH NOT CONTROLLED WITHIN DIMENSION F.
3. CATHODE BAND INDICATES POLARITY

| DIM | INCHES | | MILLIMETERS | |
|-----|--------|-------|-------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.330 | 0.350 | 8.38 | 8.89 |
| B | 0.130 | 0.145 | 3.30 | 3.68 |
| D | 0.037 | 0.043 | 0.94 | 1.09 |
| F | --- | 0.050 | --- | 1.27 |
| K | 1.000 | 1.250 | 25.40 | 31.75 |

SURMETIC is a trademark of Semiconductor Components Industries, LLC (SCILLC).

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.